

Form 9180-6
(March 1977)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

THE SURVEY OF A PORTION OF THE SUBDIVISION LINES

(WITHIN SECTIONS 15, 19, AND 30)

AND

THE SURVEY OF TRACTS 37, 38, AND 39

TOWNSHIP 7 SOUTH, RANGE 14 WEST

Of the GILA AND SALT RIVER Meridian,

In the State of ARIZONA

EXECUTED BY

DOUGLAS A. CODY

CADASTRAL SURVEYOR

RAY HARPIN

CADASTRAL SURVEYOR

Under special instructions dated OCTOBER 14, 1969, approved OCTOBER 27, 1969,

AND SUPPLEMENTAL SPECIAL INSTRUCTIONS DATED NOVEMBER 20, 1969, APPROVED

NOVEMBER 21, 1969, which provided for the surveys included under ~~U.S. Survey~~ Group

Number 517, and assignment instructions dated OCTOBER 14, 1969.

Survey commenced OCTOBER 28, 1969

Survey completed FEBRUARY 26, 1975

1A

INDEX DIAGRAM

Township 7 SOUTH, Range 14 WEST

6	5	4	3	2	1
7	8	9	10 6	11	12
18 12	17	16 5	15 2 3	14	13
19 11 9	20	21	22	23	24
30 8	29	28	27	26	25
31	32	33	34	35	36

Subdivision of section 15 pg. 13
 Subdivision of section 19 pg. 16
 Subdivision of section 30 pg. 21
 Survey of Tract 37. pg. 25
 Survey of Tract 38. pg. 28
 Survey of Tract 39. pg. 29

Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines, the survey of a portion of the subdivision lines (within sections 15, 19, and 30), and the survey of Tracts 37, 38, and 39, Township 7 South, Range 14 West, of the Gila and Salt River Meridian, Arizona.

History of Previous Surveys: The township exterior boundaries and subdivisional lines were surveyed by T. F. White, U. S. Deputy Surveyor, in 1877, as shown upon the official plat approved 30th July 1877. A portion of the west boundary was dependently resurveyed as described in the official record of the east boundary of Township 7 South, Range 15 West, executed concurrently with this group.

The dependent resurvey and surveys were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 and 1973 Editions, and the Special Instruction dated October 14, 1969, and Supplemental Special Instructions dated November 20, 1969.

The direction of all lines of these surveys were determined from direct altitude observations on the sun for azimuth, and these directions refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains and reduced to horizontal equivalents.

Prior to the restoration of any corner, all necessary lines of the original survey were retraced and a diligent search was made for any evidence of the original corner monuments and calls of the official record. Identified corners were remonumented in their original positions. Lost corners were reestablished at proportionate positions, but not until exhausting every reasonable possibility of finding direct evidence of the control of each corner.

The data furnished with the special instructions give the geographic position of the 1/4 sec. cor. of secs. 30 and 31, as: Latitude 32° 46.9' N., and Longitude 113° 44.3' W. The mean magnetic declination is 14° East.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

Restoring the Survey Executed by T. F. White,
U. S. Deputy Surveyor, in 1877

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS

Beginning at the cor. of secs. 14, 15, 22, and 23, which is marked with an iron pipe, 2 ins. in diam., firmly set, projecting 9 ins. above the surface of the ground, with brass cap mkd.

BUREAU OF RECLAMATION

T7S R14W

S 15 | S 14

S 22 | S 23

1941

The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.

N. 0° 16' W., between secs. 14 and 15

Over rolling land, through scattering paloverde trees, brush, and cacti.

20.06 The south 1/16 sec. cor. of secs. 14 and 15 is marked with an iron pipe, 1-inch diam., firmly set, projecting 11 ins. above the surface of the ground, with brass cap mkd.

BUREAU OF RECLAMATION

T7S R14W

S 15 | S 14

S 1/16

1953

The above corner marker is accepted as the position of the corner. This corner was not remonumented.

N. 0° 16' W., beginning new measurement

20.05 The 1/4 sec. cor. of secs. 14 and 15 is marked with an iron pipe, 1-inch diam., firmly set, projecting 6 ins. above the surface of the ground, with brass cap mkd.

BUREAU OF RECLAMATION

1/4 S15 | S 14

1941

The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>N. 0° 16' W., beginning new measurement</p>	
	<p>Descend over north slope, through dense French tamarisk.</p>	
19.95	<p>The point for the north 1/16 sec. cor. of secs. 14 and 15.</p>	
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">N 1/16</p>	
	<p style="text-align: center;">S 15 S 14</p>	
	<p style="text-align: center;">1975</p>	
39.90	<p>The point for the cor. of secs. 10, 11, 14, and 15 is</p>	
	<p>determined at the intersection of the center line of</p>	
	<p>roads, bearing north and west. This corner point is</p>	
	<p>located at record distances as depicted upon the Bureau</p>	
	<p>of Reclamation map number 50-303-8642, dated September</p>	
	<p>30, 1964. I accept this corner point as the best avail-</p>	
	<p>able evidence of the position of the corner.</p>	
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., with</p>	
	<p>brass cap 7 ins. below the surface of the road, mkd.</p>	
	<p style="text-align: center;">T7S R14W</p>	
	<p style="text-align: center;">S 10 S 11</p>	
	<p style="text-align: center;">S 15 S 14</p>	
	<p style="text-align: center;">1975</p>	
	<p>This corner is located 42 lks. south of an east and west</p>	
	<p>electric transmission line.</p>	
	<p>from which</p>	
	<p style="padding-left: 40px;">An electric transmission line pole, bears N. 48° 45'</p>	
	<p style="padding-left: 40px;">E., 64 lks. distant.</p>	
	<p style="padding-left: 40px;">An electric transmission line pole, bears S. 40° 50'</p>	
	<p style="padding-left: 40px;">W., 64 lks. distant.</p>	
	<p style="padding-left: 40px;">An electric transmission line pole, bears N. 44° 50'</p>	
	<p style="padding-left: 40px;">W., 60 lks. distant.</p>	
	<p>Discontinue the regular order of survey at this corner.</p>	
	<p>From the cor. of secs. 14, 15, 22, and 23, heretofore</p>	
	<p>described.</p>	
	<p>S. 89° 58' W., between secs. 15 and 22</p>	
	<p>Over nearly level land, through scattering brush.</p>	
19.97	<p>The east 1/16 sec. cor. of secs. 15 and 22 is marked</p>	
	<p>with an iron pipe, 1-inch diam., firmly set, projecting</p>	
	<p>12 ins. above the surface of the ground, with brass cap</p>	
	<p>mkd.</p>	

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS		
	<p style="text-align: center;">BUREAU OF RECLAMATION S 15 S 22 E 1/16 1953</p>	
	<p>The above corner marker is accepted as the position of the corner. This corner was not remonumented.</p> <hr style="width: 20%; margin: 10px auto;"/>	
	<p>S. 89° 58' W., beginning new measurement</p>	
<p>19.97</p>	<p>The 1/4 sec. cor. of secs. 15 and 22 is marked with an iron pipe, 1-inch diam., firmly set, projecting 18 ins. above the surface of the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">BUREAU OF RECLAMATION 1/4 S 15 S 22 1941</p>	
	<p>The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.</p> <hr style="width: 20%; margin: 10px auto;"/>	
	<p>S. 89° 58' W., beginning new measurement</p>	
<p>20.19</p>	<p>The west 1/16 sec. cor. of secs. 15 and 22 is marked with an iron pipe, 1-inch diam., firmly set, projecting 13 ins. above the surface of the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">BUREAU OF RECLAMATION T7S R14W W 1/16 S 15 S 22 1953</p>	
	<p>The above corner marker is accepted as the position for the corner. This corner was not remonumented.</p> <hr style="width: 20%; margin: 10px auto;"/>	
	<p>S. 89° 58' W., beginning new measurement</p>	
<p>20.19</p>	<p>The cor. of secs. 15, 16, 21, and 22 is marked with an iron pipe, 2 ins. diam., firmly set, projecting 8 ins. above the surface of the ground, with brass cap mkd.</p>	

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">BUREAU OF RECLAMATION T7S R14W S 16 S 15 S 21 S 22</p> <p style="text-align: center;">1941</p> <p>The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.</p>
19.97	<p>N. 0° 23.5' W., between secs. 15 and 16</p> <p>Over rolling land, through scattering brush.</p> <p>The south 1/16 sec. cor. of secs. 15 and 16 is marked with an iron pipe, 1-inch diam., firmly set, projecting 8 ins. above the surface of the ground, with brass cap mkd.</p>
	<p style="text-align: center;">BUREAU OF RECLAMATION T7S R14W S 16 S 15 S 1/16</p> <p style="text-align: center;">1953</p> <p>The above corner marker is accepted as the position for the corner. This corner was not remonumented.</p>
10.00	<p>N. 0° 23.5' W., beginning new measurement</p> <p>Descend over north slope, through dense French tamarisk.</p>
15.395	<p>The point for Angle Point No. 3, Tract 39.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">S 16 TR 39 AP 3 S 15 T7S R14W</p> <p style="text-align: center;">1975</p>
19.97	<p>The point for the 1/4 sec. cor. of secs. 15 and 16 is determined at proportionate distance; there is no evidence of the original corner.</p>

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T7S R14W 1/4</p>	
	<p style="text-align: center;">S 16 S 15</p>	
	<p style="text-align: center;">1975</p>	
	<p>This corner is designated to function for Angel Point No. 2, Tract 39.</p>	
<p>59.91</p>	<p>The cor. of secs. 9, 10, 15, and 16 is marked with a steel rod, of undetermined lengths, 2 ins. in diam., with the top 4 ins. below the surface of the road,</p>	
	<p>substantiated by:</p>	
	<p style="padding-left: 40px;">An electric transmission line pole, bears N. 43° 15' E., 58 lks. distant, mkd. RP 38.45.</p>	
	<p style="padding-left: 40px;">A cross (+) chiseled on a concrete headwall, bears S. 46° 10' E., 91 lks. distant.</p>	
	<p style="padding-left: 40px;">The end post of a bridge guard rail, bears S. 74° 40' W., 73.6 lks. distant, mkd. RP 48.55.</p>	
	<p style="padding-left: 40px;">The end post of a bridge guard rail, bears N. 70° 05' W., 75.8 lks. distant, mkd. RP 50.</p>	
	<p>The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.</p>	
	<hr/> <p>From the cor. of secs. 10, 11, 14, and 15, heretofore described.</p>	
	<p style="padding-left: 40px;">N. 89° 58' W., between secs. 10 and 15</p>	
	<p style="padding-left: 40px;">Over nearly level land, along the center line of an east and west road.</p>	
<p>20.20</p>	<p>The east 1/16 sec. cor. of secs. 10 and 15 is marked with an iron pipe, 1-inch diam., with brass cap 4 ins. above the surface of the road, mkd.</p>	
	<p style="text-align: center;">BUREAU OF RECLAMATION</p>	
	<p style="text-align: center;">S 10</p>	
	<p style="text-align: center;">S 15</p>	
	<p style="text-align: center;">E 1/16</p>	
	<p style="text-align: center;">1953</p>	
	<p>The above corner marker is accepted as the position for the corner. This corner was not remonumented.</p>	

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS

N. 89° 58' W., beginning new measurement

14.056 The point for Angle Point No. 1, Tract 38

Set an iron post, 28 ins. long, 2½ ins. in diam., with
brass cap 6 ins. below the surface of the road, mkd.

T7S R14W	
S 10	
AP 1	S 15
TR 38	

1975

20.21 The 1/4 sec. cor. of secs. 10 and 15 is marked with an
iron pipe, 24 ins. long, 2½ ins. in diam., with the top
6 ins. below the surface of the road, and is accepted as
the best available evidence of the position of the
original corner.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., with
brass cap 6 ins. below the surface of the road, mkd.

T7S R14W	
S 10	
1/4	S 15

1975

Deposit the iron pipe corner marker alongside the iron
post.

This corner is designated to function for Angle Point No.
2, Tract 38.

from which

An electric transmission line pole, bears N. 22° 15'
W., 46 lks. distant.

From this corner, the U. S. Geological Survey triangula-
tion station "Texas Hill" bears N. 40° 31' W., 44.16 chs.
distant, and is marked with a brass tablet, 3½ ins. in
diam., seated in a stone in place (near ground level),
mkd. COOP STATE RS 1925 TEXAS HILL 1934.

S. 89° 43' W., beginning new measurement

40.08 The cor. of secs. 9, 10, 15, and 16, heretofore
described.

Discontinue the regular order of survey at this corner.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS

The 1/4 sec. cor. of secs. 30 and 31 is marked with an iron pipe, 36 ins. long, 1-inch diam., firmly set, 28 ins. in the ground, with brass cap mkd.

BUREAU OF RECLAMATION

1/4 $\frac{S\ 30}{S\ 31}$

1941

The above corner marker is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T7S R14W

1/4 $\frac{S\ 30}{S\ 31}$

1969

Deposit the iron pipe corner marker alongside the iron post.

S. 89° 50' W., between secs. 30 and 31

Over nearly level land, through scattering brush.

1.947 The point for corner No. 4, lot 7, sec. 30.

Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T7S R14W

L 7 \ S 30
C 4 \ L 6

S 31

1969

2.809 The point for corner No. 3, lot 7, sec. 30.

Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T7S R14W

S 30 \ L 7
L 8 \ C 3

S 31

1969

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS	
4.20	The eastern bank of a borrow ditch, bears northwest and southeast.
5.10	The western bank of the above borrow ditch.
5.97	The eastern toe of a levee, bears N. 28° 39' W. and S. 28° 39' E.
6.30	The center line of levee, bears N. 28° 39' W. and S. 28° 39' E.
6.63	The western toe of the levee.
20.254	The point for the west 1/16 sec. cor. of secs. 30 and 31, I did not monument this corner point.
39.00	The corner of secs. 25, 30, 31, and 36 on the west boundary of the township, which is monumented with an iron pipe, 2 ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the east boundary of Tp. 7 S., R. 15 W., executed concurrently with this group.
	Discontinue the regular order of survey at this corner.
	The cor. of secs. 19, 20, 29, and 30 is marked with an iron pipe, 2 ins. diam., firmly set, projecting 3 ins. above the surface of the ground, with brass cap mkd.
	<p style="text-align: center;">BUREAU OF RECLAMATION T7S R14W <u>S 19 S 20</u> <u>S 30 S 29</u></p> <p style="text-align: center;">1941</p>
	The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.
	N. 89° 58' W., between secs. 19 and 30.
	Over nearly level land, through scattering mesquite and French tamarisk.
20.17	The point for the east 1/16 sec. cor. of secs. 19 and 30, I did not monument this corner point.
37.24	The point for Angle Point No. 5, Tract 37. Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS

T7S R14W
TR 37 / S 19
AP 5 / L 10

S 30

1969

40.34 The 1/4 sec. cor. of secs. 19 and 30 is marked with an iron pipe, 1-inch diam., firmly set, projecting 5 ins. above the surface of the ground, with brass cap mkd.

BUREAU OF RECLAMATION

1/4 S 19
 S 30

1969

The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.

I added the date of 1969 to the above brass cap.

This corner is designated to function for Angle Point No. 4B, Tract 37.

S. 89° 58' W., beginning new measurement.

20.09 The point for Angle Point No. 4A, Tract 37.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T7S R14W
S 19 / TR 37
L 11 / AP 4A

S 30

1969

20.18 The point for the west 1/16 sec. cor. of secs. 19 and 30.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T7S R14W
W 1/16 S 19
 S 30

1969

38.94 The cor. of secs. 19, 24, 25, and 30 on the west boundary of the township, which is monumented with an iron post, 2½ ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the east boundary of Tp. 7 S., R. 15 W., executed concurrently with this group.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

	CHAINS		
		<p>From the cor. of secs. 19, 20, 29, and 30, heretofore described.</p> <p>N. 0° 03' W., between secs. 19 and 20.</p> <p>Over nearly level land, through areas of dense to scattering mesquite and French tamarisk.</p>	
	19.85	<p>The point for the south 1/16 sec. cor. of secs. 19 and 20.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>	
		<p>S 1/16</p> <p>S 19 S 20</p> <p>1969</p>	
	39.70	<p>The point for the 1/4 sec. cor. of secs. 19 and 20 is determined at proportionate distance; there is no evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p>	
		<p>T7S R14W</p> <p>1/4</p> <p>S 19 S 20</p> <p>TR 37 </p> <p>AP 8 </p> <p>1969</p>	
		<p>This corner is designated to function for Angle Point No. 8, Tract 37.</p>	
	59.55	<p>The point for the north 1/16 sec. cor. of secs. 19 and 20.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p>	
		<p>N 1/16</p> <p>S 19 S 20</p> <p>AP 1 </p> <p>TR 37 </p> <p>1969</p>	
		<p>This corner is designated to function for Angle Point No. 1, Tract 37.</p> <p>from which</p> <p>An iron pipe, 2 ins. in diam., firmly set, projecting 3 ins. above the surface of the ground, bears SOUTH, 131 lks. distant, with brass cap mkd. USCE GR 110-A 1963.</p>	

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona


CHAINS		
79.40	<p>The cor. of secs. 17, 18, 19, and 20 is marked with an iron pipe, 2 ins. diam., firmly set, projecting 10 ins. above the surface of the ground, with brass cap mkd.</p>	
	<p>BUREAU OF RECLAMATION T7S R14W <u>S 18 S 17</u> <u>S 19 S 20</u></p>	
	<p>1941</p>	
	<p>The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.</p>	
	<p>Discontinue the regular order of the survey at this corner.</p>	
	<hr/> <p>N. 89° 28' W., between secs. 18 and 19.</p>	
	<p>Over nearly level land, through areas of dense to scattering mesquite and French tamarisk.</p>	
20.15	<p>The east 1/16 sec. cor. of secs. 18 and 19 is marked with an iron pipe, 1-inch diam., firmly set, projecting 12 ins. above the surface of the ground, with brass cap mkd.</p>	
	<p>BUREAU OF RECLAMATION E 1/16 <u>S 18</u> <u>S 19</u></p>	
	<p>1969</p>	
	<p>The above corner marker is accepted as the position of the corner. This corner was not remonumented.</p>	
	<hr/> <p>N. 89° 28' W., beginning new measurement.</p>	
20.15	<p>The 1/4 sec. cor. of secs. 18 and 19 is marked with an iron pipe, 2 ins. diam., with brass cap 7 ins. below the surface of the ground, with brass cap mkd.</p>	
	<p>1/4 <u>S 18</u> <u>S 19</u></p>	
	<p>1953</p>	
	<p>The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.</p>	

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 89° 28' W., beginning new measurement.</p> <p>38.88 The corner of secs. 13, 18, 19, and 24, on the west boundary of the township, which is monumented with an iron post, 2 ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the east boundary of Tp. 7 S., R. 15 W., executed concurrently with this group.</p> <p>Discontinue the dependent resurvey of the township at this corner.</p>
	<p style="text-align: center;">Survey of a Portion of the Subdivision Lines Within a Number of Sections Township 7 South, Range 14 West Gila and Salt River Meridian, Arizona</p>
	<p>Thence, in section 15</p> <p>From the 1/4 sec. cor. of secs. 15 and 22, heretofore described.</p> <p>N. 0° 36' W., on the north and south center line of sec. 15.</p> <p>20.015 The point for the center-south 1/16 sec. cor. of sec. 15.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>C</p> <p>S 1/16 S 15</p> <p>C</p> <p>1975</p> </div>
	<p>40.03 Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 15.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T7S R14W</p> <p>C 1/4 S15</p> <p>1975</p> </div>
	<p>47.78 The point for Angle Point No. 3, Tract 38.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p>


Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

CHAINS



1975

60.045 The point for the center-north 1/16 sec. cor. of sec. 15.
 Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.




1975

80.06 The 1/4 sec. cor. of secs. 10 and 15, which is designated to function for Angle Point No. 2, Tract 38, heretofore described.

From the 1/4 sec. cor. of secs. 14 and 15, heretofore described.


S. 89° 51' W., on the east and west center line of sec. 15.

20.09 The point for the center-east 1/16 sec. cor. of sec. 15.
 Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.



40.18 Intersect the north and south center line, the center 1/4 sec. cor. of sec. 15, heretofore described.

56.25 The point for Angle Point No. 1, Tract 39.
 Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.



1975


Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

CHAINS	
60.30	<p>The point for the center-west 1/16 sec. cor. of sec. 15. Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>W 1/16</p> <p>C ————— C</p> <p>S 15</p> <p>1975</p> </div>
80.42	<p>The 1/4 sec. cor. of secs. 15 and 16, which is designated to function for Angle Point No. 2, Tract 39, heretofore described.</p>
	<p>From the center-east 1/16 sec. cor. of sec. 15, heretofore described.</p> <p>N. 0° 26' W., on the north and south center line of the northeast 1/4 of sec. 15.</p>
19.98	<p>Intersect the east and west center line of the northeast 1/4, the point for the northeast 1/16 sec. cor. of sec. 15. I did not monument this corner point.</p>
39.97	<p>The east 1/16 sec. cor. of secs. 10 and 15, heretofore described.</p>
	<p>From the north 1/16 sec. cor. of secs. 14 and 15, heretofore described.</p> <p>N. 89° 57' W., on the east and west center line of the northeast 1/4 of sec. 15.</p>
20.15	<p>Intersect the north and south center line of the northeast 1/4, the point for the northeast 1/16 sec. cor. of sec. 15, heretofore described.</p>
34.55	<p>Intersect line 3 - 4, Tract 38, on the arc of a curve.</p> <p>The point for the closing corner of sec. 15, I did not monument this corner point. From this corner point Angle Point No. 4, Tract 38, hereinafter described, bears along the arc of a curve, 2.90 chs. distant.</p> <p>Thence, on a blank line across Tract 38.</p>
40.30	<p>Intersect the north and south center line, the center-north 1/16 sec. cor. of sec. 15, heretofore described.</p>

Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona


CHAINS	
	<p>From the west 1/16 sec. cor. of secs. 15 and 22, heretofore described.</p>
	<p>N. 0° 30' W., on the north and south center line of the southwest 1/4 of sec. 15.</p>
19.99	<p>Intersect the east and west center line of the southwest 1/4, the point for the southwest 1/16 sec. cor. of sec. 15, I did not monument this corner point.</p>
39.22	<p>Intersect line 3 - 1, Tract 39.</p> <p>The point for the closing corner of sec. 15, I did not monument this corner point. From this corner point, Angle Point No. 1, Tract 39, heretofore described, bears N. 79° 07' E., 4.12 chs. distant.</p>
39.99	<p>Thence, on a blank line across Tract 39</p> <p>Intersect the east and west center line, the center-west 1/16 sec. cor. of sec. 15, heretofore described.</p>
	<p>From the center-south 1/16 sec. cor. of sec. 15, heretofore described.</p>
	<p>S. 89° 54' W., on the east and west center line of the southwest 1/4 of sec. 15.</p>
20.16	<p>Intersect the north and south center line of the southwest 1/4, the point for the southwest 1/16 sec. cor. of sec. 15, heretofore described.</p>
40.32	<p>The south 1/16 sec. cor. of secs. 15 and 16, heretofore described.</p>
	<p>Thence, in section 19</p> <p>From the 1/4 sec. cor. of secs. 19 and 30, which is designated to function for Angle Point No. 4B, Tract 37, heretofore described.</p>
	<p>N. 0° 02' W., on the north and south center line of sec. 19.</p>
	<p>Thence, on a blank line across Tract 37.</p> <p>Over nearly level land, through areas of dense to scattering mesquite and French Tamarisk.</p>
19.11	<p>Intersect line 2 - 3, Tract 37.</p> <p>The point for the closing corner of sec. 19.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.</p>

Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

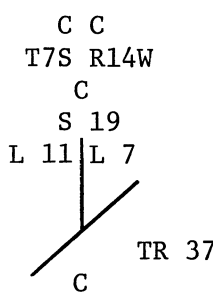CHAINS		
	<p style="text-align: center;">C C T7S R14W C S 19 L 11 L 7  C 1969</p> <p>From this closing corner, Angle Point No. 3, Tract 37, hereinafter described, bears S. 42° 21.5' W., 11.26 chs. distant.</p>	
19.95	The point for the center-south 1/16 sec. cor. of sec. 19. I did not monument this corner point.	
39.90	Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 19. Set an iron post, 28 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.	
	<p style="text-align: center;">T7S R14W C 1/4 S 19 1969</p>	
59.84	The point for the center-north 1/16 sec. cor. of sec. 19. Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.	
	<p style="text-align: center;">C N 1/16 S 19 1969</p>	
79.78	The 1/4 sec. cor. of secs. 18 and 19, heretofore described.	
	<p>From the 1/4 sec. cor. of secs. 19 and 20, which is designated to function for Angle Point No. 8, Tract 37, heretofore described.</p> <p>N. 89° 43' W., on the east and west center line of sec. 19, and on line 8 - 7, Tract 37.</p> <p>Over nearly level land, through areas of dense to scattering mesquite and French tamarisk.</p>	
1.01	The point for Angle Point No. 7, Tract 37. Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.	

Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

CHAINS



1969


Thence, on a blank line across Tract 37.

20.15 The point for the center-east 1/16 sec. cor. of sec. 19, I did not monument this corner point.

21.43 Intersect line 2 - 3, Tract 37.

The point for the closing corner of sec. 19.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

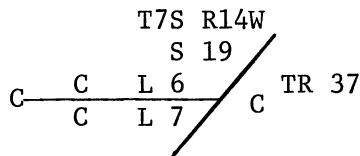

1969

From this closing corner, Angle Point No. 2, Tract 37, hereinafter described, bears N. 42° 21.5' E., 26.75 chs. distant.

40.30 Intersect the north and south center line, the center 1/4 sec. cor. of sec. 19, heretofore described.

60.46 The point for the center-west 1/16 sec. cor. of sec. 19, I did not monument this corner point.

79.20 The 1/4 sec. cor. of secs. 19 and 24 on the west boundary of the township, which is monumented with an iron post, 2½ ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the east boundary of Tp. 7 S., R. 15 W., executed concurrently with this group.

From the point for the center-east 1/16 sec. cor. of sec. 19, heretofore described.

N. 0° 02' W., on the north and south center line of the northeast 1/4 of sec. 19; thence, on a blank line across Tract 37.

Over nearly level land, through dense undergrowth.

1.41 Intersect line 2 - 3, Tract 37.

Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

CHAINS	
	<p>The point for the closing corner of sec. 19, I did not monument this corner point. From this corner point, Angle Point No. 2, Tract 37, hereinafter described, bears N. 42° 21.5' E., 24.86 chs. distant.</p>
19.90	<p>Intersect the east and west center line of the northeast 1/4, the point for the northeast 1/16 sec. cor. of sec. 19, I did not monument this corner point.</p>
	<p>Thence, on a blank line across the north half of the northeast quarter of sec. 19.</p>
39.81	<p>The east 1/16 sec. cor. of secs. 18 and 19, heretofore described.</p>
	<p>From the north 1/16 sec. cor. of secs. 19 and 20, which is designated to function for Angle Point No. 1, Tract 37, heretofore described.</p> <p>N. 89° 35.5' W., on the east and west center line of the northeast 1/4 of sec. 19, and line 1 - 2, Tract 37.</p> <p>Over nearly level land, through areas of dense to scattering mesquite and French tamarisk.</p>
3.41	<p>The point for Angle Point No. 2, Tract 37.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>T7S R14W</p> <p>S 19</p> <hr style="width: 50%; margin: 0 auto;"/> <p>L 5 AP 2</p> <p style="margin-left: 100px;">TR 37</p> </div> <p>1969</p>
	<p>Continue the east and west center line of the northeast 1/4 of sec. 19.</p>
20.16	<p>Intersect the north and south center line of the northeast 1/4, the point for the northeast 1/16 sec. cor. of sec. 19, heretofore described.</p>
40.32	<p>Intersect the north and south center line, the center-north 1/16 sec. cor. of sec. 19, heretofore described.</p>
	<p>From the west 1/16 sec. cor. of secs. 19 and 30, heretofore described.</p> <p>N. 0° 01' W., on the north and south center line of the southwest 1/4 of sec. 19</p>
19.98	<p>Intersect the east and west center line of the southwest 1/4, the point for the southwest 1/16 sec. cor. of sec. 19. I did not monument this corner point.</p>

Survey of a Portion of the Subdivision Lines
Within a Number of Sections
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS	
39.97	Intersect the east and west center line, the point for the center-west 1/16 sec. cor. of sec. 19, heretofore described.
	From the point for the center-south 1/16 sec. cor. of sec. 19, heretofore described.
	N. 89° 53' W., on the east and west center line of the southwest 1/4 of sec. 19.
20.17	Intersect the north and south center line of the southwest 1/4, the point for the southwest 1/16 sec. cor. of sec. 19, heretofore described.
38.92	The point for the south 1/16 sec. cor. of secs. 19 and 24 on the west boundary of the township, which is described (but was not monumented) in the field-note record of the dependent resurvey of a portion of the east boundary of Tp. 7 S., R. 15 W., executed concurrently with this group.
	From the point for the east 1/16 sec. cor. of secs. 19 and 30, heretofore described.
	N. 0° 02' W., on the north and south center line of the southeast 1/4 of sec. 19
18.72	Intersect line 6 - 7, Tract 37.
	The point for the closing corner of sec. 19. I did not monument this corner point. From this corner point, Angle Point No. 6, Tract 37, hereinafter described, bears S. 42° 21.5' W., 24.54 chs. distant.
	Thence, on a blank line across Tract 37.
19.90	Intersect the east and west center line of the southeast 1/4, the point for the southeast 1/16 sec. cor. of sec. 19, I did not monument this corner point.
39.79	Intersect the east and west center line, the point for the center-east 1/16 sec. cor. of sec. 19, heretofore described.
	From the south 1/16 sec. cor. of secs. 19 and 20, heretofore described.
	N. 89° 53' W., on the east and west center line of the southeast 1/4 of sec. 19.
19.09	Intersect line 6 - 7, Tract 37.

Survey of a Portion of the Subdivision Lines
Within a Number of Sections
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>The point for the closing corner of sec. 19. I did not monument this corner point. From this corner point, Angle Point No. 7, Tract 37, heretofore described, bears N. 42° 21.5' E., 26.80 chs. distant.</p> <p>Thence, on a blank line across Tract 37.</p>
20.17	Intersect the north and south center line of the southeast 1/4, the point for the southeast 1/16 sec. cor. of sec. 19, heretofore described.
39.58	Intersect line 2 - 3, Tract 37.
	<p>The point for the closing corner of sec. 19. I did not monument this corner point. From this corner point, Angle Point No. 3, Tract 37, hereinafter described, bears S. 42° 21.5' W., 12.38 chs. distant.</p> <p>Thence, on a blank line across lot 7 of section 19.</p>
40.34	Intersect the north and south center line, the point for the center-south 1/16 sec. cor. of sec. 19, heretofore described.
	<p>Thence, in section 30</p> <p>From the 1/4 sec. cor. of secs. 30 and 31, heretofore described.</p> <p>N. 0° 03' E., on the north and south center line of sec. 30.</p> <p>Over nearly level land, through areas of dense to scattering mesquite and French tamarisk.</p>
20.03	<p>The point for the center-south 1/16 sec. cor. of sec. 30.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C S 1/16 S 30 1969</p>
40.06	<p>Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 30.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T7S R14W C 1/4 S 30 1969</p>
80.13	The 1/4 sec. cor. of secs. 19 and 30, which is designated to function for Angle Point No. 4B, Tract 37, heretofore described.

Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

CHAINS

The 1/4 sec. cor. of secs. 29 and 30 is marked with an iron pipe, 1-inch diam., firmly set, projecting 9 ins. above the surface of the ground, with brass cap mkd.

BUREAU OF RECLAMATION

1/4

S 30 | S 29

1941

The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.

N. 89° 57' W., on the east and west center line of sec. 30.

Over nearly level land, through areas of dense to scattering mesquite and French tamarisk.

40.42 Intersect the north and south center line, the center 1/4 sec. cor. of sec. 30, heretofore described.

60.63 The point for the center-west 1/16 sec. cor. of sec. 30. I did not monument this corner point.

79.38 The 1/4 sec. cor. of secs. 25 and 30 on the west boundary of the township, which is monumented with an iron post, 2½ ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the east boundary of Tp. 7 S., R. 15 W., executed concurrently with this group.

From the point for the west 1/16 sec. cor. of secs. 30 and 31, heretofore described.

N. 0° 04' E., on the north and south center line of the southwest 1/4 of sec. 30.

20.05 Intersect the east and west center line of the southwest 1/4, the point for the southwest 1/16 sec. cor. of sec. 30. I did not monument this corner point.

40.10 Intersect the east and west center line, the point for the center-west 1/16 sec. cor. of sec. 30, heretofore described.

From the center-south 1/16 sec. cor. of sec. 30, heretofore described.

Survey of a Portion of the Subdivision Lines
Within a Number of Sections
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS	
	S. 89° 57' W., on the east and west center line of the southwest 1/4 of sec. 30.
12.90	The point for corner No. 1, Lot 7, sec. 30.
	Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.
	$\begin{array}{r} \text{T7S R14W} \\ \text{S 30} \\ \hline \text{C 1} \quad \diagdown \quad \text{L 6} \\ \text{L 7} \end{array}$
	1969
13.76	The point for corner No. 2, Lot 7, sec. 30.
	Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.
	$\begin{array}{r} \text{T7S R14W} \\ \text{S 30} \\ \hline \text{L 8} \quad \diagdown \quad \text{C 2} \\ \quad \quad \quad \text{L 7} \end{array}$
	1969
15.02	The point for corner No. 1, Lot 5, sec. 30.
	Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.
	$\begin{array}{r} \text{T7S R14W} \\ \text{S 30} \\ \hline \text{C 1} \\ \text{L 5} \quad \diagdown \quad \text{L 8} \end{array}$
	1969
18.08	The point for corner No. 2, Lot 5, sec. 30.
	Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.
	$\begin{array}{r} \text{T7S R14W} \\ \text{S 30} \\ \hline \text{L 8} \quad \diagdown \quad \text{C 2} \\ \quad \quad \quad \text{L 5} \end{array}$
	1969
20.24	Intersect the north and south center line of the southwest 1/4, the point for the southwest 1/16 sec. cor. of sec. 30, heretofore described.
38.98	The south 1/16 sec. cor. of secs. 25 and 30 on the west boundary of the township, which is monumented with an iron post, 2½ ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the east boundary of Tp. 7 S., R. 15 W., executed concurrently with this group.

Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

CHAINS

Survey of lot 5, Section 30
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

From Corner No. 1, Lot 5, sec. 30, heretofore described.


S. 89° 57' W., on line 1 - 2, Lot 5, identical with the
 east and west center line of the southwest 1/4 of sec.
 30.

3.06 Corner No. 2, Lot 5, sec. 30, heretofore described.

S. 28° 39' E., on line 2 - 3, Lot 5, sec. 30.

1.46 The point for corner No. 3, Lot 5, sec. 30.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins.
 in the ground, with brass cap mkd.



N. 61° 21' E., on line 3 - 1, Lot 5, sec. 30.

2.685 Corner No. 1, Lot 5, sec. 30, and the place of beginning.

Survey of lot 7, Section 30
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

From Corner No. 1, Lot 7, sec. 30, heretofore described.

Survey of a Portion of the Subdivision Lines
Within a Number of Sections
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS	
	S. 89° 57' W., on line 1 - 2, Lot 7, identical with the east and west center line of the southwest 1/4 of sec. 30.
0.86	Corner No. 2, Lot 7, sec. 30, heretofore described.

	S. 28° 39' E., on line 2 - 3, Lot 7, sec. 30.
22.81	Corner No. 3, Lot 7, sec. 30, heretofore described.

	N. 89° 50' E., on line 3 - 4, Lot 7, sec. 30, and on line between secs. 30 and 31.
0.862	Corner No. 4, Lot 7, sec. 30, heretofore described.

	N. 28° 39' W., on line 4 - 1, Lot 7, sec. 30.
22.81	Corner No. 1, Lot 7, sec. 30, and the place of beginning.

	Survey of Tracts 37, 38, and 39 Township 7 South, Range 14 West Gila and Salt River Meridian, Arizona

	Thence, with the survey of Tract 37
	Beginning at the north 1/16 sec. cor. of secs. 19 and 20, which is designated to function for Angle Point No. 1, Tract 37, heretofore described.
	N. 89° 35.5' W., on line 1 - 2, Tract 37, identical with the east and west center line of the northeast quarter of sec. 19.
3.41	Angle Point No. 2, Tract 37, heretofore described.

	S. 42° 21.5' W., on line 2 - 3, Tract 37

Survey of Tracts 37, 38, and 39
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

CHAINS	
24.86	Intersect the north and south center line of the north-east 1/4, the point for the closing corner of sec. 19, heretofore described.
26.75	Intersect the east and west center line, the closing corner of sec. 19, heretofore described.
53.62	Intersect the east and west center line of the southeast 1/4, the point for the closing corner of sec. 19, heretofore described.
54.74	Intersect the north and south center line, the closing corner of sec. 19, heretofore described.
66.00	The point for Angle Point No. 3, Tract 37.
	Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.
	<p>T7S R14W S 19 L 11 / AP 3 TR 37</p> <p>1969</p>
	<hr/> <p>Thence, on line 3 - 4A, Tract 37, along the arc of a curve, curve data:</p>
	<p>Radius 68.29 chs. distant. Length of arc 17.02 chs. distant. Length of chord 16.52 chs. distant, and bears S. 49° 18' W.</p>
	<p>At the end of the arc of the curve, Angle Point No. 4A, Tract 37, heretofore described.</p>
	<hr/> <p>N. 89° 58' E., on line 4A - 4B, Tract 37, and on line between secs. 19 and 30.</p>
20.09	The 1/4 sec. cor. of secs. 19 and 30, which is designated to function for Angle Point No. 4B, Tract 37, heretofore described.
	<hr/> <p>S. 89° 58' E., on line 4B - 5, Tract 37, and continue on line between secs. 19 and 30.</p>
3.10	Angle Point No. 5, Tract 37, heretofore described.

Survey of Tracts 37, 38, and 39
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS

Thence, on line 5 - 6, Tract 37, along the arc of a curve, curve data:

Radius 83.44 chs. distant.

Length of arc 0.78 chs. distant.

Length of chord 0.78 chs. distant, and bears N. 42° 37' E.

At the end of the arc of the curve, the point for Angle Point No. 6, Tract 37.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T7S R14W
TR 37
AP 6 / L 10
S 19
1969

N. 42° 21.5' E., on line 6 - 7, Tract 37.

- 24.54 Intersect the north and south center line of the south-east 1/4, the point for the closing corner of sec. 19, heretofore described.
- 26.13 Intersect the east and west center line of the south-east 1/4, the point for the closing corner of sec. 19, heretofore described.
- 52.93 Intersect the east and west center line of sec. 19, and Angle Point No. 7, Tract 37, heretofore described.

S. 89° 43' E., on line 7 - 8, Tract 37, identical with the east and west center line of sec. 19.

- 1.01 The 1/4 sec. cor. of secs. 19 and 20, which is designated to function for Angle Point No. 8, Tract 37, heretofore described.

N. 0° 03' W., on line 8 - 1, Tract 37, and on line between secs. 19 and 20.

- 19.85 The north 1/16 sec. cor. of secs. 19 and 20, which is designated to function for Angle Point No. 1, Tract 37, heretofore described, and the place of beginning.
-

Survey of Tracts 37, 38, and 39
 Township 7 South, Range 14 West
 Gila and Salt River Meridian, Arizona

CHAINS

Thence, with the survey of Tract 38.

Beginning at Angle Point No. 1, Tract 38, heretofore described.

N. 89° 58' W., on line 1 - 2, Tract 38, and on line between secs. 10 and 15.

6.154 The 1/4 sec. cor. of secs. 10 and 15, which is designated to function for Angle Point No. 2, Tract 38, heretofore described.

S. 0° 36' E., on line 2 - 3, Tract 38, identical with the north and south center line of sec. 15.

20.015 The center-north 1/16 sec. cor. of sec. 15, heretofore described.

Continue with the above course and measurement.

32.28 Angle Point No. 3, Tract 38, heretofore described.

Thence, on line 3 - 4, Tract 38, along the arc of a curve, curve data:

Radius 22.73 chs. distant.
 Length of arc 16.60 chs. distant.
 Length of chord 16.24 chs. distant, and bears N. 20° 58' E.

At 13.70 chs. distant on the arc of the curve. Intersect the east and west center line of the northeast quarter, the point for the closing corner of sec. 15, heretofore described.

At the end of the arc of the curve, the point for Angle Point No. 4, Tract 38.

Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

TR 38 | T7S
 AP 4 | S 15
 / R14W

1975

N. 0° 02' E., on line 4 - 1, Tract 38.

17.11 Angle Point No. 1, Tract 38, heretofore described, and the place of beginning.

Survey of Tracts 37, 38, and 39
Township 7 South, Range 14 West
Gila and Salt River Meridian, Arizona

CHAINS	
	Thence, with the survey of Tract 39
	Beginning at Angle Point No. 1, Tract 39, heretofore described.
	S. 89° 51' W., on line 1 - 2, Tract 39, identical with the east and west center line of sec. 15.
4.05	The center-west 1/16 sec. cor. of sec. 15, heretofore described.
24.17	The 1/4 sec. cor. of secs. 15 and 16, which is designated to function for Angle Point No. 2, Tract 39, heretofore described.
	<hr/>
	S. 0° 23.5' E., on line 2 - 3, Tract 39, and on line between secs. 15 and 16.
4.575	Angle Point No. 3, Tract 39, heretofore described.
	<hr/>
	N. 79° 07' E., on line 3 - 1, Tract 39
20.45	Intersect the north and south center line of the southwest quarter, the point for the closing corner of sec. 15, heretofore described.
24.57	Angle Point No. 1, Tract 39, heretofore described, and the place of beginning.
	GENERAL DESCRIPTION
	The land embraced by this survey is sandy desert land. The primary vegetation cover consists of areas of dense to scattering French tamarisk, mesquite, and paloverde, with arrow weed and brush undergrowth. Grass is very widely scattering and practically non-existent. A few scattering cottonwood trees were noted along the dry washes of the Gila River.
	The major water course is the Gila River, which meanders through the area in a southwesterly direction. No water was noted in the river during this survey. There are numerous over flow channels of the Gila River in the area.
	Irrigated farms are developed near the area with concrete canals and laterals. Improved county roads have been constructed in the vicinity.
	Game birds, coyotes, and rodents abound throughout the vicinity.

CHAINS

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
In 1969	
Marvin T. Koppang	Cadastral Surveyor
Kermit L. Duke	Surveying Aid
Manuel G. Jaramillo	Surveying Aid
Fordner VanFleet	Surveying Aid
Dale Phillips	Surveying Aid
In 1975	
Eric A. Werner	Surveying Aid
Cruz D. Almanza	Surveying Aid
Jerold L. Peterson	Surveying Aid
Lewis A. Scheeler	Surveying Aid

CERTIFICATE OF SURVEY

(I) (We), Douglas A. Cody and Ray Harpin, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 14th day of October, 1969, ~~(I) (We) have~~ and Supplemental Special Instructions dated November 20, 1969, we have dependently resurveyed a portion of the subdivisional lines, surveyed a portion of the subdivision lines (within sections 15, 19, and 30), and surveyed Tracts 37, 38, and 39, Township 7 South, Range 14 West,

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by ~~(me)~~, (us) and under ~~(my)~~ / (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 18, 1977
(Date)

Douglas A. Cody
(Cadastral Surveyor)
DOUGLAS A. CODY

July 18, 1977
(Date)

Ray Harpin
(Cadastral Surveyor)
RAY HARPIN

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
~~Washington, D.C.~~
Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines, the survey of a portion of the subdivision lines (within sections 15, 19, and 30), and the survey of Tracts 37, 38, and 39, Township 7 South, Range 14 West, of the Gila and Salt River Meridian, Arizona

executed by Douglas A. Cody and Ray Harpin, Cadastral Surveyors having been critically examined and found correct, are hereby approved.

JAN 28 1980
(Date)

J. J. Voth
(Chief, Division of Cadastral Survey)

Chief, Cadastral Survey Examination and Approval Staff

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey) GPO 849-626~~