

Form 9180-6
(March 1977)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE
DEPENDENT RESURVEY OF A PORTION OF THE
SUBDIVISIONAL LINES
AND
THE SURVEY OF A PORTION OF THE
SUBDIVISION LINES WITHIN SECTION 8
AND
THE METES-AND-BOUNDS SURVEY OF LOT NO. 26, SECTION 30
OF
TOWNSHIP 9 SOUTH, RANGE 24 WEST

Of the _____ GILA AND SALT RIVER _____ Meridian,
In the State of _____ ARIZONA _____

EXECUTED BY

RAY HARPIN _____ CADASTRAL SURVEYOR

Under special instructions dated JANUARY 7 _____, 19 72, approved JANUARY 20, 1972,
AND SUPPLEMENTAL SPECIAL INSTRUCTIONS, DATED JUNE 12, 1978, APPROVED
JUNE 23, 1978 _____, which provided for the surveys included under ~~US Survey~~/Group
Number 543 _____, and assignment instructions dated JANUARY 7 _____, 1972.

Survey commenced APRIL 24 _____, 19 72

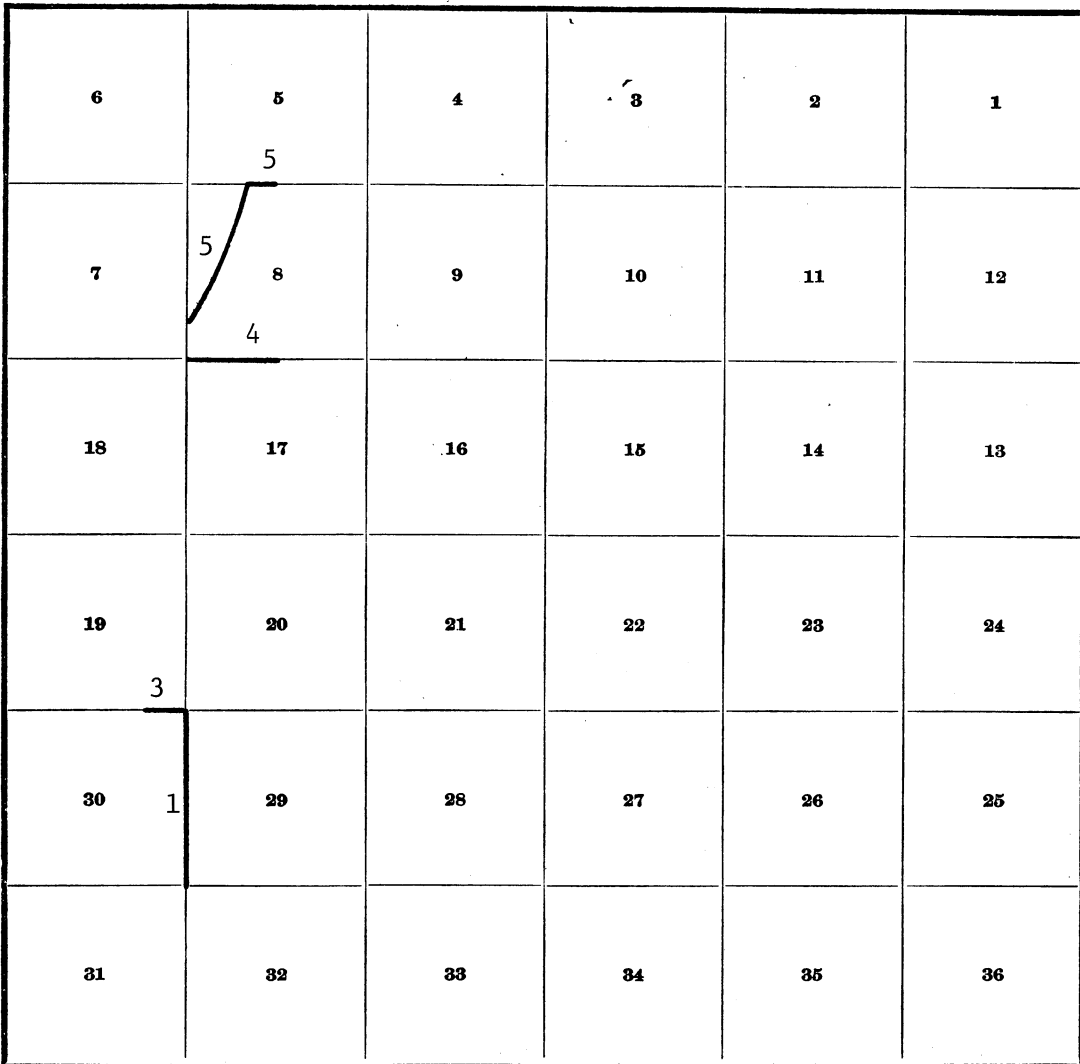
Survey completed APRIL 27 _____, 19 72

1A

BOOK 5 104

INDEX DIAGRAM

Township 9 SOUTH, Range 24 WEST



Survey of a portion of the subdivison lines within section 8, beginning on page . . . 7

Metes-and-Bounds survey of lot No. 26 of section 30, beginning on page . . . 12

Township 9 South, Range 24 West
Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines; the survey of a portion of the subdivision lines within section 8, and the metes-and-bounds survey of lot No. 26, section 30, Township 9 South, Range 24 West, of the Gila and Salt River Meridian, Arizona.

History of Previous Surveys: The exterior boundaries and subdivisional lines of this fractional township were originally surveyed by Theadore F. White, U. S. Deputy Surveyor, in 1874, as shown upon the official plat examined and approved April 18, 1874. A portion of the south, north, and west boundaries, and a portion of the subdivisional lines were resurveyed and an area of accretion was surveyed by Arthur W. Brown and William H. Thorn, U. S. Cadastral Engineers, from 1918 through 1920, as shown upon the official plat examined and approved August 27, 1920. A portion of the south and west boundaries, and a portion of the subdivisional lines were resurveyed by Francis E. Joy, U. S. Cadastral Engineer, in 1930, as shown upon the official plat accepted March 26, 1931. A portion of the north and west boundaries and a portion of the subdivisional lines were dependently resurveyed by Robert C. Yundt, Cadastral Surveyor, in 1960 and 1961, as shown upon the official plat accepted, January 10, 1962.

The dependent resurvey and survey were executed in accordance with specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions dated January 7, 1972, and Supplemental Special Instructions dated June 12, 1978.

The direction of all lines of these surveys were determined from direct altitude observations on the sun for azimuth, and these directions refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains.

The geographic position of the corner of sections 29, 30, 31, and 32, determined by scaling from a U. S. Geological Survey Quadrangle Map, 7 1/2 minute series "Gadsden, Ariz., 1965", is as follows: Latitude $32^{\circ} 36.7'$ N. and longitude $114^{\circ} 45.1'$ W. The mean magnetic declination is 14° East.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 9 South, Range 24 West
Gila and Salt River Meridian, Arizona

Restoring the survey executed by Francis E. Joy,
U. S. Cadastral Engineer, in 1930

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 9 South, Range 24 West
Gila and Salt River Meridian, Arizona

CHAINS

Beginning at the corner of sections 29, 30, 31, and 32 which is marked with an iron pipe 2½ ins. in diam., with brass cap 8 ins. below the surface of the road mkd.

YUMA COUNTY
SEC COR
S 30 | S 29
S 31 | S 32

1969

substantiated by:

A cross (+) chiseled on a concrete headwall, bears S. 78° 15' E., 85 ft. distant, mkd. RP + 85' and an arrow pointing to the corner

A cross (+) chiseled on a concrete headwall, bears S. 16° 15' E., 64 ft. distant, mkd. RP + 64' and an arrow pointing to the corner.

The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.

N. 0° 51' W., between secs. 29 and 30

Over nearly level land.


27.14 The point for the closing corner of secs. 29 and 30, on line 6 - 7 of the Farmer's Banco No. 501; which is determined at proportionate distance; there is no evidence of the original corner. I did not monument this corner point.

40.02 The point for the 1/4 sec. cor. of secs. 29 and 30 is determined at proportionate distance; there is no evidence of the original corner. I did not monument this corner point.

61.77 The point for the closing corner of secs. 29 and 30, on line 4 - 5 of the Farmer's Banco No. 501; which is determined at proportionate distance; there is no evidence of the original corner. I did not monument this corner point.

68.70 Center line of Pesch Header Canal. The point for the corner of lots 26 and 27 of section 30. Canal flows southeast. I did not monument this corner point.

69.35 Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, for the witness corner of lots 26 and 27, section 30, with brass cap mkd.



1972

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 9 South, Range 24 West
Gila and Salt River Meridian, Arizona

CHAINS

80.04 The cor. of secs. 19, 20, 29, and 30 is marked with an iron pipe 2 ins. in diam., with brass cap 18 ins. below the surface of the road, mkd.

RECLAMATION SERVICE

T9S R24W

S 19 | S 20

S 30 | S 29

1918 (record, 1954)

substantiated by:

A cross (+) chiseled on a concrete headwall, bears N. 28° 40' E., 34 ft. distant, mkd. RP + 34'

A cross (+) chiseled on a concrete headwall, bears S. 63° 30' E., 54.3 ft. distant, mkd. RP 54.3'


The above corner marker was accepted and described in the official field-note record of the dependent resurvey by Robert C. Yundt in 1960 and 1961.

Restoring the survey executed by Robert C. Yundt
Cadastral Surveyor, in 1960 and 1961

S. 89° 51' W., between secs. 19 and 30

Over nearly level land.

13.35 Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 7 ins. below the surface of the road, for the witness corner of lots 26 and 27, section 30, with brass cap mkd.



1972

from which

A wheel shaft on a water gate, bears S. 2° 30' E., 37 lks. distant.

There are no other suitable accessory nor locations available for reference monuments.

14.15 Center line of Pesch Header Canal. The true point for the corner of lots 26 and 27 of section 30. Canal flows southeast. I did not monument this corner point.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 9 South, Range 24 West
Gila and Salt River Meridian, Arizona

CHAINS

18.01 The reestablished meander corner of sections 19 and 30, on the (1874) meander line of the left bank of the Colorado River, is monumented with an iron post, 2½ ins. in diam., with brass cap 4 ins. below the surface of the roadway, mkd.

$$\begin{array}{r} \text{MC} \diagup \text{T9S} \\ \text{S 19} \\ \hline \text{S 30} \\ \text{R24W} \end{array}$$

1960

Discontinue the regular order of survey at this corner.

The 1/4 sec. cor. of secs. 8 and 17 is monumented with an iron post, 2½ ins. in diam., with brass cap 12 ins. below the surface of the road, mkd.

$$\begin{array}{r} \text{T9S R24W} \\ \text{1/4} \frac{\text{S 8}}{\text{S 17}} \end{array}$$

1960

From which

A cross (+) chiseled on a concrete headgate, bears S. 18° 45' E., 31.7 ft. distant, mdk. + RP 31.7 ft.

S. 89° 48' W., between secs. 8 and 17

Over nearly level land.

19.97 The point for the west 1/16 sec. cor. of secs. 8 and 17
Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 7 ins. below the surface of the roadway.

$$\begin{array}{r} \text{W 1/16} \frac{\text{S 8}}{\text{S 17}} \end{array}$$

1972

There are no suitable accessories nor locations available for reference monuments.

39.94 The corner of secs. 7, 8, 17, and 18 is marked with an iron pipe, 2 ins. in diam., with brass cap 11 ins. below the surface of the road, mkd.

BUREAU OF RECLAMATION
T9S R24W
$$\begin{array}{r} \text{S 7 | S 8} \\ \hline \text{S 18 | S 17} \end{array}$$

1951

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 9 South, Range 24 West
Gila and Salt River Meridian, Arizona

CHAINS

The above corner marker was accepted and described in the official field-note record of the dependent resurvey by Robert C. Yundt in 1960 and 1961.

Discontinue the regular order of survey at this corner.

The 1/4 sec. cor. of secs. 5 and 8 is monumented with an iron post, 2½ ins. in diam., with brass cap 9 ins. below the surface of the roadway, mkd.

T9S R24W
1/4 $\frac{S\ 5}{S\ 8}$

1960

WEST, between secs. 5 and 8

Over nearly level land.

3.80 The witness Meander Corner of secs. 5 and 8 is monumented with an iron post, 2½ ins. in diam., with brass cap 5 ins. below the surface of the roadway, mkd.

T9S R24W
WC \swarrow $\frac{S\ 5}{S\ 8}$
MC \swarrow

1961

Thence, continuing course and measurement.

6.95 The true point for the Meander Corner of secs. 5 and 8 on the left bank of the Colorado River, which is determined at record course and record distant from the above witness Meander Corner.

The Reestablishment of the (1961) Meanders
of the Left Bank of the Colorado River
Through Section 8,

MEMORANDUM


The recorded courses of the original meanders of the left bank of the Colorado River through section 8 were calculated between reestablished points for the meander corners. The residual or closing errors were ascertained and the recorded courses were calculated and adjusted to a closing, by the broken boundary method, adopting new courses to the nearest minute and lengths to the nearest link, as follows:

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 9 South, Range 24 West
Gila and Salt River Meridian, Arizona

CHAINS	
	S. 19° 07' W.
6.69	Adjusted position for Angle Point No. 1, Section 8. I did not monument.

	S. 11° 05' W.
19.54	Adjusted position for Angle Point No. 2, section 8. I did not monument.
 _____
	S. 22° 52' W.
7.51	Adjusted position for Angle Point No. 3, section 8. I did not monument.
 _____
	S. 24° 22' W.
8.44	Intersect the east and west center line, the point for a Special Meander Corner of sec. 8. A witness corner is hereinafter described.
9.36	Intersect the north and south center line of the southwest quarter, the point for a Special Meander Corner of sec. 8. A witness corner is hereinafter described.
16.18	Adjusted position for Angle Point No. 4, section 8. I did not monument.
 _____
	S. 48° 56' W.
11.07	Adjusted position for Angle Point No. 5, section 8. I did not monument.
 _____
	S. 51° 11' W.
0.11	Intersect the western right-of-way of the Yuma Valley Levee, the point for the corner of lots 9 and 10, a Special Meander Corner of sec. 8. A witness cor. is hereinafter described.
9.26	Intersect the east and west center line of the southwest quarter, the point for a Special Meander Corner of sec. 8. A witness corner is hereinafter described.
11.16	The meander corner of secs. 7 and 8 is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 5 ins. above the surface of the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 9 South, Range 24 West
Gila and Salt River Meridian, Arizona

CHAINS		
	 <p>MC S 7 S 8 T9S R24W 1961</p>	
	<p>Survey of a Portion of the Subdivision Lines within Section 8 Township 9 South, Range 24 West Gila and Salt River Meridian, Arizona</p>	
	<p>From the 1/4 sec. cor. of secs. 8 and 17, heretofore described.</p> <p>N. 0° 16' W., on the north and south center line of sec. 8</p>	
20.05	<p>The point for the center-south 1/16 sec. cor. of sec. 8</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the roadway, mkd.</p> <p style="text-align: center;">C S 1/16 S 8 1972</p>	
	<p>There are no suitable accessories nor locations available for reference monuments.</p>	
40.10	<p>Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 8.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 7 ins. below the surface of the ground, mkd.</p> <p style="text-align: center;">T9S R24W C 1/4 S 8 1972</p>	
	<p>from which</p> <p style="text-align: center;">A wheel shaft on a water gate, bears S. 0° 16' E., 11 lks. distant.</p> <p>There are no other suitable accessory nor locations available for reference monuments.</p>	
40.40	Roadway, bears east and west	
65.15	Left bank of the West Main Canal, flowing S. 22° W.	


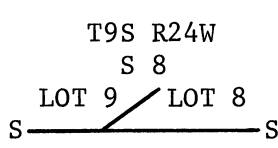

Survey of a Portion of the Subdivision Lines
 within Section 8
 Township 9 South, Range 24 West
 Gila and Salt River Meridian, Arizona

CHAINS	
66.95	Right bank of the West Main Canal
70.20	The center line of the Southern Pacific Railroad, bears N. 21° 46' E. and S. 21° 46' W.
71.25	The center line of the Yuma Valley Levee, parallels the above railroad track.
80.19	The 1/4 sec. cor. of secs. 5 and 8, heretofore described.
<p>The 1/4 sec. cor. of secs. 8 and 9 is marked with an iron pipe, 1-inch in diam., with the top 7 ins. below the surface of the road.</p>	
<p>substantiated by:</p>	
<p>A concrete post, 5 ins. in diam., bears S. 37° 10' W., 53.66 ft. distant, firmly set, projecting 3 ins. above the surface of the ground, with an aluminum tablet 1½ ins. in diam., seated on the top, mkd. USCE LA DIST RP 53.66 FT.</p>	
<p>A concrete post, 5 ins. in diam., bears N. 43° 05' W., 47.83 ft. distant, firmly set, projecting 3 ins. above the surface of the ground, with an aluminum tablet 1½ ins. in diam., seated on the top, mkd. USCE LA DIST RP 47.83 FT.</p>	
<p>The above corner marker was accepted and described in the official field-note record of the dependent resurvey by Robert C. Yundt in 1960 and 1961.</p>	
<p>S. 89° 52' W., on the east and west center line of sec. 8</p>	
40.01	Intersect the north and south center line, the center 1/4 sec. cor. of sec. 8, heretofore described.
54.60	Left bank of the West Main Canal, flowing S. 35° 25' W.
55.25	Right bank of the West Main Canal
56.87	The center line of the Southern Pacific Railroad, bears N. 35° 25' E. and S. 35° 25' W.
57.15	The center line of the Yuma Valley Levee, parallels the above railroad track.
58.97	Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for the witness Special Meander Corner of sec. 8, with brass cap mkd.
<p>1972</p>	

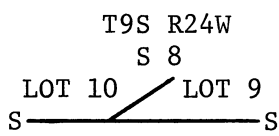

Survey of a Portion of the Subdivision Lines
 within Section 8
 Township 9 South, Range 24 West
 Gila and Salt River Meridian, Arizona

CHAINS	
59.49	Intersect line 3 - 4 of the reestablished meanders of the left bank of the Colorado River, the true point for the Special Meander Corner of sec. 8, heretofore described.
20.07	<p>From the west 1/16 sec. cor. of secs. 8 and 17, heretofore described.</p> <p>N. 0° 08' W., on the north and south center line of the southwest quarter of sec. 8</p> <p>Over nearly level land.</p>
31.14	<p>Intersect the east and west center line of the southwest quarter, the point for the southwest 1/16 sec. cor. of sec. 8. I did not monument this corner point.</p> <p>The point for the corner of lots 8 and 9 of section 8.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 11 ins. below the surface of (cultivated field) ground, mkd.</p> <div data-bbox="824 1212 998 1464" style="text-align: center;"> <p>T9S R24W</p> <p>W</p> <p>S 8</p> <p>LOT 9</p> <p>LOT 8</p> <p>W</p> </div> <p>1972</p> <p>There are no suitable accessories nor locations available for reference monuments.</p>
32.11	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, for the Witness Point of sec. 8, with brass cap mkd.</p> <div data-bbox="894 1790 950 1948" style="text-align: center;"> <p>W P</p> <p>W</p> <p>S 8</p> <p>W</p> </div> <p>1972</p>
32.85	Left bank of the West Main Canal, flowing S. 35° 25' W.
34.05	Right bank of the West Main Canal
35.95	The center line of the Southern Pacific Railroad, bears N. 35° 25' E. and S. 35° 25' W.
36.35	The center line of the Yuma Valley Levee, parallels the above railroad track.



Survey of a Portion of the Subdivision Lines
 within Section 8
 Township 9 South, Range 24 West
 Gila and Salt River Meridian, Arizona

CHAINS	
38.30	Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, for the witness Special Meander Corner of sec. 8, with brass cap mkd.
	 <p style="text-align: center;">1972</p>
39.31	Intersect line 3 - 4 of the reestablished meanders of the left bank of the Colorado River, the true point for the Special Meander Corner of sec. 8, heretofore described.
	From the center-south 1/16 sec. cor. of sec. 8, heretofore described.
	S. 89° 50' W., on the east and west center line of the south west quarter of sec. 8.
	Over nearly level land.
19.92	Intersect the north and south center line of the southwest quarter, the point for the southwest 1/16 sec. cor. of sec. 8, heretofore described.
27.82	The point for the corner of lots 8 and 9 of section 8
	Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 13 ins. below the surface of (cultivated field) ground, mkd.
	 <p style="text-align: center;">1972</p>
	There are no suitable accessories nor locations available for reference monuments.
28.23	Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, for the Witness Point of sec. 8, with brass cap mkd.
	 <p style="text-align: center;">1972</p>
29.12	Left bank of the West Main Canal, flowing S. 35° 25' W.

Survey of a Portion of the Subdivision Lines
 within Section 8
 Township 9 South, Range 24 West
 Gila and Salt River Meridian, Arizona

CHAINS		
29.87	Right bank of the West Main Canal	
31.30	The center line of the Southern Pacific Railroad, bears on a curve northeast and southwest.	
31.57	The center line of the Yuma Valley Levee, parallels the above railroad track.	
35.40	The western right-of-way of the Yuma Valley Levee, the point for the corner of lots 9 and 10 of sec. 8.	
	Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, with brass cap. mkd.	
		
	1972	
37.87	Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, for the witness Special Meander Corner of sec. 8, with brass cap mkd.	
		
	1972	
38.35	Intersect line 5 - MC secs. 7 and 8 of the reestablished meanders of the left bank of the Colorado River, the true point for the Special Meander Corner of sec. 8, heretofore described.	
	From the corner of lots 8 and 9, sec. 8 (heretofore described), which is located on the east and west center line of the southwest quarter of sec. 8.	
	N. 35° 25' E., between lots 8 and 9, sec. 8, and along the eastern right-of-way of the Yuma Valley Levee.	
13.61	Intersect the north and south center line of the southwest quarter, the corner of lots 8 and 9, sec. 8, heretofore described.	
	From the corner of lots 9 and 10, sec. 8 (heretofore described,) which is located on the east and west center line of the southwest quarter of sec. 8.	
	N. 36° 46' E., between lots 9 and 10, sec. 8, and along the western right-of-way of the Yuma Valley Levee.	

Survey of a Portion of the Subdivision Lines
 within Section 8
 Township 9 South, Range 24 West
 Gila and Salt River Meridian, Arizona

CHAINS	
4.16	<p>The point for an Angle Point of lots 9 and 10, sec. 8</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T9S R24W S 8</p>  <p>LOT 10 / LOT 9</p> <p>1972</p> </div> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 35° 25' E.</p>
1.91	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, for the witness Special Meander Corner of sec. 8, with brass cap mkd.</p> <div style="text-align: center;">  <p>WC SMC</p> <p>LOT 10 / LOT 9</p> <p>S 8</p> <p>1972</p> </div>
2.97	<p>Intersect line 5 - MC secs. 7 and 8 of the reestablished meanders of the left bank of the Colorado River, the true point for the Special Meander Corner of sec. 8, heretofore described.</p>
<p>The Metes-and-Bounds Survey of Lot No. 26 within section 30 Township 9 South, Range 24 West Gila and Salt River Meridian, Arizona</p>	
<p>Beginning at the corner of secs. 19, 20, 29, and 30 heretofore described.</p>	
<p>S. 89° 51' W., along the north boundary of lot 26, sec. 30, which is identical with the section line between sections 19 and 30.</p>	
13.35	<p>The witness corner of lots 26 and 27 of section 30, heretofore described.</p>
14.15	<p>The true point for the corner of lots 26 and 27 of section 30, heretofore described.</p> <hr style="width: 30%; margin: 10px auto;"/>

The Metes-and-Bounds Survey of Lot No. 26
 within section 30
 Township 9 South, Range 24 West
 Gila and Salt River Meridian, Arizona

CHAINS	
	S. 55° 15' E., along the southwestern boundary of lot 26, which is identical with the northeastern boundary of lot 27 of section 30, and along the center line of Pesch Header Canal.
11.45	The point for an Angle Point of lots 26 and 27 of section 30. I did not monument this corner point.
	S. 49° 54' E.
1.51	The point for an Angle Point of lots 26 and 27 of section 30. I did not monument this corner point.
	S. 44° 33' E.
5.34	Intersect the section line between secs. 29 and 30, the true point for the corner between lots 26 and 27 of sec. 30, heretofore described.
	N. 0° 51' W., along the eastern boundary of lot 26, sec. 30, which is identical with the section line between sections 29 and 30.
0.65	The witness corner of lots 26 and 27 of section 30, heretofore described.
11.34	The corner of secs. 19, 20, 29, and 30, and the place of beginning.
	GENERAL DESCRIPTION
	<p>The land area within this survey is nearly level. The soil is sandy clay loam where the land is under cultivation and sandy loam west of the Yuma Valley Levee. The vegetation west of the levee consists of scattering to dense cottonwood, willows, and French tamarisk; undergrowth arrow weed.</p>
	<p>Improvements located throughout the area, are: Yuma Valley Levee; Southern Pacific Railroad; Yuma County and farm roads; numerous canals and laterals for irrigation.</p>

CHAINS		
--------	--	--

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS


NAMES	CAPACITY
Glenn F. Goodson	Cadastral Surveyor
Everett E. Gorgen	Surveying Aid
Jose M. Montoya	Surveying Aid
Steven L. Gehrke	Surveying Aid
Victor E. Templeton	Surveying Aid
Luscious L. Burns	Surveying Aid
Caleb C. Costin	Surveying Aid

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Ray Harpin, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 7th day of January, 1972, ~~(I) ~~(We)~~ have~~ and Supplemental Special Instructions dated June 12, 1978. I have dependently resurveyed a portion of the subdivisional lines; surveyed a portion of the subdivision lines within section 8, and surveyed the metes-and-bounds survey of lot No. 26 of section 30, township 9 South, Range 24 West,

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 28, 1978
(Date)


(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
~~Washington, D.C.~~

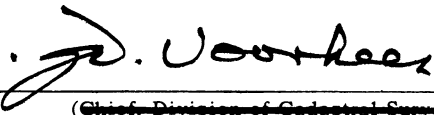
Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines; the survey of a portion of the subdivision lines within section 8, and the Metes-and-Bounds survey of lot No. 26 of section 30, of Township 9 South, Range 24 West, of the Gila and Salt River Meridian, Arizona

executed by Ray Harpin, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 21 1980
(Date)


(Chief, Division of Cadastral Survey)

Chief, Cadastral Survey Examination and Approval Staff

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey) GPO 849-626~~