

Form 9180-6  
(March 1977)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

A PORTION OF THE SUBDIVISION LINES WITHIN SECTIONS 3, 4, 8, AND 17

AND

THE SURVEY OF A PORTION OF THE SUBDIVISION LINES

WITHIN SECTIONS 3, 4, 5, 7 AND 8,

THE METES-AND-BOUNDS SURVEY OF PARCEL C, SECTION 17,

AND

THE METES-AND-BOUNDS SURVEY OF TRACTS 39 THROUGH 46 INCLUSIVE,

TOWNSHIP 8 SOUTH, RANGE 16 WEST

Of the GILA AND SALT RIVER Meridian,

In the State of ARIZONA

EXECUTED BY

DOUGLAS A. CODY

CADASTRAL SURVEYOR

Under special instructions dated OCTOBER 14, 1969, approved OCTOBER 27, 1969,  
AND SUPPLEMENTAL SPECIAL INSTRUCTIONS DATED NOVEMBER 20, 1969, APPROVED

NOVEMBER 21, 1969, which provided for the surveys included under ~~U.S. Survey~~ Group  
Number 517, and assignment instructions dated OCTOBER 14, 1969.

Survey commenced DECEMBER 4, 1974

Survey completed JANUARY 10, 1975

BOOK 5 118

INDEX DIAGRAM

Township 8 SOUTH, Range 16 WEST,

6	5 13 24	4 6 12	3 4 5	2	1
7 22 21	8 10 17	9	10	11	12
18 15	17 8	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Dependent Resurvey of a portion of the subdivision lines, within  
 Section 3 . . . . . p. 25      Section 8 . . . . . p. 30  
 Section 4 . . . . . p. 27      Section 17 . . . . . p. 34

Survey of a portion of the subdivision lines, within  
 Section 3 . . . . . p. 44      Section 7 . . . . . p. 50  
 Section 4 . . . . . p. 47      Section 8 . . . . . p. 53  
 Section 5 . . . . . p. 48

Metes-and-Bounds Survey of Parcel C, Section 17 . . . p. 54

Metes-and-Bounds Survey of Tracts  
 Tract No. 39 . . . . . p. 57      Tract No. 43 . . . . . p. 63  
 Tract No. 40 . . . . . p. 59      Tract No. 44 . . . . . p. 63  
 Tract No. 41 . . . . . p. 60      Tract No. 45 . . . . . p. 66  
 Tract No. 42 . . . . . p. 61      Tract No. 46 . . . . . p. 67

Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

## CHAINS

The following field notes are those of the dependent resurvey of a portion of the west boundary of the township, a portion of the subdivisional lines, and a portion of the subdivision lines within section 3, 4, 8, and 17; the survey of a portion of the subdivision lines within sections 3, 4, 5, 7, and 8, the metes-and-bounds survey of Parcel C, section 17, and the metes-and-bounds survey of Tracts 39 through 46, Township 8 South, Range 16 West, of the Gila and Salt River Meridian, Arizona.

History of Previous Surveys: The east boundary was surveyed by Theodore F. White, U. S. Deputy Surveyor, in 1877. The south, west, and north boundaries, and the subdivisional lines were surveyed by John L. Harris, U. S. Deputy Surveyor, in 1878, as shown upon the official plat approved April 1, 1878. A portion of the subdivisional lines were dependently resurveyed; a portion of the subdivision lines within sections 4 and 8, and surveyed the metes-and-bounds survey of Tracts 37 and 38, by Clark Gumm, Cadastral Engineer in 1952, as shown upon the official plat accepted July 7, 1952. A portion of the subdivisional lines were dependently resurveyed; a portion of the subdivision lines within section 17 were surveyed by Albin H. Wadin, Engineer, Bureau of Reclamation, in 1952, as shown upon the official plat, examined and approved by the Bureau of Reclamation, Washington, D. C., July 17, 1953, and was accepted by the Chief, Branch of Surveys (Cadastral), Bureau of Land Management, July 17, 1953. A portion of the subdivisional lines were dependently resurveyed; a portion of the subdivision lines within sections 1, 3, 8, and 17 were surveyed by Albin H. Wadin, Engineer, Bureau of Reclamation, in 1954, as shown upon the official plat, examined and approved by the Bureau of Reclamation, Washington, D. C., March 17, 1955, and was accepted by the Chief, Branch of Surveys (Cadastral), Bureau of Land Management, March 17, 1955. A portion of the north boundary of the township was dependently resurveyed as described in the official field-note record of the dependent resurvey of a portion of the south boundary of Tp. 7 S., R. 16 W., executed concurrently with this group.

The dependent resurveys and surveys were executed in accordance with the specifications as set forth in the Manual of Surveyin Instructions, 1973 Edition, and the Special Instructions dated October 14, 1969, and Supplemental Special Instructions dated November 20, 1969.

The direction of all lines of these surveys were determined from direct altitude observations on the sun for azimuth, and these directions refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains.

Prior to the restoration of any corner, all necessary lines of the original survey were retraced and a diligent search was made for any evidence of the original corner monuments and calls of the official record. Identified corners were remonumented in their original positions, but not until exhausting every reasonable possibility of finding direct evidence for the control of each corner.

Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

The geographic position of the corner of secs. 17, 18, 19, and 20, determined by scaling from a U. S. Geological Survey Quadrangle Map, 7 1/2 minute series "Tacna, Arizona, 1965", is as follows: Latitude 32° 43.4' N., and Longitude 113° 56.1' W. The mean magnetic declination is 14° East.

Dependent Resurvey of a Portion  
of the West Boundary of the Township  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

Restoring the Survey Executed by John L. Harris  
U. S. Deputy Surveyor, in 1878

The cor. of secs. 7, 12, 13, and 18 on the west boundary of the township, which is marked with a steel rod, 1/2-inch in diam., with the top flush with the surface of the road

substantiated by:

A (capped) iron pipe, 2 ins. in diam., firmly set, projecting 2 ft. above the surface of the ground, bears N. 36° 40' E., 38.0 ft. distant, mkd. R P 38.0'

An electric transmission line pole, bears N. 45° 45' E. 39.14 ft. distant, mkd. RP 39.14'

A cross (+) chiseled on concrete headwall of a lateral, bears N. 78° 30' W., 58.14 ft. distant, mkd. R P 58.14' +

The above corner marker is accepted as the best available evidence of the position of the original corner.

At the corner point

A copper-coated steel stake, 18 ins. long, 1/2-inch in diam., placed and driven on top of the steel rod corner marker, with brass cap 1½ ins. in diam., flush with the surface of the road, mkd.

T8S  
R17W R16W  
S 12 | S 7  
S 13 | S 18

1975

Dependent Resurvey of a Portion  
of the West Boundary of the Township  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>N. 0° 35' W., through Tp. 8 S., between Rs. 16 and 17 W., and between secs. 7 and 12</p> <p>Over nearly level land, along the center line of a road.</p>	
14.605	<p>The point for Angle Point No. 6, Tract 46</p> <p>Set a copper-coated steel stake, 30 ins. long, 1/2-inch in diam., with brass cap 1½ ins. in diam., flush with the surface of the road, mkd.</p> <div style="text-align: center;"> <p>T8S R17W R16W   TR 46   AP 6 S 12     S 7</p> </div> <p>1975</p>	
19.88	<p>The point for the south 1/16 sec. cor. of secs. 7 and 12</p> <p>Set a copper-coated steel stake, 30 ins. long, 1/2-inch in diam., with brass cap 1½ ins. in diam., flush with the surface of the road, mkd.</p> <div style="text-align: center;"> <p>S 1/16 S 12   S 7</p> </div> <p>1975</p> <p>This corner is designated to function for Angle Point No. 5, Tract 46.</p> <p>There are no suitable accessories nor locations available for reference monuments.</p>	
39.76	<p>The 1/4 sec. cor. of secs. 7 and 12 is marked with a steel rod, 1/2-inch in diam., with the top flush with the surface of the road</p> <p>substantiated by:</p> <p style="padding-left: 40px;">An electric transmission line pole, bears S. 40° 55' E., 40 ft. distant, mkd. R P 40.0'</p> <p>The above corner marker is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>A copper-coated steel stake, 18 ins. long, 1/2-inch in diam., placed and driven on top of the steel rod corner marker, with brass cap 1½ ins. in diam., flush with the surface of the road, mkd.</p>	

Dependent Resurvey of a Portion  
of the West Boundary of the Township  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

T8S  
R17W R16W  
1/4

S 12|S 7

1975

There are no suitable accessories nor locations available for reference monuments.

Discontinue the dependent resurvey of the range line at this corner.

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

Restoring the Survey Executed by  
Albin H. Wadin, Engineer  
Bureau of Reclamation, in 1954

The 1/4 sec. cor. of secs. 2 and 3 is marked with an iron pipe, 1-inch in diam., with brass cap 9 ins. below the surface of the road, mkd.

BUREAU OF RECLAMATION  
1/4 COR

S 3|S 2  
T8S R16W

1954

substantiated by:

An U. S. Bureau of Reclamation Bench Mark bears S. 88° 25' E., 44 lks. distant, and is marked with a brass tablet seated in a concrete headwall, mkd. B M EL 282.34

A cross (+) chiseled on concrete headwall of a lateral, bears S. 87° 50' W., 43 lks. distant.

N. 0° 54' W., between secs. 2 and 3.

Over nearly level land, along the center line of a road.

20.23

The north 1/16 sec. cor. of secs. 2 and 3 is marked with an iron pipe, 1-inch in diam., with brass cap 27 ins. below the surface of the road, mkd.

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

BUREAU OF RECLAMATION

N 1/16

S 3 | S 2

1950

The above corner marker was accepted and described in the official field-note record of the dependent resurvey executed by Albin H. Wadin, Engineer, Bureau of Reclamation, in 1954.

from which

An electric transmission line pole, bears S. 17° 40' W., 131 lks. distant.

There are no other suitable accessories nor locations available for reference monuments.

---

N. 0° 55' W., beginning new measurement

- 1.53 The point for Angle Point No. 6, lot 6, sec. 3 is determined at record distance; there is no evidence of the original cor. I did not monument this corner point.
- 12.97 The point for Angle Point No. 5, lot 5 and Angle Point No. 1, lot 6, sec. 3 is determined at record distance; there is no evidence of the original corner. I did not monument this corner point.
- 20.17 The cor. of secs. 2, 3, 34, and 35 on the north boundary of the township, which is monumented with an iron post, 2½ ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the south boundary of Tp. 7 S., R. 16 W., executed concurrently with this group.

Discontinue the regular order of survey at this corner.

---

Restoring the Survey Executed by John L. Harris  
U. S. Deputy Surveyor, in 1878

---

The 1/4 sec. cor. of secs. 3 and 10 is marked with an iron pipe, 1-inch in diam., with brass cap 24 ins. below the surface of the road, mkd.

BUREAU OF RECLAMATION

1/4  $\frac{S\ 3}{S\ 10}$ 

1954

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.</p>	
	<hr/> <p>S. 89° 47' W., between secs. 3 and 10</p>	
	<p>Over nearly level land, along the center line of a road.</p>	
20.26	<p>The point for the west 1/16 sec. cor. of secs. 3 and 10</p>	
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 6 ins. below the surface of the road, mkd.</p>	
	<p style="text-align: center;">W 1/16 <math>\frac{S 3}{S 10}</math></p>	
	<p style="text-align: center;">1974</p>	
	<p>There are no suitable accessories nor locations available for reference monuments.</p>	
40.52	<p>The cor. of secs. 3, 4, 9, and 10 is marked with an iron pipe, 2 ins. in diam., with the top 3 ins. below the surface of the road</p>	
	<p>substantiated by:</p>	
	<p style="padding-left: 40px;">An electric transmission line pole, bears N. 30° 20' E., 54.9 ft. distant, mkd. R P 54.9'</p>	
	<p style="padding-left: 40px;">An electric transmission line pole, bears S. 45° 20' E., 39.85 ft. distant, mkd. R P 39.85'</p>	
	<p style="padding-left: 40px;">An electric transmission line pole, bears S. 44° 25' W., 39.18 ft. distant, mkd. R P 39.18'</p>	
	<p>The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.</p>	
	<hr/> <p style="text-align: center;">Restoring the Survey Executed by Clark Gumm, Cadastral Engineer in 1952</p>	
	<hr/> <p>N. 0° 41' W., between secs. 3 and 4</p>	
	<p>Over nearly level land, along a north and south road.</p>	
20.27	<p>The point for the south 1/16 sec. cor. of secs. 3 and 4 is determined at proportionate distance; there is no evidence of the original corner.</p>	
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the road, mkd.</p>	



Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

	CHAINS		
		<p>S 1/16</p> <p>S 4 S 3</p> <p>1974</p> <p>There are no suitable accessories nor locations available for reference monuments.</p>	
	35.135	<p>Intersect the arc of a curve, hereinafter described, the point for Angle Point No. 3, Tract 41</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the road, mkd.</p> <div style="text-align: center;"> <p>T8S R16W</p> <p> </p> <p>TR 41</p> <p>AP 3</p> <p> </p> <p>S 4 S 3</p> </div> <p>1974</p> <p>from which</p> <p>An iron post, 28 ins. long, 2½ ins. in diam., set 25 ins. in the ground, for a reference monument, bears N. 56° 15' E., 74 lks. distant, with brass cap mkd. RM T8S R16W S3 1974, and an arrow pointing to the corner.</p> <p>An iron post, 28 ins. long, 2½ ins. in diam., set 25 ins. in the ground, for a reference monument, bears S. 63° 35' E., 79 lks. distant, with brass cap mkd. RM T8S R16W S3 1974, and an arrow pointing to the corner.</p>	
	40.54	<p>The 1/4 sec. cor. of secs. 3 and 4 is marked with an iron pipe, 1-inch in diam., with brass cap 4 ins. below the surface of the road, mkd.</p> <p style="text-align: center;">BUREAU OF RECLAMATION</p> <p style="text-align: center;">1/4 S 4 S 3</p> <p style="text-align: center;">1949</p> <p>The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.</p> <p>This corner is designated to function for Angle Point No. 2, Tract 41</p> <p>from which</p> <p>A French tamarisk tree, 6 ins. in diam., bears N. 71° 45' E., 110 lks. distant, scribed 1/4 S3 BT.</p> <p>There are no other suitable accessories nor locations available for reference monuments.</p>	

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

Restoring the Survey Executed by John L. Harris  
U. S. Deputy Surveyor, in 1878

---

N. 0° 41' W., beginning new measurement

20.29 The north 1/16 sec. cor. of secs. 3 and 4 is marked with an iron pipe, 1-inch in diam., with brass cap 4 ins. below the surface of the road, mkd.

BUREAU OF RECLAMATION  
N 1/16

S 4 | S 3

1950

The above corner marker is accepted as the position of the corner. This corner was not remonumented.

---

N. 0° 41' W., beginning new measurement

20.19 The cor. of secs. 3, 4, 33, and 34 on the north boundary of the township, which is marked with an iron pipe, 2 ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the south boundary of Tp. 7 S., R. 16 W., executed concurrently with this group.

Discontinue the regular order of survey at this corner.

Restoring the Survey Executed by  
Albin H. Wadin, Engineer  
Bureau of Reclamation, in 1954

---

This 1/4 sec. cor. of secs. 16 and 17 is marked with an iron pipe, 1-inch in diam., firmly set, projecting 11 ins. above the surface of the ground, with brass cap mkd.

1/4

S 17 | S 16

1941

The above corner marker was accepted and described in the official field-note record of the dependent resurvey executed by Albin H. Wadin, Engineer, Bureau of Reclamation, in 1954.

---

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

	CHAINS		
		<p>N. 0° 19' W., between secs. 16 and 17</p> <p>Over nearly level land.</p>	
	13.50	<p>Descend into the Coldred Floodway, the south bank bears east and west.</p>	
	20.01	<p>The north 1/16 sec. cor. of secs. 16 and 17 is marked with an iron pipe, 36 ins. long, 1-inch in diam., firmly set, projecting 5 ins. above the surface of the ground, and in a collar of stone, with brass cap mkd.</p>	
		<p style="text-align: center;">N 1/16</p> <p style="text-align: center;">S 17 S 16</p> <p style="text-align: center;">1954</p>	
		<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>	
		<p style="text-align: center;">N 1/16</p> <p style="text-align: center;">S 17 S 16</p> <p style="text-align: center;">1974</p>	
		<p>Deposit the iron pipe corner marker inside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/>	
		<p>N. 0° 20' W., beginning new measurement</p> <p>Continue over nearly level land of floodplain.</p>	
	20.01	<p>The corner of secs. 8, 9, 16, and 17 is marked with the remains of an iron pipe, 4 ins. long, 2 ins. in diam., with the top 30 ins. below the surface of the ground, and is accepted as the best available evidence of the position of the original corner.</p>	
		<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap flush with the surface of the ground, mkd.</p>	
		<p style="text-align: center;">T8S R16W</p> <p style="text-align: center;">S 8 S 9</p> <p style="text-align: center;">S 17 S 16</p> <p style="text-align: center;">1974</p>	
		<p>Deposit the remains of the iron pipe corner marker inside the iron post.</p>	

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

from which

An U. S. Bureau of Reclamation Bench Mark bears S. 28° 30' W., 83 lks. distant, and is marked with a brass tablet seated in a concrete headwall, mkd. USBR B M 273.08 ELEV.

There are no other suitable accessories nor locations available for reference monuments.

Discontinue the regular order of survey at this corner.

N. 0° 16' W., between secs. 8 and 9

20.23

The point for the south 1/16 sec. cor. of secs. 8 and 9 is determined at record distant; there is no evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap flush with the surface of the ground, mkd.

S 1/16

S 8 | S 9

1974

There are no suitable accessories nor locations available for reference monuments.

33.98

The point for Angle Point No. 1, lot 3 and Angle Point No. 5, lot 4, section 8, is determined at record distant; there is no evidence of the original corner. I did not monument this corner point.

MEMORANDUM

The above lot corner was established by Albin H. Wadin, in 1954. The area of these lots within section 8 have remained vacant (United States ownership). The description, lot numbers, and the corners controlling the position of these lots are voided by this survey. New descriptions of lots and tracts are described in this survey.

39.97

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for the witness 1/4 sec. cor. of secs. 8 and 9, with brass cap mkd.

W C  
T8S R16W

1/4



S 8 | S 9

1974

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

## CHAINS

40.46 The true point for the 1/4 sec. cor. of secs. 8 and 9 which is determined at proportionate distance; this true corner point is located on the center line of an east and west lateral, 20 lks. wide, flows west. I did not monument this corner point.

---


Restoring the Survey Executed by  
Clark Gumm, Cadastral Engineer  
in 1952

---

N. 0° 16' W., beginning new measurement

15.07 Intersect the arc of a curve, hereinafter described, the point for Angle Point No. 10, Tract 44.

Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap flush with the surface of the ground, mkd.



1974

There are no suitable accessories nor locations available for reference monuments.

20.23 The point for the north 1/16 sec. cor. of secs. 8 and 9, is determined at record distant; there is no evidence of the original corner. I did not monument this corner point.

40.46 The cor. of secs. 4, 5, 8, and 9 is marked with a steel rod, of undetermined length, 2 ins. in diam., with the top 3 ins. below the surface of the road,

substantiated by:

An electric transmission line pole, bears S. 67° 20' E., 85.0 ft. distant, mkd. R P 85'.

An electric transmission line pole, bears S. 42° 10' W., 38.5 ft. distant, mkd. R P 38.5'.

The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.

This corner is designated to function for Angle Point No. 4, Tract 42, Angle Point No. 3, Tract 43, and Angle Point No. 1, Tract 44.

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>From the cor. of secs. 3, 4, 9, and 10, heretofore described.</p> <p>N. 89° 54' W., between secs. 4 and 9</p> <p>Over nearly level land, along an east and west road.</p>	
19.86	<p>The point for the east 1/16 sec. cor. of secs. 4 and 9 is determined at proportionate distance; there is no evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap, 5 ins. below the surface of the ground, mkd.</p> <p style="text-align: center;">E 1/16 <math>\frac{S\ 4}{S\ 9}</math></p> <p style="text-align: center;">1974</p> <p>from which</p> <p>An iron post, 28 ins. long, 2½ ins. in diam., set 23 ins. in the ground, for a reference monument, bears S. 48° 25' W., 61 lks. distant, with brass cap mkd. RM T8S R16W S9 1974, and an arrow pointing to the corner.</p> <p>An iron post, 28 ins. long, 2½ ins. in diam., set 23 ins. in the ground, for a reference monument, bears N. 39° 10' W., 63 lks. distant, with brass cap mkd. RM T8S R16W S4 1974, and an arrow pointing to the corner.</p>	
39.72	<p>The 1/4 sec. cor. of secs. 4 and 9 is marked with an iron pipe, 1-inch in diam., with the top 16 ins. below the surface of the road, mkd.</p> <p style="text-align: center;">BUREAU OF RECLAMATION</p> <p style="text-align: center;">1/4 <math>\frac{S\ 4}{S\ 9}</math></p> <p style="text-align: center;">1949</p> <p>The above corner marker was accepted and described in the official field-note record of the dependent resurvey executed by Clark Gumm, Cadastral Engineer, in 1952.</p> <p>There are no suitable accessories nor locations available for reference monuments.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 89° 54' W., beginning new measurement</p>	
19.86	<p>The west 1/16 sec. cor. of secs. 4 and 9 is marked with an iron pipe, 1-inch in diam., with the top 20 ins. below the surface of the road, mkd.</p>	

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

## BUREAU OF RECLAMATION

W 1/16

S 4

S 9

1950

The above corner marker was accepted and described in the official field-note record of the dependent resurvey executed by Clark Gumm, Cadastral Engineer, in 1952.

There are no suitable accessories nor locations available for reference monuments.

---

N. 89° 54' W., beginning new measurement

5.61 Intersect the arc of a curve, hereinafter described, the point for Angle Point No. 5, Tract 42

Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the ground, mkd.

T8S R16W

TR 42

AP 5 / S 4

S 9

1974

There are no suitable accessories nor locations available for reference monuments.

19.87 The corner of secs. 4, 5, 8, and 9, which is designated to function for Angle Point No. 4, Tract 42, Angle Point No. 3, Tract 43, and Angle Point No. 1, Tract 44, heretofore described.

---

Restoring the Survey Executed by John L. Harris  
U. S. Deputy Surveyor, in 1878

---

N. 0° 21' W., between secs. 4 and 5

Over nearly level land.

6.63 Intersect the arc of a curve, hereinafter described, the point for Angle Point No. 3, Tract 42 and Angle Point No. 1, Tract 43

Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p style="text-align: center;">T8S R16W S 5   S 4  AP 1   AP 3 TR 43   TR 42  1974</p>	
20.00	<p>The point for the south 1/16 sec. cor. of secs. 4 and 5</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 19 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.</p> <p style="text-align: center;">S 1/16  S 5   S 4  1974</p>	
26.00	<p>Enter and continue along the center line of a road, from the southwest.</p>	
40.00	<p>The 1/4 sec. cor. of secs. 4 and 5 is marked with an iron pipe, 1-inch in diam., with brass cap 36 ins. below the surface of the road, mkd.</p> <p style="text-align: center;">BUREAU OF RECLAMATION 1/4  S 5   S 4  1953</p> <p>substantiated by:</p> <p style="padding-left: 40px;">A cross (+) chiseled on concrete headwall of a lateral, bears S. 86° 15' E., 39.0 ft. distant, mkd. R P 39' +</p> <p style="padding-left: 40px;">A cross (+) chiseled on concrete headwall of a lateral, bears S. 86° 30' W., 41.0 ft. distant mkd. R P 41' +</p> <p>The above corner marker is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., over the above corner marker, with brass cap 8 ins. below the surface of the road, mkd.</p> <p style="text-align: center;">T8S R16W 1/4  S 5   S 4  1974</p>	



Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

Discontinue the regular order of survey at this corner.

The cor. of secs. 17, 18, 19, and 20 is marked with an iron pipe, 2 ins. in diam., with brass cap 5 ins. below the surface of the road, mkd.

## BUREAU OF RECLAMATION

T8S R16W

S 18 | S 17

S 19 | S 20

1941

The above corner marker is accepted as the best available evidence of the position of the original corner. This corner was not remonumented.

This corner is located at the intersection of roads, bearing east, west and south.

N. 0° 08' W., between secs. 17 and 18

Over nearly level land.

28.30 Descend over north slope, through scattering French tamarisk.

40.00 The 1/4 sec. cor. of secs. 17 and 18 is marked with an iron pipe (with brass cap removed) 36 ins. long, 1-inch in diam., firmly set 25 ins. in the ground, and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, with brass cap mkd.

T8S R16W

1/4

S 18 | S 17

1974



Deposit the iron pipe corner marker alongside the iron post.

Restoring the Survey Executed by  
Albin H. Wadin, Engineer  
Bureau of Reclamation, in 1952 and 1954

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>N. 0° 08' W., beginning new measurement</p>	
14.54	<p>The point for Angle Point No. 5, lot 9 and Angle Point No. 2, lot 10, which is determined at record distance; there is no evidence of the original corner. I did not monument this corner point.</p>	
	<p>MEMORANDUM</p>	
	<p>The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lot 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.</p>	
20.00	<p>The north 1/16 sec. cor. of secs. 17 and 18 is marked with an iron pipe (with brass cap removed) 36 ins. long, 1-inch in diam., with the top 6 ins. below the surface of the ground; and is accepted as the best available evidence of the original corner.</p>	
	<p>At the corner point</p>	
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 22 ins. in the ground, over the above corner marker, with brass cap mkd.</p>	
	<p>N 1/16</p>	
	<p>S 18 S 17</p>	
	<p>1975</p>	
	<p>N. 0° 08' W., beginning new measurement</p>	
7.03	<p>The point for Angle Point No. 3, lot 1 and Angle Point No. 1, lot 2, which is determined at proportionate distance; there is no evidence of the original corner. I did not monument this corner point.</p>	
	<p>MEMORANDUM</p>	
	<p>The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lots 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.</p>	

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

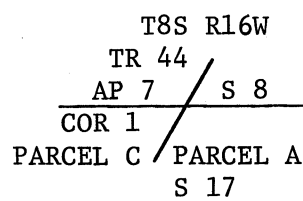
CHAINS						
7.24	<p>The point for Cor. No. 6, Parcel C, sec. 17.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>1975</p>					
19.95	<p>The cor. of secs. 7, 8, 17, and 18 is marked with an iron pipe, 2 ins. in diam., firmly set, projecting 6 ins. above the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>BUREAU OF RECLAMATION</p> <table border="1" style="margin: auto;"> <tr> <td>S 7</td> <td>S 8</td> </tr> <tr> <td>S 18</td> <td>S 17</td> </tr> </table> <p>1941</p> </div> <p>The above corner marker was accepted and described in the official field-note record of the dependent resurvey executed by Albin H. Wadin, Engineer, Bureau of Reclamation, in 1952 and 1954.</p> <p>from which</p> <p style="padding-left: 40px;">An iron post, 2½ ins. in diam., firmly set, projecting 18 ins. above the surface of the ground, bears NORTH 6 lks. distant.</p> <p>This corner is designated to function for Cor. No. 5, Parcel C, sec. 17 Angle Point No. 4, Tract 45, and Angle Point No. 9, Tract 46.</p>	S 7	S 8	S 18	S 17	
S 7	S 8					
S 18	S 17					
	<p>From the cor. of secs. 8, 9, 16, and 17, heretofore described.</p> <p>N. 89° 13' W., between secs. 8 and 17</p> <p>Over nearly level land, through dense French tamarisk.</p>					
10.15	<p>Intersect the arc of a curve, hereinafter described, the point for Angle Point No. 7, Tract 44 and Cor. No. 1, Parcel C, sec. 17.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>1974</p>					

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

18.89

The corner of lots, Angle Point No. 4, lot 5 and Angle Point No. 4, lot 6 of sec. 8, and Angle Point No. 2, lot 3 and Angle Point No. 1, lot 4 of sec. 17, which is marked with an iron pipe, 36 ins. long, 1-inch in diam., firmly set, 28 ins. in the ground, with brass cap mkd.

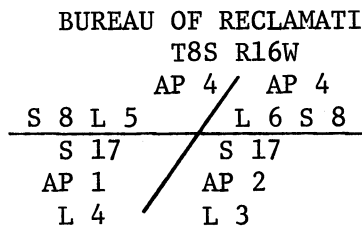


1954

MEMORANDUM

The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lot 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels, within section 17; the area of lots 1 through 6, section 8 have remained vacant (United States ownership). The description, lot numbers, and the corners controlling the position of these lots are also voided by this survey. New descriptions of lots and tracts are described in this survey.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for a witness point of Tract 44 and Parcel C, sec. 17 with brass cap mkd.



1974

Deposit the iron pipe corner marker alongside the iron post.

---

N. 89° 13' W., beginning new measurement

1.29

The point for the east 1/16 sec. cor. of secs. 8 and 17 is determined at proportionate distance; there is no evidence of the original corner.

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

	CHAINS		
		<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">E 1/16 <math>\frac{S\ 8}{S\ 17}</math></p> <p style="text-align: center;">1974</p> <p>This corner is designated to function for Angle Point No. 6, Tract 44</p>	
	3.49	<p>The point for Angle Point No. 2, lot 6 and Angle Point No. 1, lot 7 is determined at proportionate distance; there is no evidence of the original corner. I did not monument this corner point.</p> <p style="text-align: center;">MEMORANDUM</p> <p>The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lot 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.</p> <p>From the above corner point a diligent search was made for any evidence of the corner, Angle Point No. 3, Lot 6 and Angle Point No. 5, lot 7, section 17, and none was found.</p>	
	10.68	<p>Intersect the arc of a curve, hereinafter described, the point for Cor. No. 2, Parcel C, section 17</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T8S R16W S 8 ----- PARCEL D / COR 2           / PARCEL C           S 17</p> <p style="text-align: center;">1974</p>	
	21.47	<p>The 1/4 sec. cor. of secs. 8 and 17 is marked with an iron pipe, 36 ins. long, 1-inch in diam., with brass cap 12 ins. below the surface of the ground, mkd.</p> <p style="text-align: center;">BUREAU OF RECLAMATION 1/4 S 8 ----- S 17</p> <p style="text-align: center;">1950</p> <p>substantiated by:</p>	

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

A cross (+) chiseled on concrete headwall of a lateral, bears NORTH 34 ft. distant, mkd. R P + 34'

A cross (+) chiseled on concrete headwall of a lateral, bears SOUTH 29 ft. distant, mkd. R P + 29'

The above corner marker was accepted and described in the official field-note record of the dependent resurvey executed by Albin H. Wadin, Engineer, Bureau of Reclamation in 1952 and 1954.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the ground, mkd.

T8S R16W  
1/4  $\frac{S 8}{S 17}$

1974

Deposit the iron pipe corner marker alongside the iron post.

from which

An U. S. Bureau of Reclamation Bench Mark bears S. 89° 05' E., 101 lks. distant, and is marked with a brass tablet seated in a concrete post, 7 ins. in diam., firmly set, projecting 9 ins. above the surface of the ground, mkd. BUREAU OF RECLAMATION ELEV. 270.10 1953.

N. 89° 14' W., beginning new measurement

20.18 The west 1/16 sec. cor. of secs. 8 and 17 is marked with an iron pipe, 36 ins. long, 1-inch in diam., with brass cap 4 ins. below the surface of the ground, mkd.

BUREAU OF RECLAMATION  
W 1/16  
 $\frac{S 8}{S 17}$

1950

The above corner marker was accepted and described in the official field-note record of the dependent resurvey executed by Albin H. Wadin, Engineer, Bureau of Reclamation in 1952 and 1954.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

W 1/16  $\frac{S 8}{S 17}$

1974

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS


Deposit the iron pipe corner marker alongside the iron post.

---

N. 89° 25' W., beginning new measurement

11.76 The point for Angle Point No. 1, Tract 45 and Corner No. 4, Parcel C, sec. 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, with brass cap mkd.



1974

20.17 The corner of secs. 7, 8, 17, and 18, which is designated to function for Corner No. 5, Parcel C, sec. 17, Angle Point No. 4, Tract 45, and Angle Point No. 9, Tract 46, heretofore described.

---

Restoring the Survey Executed by John L. Harris  
U. S. Deputy Surveyor, in 1878


---

S. 89° 34' W., between secs. 7 and 18

Over nearly level land.

20.425 The point for the east 1/16 sec. cor. of secs. 7 and 18

Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 12 ins. below the surface of the cultivated field, mkd.



1975

There are no suitable accessories nor locations available for reference monuments.

23.155 Intersect the arc of a curve, hereinafter described, the point for Angle Point No. 8, Tract 46

Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 12 ins. below the surface of the cultivated field, mkd.

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

$$\begin{array}{r} \text{T8S R16W} \\ \text{TR 46} \\ \text{S 7} \quad \text{AP 8} \\ \hline \text{S 18} \end{array}$$

1975

There are no suitable accessories nor locations available for reference monuments.

40.85 The point for the 1/4 sec. cor. of secs. 7 and 18 is determined at proportionate distance; there is no evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 12 ins. below the surface of the cultivated field, mkd.

$$\begin{array}{r} \text{T8S R16W} \\ \text{S 7} \\ \hline \text{S 18} \end{array}$$

1975

There are no suitable accessories nor locations available for reference monuments.

61.275 The point for the west 1/16 sec. cor. of secs. 7 and 18

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} \text{S 7} \\ \hline \text{S 18} \end{array}$$

1975

80.545 The corner of secs. 7, 12, 13, and 18 on the west boundary of the township, heretofore described.

From the corner of secs. 7, 8, 17, and 18, which is designated to function for Corner No. 5, Parcel C, Sec. 17, Angle Point No. 4, Tract 45, and Angle Point No. 9, Tract 46, heretofore described.


N. 0° 07' W., between secs. 7 and 8

5.42 Intersect the arc of a curve, hereinafter described, the point for Angle Point No. 3, Tract 45 and Angle Point No. 1, Tract 46.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.



Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p style="text-align: center;">T8S R16W S 7   S 8  AP 1   AP 3 TR 46   TR 45 1975</p>	
20.04	<p>The point for the south 1/16 sec. cor. of secs. 7 and 8</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the roadway, mkd.</p> <p style="text-align: center;">S 1/16 S 7   S 8 1974</p> <p>There are no suitable accessories nor locations available for reference monuments.</p>	
40.08	<p>The 1/4 sec. cor. of secs. 7 and 8 is marked with a steel rod, 24 ins. long, 1/2-inch in diam., with the top 24 ins. below the surface of the road; and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the road, mkd.</p> <p style="text-align: center;">T8S R16W 1/4 S 7   S 8 1974</p> <p>Deposit the steel rod corner marker alongside the iron post.</p> <p>from which</p> <p style="text-align: center;">A (capped) iron pipe, 2 ins. in diam., firmly set, projecting 1 ft. above the surface of the ground, bears N. 89° 00' W., 51 lks. distant.</p> <p>There are no other suitable accessories nor locations available for reference monuments.</p> <p>Discontinue the regular order of survey at this corner.</p>	
	<p>Restoring the Survey Executed by Clark Gumm, Cadastral Engineer in 1952</p>	

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona


CHAINS

From the cor. of secs. 4, 5, 8, and 9, which is designated to function for Angle Point No. 4, Tract 42, Angle Point No. 3, Tract 43, and Angle Point No. 1, Tract 44, heretofore described.

S. 89° 52.7' W., between secs. 5 and 8

4.90 Intersect the arc of a curve, hereinafter described; the point for Angle Point No. 2, Tract 43 and Angle Point No. 2, Tract 44


Set an iron post, 28 in. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the ground, mkd.



1974

There are no suitable accessories nor locations available for reference monuments.


9.035 Angle Point No. 1, Tract 38 is marked with an iron pipe, 1-inch in diam., with brass cap 3 ins. below the surface of the road, mkd.



1952

The above corner was established by Clark Gumm, Cadastral Engineer, in 1952. I destroyed this corner. The area of Tract No. 38 and lots 1 and 2 of section 8 have remained vacant (United States ownership). The description of Tract No. 38 and lots 1 and 2 of section 8, and the corners controlling the position of the above tract and lots are voided by this survey. New descriptions (hereinafter described) of the east half of the northeast quarter, are of lots 7 and 8 of section 8 and a portion of Tract No. 44.

20.125 The East 1/16 sec. cor. of secs. 5 and 8 which was designated to function for Angle Point No. 2, Tract 38, and is marked with an iron pipe, 1-inch in diam., with brass cap 12 ins. below the surface of the road, mkd.



1950

substantiated by:

Dependent Resurvey of a Portion  
of the Subdivisional Lines  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

## CHAINS

A cross (+) chiseled on concrete headwall of a lateral, bears S. 0° 30' W., 32.0 ft. distant, mkd. R P + 32.

A cross (+) chiseled on concrete headwall of a lateral, bears N. 4° 40' W., 31.0 ft. distant, mkd. R P + 31.

The above corner marker was accepted and described in the official field-note record of the dependent resurvey executed by Clark Gumm, Cadastral Engineer, in 1952. This corner was not remonumented.

---

S. 89° 52.7' W., beginning new measurement

20.12 The 1/4 sec. cor. of secs. 5 and 8 is marked with an iron pipe, 1-inch in diam., with brass cap 12 ins. below the surface of the road, mkd.

## BUREAU OF RECLAMATION

1/4

S 5

S 8

1950

The above corner marker was accepted and described in the official field-note record of the dependent resurvey executed by Clark Gumm, Cadastral Engineer, in 1952. This corner was not remonumented.

Discontinue the dependent resurvey of the subdivisional lines at this corner.

---

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

---

Restoring the Survey Executed by  
Albin H. Wadin, Engineer  
Bureau of Reclamation, in 1954

---

Thence, in Section 3

The center 1/4 sec. cor. of sec. 3 is marked with an iron pipe, 1-inch, in diam., with brass cap 6 ins. below the surface of the cultivated field, mkd.

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

BUREAU OF RECLAMATION  
C 1/4 S 3

1949

The above corner marker was accepted and described in the official field-note record of the survey executed by Albin H. Wabin, Engineer, Bureau of Reclamation, in 1954. This corner was not remonumented.

from which

A (capped) iron pipe, 2 ins. in diam., firmly set, projecting 28 ins. above the surface of the ground, bears S. 50° E., 5 lks. distant.


There are no other suitable accessories nor locations available for reference monuments.

---

N. 0° 48° W., on the north and south center line of sec.

20.24 The point for the center-north 1/16 sec. cor. of sec. 3 is determined at proportionate distance; there is no evidence of the original corner. I did not monument this corner point.

24.21 The point for Angle Point No. 3, Tract 39  
Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.



1974

40.44 The 1/4 sec. cor. of secs. 3 and 34 on the north boundary of the township, which is marked with an iron pipe, 1-inch in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the south boundary of Tp. 7 S., R. 16 W., executed concurrently with this group.

The northeast 1/16 sec. cor. of sec. 3 is marked with an iron pipe, 1-inch in diam., with brass cap 4 ins. below the surface of the ground, mkd.

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

BUREAU OF RECLAMATION  
NE 1/16  
S 3

1950

The above corner marker was accepted and described in the official field-note record of the survey executed by Albin H. Wadin, Engineer, Bureau of Reclamation, in 1954. This corner was not remonumented.

---

S. 89° 46' W., on the east and west center line of the northeast quarter of sec. 3

20.19 Intersect the north and south center line, the point for the center-north 1/16 sec. cor. of sec. 3, heretofore described.

Discontinue the dependent resurvey of the subdivision lines within section 3 at this corner point.

---

Thence, in Section 4

Restoring the Survey Executed by  
Clark Gumm, Cadastral Engineer  
in 1952

---


From the 1/4 sec. cor. of secs. 4 and 9, heretofore described.

N. 0° 32' W., on the north and south center line of sec. 4.

16.27 Intersect line 5 - 6, Tract 42, on the arc of a curve, hereinafter described.



Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T8S R16W  
TR 42



1974

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS	
20.13	<p>Thence, on a blank line across Tract 42.</p> <p>The center-south 1/16 sec. cor. of sec. 4 is marked with an iron pipe, 1-inch in diam., with brass cap 3 ins. below the surface of the ground, mkd.</p> <p style="text-align: center;">BUREAU OF RECLAMATION</p> <p style="text-align: center;">  </p> <p style="text-align: center;">1950</p> <p>The above corner marker was accepted and described in the official field-note record of the survey executed by Clark Gumm, Cadastral Engineer, in 1952.</p> <p>Discontinue the regular order of survey at this corner.</p> <hr/> <p>From the east 1/16 sec. cor. of secs. 4 and 9, heretofore described.</p> <p>N. 0° 36.5' W., on the north and south center line of the southeast quarter of sec. 4.</p>
8.01	<p>Angle Point No. 4, Tract 37 is marked with an iron pipe 1-inch in diam., firmly set, projecting 7 ins. above the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">BUREAU OF RECLAMATION</p> <p style="text-align: center;">  </p> <p style="text-align: center;">1952</p> <p>The above corner was established by Clark Gumm, Cadastral Engineer, in 1952. I destroyed this corner. The area of Tract No. 37 and Lot 5, section 4 have remained vacant (United States ownership). The description of Tract No. 37 and Lot 5, section 4 and the corners controlling the position of the above tract and lot are voided by this survey. New descriptions (hereinafter described) of the southwest quarter of the southeast quarter, are of lot 8, section 4 and a portion of Tract No. 42.</p> <p>From the above corner point a diligent search was made for any evidence of Angle Point No. 3, Tract 37, and none was found.</p>
20.21	<p>The southeast 1/16 sec. cor. of sec. 4 is marked with the remains of an iron pipe, 23 ins. long, 1-inch in diam., with the top 15 ins. below the surface of the ground, and is accepted as the best available evidence of the position of the original corner.</p>

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

	CHAINS		
		<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 12 ins. below the surface of the ground, mkd.</p> <p style="text-align: center;">SE 1/16 S 4</p> <p style="text-align: center;">1974</p> <p>Deposit the iron pipe corner marker alongside the iron post.</p> <p>There are no suitable accessories nor locations available for reference monuments.</p> <p>The above corner was established by Clark Gumm, Cadastral Engineer, in 1952; which he designated it to function for Angle Point No. 1, Tract 37. The area of Tract No. 37 and Lot 5, section 4 have remained vacant (United States ownership). The description of Tract No. 37 and Lot 5, section 4, and the corners controlling the position of the above tract and lot are voided by this survey. New descriptions (hereinafter described) of the southwest quarter of the southeast quarter, are of lot 8, section 4 and a portion of Tract No. 42.</p> <p>Discontinue the regular order of survey at this corner.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 55' W., on the east and west center line of the southeast quarter of sec. 4.</p>	
	7.825	<p>The point for Angle Point No. 1, Tract 42</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 12 ins. below the surface of the ground, mkd.</p> <p style="text-align: center;">T8S R16W S 4 AP 1 TR 42</p> <p style="text-align: center;">1974</p> <p>There are no suitable accessories nor locations available for reference monuments.</p>	
	17.27	<p>The point for Angle Point No. 2, Tract 37 is determined at proportionate distance; there is no evidence of the original corner.</p> <p>This corner point was originally established by Clark Gumm, Cadastral Engineer, in 1952. The area of Tract No. 37 and Lot 5, section 4 have remained vacant (United States ownership). The description of Tract No. 37 and Lot 5, section 4 and the corners controlling the position of the above tract and lot are voided by this survey. New descriptions (hereinafter described) of the southwest quarter of the southeast quarter, are lot 8, section 4 and a portion of Tract No. 42.</p>	

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
19.83	<p>The center-south 1/16 sec. cor. of sec. 4, heretofore described.</p>	
	<p>Discontinue the regular order of survey at this corner.</p>	
	<p>Thence, in Section 8</p>	
	<p>From the 1/4 sec. cor. of secs. 8 and 17, heretofore described.</p>	
	<p>N. 0° 11' W., on the north and south center line of sec. 8</p>	
20.12	<p>The point for the center-south 1/16 sec. cor. of sec. 8.</p>	
	<p>I did not monument this corner point.</p>	
40.24	<p>Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 8; there is no evidence of the original corner.</p>	
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the ground, mkd.</p>	
	<p>T8S R16W</p>	
	<p>C 1/4 S 8</p>	
	<p>1974</p>	
	<p>There are no suitable accessories nor locations available for reference monuments.</p>	
80.29	<p>The 1/4 sec. cor. of secs. 5 and 8, heretofore described.</p>	
	<p>From the true point for the 1/4 sec. cor. of secs. 8 and 9, heretofore described.</p>	
	<p>N. 89° 32' W., on the east and west center line of sec. 8.</p>	
2.24	<p>Intersect line 8 - 9, Tract 44. The point for the closing corner of sec. 8.</p>	
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>	
	<p>TR 44 T8S</p>	
	<p>S 8</p>	
	<p>C ——— C</p>	
	<p>R16W CC</p>	
	<p>1974</p>	
	<p>From this closing corner Angle Point No. 9, Tract 44 hereinafter described, bears N. 2° 57' E., 2.21 chs. distant.</p>	



Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

	CHAINS		
		<p>Thence, on a blank line across Tract 44.</p>	
	17.41	<p>Intersect line 3 - 4, Tract 44. The point for the closing corner of sec. 8.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>	
		<div style="text-align: center;"> <p>T8S R16W /</p> <p>C ————— C</p> <p>CC S 8 TR 44</p> </div>	
		<p>1974</p>	
		<p>From this closing corner Angle Point No. 3, Tract 44, hereinafter described, bears N. 2° 57' E., 2.87 chs. distant.</p>	
	20.15	<p>The point for the center-east 1/16 sec. cor. of sec. 8 is determined at proportionate distance; there is no evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>	
		<div style="text-align: center;"> <p>C <math>\frac{E \ 1/16}{S \ 8}</math> C</p> </div>	
		<p>1974</p>	
		<p>This corner was originally established by Clark Gumm, Cadastral Engineer, in 1952. The area of Tract No. 38 and Lots 1 and 2 of section 8, have remained vacant (United States ownership). The description of Tract No. 38 and Lots 1 and 2 of section 8, and the corners controlling the position of the above tract and lots are voided by this survey. New descriptions (hereinafter described) of the east half of the northeast quarter, are of Lots 7 and 8 of section 8 and a portion of Tract No. 44.</p> <p>From the above corner a diligent search was made for any evidence of Angle Point No. 4, Tract 38, and none was found.</p>	
	40.30	<p>Intersect the north and south center line, the center 1/4 sec. cor. of sec. 8, heretofore described.</p>	
	60.45	<p>The point for the center-west 1/16 sec. cor. of sec. 8. I did not monument this corner point.</p>	
	80.60	<p>The 1/4 sec. cor. of secs. 7 and 8, heretofore described.</p>	

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS


Restoring the Survey Executed by  
Albin H. Wadin, Engineer  
Bureau of Reclamation, in 1954

From the east 1/16 sec. cor. of secs. 8 and 17, which is designated to function for Angle Point No. 6, Tract 44, heretofore described.

N. 0° 13' W., on the north and south center line of the southeast quarter of sec. 8.

13.80 Intersect the arc of a curve, hereinafter described. The point for Angle Point No. 5, Tract 44.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.



1974

20.18 The southeast 1/16 sec. cor. of sec. 8 is marked with an iron pipe, 1-inch in diam., with brass cap 24 ins. below the surface of the ground, mkd.

BUREAU OF RECLAMATION  
SE 1/16 S 8

1954

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground over the top of the above corner marker, with brass cap mkd.

SE 1/16 S 8

1974

N. 0° 13' W., beginning new measurement.

20.17 Intersect the east and west center line, the center-east 1/16 sec. cor. of sec. 8, heretofore described.

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

## CHAINS

From the south 1/16 sec. cor. of secs. 8 and 9, heretofore described.

N. 89° 23' W., on the east and west center line of the southeast quarter of sec. 8

3.42 Intersect line 7 - 8, Tract 44, on the arc of a curve, hereinafter described. I did not monument this point of intersection.

Thence, on a blank line across Tract 44.

13.50 The corner of lots, Angle Point No. 2, Lot 3, Angle Point No. 4, Lot 4, Angle Point No. 1, Lot 5, and Angle Point No. 2, Lot 6 of sec. 8, which is marked with an iron pipe, 36 ins. long, 1-inch in diam., firmly set 27 ins. in the ground, with brass cap mkd.

## BUREAU OF RECLAMATION

T8S R16W

S 8

L 4 / L 3

AP 4 / AP 2

AP 1 / AP 2

L 5 | L 6

1954

## MEMORANDUM

The above lot corner was established by Albin H. Wadin, in 1954. The area of lots 1 through 6, section 8 have remained vacant (United States ownership). The description, lot numbers, and the corners controlling the position of these lots are voided by this survey. New descriptions of lots and tracts are described in this survey.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for a witness point of the south 1/16 line, section 8, with brass cap mkd.

W P

T8S R16W

S — S 8 — S

1974

Deposit the iron pipe corner marker alongside the iron post.

From the above corner a diligent search was made for any evidence of the corner, Angle Point No. 5, Lot 5 and Angle Point No. 3, Lot 6, sec. 8, and none was found.

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS	
	N. 89° 23' W., beginning new measurement
5.23	Intersect line 4 - 5, Tract 44, on the arc of a curve, hereinafter described. I did not monument this point of intersection.
6.66	The southeast 1/16 sec. cor. of sec. 8, heretofore described.
	N. 89° 23' W., beginning new measurement
20.16	Intersect the north and south center line, the point for the center-south 1/16 sec. cor. of sec. 8, heretofore described.
	Discontinue the dependent resurvey of the subdivision lines within section 8 at this corner point.
	Thence, in Section 17
	Restoring the Survey Executed by Albin H. Wadin, Engineer Bureau of Reclamation, 1952 and 1954
	The center 1/4 sec. cor. of sec. 17 is marked with an iron pipe, 1-inch in diam., firmly set, projecting 5 ins. above the surface of the ground, mkd.
	C 1/4 S 17
	1952
	This corner is designated to function for Corner No. 8, Parcel C.
	N. 0° 12' W., on the north and south center line of sec. 17.
	Thence, on a blank line across Parcel C, section 17
14.85	The corner of lots, Angle Point No. 5, Lot 11, Angle Point No. 1, Lot 12, Angle Point No. 3, Lot 13, and Angle Point No. 3, Lot 14 of sec. 17, which is marked with an iron pipe, 36 ins. long, 1-inch in diam., firmly set 30 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

BUREAU OF RECLAMATION

T8S R16W

AP 5 | AP 3

L 11 | L 13

AP 1 | AP 3

L 12 | L 14

S 17

1954

MEMORANDUM

The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lot 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for a witness point of the north and south center line, of section 17, with brass cap mkd.

W P  
T8S R16W

C

S | 17

C

1974

Deposit the iron pipe corner marker alongside the iron post.

N. 0° 12' W., beginning new measurement

5.15 The center-north 1/16 sec. cor. of sec. 17 is marked with an iron pipe, 1-inch in diam., firmly set, projecting 5 ins. above the surface of the ground, with brass cap mkd.


BUREAU OF RECLAMATION

C N 1/16

S 17

1952

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS	
13.81	<p>N. 0° 13' W., beginning new measurement</p> <p>Intersect line 2 - 3, Parcel C, section 17, on the arc of a curve, hereinafter described.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <p>T8S R16W</p>  <p>PARCEL C</p> </div> <p style="text-align: center;">1974</p>
20.02	<p>The 1/4 sec. cor. of secs. 8 and 17, heretofore described.</p> <hr style="border: 0.5px solid black; margin: 20px 0;"/> <p>From the 1/4 sec. cor. of secs. 16 and 17, heretofore described.</p> <p>N. 89° 13' W., on the east and west center line of sec. 17</p>
20.215	<p>The center-east 1/16 sec. cor. of sec. 17 is marked with an iron pipe, 1-inch in diam., firmly set, projecting 10 ins. above the surface of the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <p>BUREAU OF RECLAMATION</p> <p>C - E</p> <p>1/16</p> <p>S 17</p> <p>1954</p> </div> <hr style="border: 0.5px solid black; margin: 20px 0;"/>
20.215	<p>N. 89° 13' W., beginning new measurement</p> <p>The center 1/4 sec. cor. of sec. 17, heretofore described.</p> <hr style="border: 0.5px solid black; margin: 20px 0;"/>
20.21	<p>N. 89° 13' W., beginning new measurement</p> <p>The center-west 1/16 sec. cor. of sec. 17 is marked with an iron pipe, 1-inch in diam., firmly set, projecting 6 ins. above the surface of the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

BUREAU OF RECLAMATION

C W  
1/16  
S 17

1954

N. 89° 13' W., beginning new measurement

5.83

The corner of lots, Angle Point No. 6, Lot 9 and Angle Point No. 1, Lot 10 of sec. 17, which is marked with an iron pipe, 36 ins. long, 1-inch in diam., firmly set 30 ins. in the ground, with brass cap mkd.

BUREAU OF RECLAMATION

T8S R16W  
AP 1 \ AP 6  
L 10 / L 9  
S 17

1954

MEMORANDUM

The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lots 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T8S R16W  
L 10 \ PARCEL H  
AP 1 /  
C S 17 C

1974

Deposit the iron pipe corner marker alongside the iron post.

N. 89° 13' W., beginning new measurement

14.38

The 1/4 sec. cor. of secs. 17 and 18, heretofore described.

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

From the center-east 1/16 sec. cor. of sec. 17, heretofore described.

N. 0° 16' W., on the north and south center line of the northeast quarter of sec. 17

16.20 Levee, 20 lks. wide, 10 ft. high, bears N. 70° W. and S. 70° E.

20.00 The northeast 1/16 sec. cor. of sec. 17 is marked with an iron pipe, 1-inch in diam., firmly set, projecting 4 ins. above the surface of the ground, with brass cap mkd.

BUREAU OF RECLAMATION

NE

1/16

S 17

1954

N. 0° 16' W., beginning new measurement

8.30 Intersect line 10 - 1, Parcel C, section 17, on the arc of a curve, hereinafter described. I did not monument this point of intersection.

Thence, on a blank line across Parcel C, section 17

13.63 The corner of lots, Angle Point No. 3, Lot 3, Angle Point No. 3, Lot 4, Angle Point No. 1, Lot 5, and Angle Point No. 6, Lot 6 of sec. 17, which is marked with an iron pipe 36 ins. long, 1-inch in diam., firmly set 30 ins. in the ground, with brass cap mkd.

BUREAU OF RECLAMATION

T8S R16W

AP 6 | AP 3

L 6 | L 4

AP 1 | AP 3

L 5 | L 3

S 17

1954

MEMORANDUM

The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lots 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.



Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for a witness point of the north and south center line of the northeast quarter of section 17, with brass cap mkd.</p> <div style="text-align: center;"> <p>W P T8S R16W E   S 17   E</p> </div> <p>1974</p> <p>Deposit the iron pipe corner marker alongside the iron post.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 0° 16' W., beginning new measurement</p>	
6.37	<p>The east 1/16 sec. cor. of secs. 8 and 17, which is designated to function for Angle Point No. 6, Tract 44, heretofore described.</p>	
	<p>From the north 1/16 sec. cor. of secs. 16 and 17, heretofore described.</p> <p>N. 89° 14' W., on the east and west center line of the northeast quarter of sec. 17.</p>	
10.00	<p>Levee, 20 lks. wide, 10 ft. high, bears N. 70° W. and S. 70° E.</p>	
20.20	<p>The northeast 1/16 sec. cor. of sec. 17, heretofore described.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 89° 13' W., beginning new measurement</p>	
4.55	<p>The corner of lots, Angle Point No. 2, Lot 5, Angle Point No. 5, Lot 6, Angle Point No. 1, Lot 14, and Angle Point No. 2, Lot 15 of sec. 17, which is marked with an iron pipe, 36 ins. long, 1-inch in diam., firmly set 30 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>BUREAU OF RECLAMATION T8S R16W AP 5 / AP 2 L 6 / L 5 ----- AP 1 / AP 2 L 14 / A 15 S 17</p> </div> <p>1954</p>	

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona


CHAINS

MEMORANDUM

The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lots 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for Angle Point No. 2, Lot 15, sec. 17, with brass cap mkd.




1974

Deposit the iron pipe corner marker alongside the iron post.

N. 89° 13' W., beginning new measurement

8.07 The corner of lots, Angle Point No. 4, Lot 6, Angle Point No. 4, Lot 7, Angle Point No. 1, Lot 13, and Angle Point No. 2, Lot 14, of sec. 17, which is marked with an iron pipe, 36 ins. long, 1-inch in diam., firmly set 30 ins. in the ground, with brass cap mkd.

BUREAU OF RECLAMATION



1954

MEMORANDUM

The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lots 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for a witness point of the east and west center line of the northeast quarter of section 17, with brass cap mkd.</p> <p style="text-align: center;">W P T8S R16W N — S 17 — N 1974</p> <p>Deposit the iron pipe corner marker alongside the iron post.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 89° 13' W., beginning new measurement</p>	
1.46	<p>Intersect line 10 - 1, Parcel C, section 17, on the arc of a curve, hereinafter described. The point for the closing corner of sec. 17. I did not monument this point for the closing corner.</p> <p>Thence, on a blank line across Parcel C, section 17.</p>	
7.58	<p>The center-north 1/16 sec. cor. of sec. 17, heretofore described.</p> <hr/> <p>From the center-west 1/16 sec. cor. of sec. 17, heretofore described.</p> <p>N. 0° 10' W., on the north and south center line of the northwest quarter of sec. 17.</p>	
8.78	<p>The point for the corner of lots, Angle Point No. 4, Lot 8, Angle Point No. 1, Lot 9, Angle Point No. 3, Lot 11, and Angle Point No. 3, Lot 12 of sec. 17, which is determined at record distance; there is no evidence of the original corner.</p> <p style="text-align: center;">MEMORANDUM</p> <p>The above lot corner was established by Albin H. Wadin in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lots 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.</p> <p>From the above corner point a diligent search was made for any evidence of the corner, Angle Point No. 3, Lot 8 and Angle Point No. 2, Lot 9 of sec. 17, and none was found.</p>	

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the same above corner point a diligent search was made for any evidence of the corner, Angle Point No. 4, Lot 11 and Angle Point No. 2, Lot 12 of sec. 17, and none was found.</p>
13.71	<p>Intersect line 7 - 8, Parcel C, section 17</p>
	<p>The point for the closing corner of sec. 17. I did not monument this corner point. From this point for the closing corner, the center 1/4 sec. cor. of sec. 17, which is designated to function for Corner No. 8, Parcel C, sec. 17, heretofore described, bears S. 55° 21.5' E., 24.61 chs. distant.</p>
	<p>Thence, on a blank line across Parcel C, section 17</p>
20.00	<p>The northwest 1/16 sec. cor. of sec. 17 is marked with an iron pipe, 36 ins. long, 1-inch in diam., with brass cap 24 ins. below the surface of the ground, mkd.</p>
	<p style="text-align: center;">BUREAU OF RECLAMATION NW 1/16 S 17</p>
	<p style="text-align: center;">1952</p>
	<p>At the corner point</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, over the top of the above corner marker, with brass cap mkd.</p>
	<p style="text-align: center;">NW 1/16 S 17</p>
	<p style="text-align: center;">1974</p>
	<p>N. 0° 10' W., beginning new measurement</p>
13.62	<p>Intersect line 2 - 3, Parcel C, section 17, on the arc of a curve, hereinafter described. I did not monument this point of intersection.</p>
20.01	<p>The west 1/16 sec. cor. of secs. 8 and 17, heretofore described.</p>
	<p>From the center-north 1/16 sec. cor. of sec. 17, heretofore described.</p>
	<p>N. 89° 12' W., on the east and west center line of the northwest quarter of sec. 17; thence, on a blank line across Parcel C, section 17</p>
20.20	<p>The northwest 1/16 sec. cor. of sec. 17, heretofore described.</p>

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

N. 89° 12' W., beginning new measurement


9.27 Intersect line 7 - 8, Parcel C, section 17

From this point of intersection, Corner No. 7, Parcel C, section 17, hereinafter described, bears N. 55° 21.5' W., 7.60 chs. distant.

14.18 The corner of lots, Angle Point No. 4, Lot 1, Angle Point No. 1, Lot 2, Angle Point No. 2, Lot 8, and Angle Point No. 3, Lot 9 of sec. 17, which is marked with an iron pipe, 36 ins. long, 1-inch in diam., firmly set 30 ins. in the ground, with brass cap mkd.

BUREAU OF RECLAMATION

T8S R16W



S 17

1954

MEMORANDUM


The above lot corner was established by Albin H. Wadin in 1952; creating lots 1 and 2. This lot corner was also designated to function for the corner of lots 8 and 9, in 1954. The area of these lots within the north half of section 17 having been acquired (United States ownership). The description of all lots within the north half of section 17 and the corners controlling the position of lots are voided by this survey, with the exceptions of lots 2, 10, and 15. These lots remain designated by their original lot numbers, and the southeast quarter of the northeast quarter are as located by the original descriptions. The area described by this survey is now designated as parcels.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for Angle Point No. 1, Lot 2, section 17, with brass cap mkd.

T8S R16W

S 17



1974

Deposit the iron pipe corner marker alongside the iron post.

N. 89° 12' W., beginning new measurement

Dependent Resurvey of a Portion  
of the Subdivision Lines  
Within Sections 3, 4, 8, and 17  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

6.01 The north 1/16 sec. cor. of secs. 17 and 18, heretofore described.

Discontinue the dependent resurvey of the subdivision lines within section 17 at this corner.

Survey of a Portion of the Subdivision Lines  
Within Sections 3, 4, 5, 7, and 8  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

Thence, in Section 3

From the 1/4 sec. cor. of secs. 3 and 10, heretofore described.

N. 0° 48' W., on the north and south center line of sec. 3

20.26 The center-south 1/16 sec. cor. of sec. 3 is marked with an iron pipe, 1-inch in diam., with brass cap 31 ins. below the surface of the ground, mkd.

BUREAU OF RECLAMATION

S 1/16

S 3

1950

The above corner marker is accepted as the position for the corner.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap flush with the surface of the ground, over the top of above corner marker, with brass cap mkd.

C  
|  
S 1/16 | S 3  
|  
C

1974

from which

The center of a headgate, of a concrete lined lateral (which flows west), bears S. 34° 20' E., 37 lks. distant.

---

Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

	CHAINS		
		N. 0° 48' W., beginning new measurement	
	20.26	The center 1/4 sec. cor. of sec. 3, heretofore described.  Discontinue the regular order of survey at this corner.	
		—————	
		S. 89° 49' W., on the east and west center line of sec. 3	
	20.22	The point for the center-west 1/16 sec. cor. of sec. 3. I did not monument this corner point.	
	33.58	The point for Angle Point No. 1, Tract 41.  Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.	
		T8S R16W S 3 ————— AP 1 TR 41	
		1974	
	40.44	The 1/4 sec. cor. of secs. 3 and 4, heretofore described.  Discontinue the regular order of survey at this corner.	
		From the point for the center-west 1/16 sec. cor. of sec. 3, heretofore described.	
		N. 0° 45' W., on the north and south center line of the northwest quarter of sec. 3.	
	11.21	The point for Angle Point No. 3, Tract 40.  Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.	
		T8S R16W   TR 40 S 3   AP 3 	
		1974	
	20.28	The northwest 1/16 sec. cor. of sec. 3 is marked with an iron pipe, 1-inch in diam., firmly set projecting 11 ins. above the surface of the ground, with brass cap mkd.	
		NW 1/16 S 3	
		1950	

Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

CHAINS	
	<p>The above corner marker is accepted as the position of the corner.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 0° 45' W., beginning new measurement</p>
20.18	<p>The west 1/16 sec. cor. of secs. 3 and 34 on the north boundary of the township. Which is marked with an iron pipe, 1-inch in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the south boundary of Tp. 7 S., R. 16 W., executed concurrently with this group.</p>
	<p>From the point for the center-north 1/16 sec. cor. of sec. 3, heretofore described.</p>
	<p>S. 89° 56' W., on the east and west center line of the northwest quarter of sec. 3.</p>
9.415	<p>The point for Angle Point No. 1, Tract 40.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>T8S R16W              S 3  <hr style="width: 50%; margin: 0 auto;"/>             AP 1              TR 40</p> <p>1974</p> </div>
20.20	<p>The northwest 1/16 sec. cor. of sec. 3, heretofore described.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 89° 50' W., beginning new measurement</p>
20.19	<p>The north 1/16 sec. cor. of secs. 3 and 4, heretofore described.</p>
	<p>From the west 1/16 sec. cor. of secs. 3 and 10, heretofore described.</p>
	<p>N. 0° 44' W., on the north and south center line of the southwest quarter of sec. 3.</p>
20.26	<p>Intersect the east and west center line of the southwest quarter, the point for the southwest 1/16 sec. cor. of sec. 3.</p>



Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

CHAINS		
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 7 ins. below the surface of the ground, mkd.</p> <p style="text-align: center;">SW 1/16 S 3</p> <p style="text-align: center;">1974</p> <p>There are no suitable accessories nor locations available for reference monuments.</p>	
40.52	<p>Intersect the east and west center line, the point for the center-west 1/16 sec. cor. of sec. 3, heretofore described.</p>	
20.24	<p>From the center-south 1/16 sec. cor. of sec. 3, heretofore described.</p> <p>S. 89° 48' W., on the east and west center line of the southwest quarter of sec. 3</p> <p>Intersect the north and south center line of the southwest quarter, the southwest 1/16 sec. cor. of sec. 3, heretofore described.</p>	
40.48	<p>The south 1/16 sec. cor. of secs. 3 and 4, heretofore described.</p>	
25.365	<p>Thence, in section 4</p> <p>From the center-south 1/16 sec. cor. of sec. 4, heretofore described.</p> <p>S. 89° 55' W., on the east and west center line of the southwest quarter of sec. 4.</p> <p>Intersect the arc of a curve, hereinafter described; the point for Angle Point No. 2, Tract 42.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R16W</p> <p>S 4</p> <hr style="width: 50%; margin: 0 auto;"/> <p>AP 2</p> <p>TR 42</p> <p>1974</p> </div>	
39.67	<p>The south 1/16 sec. cor. of secs. 4 and 5, heretofore described.</p>	

Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

CHAINS	
	Thence, in section 5
	From the 1/4 sec. cor. of secs. 5 and 8, heretofore described.
	N. 0° 18' W., on the north and south center line of sec. 5
20.00	The point for the center-south 1/16 sec. cor. of sec. 5. I did not monument this corner point.
40.00	Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 5.
	Set an iron post, 28 ins. long 2½ ins. in diam., with brass cap 5 ins. below the surface of the road, mkd.
	T8S R16W
	C 1/4
	S 5
	1974
	from which
	A capped iron pipe, 2 ins. in diam., firmly set, projecting 11 ins. above the surface of the ground, bears S. 73° 30' W., 35 lks. distant.
	There are no other suitable accessories nor locations available for reference monuments.
80.01	The 1/4 sec. cor. of secs. 5 and 32 on the north boundary of the township; which is marked with a steel rod, of undetermined length, 5/8-inch in diam., with the top flush with the surface of the road.
	substantiated by:
	A cross (+) chiseled on a concrete headwall, bears N. 4° 10' E., 49 ft. distant, mkd. + RP 49
	A cross (+) chiseled on a concrete headwall, bears S. 4° 45' E., 39 ft. distant, mkd. + RP 39
	The above corner marker is accepted as the best available evidence of the position of the original corner. I did not remonument this corner.
	From the 1/4 sec. cor. of secs. 4 and 5, heretofore described.
	S. 89° 52' W., on the east and west center line of sec. 5
	Thence, along the center line of a concrete lined canal.
20.10	The point for the center-east 1/16 sec. cor. of sec. 5. I did not monument this corner point.

Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

	CHAINS		
		<p>At this corner point the above canal, turns and flows to the south.</p>	
	40.20	Intersect the north and south center line, the center 1/4 sec. cor. of sec. 5, heretofore described.	
	80.36	The 1/4 sec. cor. of secs. 5 and 6 is marked with an iron pipe, 1-inch in diam., with brass cap 5 ins. below the surface of the road, mkd.	
		<p>BUREAU OF RECLAMATION                  1/4                  S 6   S 5                  1953</p>	
		<p>substantiated by:</p> <p>A steel rod, 1/4-inch in diam., set in the concrete headwall, bears S. 60° 25' E., 31.4 ft. distant, the concrete headwall is marked R P 31.4</p> <p>A cross (+) chiseled on a concrete headwall, bears N. 68° 35' W., 57 ft. distant, mkd. + R P 57</p> <p>The above corner marker is accepted as the best available evidence of the position of the original corner. I did not remonument this corner.</p> <p>Discontinue the regular order of survey at this corner.</p>	
		<p>From the east 1/16 sec. cor. of secs. 5 and 8, heretofore described.</p> <p>N. 0° 20.5' W., on the north and south center line of the southeast quarter of sec. 5.</p> <p>Along the center line of a concrete lined canal.</p>	
	20.00	Intersect the east and west center line of the southeast quarter, the point for the southeast 1/16 sec. cor. of sec. 5. I did not monument this corner point. A witness corner is hereinafter described.	
	40.00	Intersect the east and west center line, the point for the center-east 1/16 sec. cor. of sec. 5, heretofore described.	
		<p>From the south 1/16 sec. cor. of secs. 4 and 5, heretofore described.</p> <p>S. 89° 52' W., on the east and west center line of the southeast quarter of sec. 5.</p>	

Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

CHAINS	
19.99	Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, for the witness southeast 1/16 sec. cor. of sec. 5, with brass cap mkd.
20.11	Intersect the north and south center line of the southeast quarter, the true point for the southeast 1/16 sec. cor. of sec. 5, heretofore described.
40.22	Intersect the north and south center line, the point for the center-south 1/16 sec. cor. of sec. 5, heretofore described.
	Thence, in section 7
	From the 1/4 sec. cor. of secs. 7 and 18, heretofore described.
	N. 0° 23' W., on the north and south center line of sec. 7.
4.685	Intersect line 6 - 7, Tract 46, hereinafter described.  Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.
	Thence, continue on the north and south center line of sec. 7 and on a blank line across Tract 46.
19.955	The point for the center-south 1/16 sec. cor. of sec. 7  Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.
20.295	The point for Angle Point No. 3, Tract 46.

Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R16W</p> <p>C</p> <p>S   7</p> <p>AP 3</p> <p>TR 46</p> <p>C</p> </div> <p>1975</p>
39.91	<p>Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 7.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R16W</p> <p>C 1/4 S 7</p> </div> <p>1975</p>
79.61	<p>The 1/4 sec. cor. of secs. 6 and 7 is marked with a steel rod, of undetermined length, 2 ins. in diam., with the top 3 ins. below the surface of the road; and is accepted as the best available evidence of the position of the original corner. I did not remonument this corner.</p> <p>This corner is located near the center line of an east and west road.</p>
20.52	<p>From the 1/4 sec. cor. of secs. 7 and 8, heretofore described.</p> <p>S. 89° 20' W., on the east and west center line of sec. 7</p> <p>The point for the center-east 1/16 sec. cor. of sec. 7.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>E 1/16</p> <p>C ————— C</p> <p>S 7</p> </div> <p>1975</p>
41.04	<p>Intersect the north and south center line, the center 1/4 sec. cor. of sec. 7, heretofore described.</p>
61.565	<p>The point for the center-west 1/16 sec. cor. of sec. 7.</p>

Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>
	$\begin{array}{c} W\ 1/16 \\ C \text{ --- } C \\ S\ 7 \end{array}$
	<p>1975</p>
80.865	<p>The 1/4 sec. cor. of secs. 7 and 12 on the west boundary of the township, heretofore described.</p>
	<p>Discontinue the regular order of survey at this corner.</p>
	<p>From the west 1/16 sec. cor. of secs. 7 and 18, heretofore described.</p>
	<p>N. 0° 32' W., on the north and south center line of the southwest quarter of sec. 7.</p>
9.79	<p>Intersect line 6 - 7, Tract 46, hereinafter described.</p>
	<p>From this point of intersection, Angle Point No. 6, Tract 46, bears N. 76° 25' W., 19.88 chs. distant.</p>
	<p>Thence, on a blank line across Tract 46.</p>
19.91	<p>Intersect the east and west center line of the southwest quarter, the point for the southwest 1/16 sec. cor. of sec. 7.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p>SW 1/16 S 7</p>
	<p>1975</p>
39.93	<p>Intersect the east and west center line, the center-west 1/16 sec. cor. of sec. 7, heretofore described.</p>
	<p>From the center-south 1/16 sec. cor. of sec. 7, heretofore described.</p>
	<p>S. 89° 27' W., on the east and west center line of the southwest quarter of sec. 7.</p>
20.475	<p>Intersect the north and south center line of the southwest quarter, the southwest 1/16 sec. cor. of sec. 7, heretofore described.</p>
39.76	<p>The south 1/16 sec. cor. of secs. 7 and 12 on the west boundary of the township, heretofore described.</p>

Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona


	CHAINS		
		<p>From the east 1/16 sec. cor. of secs. 7 and 18, heretofore described.</p> <p>N. 0° 15' W., on the north and south center line of the southeast quarter of sec. 7; thence, on a blank line across Tract 46.</p>	
	15.04	Intersect line 1 - 2, Tract 46, on the arc of a curve, hereinafter described.	
	20.00	Intersect the east and west center line of the southeast quarter, the point for the southeast 1/16 sec. cor. of sec. 7.	
		Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.	
		SE 1/16 S 7	
		1975	
	40.00	Intersect the east and west center line, the center-east 1/16 sec. cor. of sec. 7, heretofore described.	
		<p>From the south 1/16 sec. cor. of secs. 7 and 8, heretofore described.</p> <p>S. 89° 27' W., on the east and west center line of the southeast quarter of sec. 7.</p>	
	20.47	Intersect the north and south center line of the southeast quarter, the southeast 1/16 sec. cor. of sec. 7, heretofore described.	
	39.59	Intersect line 2 - 3, Tract 46, hereinafter described.	
		Thence, continue on the east and west center line of the southeast quarter of sec. 7 and on a blank line across Tract 46.	
	40.94	Intersect the north and south center line, the center-south 1/16 sec. cor. of sec. 7, heretofore described.	
		Thence, in section 8	
		From the west 1/16 sec. cor. of secs. 8 and 17, heretofore described.	
		N. 0° 09' W., on the north and south center line of the southwest quarter of sec. 8.	
	20.05	Intersect the east and west center line of the southwest quarter, the point for the southwest 1/16 sec. cor. of sec. 8.	

Survey of a Portion of the Subdivision Lines  
 Within Sections 3, 4, 5, 7, and 8  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona



CHAINS		
40.13	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap 5 ins. below the surface of the roadway, mkd.</p> <p style="text-align: center;">SW 1/16 S 8</p> <p style="text-align: center;">1974</p> <p>This corner is located on the north edge of an east and west roadway.</p> <p>There are no suitable accessories nor locations available for reference monuments.</p> <p>Intersect the east and west center line, the point for the center-west 1/16 sec. cor. of sec. 8, heretofore described.</p>	
20.16	<p>From the point for the center-south 1/16 sec. cor. of sec. 8, heretofore described.</p> <p>N. 89° 26' W., on the east and west center line of the southwest quarter of sec. 8.</p> <p>Intersect the north and south center line of the southwest quarter, the southwest 1/16 sec. cor. of sec. 8, heretofore described.</p>	
40.32	<p>The south 1/16 sec. cor. of secs. 7 and 8, heretofore described.</p>	
	<p>The Metes-and-Bounds Survey of Parcel C,        Within Section 17        Township 8 South, Range 16 West        Gila and Salt River Meridian, Arizona</p>	
8.74	<p>From Corner No. 1, Parcel C of sec. 17, which is identical with Angle Point No. 7, Tract 44, heretofore described.</p> <p>N. 89° 13' W., on the line 1 - 2, Parcel C of sec. 17, which is identical with line 7 - 6, Tract 44, and is identical with the section line between secs. 8 and 17.</p> <p>The witness point between secs. 8 and 17, heretofore described.</p> <p>Continue with course and measurement</p>	
10.03	<p>The east 1/16 sec. cor. of secs. 8 and 17, which is designated to function for Angle Point No. 6 of Tract 44, heretofore described.</p>	



The Metes-and-Bounds Survey of Parcel C,  
 Within Section 17  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

CHAINS		
	<p>Continue with course and measurement, on line 1 - 2, Parcel C of section 17, and on the section line between secs. 8 and 17.</p>	
19.42	<p>Corner No. 2, Parcel C of sec. 17, heretofore described.</p> <hr/> <p>Thence, on line 2 - 3, Parcel C of sec. 17, along the arc of a curve, curve data:</p> <p>Chord bears S. 86° 18' W.            Chord length 38.21 chs. distant            Radius 31.82 chs. distant            Length of arc 40.99 chs. distant</p> <p>At 12.44 chs. distant on the arc of the curve. Intersect the north and south center line of sec. 17, heretofore described.</p> <p>At 32.98 chs. distant on the arc of the curve. Intersect the north and south center line of the northwest quarter of sec. 17, heretofore described.</p> <p>At the end of the arc of the curve, the point for Corner No. 3, Parcel C of sec. 17.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R16W            S 17</p>  <p>COR 3            PAR C</p> <p>1974</p> </div> <hr/> <p>N. 56° 48' W., on line 3 - 4, Parcel C of sec. 17</p>	
5.49	<p>Corner No. 4, Parcel C of sec. 17, which is identical with Angle Point No. 1, Tract 45, heretofore described.</p> <hr/> <p>N. 89° 25' W., on line 4 - 5, Parcel C of sec. 17, which is identical with line 1 - 4, Tract 45, and is identical with the section line between sections 8 and 17.</p>	
8.41	<p>The cor. of secs. 7, 8, 17, and 18, heretofore described, which is designated to function for Corner No. 5, Parcel C of sec. 17, Angle Point No. 4, Tract 45, and Angle Point No. 9, Tract No. 46.</p> <hr/>	

The Metes-and-Bounds Survey of Parcel C,  
 Within Section 17  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona


CHAINS	
	<p>S. 0° 08' E., on line 5 - 6, Parcel C of sec. 17, which is identical with the section line between secs. 17 and 18.</p>
12.71	<p>Corner No. 6, Parcel C of sec. 17, heretofore described.</p> <hr/>
	<p>S. 56° 48' E., on line 6 - 7, Parcel C of sec. 17.</p>
5.60	<p>The point for Corner No. 7, Parcel C of sec. 17.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T8S R16W                  S 17                  PAR C                    COR 7                  1974</p> <hr/>
	<p>S. 55° 21.5' E., on line 7 - 8, Parcel C of sec. 17.</p>
7.60	<p>Intersect the east and west center line of the northwest quarter of sec. 17, heretofore described.</p>
18.89	<p>Intersect the north and south center line of the northwest quarter of sec. 17, heretofore described.</p>
43.50	<p>The center 1/4 sec. cor. of sec. 17, heretofore described, which is designated to function for Corner No. 8, Parcel C of sec. 17.</p> <hr/>
	<p>N. 39° 29' E., on line 8 - 9, Parcel C of sec. 17.</p>
17.765	<p>The point for Corner No. 9, Parcel C of sec. 17.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T8S R16W                  S 17                    COR 9                  PAR C                  1974</p> <hr/>
	<p>N. 58° 38' W., on line 9 - 10, Parcel C of sec. 17</p>

The Metes-and-Bounds Survey of Parcel C,  
 Within Section 17  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

## CHAINS

9.91 The point for Corner No. 10, Parcel C of sec. 17

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.



Thence, on line 10 - 1, Parcel C of sec. 17, along the arc of a curve, curve data:

Chord bears N. 52° 43' E.  
 Chord length 34.23 chs. distant  
 Radius 46.97 chs. distant  
 Length of arc 35.03 chs. distant

At 3.39 chs. distant on the arc of the curve. Intersect the east and west center line of the northeast quarter of sec. 17, heretofore described.

At 19.68 chs. distant on the arc of the curve. Intersect the north and south center line of the northeast quarter of sec. 17, heretofore described.

At the end of the arc of the curve, Corner No. 1, Parcel C of sec. 17, which is identical with Angle Point No. 7, Tract 44, and the place of beginning.

The Metes-and-Bounds Survey  
 of Tracts 39 through 46 inclusive  
 Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

Thence, with the survey of Tract 39

Beginning at Angle Point No. 1, Tract 39 of Tp. 8 S., R. 16 W., which is identical with Angle Point No. 4, Tract 40 of Tp. 7 S., R. 16 W., on the north boundary of the township; which is monumented with an iron post, 2½ ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of the portion of the south boundary of Tp. 7 S., R. 16 W., executed concurrently with this group.

S. 89° 51' W., on line 1 - 2, Tract 39, Tp. 8 S., R. 16 W. which is identical with line 4 - 3, Tract 40, Tp. 7 S., R. 16 W., and on the township line between Tps. 7 and 8 S., through R. 16 W.

The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

14.62

The 1/4 sec. cor. of secs. 3 and 34 is marked with an iron pipe, 1-inch in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of a portion of the south boundary of Tp. 7 S., R. 16 W., executed concurrently with this group.

This corner is designated to function for Angle Point No. 2, Tract 39, Tp. 8 S., R. 16 W.

---

S. 0° 48' E., on line 2 - 3, Tract 39, which is identical with the north and south center line of sec. 3.

16.23

Angle Point No. 3, Tract 39, heretofore described.

---

N. 88° 11' E., on line 3 - 4, Tract 39.

0.885

The point for Angle Point No. 4, Tract 39

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T8S R16W  
TR 39  
AP 4  


---

S 3

1974

---

N. 89° 52' E., on line 4 - 5, Tract 39.

10.935

Intersect Angle Point No. 3, Lot 9, sec. 3, which is marked with the remains of an iron pipe, 21 ins. long, 1-inch in diam., firmly set 17 ins. in the ground, and is accepted as the best available evidence of the position of the corner. This corner is designated to function for Angle Point No. 5, Tract 39.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

TR 39 \ LOT 9  
AP 5 \ AP 3  


---

S 3  
T8S R16W

1974

Deposit the remains of the iron pipe corner marker alongside the iron post.

---


The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS										
10.68	<p>N. 24° 53' W., on line 5 - 6, Tract 39, which is identical with line 3 - 2, Lot 9, sec. 3 (of the 1954 survey).</p> <p>Intersect Angle Point No. 2, Lot 9, sec. 3, which is marked with the remains of an iron pipe, 17 ins. long, 1-inch in diam., with the top flush with the surface of the ground, and is accepted as the best available evidence of the position of the corner. This corner is designated to function for Angle Point No. 6, Tract 39.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td colspan="2">T8S R16W</td></tr> <tr><td colspan="2">S 3</td></tr> <tr><td>AP 6</td><td>AP 2</td></tr> <tr><td>TR 39</td><td>LOT 9</td></tr> </table> <p>1974</p> </div> <p>Deposit the remains of the iron pipe corner marker alongside the iron post.</p> <hr style="width: 20%; margin: 20px auto;"/>	T8S R16W		S 3		AP 6	AP 2	TR 39	LOT 9	
T8S R16W										
S 3										
AP 6	AP 2									
TR 39	LOT 9									
0.59	<p>S. 89° 52' W., on line 6 - 7, Tract 39</p> <p>The point for Angle Point No. 7, Tract 39.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 21 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>TR 39</td><td>T8S</td></tr> <tr><td>AP 7</td><td>R16W</td></tr> <tr><td colspan="2">S 3</td></tr> </table> <p>1974</p> </div> <hr style="width: 20%; margin: 20px auto;"/>	TR 39	T8S	AP 7	R16W	S 3				
TR 39	T8S									
AP 7	R16W									
S 3										
10.065	<p>N. 49° 33.5' E., on line 7 - 1, Tract 39</p> <p>Angle Point No. 1, Tract 39, Tp. 8 S., R. 16 W., which is identical with Angle Point No. 4, Tract 40, Tp. 7 S., R. 16 W., and the place of beginning.</p> <hr style="width: 100%; margin: 20px 0;"/> <p>Thence, with the survey of Tract 40</p> <p>Beginning at Angle Point No. 1, Tract 40, heretofore described, and is located on the east and west center line of the northwest quarter of sec. 3.</p>									

The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS	
	S. 89° 56' W., on line 1 - 2, Tract 40, which is identical with the east and west center line of the northwest quarter of sec. 3.
10.785	The northwest 1/16 sec. cor. of sec. 3, heretofore described, which is designated to function for Angle Point No. 2, Tract 40.
	S. 0° 45' E., on line 2 - 3, Tract 40, which is identical with the north and south center line of the northwest quarter of sec. 3.
9.07	Angle Point No. 3, Tract 40, heretofore described.
	N. 49° 33.5' E., on line 3 - 1, Tract 40.
14.01	Angle Point No. 1, Tract 40, and the place of beginning.
	Thence, with the survey of Tract 41
	Beginning at Angle Point No. 1, Tract 41, heretofore described, and is located on the east and west center line of sec. 3.
	S. 89° 49' W., on line 1 - 2, Tract 41, which is identical with the east and west center line of sec. 3.
6.86	The 1/4 sec. cor. of secs. 3 and 4, heretofore described, which is designated to function for Angle Point No. 2, Tract 41.
	S. 0° 41' E., on line 2 - 3, Tract 41, which is identical with the section line between secs. 3 and 4.
5.405	Angle Point No. 3, Tract 41, heretofore described.
	Thence, on line 3 - 4, Tract 41, along the arc of a curve, curve data:
	Chord bears N. 51° 35' E. Chord length 8.015 chs. distant Radius 113.635 chs. distant Length of arc 8.015 chs. distant
	At the end of the arc of a curve, the point for Angle Point No. 4, Tract 41.

The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

	CHAINS		
		<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  <p>TR 41 AP 4 S 3 T8S R16W</p> </div> <p>1974</p> <hr/> <p>N. 49° 33.5' E., on line 4 - 1, Tract 41</p>	
	0.685	Intersect the east and west center line of sec. 3, Angle Point No. 1, Tract 41, and the place of beginning.	
		<p>Thence, with the survey of Tract 42</p> <p>Beginning at Angle Point No. 1, Tract 42, and is located on the east and west center line of the southeast quarter of sec. 4, heretofore described.</p> <p>S. 89° 55' W., on line 1 - 2, Tract 42, which is identical with the east and west center line of the southeast quarter of sec. 4.</p>	
	12.005	The center-south 1/16 sec. cor. of sec. 4, heretofore described.	
		Continue with course and measurement, on line 1 - 2, Tract 42, and on the east and west center line of the southwest quarter of sec. 4.	
	37.37	Angle Point No. 2, Tract 42, heretofore described.	
		<p>Thence, on line 2 - 3, Tract 42, along the arc of a curve, curve data:</p> <p>Chord bears S. 46° 43' W. Chord length 19.535 chs. distant Radius 75.76 chs. distant Length of arc 19.59 chs. distant</p> <p>At the end of the arc of the curve, Angle Point No. 3, Tract 42, which is identical with Angle Point No. 1, Tract 43, heretofore described, and is located on the sec. line between secs. 4 and 5.</p> <hr/> <p>S. 0° 21' E., on line 3 - 4, Tract 42, which is identical with line 1 - 3, Tract 43, and is identical with the section line between secs. 4 and 5.</p>	

The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS	
6.63	<p>The corner of secs. 4, 5, 8, and 9, which is designated to function for Angle Point No. 4, Tract 42, Angle Point No. 3, Tract 43, and Angle Point No. 1, Tract 44, heretofore described.</p> <hr/> <p>S. 89° 54' E., on line 4 - 5, Tract 42, which is identical with the section line between secs. 4 and 9.</p>
14.26	<p>Angle Point No. 5, Tract 42, heretofore described.</p> <hr/> <p>Thence, on line 5 - 6, Tract 42, along the arc of a curve, curve data:</p> <p>Chord bears N. 58° 11' E. Chord length 31.75 chs. distant Radius 60.61 chs. distant Length of arc 32.14 chs. distant</p> <p>At 30.39 chs. distant on the arc of the curve. Intersect the north and south center line of sec. 4, heretofore described.</p> <p>At the end of the arc of the curve, the point for Angle Point No. 6, Tract 42.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>TR 42 AP 6 / S 4 T8S R16W</p> <p>1974</p> </div> <hr/> <p>N. 73° 22' E., on line 6 - 7, Tract 42</p>
3.015	<p>The point for Angle Point No. 7, Tract 42</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>TR 42 AP 7 / S 4 T8S R16W</p> <p>1974</p> </div> <hr/>



The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

## CHAINS

Thence, on line 7 - 1, Tract 42, along the arc of a curve, curve data:

Chord bears N. 71° 23' E.  
Chord length 7.835 chs. distant  
Radius 113.64 chs. distant  
Length of arc 7.84 chs. distant

At the end of the arc of the curve, Angle Point No. 1, Tract 42, and the place of beginning.

Thence, with the survey of Tract 43

Beginning at Angle Point No. 1, Tract 43, which is identical with Angle Point No. 3, Tract 42, heretofore described.

Thence, on line 1 - 2, Tract 43, along the arc of a curve, curve data:

Chord bears S. 36° 11' W.  
Chord length 8.23 chs. distant  
Radius 75.76 chs. distant  
Length of arc 8.23 chs. distant

At the end of the arc of the curve, Angle Point No. 2, Tract 43, which is identical with Angle Point No. 2, Tract 44, heretofore described.

N. 89° 52.7' E., on line 2 - 3, Tract 43, which is identical with line 2 - 1, Tract 44, and is identical with the section line between secs. 5 and 8.

4.90 The corner of secs. 4, 5, 8, and 9, which is designated to function for Angle Point No. 3, Tract 43, Angle Point No. 4, Tract 42, and Angle Point No. 1, Tract 44, heretofore described.

N. 0° 21' W., on line 3 - 1, Tract 43, which is identical with line 4 - 3, Tract 42, and is identical with the section line between secs. 4 and 5.

6.63 Angle Point No. 1, Tract 43, which is identical with Angle Point No. 3, Tract 42, and the place of beginning.

Thence, with the survey of Tract 44

The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

Beginning at the corner of sec. 4, 5, 8, and 9, which is designated to function for Angle Point No. 1, Tract 44, Angle Point No. 4, Tract 42, and Angle Point No. 3, Tract 43, heretofore described.

S. 89° 52.7' W., on line 1 - 2, Tract 44, which is identical with line 3 - 2, Tract 43, and is identical with the section line between secs. 5 and 8.

4.90 Angle Point No. 2, Tract 44, which is identical with Angle Point No. 2, Tract 43, heretofore described.

---

Thence, on line 2 - 3, Tract 44, along the arc of a curve, curve data:

Chord bears S. 18° 01' W.  
Chord length 39.37 chs. distant  
Radius 75.76 chs. distant  
Length of arc 39.83 chs. distant

At the end of the arc of the curve, the point for Angle Point No. 3, Tract 44.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T8S R16W

S 8 / TR 44  
AP 3

1974

---

S. 2° 57' W., on line 3 - 4, Tract 44

2.87 Intersect the east and west center line, the closing corner of sec. 8, heretofore described.

20.57 The point for Angle Point No. 4, Tract 44

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T8S R16W

S 8 / TR 44  
AP 4

1974

---

Thence, on line 4 - 5, Tract 44, along the arc of a curve, curve data:

The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>Chord bears S. 11° 06' W. Chord length 9.01 chs. distant Radius 31.82 chs. distant Length of arc 9.04 chs. distant</p> <p>At 2.50 chs. distant on the arc of the curve. Intersect the east and west center line of the southeast quarter of sec. 8, heretofore described.</p> <p>At the end of the arc of the curve, Angle Point No. 5, Tract 44, heretofore described.</p> <hr/> <p>S. 0° 13' E., on line 5 - 6, Tract 44, which is identical with the north and south center line of the southeast quarter of sec. 8.</p>	
13.80	<p>The east 1/16 sec. cor. of secs. 8 and 17, heretofore described, which is designated to function for Angle Point No. 6, Tract 44.</p> <hr/> <p>S. 89° 13' E., on line 6 - 7, Tract 44, which is identical with the section line between secs. 8 and 17.</p>	
1.29	<p>The witness point of secs. 8 and 17, heretofore described.</p> <p>Continue with course and measurement</p>	
10.03	<p>Angle Point No. 7, Tract 44, which is identical with Corner No. 1, Parcel C of section 17, heretofore described.</p> <hr/> <p>Thence, on line 7 - 8, Tract 44, along the arc of a curve, curve data:</p> <p>Chord bears N. 17° 08' E. Chord length 23.03 chs. distant Radius 46.97 chs. distant Length of arc 23.26 chs. distant</p> <p>At 21.38 chs. distant on the arc of the curve. Intersect the east and west center line of the southeast quarter of sec. 8, heretofore described.</p> <p>At the end of the arc of the curve, the point for Angle Point No. 8, Tract 44.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T8S R16W</p> <p style="text-align: center;">TR 44 / AP 8 / S 8</p> <p style="text-align: center;">1974</p> <hr/>	

The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS	
	N. 2° 57' E., on line 8 - 9, Tract 44
18.365	Intersect the east and west center line, the closing corner of sec. 8, heretofore described.
20.575	The point for Angle Point No. 9, Tract 44.
	Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.
	T8S R16W
	TR 44 /
	AP 9 / S 8
	1974
	<hr/> <p>Thence, on line 9 - 10, Tract 44, along the arc of a curve, curve data:</p>
	Chord bears N. 9° 07' E.
	Chord length 13.01 chs. distant
	Radius 60.61 Chs. distant
	Length of arc 13.03 chs. distant
	At the end of the arc of the curve, Angle Point No. 10, Tract 44, heretofore described.
	<hr/> <p>N. 0° 16' W., on line 10 - 1, Tract 44, which is identical with the section line between secs. 8 and 9.</p>
5.16	The point for the north 1/16 sec. cor. of secs. 8 and 9, heretofore described.
25.39	The corner of secs. 4, 5, 8, and 9, which is designated to function for Angle Point No. 1, Tract 44, Angle Point No. 4, Tract 42, and Angle Point No. 3, Tract 43, and the place of beginning.
	<hr/> <p>Thence, with the survey of Tract 45</p>
	Beginning at Angle Point No. 1, Tract 45, which is identical with Corner No. 4, Parcel C of sec. 17, heretofore described.
	N. 56° 48' W., on line 1 - 2, Tract 45
9.14	The point for Angle Point No. 2, Tract 45
	Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

T8S R16W  
S 8  
AP 2  
TR 45

1974

Thence, on line 2 - 3, Tract 45, along the arc of a curve, curve data:

Chord bears N. 57° 08' W.  
Chord length 0.925-chain distant  
Radius 83.33 chs. distant  
Length of arc 0.925-chain distant

At the end of the arc of the curve, Angle Point No. 3, Tract 45, which is identical with Angle Point No. 1, Tract 46, heretofore described.

S. 0° 07' E., on line 3 - 4, Tract 45, which is identical with line 1 - 9, Tract 46, and is identical with the section line between secs. 7 and 8.

5.42 The corner of secs. 7, 8, 17, and 18, which is designated to function for Angle Point No. 4, Tract 45, Angle Point No. 9, Tract 46, and Corner No. 5, Parcel C of sec. 17, heretofore described.

S. 89° 25' E., on line 4 - 1, Tract 45, which is identical with line 5 - 4, Parcel C of sec. 17, and is identical with the section line between secs. 8 and 17.

8.41 Angle Point No. 1, Tract 45, which is identical with Corner No. 4, Parcel C of sec. 17, and the place of beginning.

Thence, with the survey of Tract 46

Beginning at Angle Point No. 1, Tract 46, which is identical with Angle Point No. 3, Tract 45, heretofore described.

Thence, on line 1 - 2, Tract 46, along the arc of a curve, curve data:

Chord bears N. 66° 56' W.  
Chord length 27.49 chs. distant  
Radius 83.33 chs. distant  
Length of arc 27.62 chs. distant


The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS

At 22.63 chs. distant on the arc of the curve. Intersect the north and south center line of the southeast quarter of sec. 7, heretofore described.

At the end of the arc of the curve, the point for Angle Point No. 2, Tract 46

Set an iron post, 28 ins. long, 2½ ins. in diam., 21 ins. in the ground, with brass cap mkd.



1974

---

N. 76° 25' W., on line 2 - 3, Tract 46

14.75 Intersect the east and west center line of the southeast quarter of sec. 7, heretofore described.

16.14 Intersect the north and south center line of sec. 7, Angle Point No. 3, Tract 46, heretofore described.

---

S. 0° 23' E., on line 3 - 4, Tract 46, which is identical with the north and south center line of sec. 7.

0.34 The center-south 1/16 sec. cor. of sec. 7, heretofore described, which is designated to function for Angle Point No. 4, Tract 46.

---

S. 89° 27' W., on line 4 - 5, Tract 46, which is identical with the east and west center line of the southwest quarter of sec. 7.

20.475 The southwest 1/16 sec. cor. of sec. 7, heretofore described.

39.76 The south 1/16 sec. cor. of secs. 7 and 12 on the west boundary of the township, heretofore described, which is designated to function for Angle Point No. 5, Tract 46.


---

S. 0° 35' E., on line 5 - 6, Tract 46, which is identical with the range line between Rs. 16 and 17 W., through Tp. 8 S.

5.275 Angle Point No. 6, Tract 46, heretofore described.

---

The Metes-and-Bounds Survey  
of Tracts 39 through 46 inclusive  
Township 8 South, Range 16 West  
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>S. 76° 25' E., on line 6 - 7, Tract 46.</p>	
19.88	Intersect the north and south center line of the south-west quarter of sec. 7, heretofore described.	
40.96	Intersect the north and south center line of sec. 7, heretofore described.	
53.33	<p>The point for Angle Point No. 7, Tract 46.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R16W  TR 46  AP 7  S 7</p>  <p>1974</p> </div>	
	<p>Thence, on line 7 - 8, Tract 46, along the arc of a curve, curve data:</p> <p>Chord bears S. 73° 56' E.  Chord length 5.94 chs. distant  Radius 68.18 chs. distant  Length of arc 5.95 chs. distant</p> <p>At the end of the arc of the curve, Angle Point No. 8, Tract 46, heretofore described.</p>	
	<p>N. 89° 34' E., on line 8 - 9, Tract 46, which is identical with the section line between secs. 7 and 18.</p>	
2.73	The east 1/16 sec. cor. of secs. 7 and 18, heretofore described.	
23.155	The corner of secs. 7, 8, 17, and 18, which is designated to function for Angle Point No. 9, Tract 46, Angle Point No. 4, Tract 45, and Corner No. 5, Parcel C of sec. 17, heretofore described.	
	<p>N. 0° 07' W., on line 9 - 1, Tract 46, which is identical with line 4 - 3, Tract 45, and is identical with the section line between secs. 7 and 8.</p>	
5.42	Angle Point No. 1, Tract 46 which is identical with Angle Point No. 3, Tract 45, and the place of beginning.	

Township 8 South, Range 16 West  
 Gila and Salt River Meridian, Arizona

CHAINS

GENERAL DESCRIPTION

The land area within these surveys are nearly level to gently rolling. The soil consist of sandy clay loam; and for the most part the area is under cultivation, except for the federally controlled lands which are undeveloped; with French tamarisk and mesquite trees, and creosote brush (shrub).

Improvements located throughout the area, are: The Wellton-Mohawk Main Channel; numerous canals and laterals for irrigation and/or drainage purposes; County and farm roads.



Form 9180-8  
(March 1969)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Terry L. Behrendt	Surveying Aid
Eric A. Werner	Surveying Aid
Jerold L. Peterson	Surveying Aid
Lewis J. Scheeler	Surveying Aid
Norbert L. Schatzer	Surveying Aid
Robert L. Clark	Surveying Aid

CERTIFICATE OF SURVEY

(I) ~~XXXX~~ Douglas A. Cody, HEREBY  
 CERTIFY upon honor that, in pursuance of special instructions bearing date of the 14th day  
 of October, 19 69, ~~(XXXXXX) have~~ and Supplemental Special Instructions  
 dated November 20, 1969, I have dependently resurveyed a portion of the  
 west boundary, a portion of the subdivisional lines and a portion of the  
 subdivision lines within sections 3, 4, 8, and 17; surveyed a portion of  
 the subdivision lines within sections 3, 4, 5, 7, and 8, and the metes-  
 and-bounds survey of Parcel C of section 17, and the metes-and-bounds  
 survey of Tracts 39 through 46 inclusive, Township 8 South, Range 16 West,  
 of the Gila and Salt River Meridian, in the State of Arizona, which  
 are represented in the foregoing field notes as having been executed by (me), ~~(XXX)~~ and under (my)  
~~XXXX~~ direction; and that said survey has been made in strict conformity with said special instruc-  
 tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in  
 specific manner described in the foregoing field notes.

November 13, 1978  
 (Date)

*Douglas A. Cody*  
 (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
 Washington, D.C.  
 Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the west  
 boundary, a portion of the subdivisional lines, and a portion of the sub-  
 division lines within sections 3, 4, 8, and 17; the survey of a portion of  
 the subdivision lines within sections 3, 4, 5, 7, and 8, the metes-and-  
 bounds survey of Parcel C, section 17, and the metes-and-bounds survey of  
 Tracts 39 through 46 inclusive, Township 8 South, Range 16 West, of the  
 Gila and Salt River Meridian, Arizona  
 executed by Douglas A. Cody, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

MAY 1 1980  
 (Date)

*J. J. [Signature]*  
 (Chief, Division of Cadastral Survey)

Chief, Cadastral Survey Examination and Approval Staff  
 CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in  
 , is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849-626