

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**ORIGINAL**  
FIELD NOTES

OF THE  
DEPENDENT RESURVEY OF A PORTION  
OF THE  
SUBDIVISIONAL LINES  
AND CERTAIN  
BOUNDARIES OF MINERAL SURVEYS  
IN  
SECTIONS 18 AND 19  
TOWNSHIP 14 NORTH, RANGE 2 EAST

Of the Gila and Salt River Meridian,  
In the State of Arizona

EXECUTED BY

Paul L. Reeves, Cadastral Surveyor

Under special instructions dated January 6, 1984, approved January 6, 1984

which provided for the surveys included under Group Number 633 and assignment  
instructions dated January 6, 1984

Survey commenced January 9, 1984

Survey completed January 19, 1984

BOOK 5207

INDEX DIAGRAM

TOWNSHIP 14 NORTH, RANGE 2 EAST

6	5	4	3	2	1
7	8	9	10	11	12
18 5 5	17	16	15	14	13
19 4 3	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

M.S. 2050

Alice Rosalva.....pp 9-10  
 Arthur Lester.....pp 8-9  
 Euna Gwendolin.....pp 10-11  
 Ledge No. 1.....pp 7-8, 11  
 Ledge No. 2.....pp 6-7  
 Prudential.....pp 11-13

## T 14 N, R 2 E, Gila and Salt River Mer., Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines and certain boundaries of mineral surveys in sections 18 and 19, Township 14 North, Range 2 East, Gila and Salt River Meridian, Arizona.

The west boundary was surveyed in 1871 by S.W. Foreman. The west boundary was resurveyed and the subdivisional lines were surveyed in 1923 by Benjamin J. Kinsey and Ty White. The survey history of the various mining claims can be found in the individual mineral survey field notes.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 633, Arizona, dated January 6, 1984.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions, lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The direction of lines was determined from triangulation stations of the horizontal control network and verified by direct solar observations and refer to the true meridian. Angles and distances were measured electronically with a Hewlett Packard 3820 and a Zeiss Elta 46 total station instrument.

The geographic position of the corner of sections 19, 20, 29 and 30, as determined by a tie to U.S.G.S. triangulation station "FAIN ET", located in section 28 of Township 14 North, Range 1 East, is as follows:

Latitude: 34°34'25.263" N Longitude: 112°11'05.385" W

The mean magnetic declination is 14° E.

---

Dependent Resurvey, a Portion of the Subdivisional Lines  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona.

---

Restoring the 1923 survey by  
Benjamin J. Kinsey and Ty White

---

Beginning at the  $\frac{1}{4}$  sec. cor. of secs. 19 and 30, monumented with an iron post, 1 in. diam., projecting 18 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. as described in the official record of the 1923 survey, cor. is located in an E and W fence line.

From this point, Cor. No. 1, M.S. 1411 Newport lode, bears N 35°08' W, 47.20 chs. dist., monumented with a slate stone, 15 x 5 x 16 ins. above ground, mkd. N NO 1 1411 on the E face, with a mound of stone, 2½ ft. base, 1 ft. high, S of the cor., from which an original accessory

Dependent Resurvey, a Portion of the Subdivisional Lines  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>A cross on a slate rock in place, 2 x 1½ x 2 ft. above ground, bears N 62°33' E, 72.5 ft. dist., mkd. X BR N NO 1 1411. (Record: 70.5 ft. dist.)</p>
	<p>From this same point, Cor. No. 4, M.S. 1411 New York lode, bears N 0°18' W, 33.69 chs. dist., monumented with a granite stone, 12 x 10 x 16 ins. above ground, mkd. NY NO 4 1411 on the SW face, with a mound of stone, 2½ ft. base, 2 ft. high, S of the cor., from which the original accessories</p>
	<p>A cross on a granite rock in place, 4 x 3 x 3 ft. above ground, bears S 28°20' W, 81.5 ft. dist., mkd. EXR NY NO 4 1411. (Record: 80.5 ft. dist.)</p>
	<p>A cross on a granite rock in place, 1½ x 1½ x 1 ft. above ground, bears S 11°33' E, 93.4 ft. dist., mkd. XBR NY NO 4 1411. (Record: 91.5 ft. dist.)</p>
	<p>N 89°50' E, bet. secs. 19 and 30.</p>
	<p>Over rolling land, through medium oak brush, catclaw and cacti.</p>
<p>40.01</p>	<p>The cor. of secs. 19, 20, 29 and 30, monumented with an iron post, 2 ins. diam., projecting 1 in. above ground, with brass cap mkd. as described in the official record of the 1923 survey, with a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p>
	<p>Cor. is located in an E and W fence.</p>
	<p>N 0°05' W, bet. secs. 19 and 20.</p>
	<p>Over rolling land, through medium oak brush, catclaw, cacti and scattered juniper.</p>
<p>39.96</p>	<p>The ¼ sec. cor. of secs. 19 and 20, monumented with an iron post, 1 in. diam., projecting 13 ins. above ground, with brass cap mkd. as described in the official record of the 1923 survey, with a mound of stone, 3 ft. base, 2 ft. high, W of the cor.</p>
	<p>N 0°05' W, beginning new measurement.</p>
<p>40.06</p>	<p>The cor. of secs. 17, 18, 19 and 20, monumented with an iron post, 2 ins. diam., projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1923 survey, with a mound of stone, 3 ft. base, 2 ft. high, W of the cor.</p>
	<p>From this point U.S.G.S. triangulation station "FAIN ET" bears S 71°24'57" W, 343.606 chs. dist., monumented with a 3½ in. diam. brass tablet crimped over a copperweld rod, flush with ground, mkd. ELEV FT ABOVE SEA FAIN E.T. 1969.</p>

Dependent Resurvey, a Portion of the Subdivisional Lines  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

	CHAINS		
		<p>From the cor. of secs. 18 and 19 only, on the W bdy. of the Tp., monumented with an iron post, 2 ins. diam., projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1923 survey, with a mound of stone, 3 ft. base, 2 ft. high, E of the cor.</p> <p>Cor. is located 2.5 lks. W of a N and S fence.</p> <p>N 89°52' E, bet. secs. 18 and 19.</p> <p>Over rolling land, through medium oak brush, catclaw, cacti and scattered juniper.</p>	
	18.62	Intersect line 4-1, M.S. 2050 Prudential lode, from which Cor. No. 4, identical with Cor. No. 1, M.S. 2050 Al Freer lode, bears N 31°14' E, 12.685 chs. dist., hereinafter described.	
	29.10	Intersect line 2-3, M.S. 2050 Prudential lode, from which Cor. No. 3, identical with Cor. No. 2, M.S. 2050 Al Freer lode and Cor. No. 1, M.S. 1521 Kansas lode, bears N 31°18' E, 8.68 chs. dist., hereinafter described.	
	36.64	<p>The ¼ sec. cor. of secs. 18 and 19, monumented with an iron post, 1 in. diam., projecting 16 ins. above ground, with brass cap mkd. as described in the official record of the 1923 survey, with a mound of stone, 2½ ft. base, 1½ ft. high, N of the cor.</p> <p>From this point, Cor. No. 2, M.S. 2050 Brown lode, identical with Cor. No. 1, M.S. 2050 Ledge No. 1 lode and Cor. No. 4, M.S. 2050 Arthur Lester lode, bears N 62°27' E, 8.26 chs. dist., hereinafter described.</p> <hr/> <p>N 89°57' E, beginning new measurement.</p>	
	6.95	Intersect line 4-1, M.S. 2050 Arthur Lester lode, from which Cor. No. 4, identical with Cor. No. 1, Ledge No. 1 lode and Cor. No. 2, Brown lode of the same survey, bears N 5°36' E, 3.835 chs. dist., hereinafter described.	
	25.21	Intersect line 3-4, M.S. 2050 Euna Gwendolin lode, from which Cor. No. 3 bears S 21°58' W, 75.7 lks. dist., hereinafter described.	
	40.05	<p>The cor. of secs. 17, 18, 19 and 20.</p> <hr/> <p>N 0°16' W, bet. secs. 17 and 18.</p> <p>Over rolling land, through medium oak brush, catclaw, cacti and scattered juniper.</p>	
	40.01	<p>The ¼ sec. cor. of secs. 17 and 18, monumented with an iron post, 1 in. diam., projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1923 survey, with a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p> <hr/> <p>N 0°04' W, beginning new measurement.</p>	

Dependent Resurvey, a Portion of the Subdivisional Lines  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

CHAINS		
40.01	<p>The cor. of secs. 7, 8, 17 and 18, monumented with an iron post, 2 ins. diam., projecting 16 ins. above ground, with brass cap mkd. as described in the official record of the 1923 survey, with a mound of stone, 2½ ft. base, 2 ft. high, W of the cor.</p>	
	<p>Dependent Resurvey of Certain Bdys. of Mineral Surveys T 14 N, R 2 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>Mineral Survey No. 2050 Ledge No. 2 Lode</p>	
	<p>From Cor. No. 2, M.S. 2050 Ledge No. 2 lode, identical with Cor. No. 3, M.S. 2050 Ledge No. 1 lode, situated in sec. 18, T 14 N, R 2 E, monumented with a granite stone, 14 x 7 x 16 ins. above ground, mkd. L NO 3 2050 on the S face and L 2050 on the N face, with a mound of stone, 2½ ft. base, 2 ft. high, NE of the cor., not remonumented.</p> <p>N 15°30' E, on line 2-3 of M.S. 2050 Ledge No. 2 lode.</p>	
22.43	<p>Cor. No. 3, M.S. 2050 Ledge No. 2 lode, monumented with a slate stone, 12 x 3 x 20 ins. long, lying loose alongside a mound of stone, 2½ ft. base, 1 ft. high, mkd. L NO 3 2050, established the cor. from an original bearing object</p> <p>A cross on a granite boulder, 5 x 3 x 3½ ft. high, bears S 80°07' E, 115 ft. dist., mkd. XBR.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 2½ ft. base, to top, with cap mkd.</p> <div data-bbox="649 1666 990 1881" style="text-align: center;"> </div>	
4.435	<p>Bury the original stone in the mound.</p> <p>N 71°56' W, on line 3-4, M.S. 2050 Ledge No. 2 lode.</p>	
9.03	<p>The North End Center of M.S. 2050 Ledge No. 2 lode, monumented with a mound of stone, 3 ft. base, 2 ft. high, not remonumented.</p>	
9.03	<p>Cor. No. 4, M.S. 2050 Ledge No. 2 lode, identical with Cor. No. 3, M.S. 2050 Little Major lode, monumented with a slate stone, 30 x 15 x 6 ins. long, loosely set, projecting 22 ins. above ground, no marks visible, with a mound of stone, 2 ft. base, 1 ft. high, N of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 12 ins. in the ground, in a mound of stone, 3 ft. base, to top, with cap mkd.</p>	

Dependent Resurvey of Certain Bdys. of Mineral Surveys  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

CHAINS		
	<div style="text-align: center;"> <p>T14N R2E S18</p> </div>	
22.64	<p>Bury the original stone in the mound.</p> <p>S 15°43' W, on line 4-1, M.S. 2050 Ledge No. 2 lode, identical with line 3-2, M.S. 2050 Little Major lode.</p> <p>Cor. No. 1, M.S. 2050 Ledge No. 2 lode, identical with Cor. No. 2, M.S. 2050 Little Major lode, Cor. No. 4, M.S. 2050 Ledge No. 1 lode and Cor. No. 3, M.S. 2050 Brown lode, monumented with a granite stone, 11 x 14 x 12 ins. above ground, mkd. B NO 3 2050 on N face and illegible marks on remaining three sides, with a mound of stone, 2½ ft. base, 2 ft. high, N of cor., not remonumented.</p>	
	<p>Mineral Survey No. 2050 Ledge No. 1 Lode</p>	
21.25	<p>Cor. No. 4, M.S. 2050 Ledge No. 1 lode, identical with Cor. No. 1, M.S. 2050 Ledge No. 2 lode, Cor. No. 2, M.S. 2050 Little Major lode and Cor. No. 3, M.S. 2050 Brown lode, heretofore described.</p> <p>S 21°35' W, on line 4-1, M.S. 2050 Ledge No. 1 lode, identical with line 3-2, M.S. 2050 Brown lode.</p>	
22.78	<p>Center of easterly high voltage power line, bears S 20°23' E and N 20°23' W.</p> <p>Cor. No. 1, M.S. 2050 Ledge No. 1 lode, identical with Cor. No. 4, M.S. 2050 Arthur Lester lode, and Cor. No. 2, M.S. 2050 Brown lode, monumented with a rebar, ¾ in. diam., projecting 3 ins. above ground, set in a post hole, with the remains of the original post lying alongside the rebar, with a mound of stone, 3 ft. base, 2 ft. high, NE of cor., from which an original accessory</p> <p style="padding-left: 40px;">A quartz rock in place, 12 x 7 x 9 ins. above ground, bears N 70°55' W, 87.7 ft. dist., marks visible 205 on top and M 111 on S face. (Record: 86 ft. dist.)</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 28 ins. in the ground, over the rebar, with cap mkd.</p>	
	<div style="text-align: center;"> <p>T14N R2E</p> </div>	


Dependent Resurvey of Certain Bdys. of Mineral Surveys  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>Rebuild mound of stone, 3 ft. base, 2 ft. high, E of cor.</p> <p>Bury the remains of the original post in the mound.</p> <hr/> <p style="text-align: center;">Mineral Survey No. 2050 Arthur Lester Lode</p> <hr/> <p>From Cor. No. 4, M.S. 2050 Arthur Lester lode, identical with Cor. No. 2, M.S. 2050 Brown lode, and Cor. No. 1, M.S. 2050 Ledge No. 1 lode, heretofore described.</p> <p>S 5°36' W, on line 4-1 of M.S. 2050 Arthur Lester lode.</p>
2.15	Center of westerly high voltage power line, bears S 20°23' E and N 20°23' W.
3.835	Intersect the line bet. secs. 18 and 19, from which the $\frac{1}{4}$ sec. cor. of secs. 18 and 19 bears S 89°57' W, 6.95 chs. dist., heretofore described.
	Thence in sec. 19.
22.85	Point for Cor. No. 1, M.S. 2050 Arthur Lester lode, determined from the original cor. accessory
	<p style="padding-left: 40px;">A shale outcropping, 4 x 1½ x 1 ft. high, bears N 62½° E, 237 ft. dist., marks visible BR.</p> <p>At the cor. point</p> <p>Set an aluminum post, 72 ins. long, <math>\frac{3}{4}</math> in. diam., 72 ins. in the ground, with cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T14N R2E</p> <p>ARTHUR LESTER MS 2050 COR 1</p> <p>S19</p> <p>1984</p> </div>
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of cor.</p> <p>Cor. is located in the center of a wash, 30 lks. wide, 1 ft. deep, drains N 65° W.</p> <p>S 72°34' E, on line 1-2, M.S. 2050 Arthur Lester lode.</p>
4.615	The South End Center of M.S. 2050 Arthur Lester lode, monumented with a mound of stone, 2½ ft. base, 1½ ft. high, not remonumented.
	Continue measurement.
9.15	Point for Cor. No. 2, M.S. 2050 Arthur Lester lode, at intersection with line 1-2, M.S. 2050 Alice Rosalva lode.
	Set an aluminum post, 72 ins. long, $\frac{3}{4}$ in. diam., 62 ins. in the ground, in a mound of stone, 1½ ft. base, to top, with cap mkd.



Dependent Resurvey of Certain Bdys. of Mineral Surveys  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

CHAINS



Cor. is located at the southerly edge of a wash, 40 lks. wide, 1 ft. deep, drains N 80° W.

From this point, Cor. No. 1, M.S. 2050 Alice Rosalva lode, identical with Cor. No. 1, M.S. 2050 Euna Gwendolin lode, bears N 5°45' E, 12.19 chs. dist., monumented with a red shale stone, 16 x 2 x 1 in. above ground, mkd. E NO 1 2050 on the N face and AR NO 1 2050 on the S face, with a mound of stone, 2½ ft. base, 1 ft. high, NE of the cor., not remonumented.

Mineral Survey No. 2050  
Alice Rosalva Lode

From Cor. No. 2, M.S. 2050 Arthur Lester lode, on line 1-2, M.S. 2050 Alice Rosalva lode, heretofore described.

S 5°45' W, on line 1-2 of M.S. 2050 Alice Rosalva lode.

10.425 Cor. No. 2, M.S. 2050 Alice Rosalva lode, monumented with a granite stone, 14 x 4 x 8 ins. above ground, mkd. AR NO 1 2050, with a mound of stone, 2½ ft. base, 1½ ft. high, S of cor., not remonumented.

S 70°11' E, on line 2-3, M.S. 2050 Alice Rosalva lode.

4.525 The South End Center of M.S. 2050 Alice Rosalva lode, monumented with a mound of stone, 2½ ft. base, ½ ft. high, not remonumented.

8.43 Center of westerly high voltage power line, bears S 20°23' E and N 20°23' W.

9.115 Point for Cor. No. 3, M.S. 2050 Alice Rosalva lode, determined from the original bearing object

A cross on a slate outcropping, 2 x 2 x 1 ft. high, bears S 48°10' E, 300 ft. dist., mkd. X BR.


At the cor. point

Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 2½ ft. base, to top, with cap mkd.



from which


Dependent Resurvey of Certain Bdys. of Mineral Surveys  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>A cross chiseled on top of a concrete footing of a high voltage tower, bears S 20° E, 34.9 lks. dist.</p>
	<p>A cross chiseled on top of a concrete footing of a high voltage tower, bears N 60° W, 37.9 lks. dist.</p>
	<p>N 5°50' E, on line 3-4, M.S. 2050 Alice Rosalva lode.</p>
<p>3.25</p>	<p>Center of westerly high voltage power line, bears S 20°23' E and N 20°23' W.</p>
<p>22.57</p>	<p>Cor. No. 4, M.S. 2050 Alice Rosalva lode, identical with Cor. No. 2, M.S. 2050 Euna Gwendolin lode, monumented with a granite stone, 8 x 5 x 7 ins. above ground, mkd. E NO 2 2050 on the N face and A NO 2 2050 on the S face, with a mound of stone, 3 ft. base, 1 ft. high, E of the cor., not remonumented.</p>
<p>Mineral Survey No. 2050 Euna Gwendolin Lode</p>	
	<p>From Cor. No. 2, M.S. 2050 Euna Gwendolin lode, identical with Cor. No. 4, M.S. 2050 Alice Rosalva lode, heretofore described.</p>
	<p>N 6°04' E, on line 2-3, M.S. 2050 Euna Gwendolin lode.</p>
<p>12.055</p>	<p>Point for Cor. No. 3, M.S. 2050 Euna Gwendolin lode, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base, to top, with cap mkd.</p>
	<div style="text-align: center;"> <p>T14N R2E EUNA GWEN MS 2050 COR 3 1984</p>  <p>S19</p> </div>
	<p>From this point, a rebar, ¼ in. diam., projecting 2 ins. above ground, bears S 14°09' W, 1.338 chs. dist. This point was established by W.J. Cheek, Registered Civil Engineer, No. 2398, Prescott, Arizona, and is not used in the course of this survey.</p>
	<p>N 21°58' E, on line 3-4, M.S. 2050 Euna Gwendolin lode.</p>
<p>0.757</p>	<p>Intersect the line bet. secs. 18 and 19, from which the cor. of secs. 17, 18, 19 and 20 bears N 89°57' E, 14.84 chs. dist., heretofore described.</p>
	<p>Thence in sec. 18.</p>
<p>11.065</p>	<p>Cor. No. 4, M.S. 2050 Euna Gwendolin lode, monumented with a granite stone, 16 x 8 x 15 ins., broken off at ground surface, mkd. E NO 4 2050, with a scattered mound of stone, to the E.</p>
	<p>At the cor. point</p>

Dependent Resurvey of Certain Bdys. of Mineral Surveys  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

CHAINS

Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 2½ ft. base, to top, with cap mkd.



Bury the original stone in the mound.

- 4.53 N 70°20' W, on line 4-5, M.S. 2050 Euna Gwendolin lode.  
The North End Center of M.S. 2050 Euna Gwendolin lode, monumented with a mound of stone, 2½ ft. base, 2 ft. high, not remonumented.  
Continue measurement.

- 9.06 Cor. No. 5, M.S. 2050 Euna Gwendolin lode, on line 2-3, M.S. 2050 Ledge No. 1 lode, as reported in the official record of the 1905 survey, monumented with a granite stone, 12 x 10 x 12 ins. above ground, marks visible E 2050 on the S face, with a mound of stone, 2½ ft. base, 1 ft. high, E of the cor.; not remonumented.

---

Mineral Survey No. 2050  
Ledge No. 1 Lode

---

- 10.50 From Cor No. 5, M.S. 2050 Euna Gwendolin lode, as reported being on line 2-3, M.S. 2050 Ledge No. 1 lode, in the official record of the 1905 survey, heretofore described.  
N 21°43' E, on line 2-3, M.S. 2050 Ledge No. 1 lode.  
Cor. No. 3, M.S. 2050 Ledge No. 1 lode, identical with Cor. No. 2, M.S. 2050 Ledge No. 2 lode, heretofore described.

---

Mineral Survey No. 2050  
Prudential Lode

---


From the true point for Cor. No. 1, M.S. 2050 Prudential lode, determined at record dist. from the original bearing object and on the line bet. the witness cor. for Cor. No. 1 and Cor. No. 2.

from which the original bearing object

A cross on a slate rock outcropping, 10 x 3 x 4 ft. above ground, bears S 68°09' E, 67 lks. dist., mkd. XBR. (Record: S 68°15' E)

From this point the witness cor. bears N 68°17' W, 36.4 lks. dist., monumented with a slate stone, 14 x 6 x 15 ins. above ground, mkd. P NO 1 2050 on the N face, with a mound of stone, 2½ ft. base, 1 ft. high, N of the cor., not remonumented.

Dependent Resurvey of Certain Bdys. of Mineral Surveys  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

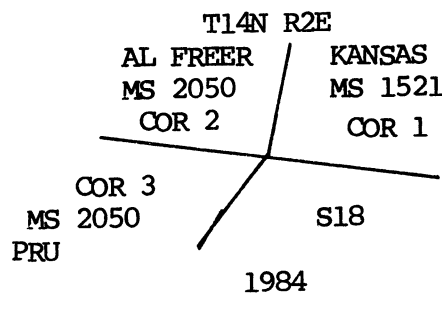CHAINS	
	S 68°17' E, on line 1-2, M.S. 2050 Prudential lode.
9.06	Cor. No. 2, M.S. 2050 Prudential lode, monumented with a granite stone, 8 x 7 x 14 ins. above ground, mkd. M NO 1 2050 on the E face and P NO 2 2050 on the W face, with a mound of stone, 2½ ft. base, 1½ ft. high, N of the cor., not remonumented.
	N 31°18' E, on line 2-3, M.S. 2050 Prudential lode.
13.96	Intersect the line bet. secs. 18 and 19, from which the ¼ sec. cor. of secs. 18 and 19, bears N 89°52' E, 7.54 chs. dist., heretofore described.
	Thence in sec. 18.
22.64	Cor. No. 3, M.S. 2050 Prudential lode, identical with Cor. No. 2, M.S. 2050 Al Freer lode and Cor. No. 1, M.S. 1521 Kansas lode, determined at record dist. from the original bearing objects
	A cross on a slate rock ledge, 20 x 20 x 5 ft. high, bears S 79°38' W, 125.5 lks. dist., mkd. B+RK NO 1 1521. (Record: S 78°15' W)
	A cross on a slate rock ledge, 20 x 20 x 5 ft. high, bears N 84°47' W, 112.5 lks. dist., mkd. BXRK NO 1. (Record: N 86°28' W)
	At the cor. point
	Set an aluminum post, 36 ins. long, ¾ in. diam., 36 ins. in the ground, with cap mkd.
	
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.
	Cor. is located in a wash, 25 lks. wide, draining S 70° W.
	N 67°57' W, on line 3-4, M.S. 2050 Prudential lode.
9.08	Cor. No. 4, M.S. 2050 Prudential lode, identical with Cor. No. 1, M.S. 2050 Al Freer lode, monumented with a slate stone, 14 x 6 x 15 ins. above ground, mkd. with a cross on top and EF NO 1 2050 on the N face and P NO 4 2050 on the S face, with a mound of stone, 2½ ft. base, 1½ ft. high, N of the cor., not remonumented, from which an original bearing object
	A slate rock outcropping, 4 x 2 x 2½ ft. high, bears S 55°40' E, 148 ft. dist., marks visible BXR. (Record: 145 ft. dist.)
	S 31°14' W, on line 4-1, M.S. 2050 Prudential lode.

Dependent Resurvey of Certain Bdys. of Mineral Surveys  
T 14 N, R 2 E, Gila and Salt River Mer., Arizona

	CHAINS		
	12.685	Intersect the line bet. secs. 18 and 19, from which the cor. of secs. 18 and 19 only, on the W bdy. of the Tp., bears S 89°52' W, 18.62 chs. dist., heretofore described.  Thence in sec. 19.	
	22.685	True point for Cor. No. 1, M.S. 2050 Prudential lode, heretofore described.	
		GENERAL DESCRIPTION	
		The land encompassed in this survey is located about 4 miles NE of Dewey, Arizona. The elevation is about 5,200 feet above sea level.	
		The land is generally rolling, covered with medium oak brush, catclaw and scattered juniper.	
		Access is by way of a track road which traverses North and South through the area.	
		The mean magnetic declination was determined to be 14° E.	



## CERTIFICATE OF SURVEY

I, Prul L. Reeves, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 6th day of January, 1984, I have dependently resurveyed a portion of the subdivisional lines and certain boundaries of mineral surveys in sections 18 and 19, Township 14 North, Range 2 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

NOV 09 1984

(Date)

*Paul L. Reeves*

(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

## CERTIFICATE OF APPROVAL

Arizona State Office  
Bureau of Land Management  
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines and certain boundaries of mineral surveys in sections 18 and 19, Township 14 North, Range 2 East, of the Gila and Salt River Meridian, Arizona, executed by Paul L. Reeves, having been critically examined and found correct, are hereby approved.

NOV 19 1984

(Date)

*James P. Kelley*

(Chief Cadastral Surveyor of Arizona)