

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,

A PORTION OF THE EAST BOUNDARY,

PORTIONS OF THE SUBDIVISIONAL LINES,

AND THE RESURVEYS OF HOMESTEAD ENTRY SURVEYS NOS. 87 AND 375,

AND THE SURVEY OF THE SUBDIVISIONS OF SECTIONS 13, 14, 23, 24, 25, 26, 35, AND 36,

TOWNSHIP 22 NORTH, RANGE 8 EAST

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Paul L. Reeves, Cadastral Surveyor

Under special instructions dated April 30, 1986, approved April 30, 1986,

_____ which provided for the surveys included under Group Number

678 and assignment instructions dated May 6, 1986. _____

Survey commenced May 7, 1986

Survey completed August 20, 1987

INDEX DIAGRAM

TOWNSHIP 22 NORTH, RANGE 8 EAST,

6	5	4	3	2	1			
7	8	9	10	11	12			
				82	56			
18	17	16	15	78	14	52	13	27
				75			50	
19	20	21	22	72	23	46	24	25
				71			41	
30	29	28	27	66	26	39	25	17
				63			35	
31	32	33	34	57	35	31	36	13
				9			4	

Subdivision of section 13—pp. 92
 Subdivision of section 14—pp. 98
 Subdivision of section 23—pp. 105
 Subdivision of section 24—pp. 114
 H.E.S. No. 87—pp. 86
 H.E.S. 375—pp. 84

Subdivision of section 25—pp. 121
 Subdivision of section 26—pp. 149
 Subdivision of section 35—pp. 158
 Subdivision of section 36—pp. 177

T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the south boundary, a portion of the east boundary, portions of the subdivisional lines, and the resurveys of Homestead Entry Surveys Nos. 87 and 375, and the survey of the subdivision of sections 13, 14, 23, 24, 25, 26, 35, and 36, of Township 22 North, Range 8 East, of the Gila and Salt River Meridian, Arizona.

The east 5 miles of the south boundary were surveyed in 1879 by J.L. Harris. The east boundary and the subdivisional lines were surveyed in 1883 by O.D. Wheeler. The south boundary was resurveyed in 1883 by O.D. Wheeler, including the west one mile, for which there is no previous record of survey. The east boundary was resurveyed in 1902 by F.B. Jacobs. Homestead Entry Survey No. 87 was surveyed in 1913 by W.H. Finigan. Homestead Entry Survey No. 375 was surveyed in 1915-1919 by C.D. Hodson and A.W. Hendrix, and the north, east, and south boundaries of section 14 were retraced, and the west boundary of section 14 was resurveyed at this time. The corner of sections 10, 11, 14, and 15, and the corner of sections 14, 15, 22, and 23 were remonumented in 1966 by W.R. Ott. The $\frac{1}{4}$ section corner of sections 26 and 35, and the corner of sections 1, 2, 35, and 36, Tps. 21 and 22 N, R 8 E, were remonumented in 1972 by H.K. Smith.

There have been numerous private surveys within this township. Some have been recorded with Coconino County, but others have not. Extensive research was done to locate all extant private plats whether or not they were recorded. Copies of the unrecorded plats have been placed in the Survey Group File.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated April 30, 1986, for Group No. 678, Arizona.

The directions of all lines were determined by altitude observations on the sun, and refer to the true meridian. Distances and angles were measured with a Zeiss Elta 46 instrument.

T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

Preliminary to the resurvey, the lines of prior surveys were retraced and search was made for evidence of the corner positions. In several instances, monuments and/or accessories were found which did not match the description in the original field notes, but which were old and had the characteristics typical for the time of the original survey. This evidence was evaluated along with perpetuations or reestablishments by the private surveyors and engineers. All found corners and those monuments which were determined to be the best available evidence of the original corner positions were remonumented in their positions. Lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The geographic position of the southeast corner of section 36, as determined from a tie made to U.S. Coast and Geodetic Survey triangulation station "TUFA 1936," located in the SE quarter of section 29, T 22 N, R 9 E, is as follows:

Latitude: 35°14'25.86" N Longitude: 111°29'17.78" W

The mean magnetic declination as shown on Sunset Crater West, Ariz., quadrangle map, published by U.S. Geological Survey in 1966, is 13½° E.

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

Reestablishment of the Resurvey Executed by
O.D. Wheeler, Deputy Surveyor, in 1883

Beginning at the cor. of Tps. 21 and 22 N, R 8 E only, originally established by J.L. Harris in 1879, and remonumented by F.B. Jacobs in 1902, monumented with a malpais stone, 18 x 14 x 12 ins., firmly set, projecting 12 ins. above ground, with no visible marks, from which the remains of the 1902 bearing trees:

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

A ponderosa pine snag, 22 ins. diam., bears
S $2\frac{1}{2}^{\circ}$ E, 398 lks. dist., mkd. T21N R9E S31 BT
(Record: S $2\frac{3}{4}^{\circ}$ E).

The remains of a ponderosa pine stump, 16 ins.
diam., bears S $48\frac{3}{4}^{\circ}$ W, 431 lks. dist., with no
visible marks.

At the cor. point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins.
diam., 26 ins. in the ground, with brass cap mkd.

T22N		
R8E		T22N
S36		R9E
S1		
T21N		S31
1986		

from which new bearing trees

A pinyon, 7 ins. diam., bears S $20\frac{1}{4}^{\circ}$ W, 147
lks. dist., mkd. T21N R8E S1 BT.

A pinyon, 7 ins. diam., bears N $59\frac{1}{2}^{\circ}$ W, 56
lks. dist., mkd. T22N R8E S36 BT.

Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored
plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel
post.

Set a steel fence post near the cor.

From this point, U.S. Coast and Geodetic Survey
triangulation station "TUFA 1936," bears N $53^{\circ}07.5'$ E
(forward bearing), 151.04 chs. dist., monumented with
a standard brass disk, 4 ins. diam., firmly cemented
into a drill hole in a rock outcrop, with top mkd
TUFA 1936 and a triangle. The Azimuth and reference
marks are in place and in good condition as per
record.

S $89^{\circ}55'$ W, bet. secs. 1 and 36.

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Over rolling land, through medium growth of pinyon, juniper, and ponderosa pine.</p> <p>40.29 The $\frac{1}{4}$ sec. cor. of secs. 1 and 36, monumented with a local iron rod, 24 ins. long, $\frac{1}{2}$ in. diam., projecting 3 ins. above ground, with a 2 in. square metal plate on top mkd. $\frac{1}{4}$ S36, from which the remains of the original bearing trees:</p> <p style="padding-left: 40px;">A ponderosa pine stump, 16 ins. diam., bears S $10\frac{1}{4}^{\circ}$ W, 30 lks. dist., with no marks visible.</p> <p style="padding-left: 40px;">The burned-out stump hole of a ponderosa pine, bears N 25° W, 102 lks. dist.</p> <p>This point was perpetuated by C.W. Dryden, Registered Civil Engineer No. 971, Arizona, in 1958, and is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E $\frac{1}{4}$ <u>S36</u> S 1 T21N 1986</p> <p>from which a new bearing tree</p> <p style="padding-left: 40px;">A ponderosa pine, 22 ins. diam., bears N $35\frac{1}{2}^{\circ}$ W, 270 lks. dist., mkd. $\frac{1}{4}$ S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the iron rod inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p style="text-align: center;">_____</p> <p>S $87^{\circ}08'$ W, beginning new measurement.</p>
--------	---

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 10.07</p>	<p>Point for the E-W 1/64 sec. cor. of secs. 1 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 E-W 1/64 S 1 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 10 ins. diam., bears N 81¾° E, 122 lks. dist., mkd. E-W 1/64 S36 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 23 ins. diam., bears S 4¾° W, 83 lks. dist., mkd. E-W 1/64 S1 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 11 lks. E of a fence, bears N and S.</p> <p>From this point, a local cor., bears West, 4.7 lks. dist., monumented with an iron rod, ½ in. diam., projecting 3 ins. above ground. This corner was established by C.W. Dryden, Registered Land Surveyor No. 4321, Arizona, in 1963, and is not utilized in the course of this resurvey.</p> <p>Continue over open, nearly level land.</p>
<p>20.14</p>	<p>Point for the W 1/16 sec. cor. of secs. 1 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E W 1/16 <u>S36</u> S 1 T21N 1986</p>

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>from which</p> <p>A ponderosa pine, 13 ins. diam., bears S $58\frac{1}{4}^{\circ}$ W, 334 lks. dist., mkd. W 1/16 S1 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 80 lks. N of a track road, bears E and W.</p> <p>30.21 The W-W 1/64 sec. cor. of secs. 1 and 36, monumented with a local iron rod, 17 ins. long, $\frac{1}{2}$ in. diam., projecting 2 ins. above ground. This cor. was established by C.W. Dryden, Registered Land Surveyor No. 4321, Arizona, in 1963, and is accepted as a careful and faithful determination of the position of the corner.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 W-W 1/64 S 1 1986</p> <p>from which</p> <p>A pinyon, 6 ins. diam., bears N $79\frac{1}{4}^{\circ}$ W, 22 lks. dist., mkd. W-W 1/64 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the iron rod inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 33 lks. N of the corner of abandoned fences extending N and E, and 55 lks. N of a track road bearing irregularly E and W.</p>	
--	--------	--	--

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>From this point, a local cor., bears N 39°19' E, 0.13 chs. dist., monumented with a rebar, ½ in. diam., projecting 2 ins. above ground, with a tag attached mkd. P.E. 2007, set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, was established subsequent to Dryden's monument, and is not utilized in the course of this resurvey.</p> <hr/> <p>S 87°08' W, beginning new measurement.</p> <p>Enter medium growth of pinyon, juniper, and ponderosa pine.</p> <p>10.05 The cor. of secs. 1, 2, 35, and 36, monumented with an iron post, 2½ ins. diam., projecting 6 ins. above ground, and in a mound of stone, 2½ ft. base, to top, with brass cap mkd. as described in the official record of the 1972 remonumentation.</p> <p>from which the remains of the original bearing trees</p> <p>A pine stump, 12 ins. diam., bears N 56¼° E, 39.5 lks. dist., with no visible scribe marks (1972 Record: N 60° E, 38 lks. dist.).</p> <p>A ponderosa pine, 26 ins. diam., bears S 52¼° W, 100 lks. dist., mkd. T21N R8E S2 BT (1972 Record: S 50° W).</p> <p>The remains of a pine stump, bears N 75° W, 162 lks. dist., no marks visible (1972 Record: N 74½° W).</p> <p>from which the 1972 bearing tree</p> <p>A ponderosa pine, 20 ins. diam., bears N 50° E, 167 lks. dist., mkd. T22N R8E S36 BT (Record: N 52° E, 168 lks. dist.).</p> <hr/> <p>S 85°34' W, bet. secs. 2 and 35.</p> <p>Ascending over rolling land, through moderate ponderosa pine, pinyon, and oak.</p>
--	---------------	--

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS
40.06

The $\frac{1}{4}$ sec. cor. of secs. 2 and 35, monumented with a mound of stone, 3 ft. base, 8 ins. high, nearly covered with earth and brush on the E side of a moderate to steep slope, from which the remains of an original bearing tree

The stump hole of a rotted pine of undeterminable diam., bears S 31° E, 20 lks. dist., no marks visible.

At the cor. point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T22N R8E
 $\frac{1}{4}$ S35
S 2
T21N
1986

from which new bearing trees

A pinyon, 13 ins. diam., bears N 58° E, 51.5 lks. dist., mkd. $\frac{1}{4}$ S35 BT.

A pinyon, 12 ins. diam., bears S $39\frac{1}{2}^{\circ}$ E, 33 lks. dist., mkd. $\frac{1}{4}$ S2 BT.

Rebuild the mound of stone, 3 ft. base, 1 ft. high, E of cor. for support.

Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

From this point, a local cor., bears S $38^{\circ}25'$ W, 1.17 chs. dist., monumented with an iron rod, $\frac{1}{2}$ in. diam., projecting 2 ins. above the ground. This cor. was established by Jess D. Roeder, Registered Land Surveyor No. 2308, Arizona, in 1959, using improper procedures and is not utilized in the course of this resurvey.

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>4.00</p> <p>20.715</p> <p>39.40</p> <p>41.43</p>	<p>S 88°13' W, beginning new measurement.</p> <p>Continue ascending E slope.</p> <p>Top of knoll, bears N 10° E and S 10° W, thence descend W slope.</p> <p>Point for the W 1/16 sec. cor. of secs. 2 and 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E W 1/16 <u>S35</u> S 2 T21N 1986</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon, 5 ins. diam., bears S ½° W, 17.5 lks. dist., mkd. W 1/16 S2 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears N 5½° W, 58.5 lks. dist., mkd. W 1/16 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a moderate W slope.</p> <p>Track road, bears N 7° E and S 7° W.</p> <p>The cor. of secs. 2, 3, 34, and 35, monumented with a rebar, 24 ins. long, ½ in. diam., projecting 3 ins. above the ground, with a 2 in. square metal plat attached and mkd.</p> <p style="text-align: center;">T22N R8E S34 S35 S 3 S 2 T21N</p>	
---	--	--

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

from which remains of the 1879 bearing trees

A ponderosa pine stump, 3 ins. diam., bears
N $37\frac{1}{2}^\circ$ E, 150 lks. dist., no marks visible
(1883 Record: N $39\frac{1}{2}^\circ$ E, 151 lks. dist.).

A ponderosa pine stump, 26 ins. diam., bears
S $71\frac{1}{2}^\circ$ E, 52 lks. dist., no marks visible
(1879 Record: S 84° E).

The stump hole of a ponderosa pine, 19 ins.
diam., bears S $72\frac{3}{4}^\circ$ W, 89 lks. dist., no marks
visible (1883 Record: S 72° W, 93 lks. dist.).

An oak stump, 15 ins. diam., bears N 39° W,
18 lks. dist., no marks visible (1883 Record:
N $32\frac{1}{2}^\circ$ W, 19 lks. dist.).

At the cor. point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins.
diam., 24 ins. in the ground, with brass cap mkd.

T22N R8E	
S34	S35
S 3	S 2
T21N	
1986	

from which new bearing trees

A ponderosa pine, 12 ins. diam., bears N $36\frac{1}{4}^\circ$ E,
89 lks. dist., mkd. T22N R8E S35 BT.

A ponderosa pine, 6 ins. diam., bears S $10\frac{1}{4}^\circ$ E,
19.5 lks. dist., mkd. T21N R8E S2 BT.

A ponderosa pine, 9 ins. diam., bears S $30\frac{1}{4}^\circ$ W,
113 lks. dist., mkd. T21N R8E S3 BT.

Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored
plastic case beneath the stainless steel post.

Bury the local cor. inside the stainless steel post.

Set a steel fence post near the cor.

Dependent Resurvey of a Portion of the South Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Cor. is located 1 lk. SE of a fence cor., fences extend N and W.</p> <p>From this point, a local cor., bears N 89°31' E, 1.213 chs. dist., monumented with a rebar, $\frac{3}{4}$ in. diam., projecting 3 ins. above the ground, with tag attached and mkd. 2007.</p> <hr/> <p>Dependent Resurvey of a Portion of the East Boundary, T 22 N, R 8 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the cor. of Tps. 21 and 22 N, R 8 E only, hereinbefore described.</p> <p>N 0°14' W, on the E bdy. of sec. 36.</p> <p>Over rolling land, through medium pinyon, juniper, and ponderosa pine.</p> <p>3.155 From this point on line, a local cor., bears West, 0.7 lks. dist., monumented with a rebar, $\frac{1}{2}$ in. diam., flush with ground, with a yellow cap attached and mkd. CARTER REF. PT.</p> <p>3.585 From this point on line, a local cor., bears East, 0.7 lks. dist., monumented with a rebar, $\frac{1}{2}$ in. diam., projecting 4 ins. above the ground, origin unknown.</p> <p>9.35 Center of asphalt road No. 510, bears S 60° E and N 60° W.</p> <p>15.31 From this point on line, a local cor., bears East, 5.4 lks. dist., monumented with a rebar $\frac{1}{2}$ in. diam., projecting 1 in. above the ground in a small mound of stone, origin unknown.</p> <p>31.84 From this point on line, a local cor., bears West, 2.4 lks. dist., monumented with a malpais stone, 6 x 6 x 7 ins. above the ground, mkd. $\frac{1}{4}$ on E face, with a mound of stone, 2 ft. base, 1 ft. high, S of cor., origin unknown.</p>
--------	---

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 40.28</p>	<p>The ¼ sec. cor. of sec. 36 only, monumented with a malpais stone, 22 x 12 x 6 ins., firmly set, projecting 6 ins. above ground, with an orange fiberglass post alongside cor., from which the 1883 bearing tree</p> <p style="padding-left: 40px;">A ponderosa pine stump, 24 ins. diam., bears S 65° W, 36 lks. dist., no marks visible.</p> <p>from which a 1902 bearing tree</p> <p style="padding-left: 40px;">A ponderosa pine stump, 30 ins. diam., bears N 53° E, 273 lks. dist., no marks visible.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T22N R8E R9E ¼ S36 1986</p> </div> <p>from which a new bearing tree</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears S 85¾° W, 244 lks. dist., mkd. ¼ S36 BT.</p> <p>Deposit the original stone alongside the corner.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°16' W, beginning new measurement.</p>	
<p>1.80</p>	<p>Track road, bears S 67° E and N 63° W.</p>	
<p>11.405</p>	<p>From this point on line, a local cor., bears East 3 lks. dist., monumented with a ¾ in. open end pipe, projecting 2 ins. above the ground, origin unknown.</p>	
<p>19.635</p>	<p>Point for the N 1/16 sec. cor. of sec. 36 only.</p>	

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E R9E N 1/16 S36 1986</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon, 8 ins. diam., bears N 62° W, 39 lks. dist., mkd. N 1/16 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>30.98 From this point on line, the closing cor. of secs. 30 and 31, T 22 N, R 9 E, bears East, 5 lks. dist., monumented with a volcanic stone, 10 x 8 x 6 ins., lying loose and mkd. with 6 grooves on one face, from the stone, a bearing tree</p> <p style="padding-left: 40px;">A ponderosa pine, 32 ins. diam., bears N 62° E, 80 lks. dist., marks visible through partly healed blaze S30 BT.</p> <p>Note: This bearing tree was not called out in the original survey notes. A core sample was taken to the Forestry Department at Northern Arizona University. The tree ring count indicated that it is of an age to be an original bearing tree. Cor. was not remonumented.</p> <p>34.67 From this point on line, a local cor., bears East 6 lks. dist., monumented with a rebar ¾ in. diam., projecting 4 ins. above the ground, origin unknown.</p> <p>39.27 The cor. of secs. 25 and 36 only, T 22 N, R 8 E, monumented with a malpais stone, 20 x 12 x 11 ins., firmly set projecting 6 ins. above the ground, mkd. with 5 grooves on N face and 1 groove of S face, from which remains of the original bearing trees</p>
--	---------------	---

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

A ponderosa pine stump, 24 ins. diam., bears N $56\frac{3}{4}^\circ$ E, 67.5 lks. dist., no marks visible (1902 Record: N 56° E, 70 lks. dist.).

A ponderosa pine stump, 30 ins. diam., bears S $42\frac{1}{2}^\circ$ W, 75.5 lks. dist., with illegible scribe marks (1902 Record: S 40° W, 80 lks. dist.).

A stump hole of a fallen ponderosa pine, 24 ins. diam., bears N $35\frac{1}{4}^\circ$ W, 143 lks. dist., mkd. T22N R8E S25 BT (1902 Record: N 37° W, 144 lks. dist.).

and from which a 1902 bearing tree

A ponderosa pine stump, 24 ins. diam., bears S $42\frac{1}{4}^\circ$ E, 187 lks. dist., no marks visible (Record: S 44° E).

At the cor. point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in the ground, with brass cap mkd.

T22N	T22N
S25	R9E
S36	S30
R8E	
	1986

from which new bearing trees

A ponderosa pine, 18 ins. diam., bears S 13° W, 67.5 lks. dist., mkd. T22N R8E S36 BT.

A ponderosa pine, 18 ins. diam., bears N $21\frac{3}{4}^\circ$ W, 51.5 lks. dist., mkd. T22N R8E S25 BT.

Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.

Deposit the original stone alongside the cor.

Set a steel fence post near the cor.

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>N 0°02' W, on the E bdy. of sec. 25.</p> <p>Descending northeast slope, through medium ponderosa pine.</p> <p>11.44 The S 1/16 sec. cor. of sec. 30 only, T 22 N, R 9 E, monumented with an open end pipe, 15 ins. long, 3/4 in. diam., flush with ground, with tag attached and mkd. LS 4021. This cor. was established by Todd Rockwell, Registered Land Surveyor No. 4021, Arizona, in 1967, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T22N</p> <p>R8E R9E</p> <p> </p> <p> S 1/16</p> <p> S30</p> <p> </p> <p>1987</p> </div> <p>from which</p> <p style="margin-left: 40px;">A ponderosa pine, 7 ins. diam., bears S 60 1/4° E, 215.5 lks. dist., mkd. S 1/16 S30 BT.</p> <p style="margin-left: 40px;">A Utah juniper, 8 ins. diam., bears S 17° E, 275.5 lks. dist., mkd. S 1/16 S30 BT.</p> <p style="margin-left: 40px;">A fence cor. bears S 89 3/4° E, 46 lks. dist., with fences extending N and E.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set an aluminum fence post alongside the cor.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N 0°02' W, beginning new measurement.</p>
--------	--

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 3.57</p>	<p>The N-S-S 1/256 sec. cor. of sec. 25 only, T 22 N, R 8 E, monumented with an open end pipe, 15 ins. long, 3/4 in. diam., projecting 1 in. above ground, with tag attached and mkd. LS 4021. This cor. was established by Todd Rockwell, Registered Land Surveyor No. 4021, Arizona, in 1967, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 N-S-S 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 16 ins. diam., bears S 54 1/4° W, 240.5 lks. dist., mkd. N-S-S 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 44 lks. W of a fence cor., fences extend S and W.</p> <p style="text-align: center;">_____</p> <p>N 0°04' W, beginning new measurement.</p>
<p>1.50</p>	<p>Leave timber, edge bears E and W, thence across cultivated field.</p>
<p>5.02</p>	<p>Point for the S 1/16 sec. cor. of sec. 25 only, T 22 N, R 8 E.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 18 ins. below cultivated field, with aluminum cap mkd.</p>

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p style="text-align: center;">T22N R8E R9E S 1/16 S25 1986</p>
9.90	<p>Fence, bears E and W, leave cultivated field, thence along a graded road.</p>
16.215	<p>Point for the ¼ sec. cor. of sec. 30 only, on the W bdy. of the Tp., is at midpoint on the W bdy. of sec. 30.</p>
	<p>Set stainless steel post, 28 ins. long, 2½ ins. diam., 12 ins. below road, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E R9E ¼ S30 1987</p>
	<p>from which</p> <p>An aluminum post, 36 ins. long, ¾ in. diam., set 31 ins. in the ground, for a reference monument, bears N 58¼° E, 46.4 ft. dist., with brass cap mkd. T22N R9E S30 RM 46.4 FT 1987, and an arrow pointing to the cor. Drive a aluminum fence post alongside the RM.</p> <p>An aluminum post, 36 ins. long, ¾ in. diam., set 31 ins. in the ground, for a reference monument, bears S 46¾° E, 55.9 ft. dist., with brass cap mkd. T22N R9E S30 RM 55.9 FT 1987, and an arrow pointing to the cor. Drive an aluminum fence post alongside the RM.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath a stainless steel post.</p> <p>Cor is located 18 lks. dist. W of center of Slayton Ranch Road, bears N and S.</p>

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 25.09</p>	<p>The ¼ sec. cor. of sec. 25 only, T 22 N, R 8 E, monumented with an open end pipe, 16 ins. long, ¾ in. diam., 6 ins. below a road, with tag attached and mkd. LS 4021. This cor. was reestablished by Todd Rockwell, Registered Land Surveyor No. 4021, Arizona, in 1967, and is accepted as a careful and faithful reestablishment of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 14 ins. below the road, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E R9E ¼ S25 1986</p> <p>from which</p> <p style="padding-left: 40px;">An aluminum post, 36 ins. long, ¾ in. diam., set 33 ins. in the ground, for a reference monument, bears S 44°44' W, 39.4 ft. dist., with aluminum cap mkd. RM T22N R8E 39.4 FT TO COR S25 1986 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">An aluminum post, 36 ins. long, ¾ in. diam., set 31 ins. in the ground, for a reference monument, bears N 44°56' W, 38.7 ft. dist., with aluminum cap mkd. RM T22N R8E 38.7 FT TO COR S25 1986 and an arrow pointing to the cor.</p> <p>Reference monuments are located 2 lks. E of a N and S fence.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>The cor. is located 17 lks. W of center of a bladed road, bears N and S.</p>	
-------------------------	---	--

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

From this point, a local cor., bears S 10°00' E, 4 lks. dist., monumented with a rebar $\frac{3}{4}$ in. diam., 4 ins. below surface of a road, with tag attached and mkd. $\frac{1}{4}$ S25 LS 14671. This cor. was reestablished by Kenneth A. Krenke, Registered Land Surveyor No. 14671, Arizona. This cor. was set subsequent to Todd Rockwell's monument and is not utilized in the course of this resurvey.


N 0°01' E, beginning new measurement.

10.91

The N 1/16 sec. cor. of sec. 30 only, T 22 N, R 9 E, monumented with a rebar, 30 ins. long, $\frac{3}{4}$ in. diam., 6 ins. below surface of W edge of a bladed road, bears N and S, with aluminum cap attached, marks visible are 2007. This monument was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date, and is accepted as a careful and faithful determination of the position of the cor.

At the cor. point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. below road, with brass cap mkd.



from which

An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 30 ins. in the ground, for a reference monument, bears N $46\frac{3}{4}$ ° E, 54.5 ft. dist., with brass cap mkd. T22N R9E RM 54.5 FT 1987, and an arrow pointing to the cor. point.

Reference monument is located 2 lks. dist. S of a fence cor., fences extending N and E.

An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 32 ins. in the ground, for a reference monument, bears S $43\frac{1}{4}$ ° E, 58.5 ft. dist., with brass cap mkd. T22N R9E RM 58.5 FT 1987, and an arrow pointing to the cor. point.

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Reference monument is located $\frac{1}{2}$ lk. dist. W of a fence line, bears N and S.</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 20 lks. dist. W of center of Slayton Ranch Road, bears N and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°01' E, beginning new measurement.</p>
9.15	<p>Point for the N 1/16 sec. cor. of sec. 25 only, T 22 N, R 8 E. Near the point for the N 1/16 sec. cor., found a local cor. lying loose on ground, which is a rebar, 15 ins. long, $\frac{1}{2}$ in. diam., with a tag attached and mkd. PE 6312. This monument was set by William A. Ramsey, Registered Civil Engineer No. 6312, Arizona, of unknown date.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 8 ins. below the surface of the W edge of a road, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T22N R8E R9E N 1/16 S25 1986</p> </div> <p>from which</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 32 ins. in the ground, for a reference monument, bears S 61°23' W, 35.4 ft. dist., with aluminum cap mkd. RM T22N R8E 35.4 FT TO COR S25 1986 and an arrow pointing to the cor.</p> <p>Reference monument is located 2 lks. E of a fence, bears S and N, 38 lks. dist. to a fence cor., thence W.</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 33 ins. in the ground, for a reference monument, bears N 48°54' W, 54.1 ft. dist., with aluminum cap mkd. RM T22N R8E 54.1 FT TO COR S25 1986 and an arrow pointing to the cor.</p> <p>Reference monument is located 2 lks. E of a fence, bears N and S, 59 lks. dist. to a fence cor., thence E.</p>

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p> <p>19.18</p> <p>19.76</p>	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Cor. is located 26 lks. W of center of a bladed road, bears N and S.</p> <p>The N-N 1/64 sec. cor. of sec. 25 only, T 22 N, R 8 E, monumented with a rebar, 17 ins. long, 1/2 in. diam., 4 ins. below the ground.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below the ground, with brass cap mkd.</p> <p style="text-align: center;">N-N 1/64 S25 1987</p> <p>from which</p> <p>An aluminum post, 36 ins. long, 3/4 in. diam, set 32 ins. in the ground for a reference monument, bears S 45°46' W, 57.9 ft. dist., with cap mkd. RM T22N R8E 57.9 FT. TO COR. S25 1987 and an arrow pointing to the cor.</p> <p>An aluminum post, 36 ins. long, 3/4 in. diam., set 33 ins. in the ground for a reference monument, bears N 49°45' W, 54.2 ft. dist., with cap mkd. RM T22NR8E 54.2 FT. TO COR. S25 1987 and an arrow pointing to the cor.</p> <p>Both reference monuments are located in a N and S fence.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Point for the closing cor. of secs. 19 and 30, T 22 N, R 9 E, at proportionate dist.; there is no remaining evidence of the original cor.</p>
--	---	---

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 36 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T22N</td> <td> </td> <td>T22N</td> <td></td> </tr> <tr> <td></td> <td> </td> <td>S19</td> <td>CC</td> </tr> <tr> <td>S25</td> <td> </td> <td>S30</td> <td></td> </tr> <tr> <td>R8E</td> <td> </td> <td>R9E</td> <td></td> </tr> <tr> <td></td> <td></td> <td>1987</td> <td></td> </tr> </table> </div> <p>from which</p> <p>An aluminum post, 36 ins. long, ¾ ins. diam., set 31 ins. in the ground, for a reference monument, bears N 43½° E, 54.5 ft. dist., with aluminum cap mkd. RM T22N R9E 54.5 FT TO COR S 19 1987, and an arrow pointing to the cor. point.</p> <p>Reference monument is located 1 lk. W of fence bearing N and S.</p> <p>An aluminum post, 36 ins. long, ¾ ins. diam., set 32 ins. in the ground, for a reference monument, bears S 47¾° E, 50.6 ft. dist., with aluminum cap mkd. RM T22N R9E 50.6 FT TO COR S30 1987 and an arrow pointing to the cor. point.</p> <p>Reference monument is located 1 lk. W of fence bearing N and S.</p> <p>Cor. falls 27.5 lks. W of center of Slayton Ranch Road, bears N and S.</p> <p>29.21 The cor. of secs. 24 and 25 only, T 22 N, R 8 E, monumented with a rebar, 18 ins. long, ½ in. diam., 4 ins. below surface of a road, origin unknown, and is accepted as a careful and faithful reestablishment of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 6 ins. below surface of road, with brass cap mkd.</p>	T22N		T22N				S19	CC	S25		S30		R8E		R9E				1987		
T22N		T22N																				
		S19	CC																			
S25		S30																				
R8E		R9E																				
		1987																				

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<table border="0" style="margin-left: auto; margin-right: auto;"> <tr> <td>T22N</td> <td> </td> <td>T22N</td> </tr> <tr> <td></td> <td> </td> <td>R9E</td> </tr> <tr> <td>S24</td> <td> </td> <td>S19</td> </tr> <tr> <td>S25</td> <td> </td> <td></td> </tr> <tr> <td>R8E</td> <td> </td> <td></td> </tr> <tr> <td></td> <td></td> <td>1986</td> </tr> </table> <p>from which</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 33 ins. in the ground, for a reference monument, bears S 50°50' W, 52.4 ft. dist., with aluminum cap mkd. RM T22N R8E 52.4 FT TO COR S25 1986 and an arrow pointing to the cor.</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 33 ins. in the ground, for a reference monument, bears N 56°36' W, 49.8 ft. dist., with aluminum cap mkd. RM T22N R8E 49.8 FT TO COR S24 1986 and an arrow pointing to the cor.</p> <p>The reference monuments are located 2 lks. E of a N and S fence.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>The cor. is located in a bladed road, bears N and S.</p>	T22N		T22N			R9E	S24		S19	S25			R8E					1986	
T22N		T22N																			
		R9E																			
S24		S19																			
S25																					
R8E																					
		1986																			
	<p>39.96</p>	<p>N 0°03' W, on the E bdy. of sec. 24 only, T 22 N, R 8 E.</p> <p>Over level open land, along a road.</p> <p>The $\frac{1}{4}$ sec. cor. of sec. 24 only, monumented with a malpais stone, 16 x 8 x 7 ins. firmly set, projecting 3 ins. above the ground in the center of a N and S track road, mkd. $\frac{1}{4}$ on the W face and a cross on top, from which a reference point bears N 89°49' W, 60.5 lks. dist., monumented with an open end pipe, $1\frac{1}{4}$ ins. diam., projecting 4 ins. above the ground, with aluminum cap attached and mkd. RP$\frac{1}{4}$ 2007 and an arrow pointing to the cor. This reference point was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date.</p>																			

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 12 ins. below center of a track road, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E R9E ¼ S24 1986</p> <p>from which</p> <p>An aluminum post, 36 ins. long, ¾ in. diam., set 33 ins. flush with ground, for a reference monument, bears S 60°54' W, 46.3 ft. dist., with aluminum cap mkd. RM T22N R8E 46.3 FT TO COR S24 1986 and an arrow pointing to the cor.</p> <p>An aluminum post, 36 ins. long, ¾ in. diam., set 33 ins. flush with ground, for a reference monument, bears N 55°01' W, 48.0 ft. dist., with aluminum cap mkd. RM T22N R8E 48.0 FT TO COR S24 1986 and an arrow pointing to the cor.</p> <p>Set steel fence post near both reference monuments.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the mkd. stone alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°04' W, beginning new measurement.</p> <p>40.13 The cor. of secs. 13 and 24 only, T 22 N, R 8 E, monumented with an open end pipe, 20 ins. long, 1¼ ins. diam., 1 in. below surface of ground, with tag attached and mkd. 6312. This monument was set by William A. Ramsey, Registered Civil Engineer No. 6312, Arizona, of unknown date, and is accepted as a careful and faithful reestablishment of the position of the original cor.; from which a reference point, bears S 89°53' W, 60.7 lks. dist., monumented with an open end pipe, 1¼ ins. diam., flush with ground, with aluminum cap attached and mkd. RP SEC COR 2007 and an arrow pointing to the cor. This reference point was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date.</p>	
---------------	---	--

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

At the cor. point

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T22N	
R8E	R9E
S13	S18
S24	

1986

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

Cor. is located 12 lks. W of the center of a track road, bears N and S.

N 0°05' W, on the E bdy. of sec. 13 only, T 22 N, R 8 E.

Over level open land.

10.033 Point for the S-S 1/64 sec. cor. of sec. 13 only, T 22 N, R 8 E.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

S-S 1/64
S13
1986

from which

A pinyon, 14 ins. diam., bears N 82° W, 172 lks. dist., mkd. S-S 1/64 S13 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Cor. is located on a steep SE slope, above a large meadow in medium pinyon and juniper.

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>From this point, a local cor., bears N 18° 26' E, 0.196 chs. dist., monumented with a malpais stone 8 x 6 x 8 ins. above ground, firmly set in a mound of stone 1½ ft. base, ½ ft. high, no marks visible, with a juniper post, 5 ins. diam., projecting 4 ft. above ground, near the cor., origin of this cor. is unknown. Unable to determine if this cor. was to function as the S-S 1/64 sec. cor. of S 13, T 22 N, R 8 E, or the S 1/16 sec. cor. of sec. 18 only, T 22 N, R 9 E, and is not utilized in the course of this resurvey.</p>
20.065	<p>Point for the S 1/16 sec. cor. of sec. 13 only, T 22 N, R 8 E.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T22N R8E R9E S 1/16 S13 1986</p> </div> <p>from which</p> <p>A pinyon, 7 ins. diam., bears S 36¾° W, 33 lks. dist., mkd. X at breast height and BT at base.</p> <p>A pinyon, 9 ins. diam., bears N 38° W, 118 lks. dist., mkd. S 1/16 S13 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a SE slope, 2.5 chs. E of top of ridge, slopes S 45° W.</p>
35.10	<p>Top of knoll.</p>

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>40.13</p>	<p>The ¼ sec. cor. of sec. 13 only, T 22 N, R 8 E, monumented with a malpais stone, 18 x 9 x 7 ins., firmly set and projecting 7 ins. above the ground, mkd. ¼ on W face and a cross on top, from which the 1902 bearing trees</p> <p>A ponderosa pine, 20 ins. diam., bears N 15° E, 52 lks. dist., mkd. ¼ S18 BT (Record: 54 lks. dist.).</p> <p>The remains of a ponderosa pine stump, 20 ins. diam., bears S 67¼ W, 64 lks. dist., marks visible, BT (Record: 65 lks. dist.).</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E R9E ¼ S13 1986</p> <p>from which a new bearing tree</p> <p>A ponderosa pine, 14 ins. diam., bears S 15½° W, 51 lks. dist., mkd. ¼ S13 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the original stone alongside the cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a N slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°03' E, beginning new measurement.</p>	
<p>29.67</p>	<p>From this point on line, the closing cor. of secs. 7 and 18, T 22 N, R 9 E, bears West, 9 lks. dist., monumented with a malpais stone, 16 x 6 x 6 ins. above the ground, marks visible are 2 grooves on S face and 2 on N face, from the stone the 1902 bearing trees</p>	

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

A ponderosa pine stump, 16 ins. diam., bears
N 27° E, 114 lks. dist., no marks visible
(Record: N 26½° E, 116 lks. dist.).

The stump hole of a dead and down ponderosa pine,
16 ins. diam., bears S 58½° E, 65 lks. dist.,
illegible scribe marks visible.

The cor. was not remonumented.

39.88

The cor. of secs. 12 and 13 only, T 22 N, R 8 E,
monumented with a scattered mound of stone.

Determine the cor. point from the 1883 and 1902
bearing trees.

from which the 1883 bearing trees

A ponderosa pine, 28 ins. diam., bears S 37¾° E,
31 lks. dist., illegible scribe marks visible
through partly healed blaze (1883 Record:
S 35° E, 1902 Record: S 33½° E).

A ponderosa pine stump, 28 ins. diam., bears
S 61½° W, 133 lks. dist., mkd. BT (1883
Record: S 49½° W, 117 lks. dist., 1902
Record: S 60° W, 117 lks. dist.).

from which the 1902 bearing tree

A ponderosa pine stump, 30 ins. diam., bears
N 81½° W, 200 lks. dist., no marks visible.

At the cor. point

Set a stainless steel post, 28 ins. long, 2½ ins.
diam., 24 ins. in the ground, with brass cap mkd.

T22N	T22N
	R9E
S12	S 7
S13	
R8E	

1986

Dependent Resurvey of a Portion of the East Boundary,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

from which new bearing trees

A ponderosa pine, 18 ins. diam., bears S $30\frac{1}{4}^{\circ}$ W,
104 lks. dist., mkd. T22N R8E S13 BT.

A ponderosa pine, 16 ins. diam., bears N $35\frac{1}{4}^{\circ}$ W,
173 lks. dist., mkd. T22N R8E S12 BT.

Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored
plastic case beneath the stainless steel post.

Rebuild mound of stone 3 ft. base, 2 ft. high, W of
cor.

Set a steel fence post near the cor.

From this point, a large spike flush with ground,
bears S $41^{\circ}30'$ W, 0.074 chs. dist., origin unknown.

Dependent Resurvey of a Portion of the
Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

Restoring the survey executed by
O.D. Wheeler, in 1883

From the cor. of secs. 1, 2, 35, and 36, on the
S bdy. of the Tp.

N $0^{\circ}44'$ W, bet. secs. 35 and 36.

Over gently rolling land, through medium ponderosa
pine, pinyon, juniper, and oak.

18.94 Point for the S $\frac{1}{16}$ sec. cor. of secs. 35 and 36.

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins.
diam., 25 ins. in the ground, with brass cap mkd.

T22N R8E
S $\frac{1}{16}$
S35 | S36
1986

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>from which</p> <p>A ponderosa pine, 11 ins. diam., bears N $88\frac{3}{4}^{\circ}$ E, 32 lks. dist., mkd. S 1/16 S36 BT.</p> <p>A ponderosa pine, 18 ins. diam., bears S $24\frac{1}{2}^{\circ}$ W, 30 lks. dist., mkd. S 1/16 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 230 lks. S of a gas pipeline, bears N 85° E and S 85° W.</p> <p>From this point, a local cor. bears N $36^{\circ}47'$ W, 0.96 chs. dist., monumented with a rebar, $\frac{1}{2}$ in. diam., projecting 3 ins. above the ground, origin unknown.</p> <p>21.25 A rebar, $\frac{1}{2}$ in. diam., projecting 1 in. above the ground, with aluminum cap attached and mkd. 2007 and a cross. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date.</p> <p>28.41 The N-S 1/64 sec. cor. of secs. 35 and 36, monumented with a rebar, 15 ins. long, $\frac{3}{4}$ in. diam., projecting 3 ins. above the ground, with tag attached and mkd. PE 2007. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">N-S 1/64 S35 S36 1986</p>
--------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>from which</p> <p>A ponderosa pine, 12 ins. diam., bears S 88° W, 164 lks. dist., mkd. N-S 1/64 S35 BT.</p> <p>A ponderosa pine, 23 ins. diam., bears N 10½° W, 18 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Raised a mound of stone, 2 ft. base, 1 ft. high, W of cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 294 lks. W of a bladed road, bears S 20° E and N 25° W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°44' W, beginning new measurement.</p> <p>4.80 Center of paved road No. 510, bears N 85° E and S 88° W, curving northwesterly.</p> <p>9.46 The ¼ sec. cor. of secs. 35 and 36, monumented with an open end pipe, 18 ins. long, ¾ in. diam., projecting 2 ins. above the ground and a mound of stone, 2 ft. base, ½ ft. high, S of cor., with a cap attached and mkd. ¼ 35 36 2007. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is accepted as a careful and faithful reestablishment of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> <p>T22N R8E</p> <p>¼</p> <p>S35 S36</p> <p>1986</p> </div>
--------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>from which</p> <p>A ponderosa pine, 4 ins. diam., bears S 7½° W, 166.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>A ponderosa pine, 15 ins. diam., bears S 74¾° W, 156.5 lks. dist., mkd. ¼ S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Rebuild a mound of stone, 3 ft. base, 2½ ft. high, W of cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a gentle N slope.</p> <p>From this point, a local cor. bears N 2°25' E, 2.314 chs. dist., monumented with an iron rod, ¾ in. diam., projecting 4 ins. above the ground, with a 2 in. square metal plate attached and mkd. ¼ S35 S36. This cor. was set by Charles W. Dryden, Registered Civil Engineer No. 971, Arizona, in 1958, and was reestablished using improper procedures and is not utilized in the course of this resurvey.</p> <hr/> <p>N 0°45' W, beginning new measurement.</p> <p>4.00 Leave timber, edge, bears SE and NW.</p> <p>18.935 Point for the N 1/16 sec. cor. of secs. 35 and 36. Near the cor. point, found an open end pipe, 18 ins. long, ¾ in. diam., lying loose on ground, date and origin are unknown.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E N 1/16 S35 S36 1986</p>
---------------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>37.87</p>	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the local cor. alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 1 lk. N of a fence cor., fences extend N and W.</p> <p>The cor. of secs. 25, 26, 35, and 36, monumented with a malpais stone, 12 x 10 x 10 ins., firmly set flush with ground, mkd. with one groove on E face and 1 groove of the S face and a cross on top. Record calls for a post, 4 ft. long, 4 ins. square, with mkd. stone, 12 ins. in the ground. This point is accepted as the best available evidence of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T22N R8E</p> <table border="1" style="margin: auto;"> <tr> <td>S26</td> <td> </td> <td>S25</td> </tr> <tr> <td>S35</td> <td> </td> <td>S36</td> </tr> </table> <p>1986</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the mkd. stone alongside the cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 5 lks. N of a fence cor., fences extend S and W, gate in fence extends N and 17 lks. S of center of track road, bears E and W.</p> <hr/> <p>From the cor. of secs. 25 and 36 only, on the E bdy. of the Tp.</p> <p>S 89°49' W, bet. secs. 25 and 36.</p> <p>Along a N slope, through medium ponderosa pine, juniper, and pinyon.</p>	S26		S25	S35		S36
S26		S25					
S35		S36					

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 19.905</p>	<p>The E 1/16 sec. cor. of secs. 25 and 36, monumented with an open end pipe, 18 ins. long, $\frac{3}{4}$ in. diam., projecting 2 ins. above the ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E E 1/16 $\frac{S25}{S36}$ 1986</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon, 4 ins. diam., bears N $75\frac{1}{2}^\circ$ E, 73 lks. dist., mkd. X at breast height and BT at base.</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N $62\frac{1}{2}^\circ$ W, 100 lks. dist., mkd. E 1/16 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a moderate S slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S $89^\circ 36'$ W, beginning new measurement.</p>	
<p>9.93</p>	<p>The W-E 1/64 sec. cor. of secs. 25 and 36, monumented with an open end pipe, 18 ins. long, $\frac{3}{4}$ in. diam., projecting 2 ins. above the ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S25
W-E 1/64
S36
1986

from which

A pinyon, 8 ins. diam., bears N 37¼° E, 209 lks. dist., mkd. W-E 1/64 S25 BT.

A ponderosa pine, 11 ins. diam., bears N 50¼° E, 410 lks. dist., mkd. W-E 1/64 S25 BT.

A fence cor. bears N 25 E, 51 lks. dist., fences extend N and W.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Deposit the local cor. inside the stainless steel post.

Set a steel fence post near the cor.

Cor. is located 17 lks. S of a track road, bears N 87° E and S 81° W and at the W edge of timber, bears N and S.

From this point, a local cor., bears S 29°19' E, 0.013 chs. dist., monumented with a rebar, ½ in. diam., projecting 2 ins. above the ground, with a yellow plastic cap attached and mkd. LS 11755. This cor. was set by Russel R. Penland, Jr., Registered Land Surveyor No. 11755, Arizona, in 1984, subsequent to the accepted cor. and is not utilized in the course of this resurvey.

S 89°41' W, beginning new measurement.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

9.935

The $\frac{1}{4}$ sec. cor. of secs. 25 and 36, monumented with a rebar, 21 ins. long, $\frac{1}{2}$ in. diam., projecting 2 ins. above the ground, with a yellow cap attached and mkd. LS 11755, with a lava stone, 11 x 7 x 6 ins., lying loose alongside local cor. with illegible marks. Record calls for a post, 3 ft. long, 3 ins. diam., with a mkd. stone 12 ins. in the ground. This cor. was set by Russel R. Penland, Jr., Registered Land Surveyor No. 11755, Arizona, in 1984, and is accepted as a careful and faithful perpetuation of the position of the original cor.

from which

A ponderosa pine, 29 ins. diam., bears N $84\frac{3}{4}^{\circ}$ W, 226 lks. dist., with a defaced blaze. (This may be an original bearing tree, but it was not called for in the original survey notes.)

At the cor. point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T22N R8E
 $\frac{1}{4}$ $\frac{S25}{S36}$
1986

Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.

Deposit the local cor. inside the stainless steel post.

Deposit the mkd. stone alongside the cor.

Set a steel fence post near the cor.

Cor. is located 20 lks. S of a track road, bears N 80° E and S 80° W.

From this point, a local cor., bears S $14^{\circ}09'$ W, 2.84 chs. dist., monumented with an open end pipe, $2\frac{1}{4}$ ins. diam., projecting 1 in. above the ground, origin and date unknown.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	S 82°09' W, beginning new measurement.
10.665	A local cor., monumented with a 3/4 in. open end pipe, flush with ground, origin and date unknown and is not utilized in the course of this resurvey.
20.87	The W 1/16 sec. cor. of secs. 25 and 36, monumented with a rebar, 19 ins. long, 1/2 in. diam., flush with ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p>T22N R8E W 1/16 $\frac{S25}{S36}$ 1986</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Bury the local cor. alongside the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located 30 lks., S 60° E of the intersection of graded roads, extending N, E, and W.
	<hr/> <p>S 82°07' W, beginning new measurement.</p>
10.55	Rio de Flag Creek, 15 lks. wide, flows S 80° E.
20.865	The cor. of secs. 25, 26, 35, and 36.
	<hr/> <p>N 0°40' E, bet. secs. 25 and 26.</p>
	Over gently rolling open land.
11.25	Rio de Flag Creek, 15 lks. wide, flows S 60° E.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>21.595</p>	<p>The S 1/16 sec. cor. of secs. 25 and 26, monumented with a local open end pipe, 18 ins. long, 3/4 in. diam., flush with ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E S 1/16 S26 S25 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°40' E, beginning new measurement.</p>
	<p>21.595</p>	<p>The 1/4 sec. cor. of secs. 25 and 26, monumented with a local open end pipe, 18 ins. long, 3/4 in. diam., flush with ground, and is accepted as a careful and faithful reestablishment of the position of the original cor., date and origin unknown.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E 1/4 S26 S25 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Deposit the local cor. inside the stainless steel post.</p> <p>Cor. is located in an E and W fence, and 35 lks. S 27° E of a graded road intersection, roads extend N, E, and W.</p> <hr/> <p>N 0°38' E, beginning new measurement.</p> <p>21.59 Point for the N 1/16 sec. cor. of secs. 25 and 26.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 7 ins. below surface of a road, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E N.1/16 S26 S25 1986</p> <p>from which</p> <p>An aluminum post, 36 ins. long, ¾ in. diam., set flush with ground, for a reference monument, bears N 35°15' E, 32.4 ft. dist., with aluminum cap mkd. RM T22N R8E 32.4 FT TO COR S25 1986 and an arrow pointing to the cor.</p> <p>Set a steel fence post near the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Cor. is located 37 lks., N 40° E of the intersection of graded roads extending N, N 73° E and S.</p> <p>43.18 The cor. of secs. 23, 24, 25, and 26, monumented with a malpais stone, 12 x 7 x 4 ins., flush with ground, mkd. with a cross on top, no other marks visible. Record calls for a post, 4 ft. long, 4 ins. square, with a mkd. stone, 12 ins. in the ground. This is accepted as the best available evidence of the cor.</p> <p>At the cor. point</p>
--------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.

T22N R8E
S23 | S24
S26 | S25
1986

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Raise a mound of stone, 2½ ft. base, 2 ft. high, W of cor.

Deposit the mkd. stone alongside the cor.

Set a steel fence post near the cor.

From this point, a local cor., bears N 89°55' E, 1.835 chs. dist., monumented with a rebar, ¾ in. diam., flush with ground, with an aluminum cap attached and mkd. 2007 R.P. S.S.L. COR, and a cross in center. This point was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date.

From the cor. of secs. 24 and 25 only, on the E bdy. of the Tp.

N 89°47' W, bet. secs. 24 and 25.

Over gently rolling open land.

20.325 Point for the E 1/16 sec. cor. of secs. 24 and 25.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

T22N R8E
E 1/16 S24
S25
1986

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>from which</p> <p>A pinyon, 6 ins. diam., bears S $2\frac{1}{2}^\circ$ W, 356 lks. dist., mkd. E $1/16$ S25 BT.</p> <p>A ponderosa pine, 16 ins. diam., bears S $39\frac{1}{4}^\circ$ W, 421 lks. dist., mkd. E $1/16$ S25 BT.</p> <p>A fence cor. bears N $60\frac{1}{2}^\circ$ W, 14.5 lks. dist., fences extend E, S, and W.</p> <p>Deposit a magnet in a 1 x 1 x 2 $5/8$ in. white colored plastic case beneath the stainless steel post.</p> <p>From this point, a local cor., bears N $60^\circ 24'$ W, 0.144 chs. dist., monumented with an open end pipe, $3/4$ in. diam., flush with the ground, with tag attached and mkd. LS 4021. This point was set by Todd Rockwell, Registered Land Surveyor No. 4021, Arizona, in 1967, and was established using improper procedures and is not utilized in the course of this resurvey.</p> <p>40.65 The $1/4$ sec. cor. of secs. 24 and 25, monumented with a local rebar, 36 ins. long, $3/4$ in. diam., projecting 1 in. above the ground, with tag attached and mkd. LS 2473. This cor. was set by Wilfred P. Hanson, Registered Land Surveyor No. 2473, Arizona, of unknown date and accepted as a careful and faithful perpetuation of the position of the original cor., from which the original bearing tree</p> <p>A ponderosa pine, 28 ins. diam., bears S $62\frac{1}{4}^\circ$ E, 43 lks. dist., marks visible $1/4$ BT (Record: S 60° E, 44 lks. dist.).</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E $\frac{1}{4}$ S24 S25 1986</p>	
--	--------	---	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>from which a new bearing tree</p> <p>A ponderosa pine, 13 ins. diam., bears S 44$\frac{1}{4}$° E, 182 lks. dist., mkd. $\frac{1}{4}$ S25 BT.</p> <p>A fence cor. bears N 62$\frac{3}{4}$° E, 33 lks. dist., fences extend N and E.</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this point, a local cor., bears N 45°52' E, .246 chs. dist., monumented with an open end pipe, 1$\frac{1}{4}$ in. diam., flush with ground, with tag attached and mkd. PE 6312. This cor. was set by William A. Ramsey, Registered Civil Engineer No. 6312, Arizona, of unknown date, and was reestablished using improper procedures and is not utilized in the course of this resurvey.</p> <hr/> <p>N 89°48' W, beginning new measurement.</p> <p>4.935 The E-E-W 1/256 sec. cor. of secs. 24 and 25, monumented with a stainless steel pipe, 28 ins. long, $\frac{1}{2}$ in. diam., flush with surface of a graded road, with remains of a white plastic cap attached with illegible marks, and is accepted as a careful and faithful determination of the position of the cor., origin and date unknown. Near this point, found another local cor. lying loose on the ground, which is a rebar, 18 ins. long, $\frac{5}{8}$ in. diam., of unknown origin.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 6 ins. below surface of a road, with brass cap mkd.</p> <p style="text-align: center;">S24 E-E-W 1/256 S25 1986</p>
--	--------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>from which</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 35 ins. in the ground, for a reference monument, bears S 83°54' E, 70.3 ft. dist., with aluminum cap mkd. RM T22N R8E 70.3 FT TO COR S25 1986 and an arrow pointing to the cor.</p> <p>Set a steel fence post near the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the two local cors. inside the stainless steel post.</p> <p>Cor. is located in a graded road, bears N 73° E and S 65° W.</p> <hr/> <p>N 89°48' W, beginning new measurement.</p> <p>4.94 The E-W 1/64 sec. cor. of secs. 24 and 25, monumented with a rebar, $\frac{1}{2}$ in. diam., projecting 2 ins. above the ground, with a yellow plastic cap attached and mkd. RLS 9078. This cor. was set by Joseph E. Costa, Registered Land Surveyor No. 9078, Arizona, of unknown date, not remonumented.</p> <p>14.805 The W 1/16 sec. cor. of secs. 24 and 25, monumented with a rebar, 18 ins. long, $\frac{1}{2}$ in. diam., projecting 4 ins. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E W 1/16 <u>S24</u> S25 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p>
---------------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Deposit the local cor. inside the stainless steel post.</p> <p>Raise a mound of stone, 2 ft. base, 1 ft. high, N of cor.</p> <p>From this point, a local cor., bears N 48°09' E, 12 lks. dist., monumented with a rebar, 3/4 in. diam., projecting 2 ins. above the ground, with aluminum cap attached and mkd. 2007 1/16 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date. Cor. was established using an erroneous control cor. and is not utilized in the course of this resurvey.</p> <hr/> <p>N 89°48' W, beginning new measurement.</p> <p>6.58 A local cor., monumented with a rebar, 1/2 in. diam., projecting 4 ins. above the ground, origin and date unknown, and is not utilized in the course of this resurvey.</p> <p>19.73 The cor. of secs. 23, 24, 25, and 26.</p> <hr/> <p>N 0°57' E, bet. secs. 23 and 24.</p> <p>Over level open land.</p> <p>15.39 Point for the N-S-S 1/256 sec. cor. of secs. 23 and 24.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">N-S-S 1/256 S23 S24 1986</p>	
---------------	---	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 79 lks. E of a graded road, bears N and S.</p> <p>From this point, a local cor., bears S 29°00' W, 0.505 chs. dist., monumented with a rebar, ½ in. diam., 2 ins. below surface of ground, with tag attached and mkd. LS 6893. This cor. was established by Arthur W. Lysons, Registered Land Surveyor No. 6893, Arizona, date unknown. Cor. was established using an erroneous control cor. and is not utilized in the course of this resurvey.</p> <p>20.52 Point for the S 1/16 sec. cor. of secs. 23 and 24.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E S 1/16 S23 S24 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 80 lks. E of a N and S graded road and 20 lks. N of a fence cor., fences extend N and E.</p> <p>From this point, a local cor., bears S 29°05' W, 0.663 chs. dist., monumented with a rebar, ¾ in. diam., flush with ground, with an aluminum cap attached and mkd. 2007 1/16. This cor. was established by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, in 1975. This cor. was established using an erroneous control cor. and is not utilized in the course of this resurvey.</p>	
--------	--	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 41.04</p>	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, at proportionate dist., there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E $\frac{1}{4}$ S23 S24 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 107 lks. E of a N and S graded road and 116 lks. N of an E and W graded road.</p> <p>From this point, a local cor., bears S 28°59' W, 1.327 chs. dist., monumented with a rebar, $\frac{1}{2}$ ins. diam., 4 ins. below surface of a graded road. This cor. was reestablished by Wilfred P. Hanson, Registered Land Surveyor No. 2473, Arizona, in 1971, using improper procedures and is not utilized in the course of this resurvey.</p>
<p>43.12</p>	<p>Intersect the side of a house, at a point, S 50° E, 15.5 lks. dist. from the most SW cor. of house. Sides of house extend S 50° E and N 40° E.</p>
<p>61.56</p>	<p>Point for the N 1/16 sec. cor. of secs. 23 and 24.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 28 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E N 1/16 S23 S24 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Cor. is located 140 lks. E of a N and S paved street (Stardust Trail).</p> <p>From this point, a local cor., bears S 29°08' W, 2.013 chs. dist., monumented with a rebar, ½ in. diam., flush with ground, with a yellow plastic cap attached and mkd. RLS 9078. This cor. was established by Joseph E. Costa, Registered Land Surveyor No. 9078, Arizona, date unknown. Cor. was established using an erroneous control cor., and is not utilized in the course of this resurvey.</p> <p>76.95 Point for the N-N-N 1/256 sec. cor. of secs. 23 and 24.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">N-N-N 1/256 S23 S24 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 166 lks. E of a N and S paved street (Stardust Trail).</p> <p>82.08 Point for the cor. of secs. 13, 14, 23, and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an aluminum post, 36 ins. long, ¾ in. diam., 8 ins. below surface of a graded road, with aluminum cap mkd.</p> <p style="text-align: center;">T22N R8E S14 S13 S23 S24 1986</p> <p>from which</p>	
---------------	--	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>A stainless steel post, 28 ins. long, 2½ ins. diam., set 26 ins. in the ground, for a reference monument, bears S 28°28' E, 37.2 ft. dist., with brass cap mkd. RM T22N R8E S24 37.2 FT TO COR 1986, and an arrow pointing to the cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post and set a steel fence post near the reference monument.</p> <p>Remains of an old fence cor., bears S 44½° E, 49 lks. dist., fences extend N, E, S, and W.</p> <p>Sec. cor. is located 24 lks., N 62° E of the intersection of roads, extending N, N 62° E curving E, S, S 38° W, and N 9° W; and 35 lks., S 62° W of a cattle guard.</p> <p>From this point, a local cor., bears S 29°09' W, 2.683 chs. dist., monumented with a rebar, ½ in. diam., 4 ins. below ground. This cor. was reestablished by Wilfred P. Hanson, Registered Land Surveyor No. 2473, Arizona, in 1971, using improper procedures and is not utilized in the course of this resurvey.</p> <hr/> <p>From the cor. of secs. 13 and 24 only, on the E bdy. of the Tp.</p> <p>N 88°21' W, bet. secs. 13 and 24.</p> <p>Over nearly level open land.</p> <p>19.675 Point for the E 1/16 sec. cor. of secs. 13 and 24.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E E 1/16 <u>S13</u> S24 1986</p>
---------------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>from which</p> <p>A ponderosa pine, 30 ins. diam., bears N 20$\frac{3}{4}$° W, 447.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>A ponderosa pine, 20 ins. diam., bears N 3° W, 365 lks. dist., mkd. E 1/16 S13 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 30 lks. W of a track road, bears N 3° E and S 3° W and 155 lks. S of another track road, bears N 80° E and S 80° W.</p> <p>From this point, a local cor., bears N 85°44' W, 1.667 chs. dist., monumented with an iron rod, 1/2 in. diam., projecting 4 ins. above the ground, origin and date are unknown and is not utilized in the course of this resurvey.</p> <p>39.35 Point for the 1/4 sec. cor. of secs. 13 and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T22N R8E $\frac{1}{4}$ <u>S13</u> S24 1986</p> </div> <p>from which</p> <p>A juniper, 6 ins. diam., bears N 53$\frac{3}{4}$° E, 102 lks. dist., mkd. 1/4 S13 BT.</p> <p>The fence cor. of an old abandoned fence, bears N 37$\frac{1}{4}$° E, 114 lks. dist., fences extend N and E.</p>
--------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Cor. is located 10 lks. S of center of a track road, bears irregularly E and W.</p> <p>From this point, a local cor., bears S 29°31' W, 1.342 chs. dist., monumented with a rebar, $\frac{3}{4}$ in. diam., 6 ins. below ground, with an aluminum cap attached and mkd. 2007. This cor. was reestablished by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, in 1975, and was reestablished using an erroneous control cor. and is not utilized in the course of this resurvey.</p> <p>59.03 Point for the W 1/16 sec. cor. of secs. 13 and 24.</p> <p>Set an aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., 8 ins. below surface of a track road, with aluminum cap mkd.</p> <p style="text-align: center;">T22N R8E W 1/16 <u>S13</u> S24 1986</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2½ ins. diam., set 26 ins. in the ground, for a reference monument, bears S 36°47' W, 44.8 ft. dist., with brass cap mkd. RM T22N R8E 44.8 FT TO COR S24 1986, and an arrow pointing to the cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post and set a steel fence post near the reference monument.</p> <p>An old abandoned fence cor., bears S 28½° E, 45 lks. dist.</p> <p>78.71 The cor. of secs. 13, 14, 23, and 24.</p> <hr/> <p>N 2°52' W, bet. secs. 13 and 14.</p>
---------------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>38.33</p>	<p>Over nearly level open land.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 13 and 14, monumented with a malpais stone, 18 x 13 x 4 ins., firmly set and projecting 9 ins. above the ground, mkd. $\frac{1}{4}$ on N face, and a mound of stone, 2 ft. base, 1 ft. high, N of the cor. Record calls for a post, 3 ft. long, 3 ins. diam., with a mkd. stone, 12 ins. in the ground. This is accepted as the best available evidence of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E $\frac{1}{4}$ S14 S13 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the mkd. stone alongside the cor.</p> <p>Rebuild a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>There is a steel fence post near the cor.</p> <p>Cor. is located 135 lks. W of a track road, bears N and S.</p> <p>From this point, a local cor.; bears S 17°43' E, .808 chs. dist., monumented with a rebar, 1 in. diam., projecting 2 ins. above the ground. This cor. was reestablished by Lee Martin Del Giorgio, Registered Civil Engineer No. 6744, Arizona, in 1978, and was reestablished using an erroneous control corner and is not utilized in the course of the resurvey.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°10' W, beginning new measurement.</p>
----------------------------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

9.775

The S-N 1/64 sec. cor. of secs. 13 and 14, monumented with a U.S. Department of Agriculture aluminum post, 2½ ins. diam., projecting 2 ins. above the ground. This cor. was established by the Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is accepted as a careful and faithful determination of the position of the cor., with aluminum cap mkd.

S-N
1/64
S14 | S13
1982
RLS 9431

from which the bearing trees, established by the Forest Service in 1982

A ponderosa pine, 16 ins. diam., bears N 6¾° E, 48 lks. dist., mkd. S-N 1/64 BT (1982 Record: N 6° E).

A ponderosa pine, 10 ins. diam., bears N 50° W, 73 lks. dist., mkd. S-N 1/64 BT.

Cor. is located 15 lks. S of a track road, bears E and W and 178 lks. W of a N and S track road.

N 0°10' W, beginning new measurement, through medium ponderosa pine.

9.77

Point for the N 1/16 sec. cor. of secs. 13 and 14.

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T22N R8E
N 1/16
S14 | S13
1986

from which

A ponderosa pine, 26 ins. diam., bears N 43½° E, 59.5 lks. dist., mkd. N 1/16 S13 BT.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>A ponderosa pine, 24 ins. diam., bears N $88\frac{3}{4}^{\circ}$ W, 180 lks. dist., mkd. N 1/16 S14 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 40 lks. N of a pipe line track road, bears N 85° E and S 85° W.</p> <p>29.31 The cor. of secs. 11, 12, 13, and 14, monumented with a rebar, 18 ins. long, $\frac{3}{4}$ in. diam., flush with ground, with an aluminum cap attached and mkd. Willdan Assoc., with a malpais stone, 20 x 15 x 6 ins. lying loose in a mound of stone, 2 ft. base, 1 ft. high, W of cor., stone mkd. with 4 grooves on one face and 1 groove on another face. Record calls for a post, 4 ft. long, 4 ins. square, with a mkd. stone 12 ins. in the ground. This cor. is accepted as a careful and faithful perpetuation of the position of the original cor. by Willdan Associates of unknown date, from which original bearing trees</p> <p>A pine stump, 42 ins. diam., bears N $38\frac{1}{2}^{\circ}$ E, 43 lks. dist., no marks visible (Record: N 20° E, 34 lks. dist.).</p> <p>A ponderosa pine, 32 ins. diam., bears N $59\frac{3}{4}^{\circ}$ W, 63 lks. dist., healed blaze (Record: N 40° W, 67 lks. dist.).</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E S11 S12 S14 S13 1986</p> <p>from which bearing trees, established by the Forest Service in 1982</p> <p>A ponderosa pine, 30 ins. diam., bears N $75\frac{1}{2}^{\circ}$ E, 101 lks. dist., mkd. T22N R8E S12 BT (1982 Record: N 78° E).</p>
--	--------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>40.33</p>	<p>A ponderosa pine, 16 ins. diam., bears S $4\frac{1}{4}^{\circ}$ E, 138.5 lks. dist., mkd. S13 BT (1982 Record: S 4° E).</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the mkd. stone alongside the cor.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>There is a steel fence post alongside cor.</p> <hr/> <p>From the cor. of secs. 12 and 13 only, on the E bdy. of Tp.</p> <p>S $89^{\circ}45'$ W, bet. secs. 12 and 13.</p> <p>Over gently rolling land, through medium ponderosa pine.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 12 and 13, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E $\frac{1}{4}$ <u>S12</u> S13 1986</p> <p>from which</p> <p>A ponderosa pine, 14 ins. diam., bears S $14\frac{1}{2}^{\circ}$ E, 121.5 lks. dist., mkd. $\frac{1}{4}$ S13 BT.</p> <p>A ponderosa pine, 16 ins. diam., bears N $31\frac{1}{2}^{\circ}$ W, 34.5 lks. dist., mkd. $\frac{1}{4}$ S12 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p>
----------------------------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a steel fence post near the cor.</p> <p>From this point, a local cor., bears S 45°58' W, 0.042 chs. dist., monumented with a rebar, 3/4 in. diam., projecting 2 ins. above the ground. This cor. was reestablished by the Arizona Public Service in 1985, using improper procedures and an erroneous control cor. and is not utilized in the course of this resurvey.</p> <p>60.50 Point for the W 1/16 sec. cor. of secs. 12 and 13.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E W 1/16 <u>S12</u> S13 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears N 17° E, 10 lks. dist., mkd. W 1/16 S12 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 18 ins. diam., bears S 36 3/4° W, 33 lks. dist., mkd. W 1/16 S13 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>80.67 The cor. of secs. 11, 12, 13, and 14.</p> <hr/> <p>From the cor. of secs. 2, 3, 34, and 35, on the S bdy. of Tp.</p> <p>N 0°07' W, bet. secs. 34 and 35.</p> <p>Over gently rolling land, through medium ponderosa pine and scattered oak.</p>
---------------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p style="text-align: center;">N-N-S 1/256 S34 S35 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 15 ins. diam., bears S 11½° E, 277.5 lks. dist., mkd. N-N-S 1/256 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 1.5 lks. N of a fence cor., fences extend S and W; 19 lks. W of center of a graded road, bears S 5° E and N 5° W; 30 lks. E of center of a graded road, bears N 10° E and S 10° W; and 42 lks. W of a fence cor., fences extend N and E.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°07' W, beginning new measurement.</p> <p>Along a graded road.</p> <p>5.015 The ¼ sec. cor. of secs. 34 and 35, monumented with a rebar, 12 ins. long, ¾ in. diam., 2 ins. below surface of a graded road. The origin and date are unknown and is accepted as a careful and faithful reestablishment of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 8 ins. below surface of road, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E ¼ S34 S35 1986</p>
--	---------------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>from which</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 34 ins. in the ground, for a reference monument, bears S 45°31' W, 41.6 ft. dist., with aluminum cap mkd. RM T22N R8E 41.6 FT TO COR S34 1986 and an arrow pointing to the cor.</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 35 ins. in the ground, for a reference monument, bears N 40°35' W, 45.6 ft. dist., with aluminum cap mkd. RM T22N R8E 45.6 FT TO COR S34 1986 and an arrow pointing to the cor.</p> <p>Both reference monuments are located 1 lk. E of a N and S fence.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Cor. is located 2 lks. W of center of a N and S graded road and 41 lks. W of a fence cor., fences extend E and S.</p> <hr/> <p>N 0°07' W, beginning new measurement.</p> <p>20.08 The N 1/16 sec. cor. of secs. 34 and 35, monumented with a rebar, 12 ins. long, $\frac{3}{4}$ in. diam., 1 in. below surface of road, with aluminum cap mkd. 2007 1/16 and a N and S line. This cor. was established by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 7 ins. below surface of road, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E N 1/16 S34 S35 1986</p>	
---------------	--	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>from which</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 33 ins. in the ground, for a reference monument, bears S 26°33' W, 66.2 ft. dist., with aluminum cap mkd. RM T22N R8E 66.2 FT TO COR S34 1986 and an arrow pointing to the cor.</p> <p>Reference monument is located 1 lk. E of a N and S fence.</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 33 ins. in the ground, for a reference monument, bears N 89°08' W, 29.9 ft. dist., with aluminum cap mkd. RM T22N R8E 29.9 FT TO COR S34 1986 and an arrow pointing to the cor.</p> <p>Reference monument is located 2 lks. SE of a fence cor., fences extend S and W.</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Cor. is located 3 lks. W of center of a N and S graded road.</p> <hr/> <p>N 0°07' W, beginning new measurement.</p> <p>5.02 Point for the S-N-N 1/256 sec. cor. of secs. 34 and 35.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 7 ins. below surface of road, with brass cap mkd.</p> <p style="text-align: center;">S-N-N 1/256 S34 S35 1986</p>
--	---------------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>from which</p> <p>A ponderosa pine, 15 ins. diam., bears N 35½° E, 124 lks. dist., mkd. S-N-N 1/256 S35 BT.</p> <p>An aluminum post, 36 ins. long, ¾ in. diam., set 31 ins. in the ground, for a reference monument, bears N 87°16' E, 45.3 ft. dist., with aluminum cap mkd. RM T22N R8E 45.3 FT TO COR S35 1986 and an arrow pointing to the cor.</p> <p>Reference monument is located alongside a power pole, line extending S 35° E, W, and N 40° W.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Cor. is located 7 lks. W of center of a graded road, bears N and S.</p> <p>From this point, a local cor., bears N 88°27' W, 0.037 chs. dist., monumented with a rebar, ½ in. diam., 3 ins. below surface of road, origin and date unknown and is not utilized in the course of this resurvey.</p>
7.60	Center of asphalt road No. 510, bears N 80° E and S 80° W, thence along Koch Field Road, asphalt surface.
20.07	<p>The cor. of secs. 26, 27, 34, and 35, monumented with a rebar, ¾ in. diam., 2 ins. below surface of road, with an aluminum cap attached and mkd. with a cross in center, origin and date unknown. This is a remonumentation of the perpetuation of the position of the original cor. by Charles W. Dryden, Registered Civil Engineer No. 971, Arizona, in 1958. This cor. is also shown on a survey plat by Jess D. Roeder, Registered Land Surveyor No. 2308, Arizona, in 1959, and a survey plat by the Coconino County Engineering Department in 1963, from which</p> <p>The remains of an original bearing tree stump, bears S 65½° W, 30 lks. dist., no marks (Record: S 67° W).</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

A rebar, $\frac{3}{4}$ in. diam., projecting 4 ins. above ground, bears N $63^{\circ}28'$ E, 84.5 lks. dist., with tag attached and mkd. PE 2007.

A rebar, $\frac{3}{4}$ in. diam., projecting 4 ins. above ground, bears N $69^{\circ}58'$ W, 81.5 lks. dist.

At the cor. point

Set a stainless steel post, 8 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. below surface of road, over the local cor., with brass cap mkd.

T22N R8E	
S27	S26
S34	S35
1986	

from which

A ponderosa pine, 6 ins. diam., bears S 60° E, 160.5 lks. dist., mkd. T22N R8E S35 BT.

A ponderosa pine, 7 ins. diam., bears S $45\frac{1}{2}^{\circ}$ W, 176 lks. dist., mkd. T22N R8E S34 BT.

A ponderosa pine, 11 ins. diam., bears N $82\frac{3}{4}^{\circ}$ W, 72 lks. dist., mkd. T22N R8E S27 BT.

Cor. is located 5 lks. W of center of Koch Field Road, bears N and S and 36 lks. E of a telephone line, bears N and S.

From the cor. of secs. 25, 26, 35, and 36.

N $89^{\circ}54.5'$ W, bet. secs. 26 and 35.

Over gently rolling open land.

20.115

The E 1/16 sec. cor. of secs. 26 and 35, monumented with an open end pipe, 12 ins. long, 1 in. diam., 1 in. below ground. The date and origin is unknown and is accepted as a careful and faithful determination of the position of the cor.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

At the cor. point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in the ground, with brass cap mkd.

T22N R8E
E 1/16 $\frac{S26}{S35}$
1986

from which

A ponderosa pine, 21 ins. diam., bears N 31° W, 610 lks. dist., mkd. E 1/16 S26 BT.

A ponderosa pine, 15 ins. diam., bears S $27\frac{1}{4}^\circ$ W, 266.5 lks. dist., mkd. E 1/16 S35 BT.

Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.

Deposit the local cor. inside the stainless steel post.

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N of cor.

Cor. is located 24 lks. S of graded road, bears E and S 85° W, 39 lks. S of an E and W telephone line, and at a fence cor., fences extending E and S.

From this point, a local cor., bears N $47^\circ 30'$ W, 0.005 chs. dist., monumented with a $\frac{3}{4}$ in. rebar, flush with ground, with an aluminum cap attached and mkd. 2007 1/16 and a cross in center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, in 1971, subsequent to the accepted cor. and is not utilized in the course of this resurvey.

N $89^\circ 54'$ W, beginning new measurement, through scattered ponderosa pine.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 20.11</p>	<p>The $\frac{1}{4}$ sec. cor. of secs. 26 and 35, monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 5 ins. above the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E $\frac{1}{4}$ <u>S26</u> S35 1972</p> <p>from which new bearing trees</p> <p style="padding-left: 40px;">A ponderosa pine, 15 ins. diam., bears N $60\frac{1}{2}^\circ$ W, 392 lks. dist., mkd. $\frac{1}{4}$ S26 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 15 ins. diam., bears S $\frac{1}{2}^\circ$ W, 161.5 lks. dist., mkd. $\frac{1}{4}$ S35 BT.</p> <p>A fence cor. bears N $11\frac{1}{4}^\circ$ W, 23.5 lks. dist., fences extend N and S 50° E.</p> <p>A mound of stone, 2 ft. base, 2 ft. high, is N of cor.</p> <p>Add the marks 1986 to the cap.</p> <p>Set a steel fence post near the cor.</p> <p>From this point, a $\frac{5}{8}$ in. rebar, projecting 4 ins. above ground, bears S $0^\circ 10'$ W, 1.21 chs. dist., with a tag attached and mkd. PE 2007.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N $89^\circ 51'$ W, beginning new measurement.</p>	
<p>20.14</p>	<p>The W $\frac{1}{16}$ sec. cor. of secs. 26 and 35, monumented with a rebar, 15 ins. long, $\frac{3}{4}$ in. diam., projecting 3 ins. above the ground, with an aluminum cap attached and mkd. $\frac{1}{16}$ 2007 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E W 1/16 <u>S26</u> S35 1986</p> <p>from which</p> <p>A ponderosa pine, 16 ins. diam., bears S 14¼° E, 287.5 lks. dist., mkd. W 1/16 S35 BT.</p> <p>A ponderosa pine, 6 ins. diam., bears S 29¼° W, 292 lks. dist., mkd. X at breast height and BT at base.</p> <p>A rebar, ¾ in. diam., projecting 6 ins. above the ground, bears N 89°50' E, 38 lks. dist., with a tag attached and mkd. PE 2007.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N 89°51' W, beginning new measurement.</p> <p>20.125 The cor. of secs. 26, 27, 34, and 35.</p> <hr/> <p>N 0°26' E, bet. secs. 26 and 27.</p> <p>Along Koch Field Road.</p> <p>5.395 Point for the S-S-S 1/256 sec. cor. of secs. 26 and 27.</p>	
---------------	---	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a stainless steel post, 9 ins. long, 2½ ins. diam., 3 ins. below surface of road, with brass cap mkd.</p> <p style="text-align: center;">S-S-S 1/256 S27 S26 1986</p> <p>from which</p> <p>A ponderosa pine, 8 ins. diam., bears S 51½° W, 133.5 lks. dist., mkd. S-S-S 1/256 S27 BT.</p> <p>A ponderosa pine, 13 ins. diam., bears N 53¼° W, 142 lks. dist., mkd. X at breast height and BT at base.</p> <p>A telephone pole, bears N 10° W, 215 lks. dist., mkd. 30-D 1, lines extending N, E, S, and W.</p> <p>Cor. is located 2.5 lks. W of center of Koch Field Road, bears N and S.</p> <p>10.79 Point for the S-S 1/64 sec. cor. of secs. 26 and 27.</p> <p>Set a stainless steel post, 9 ins. long, 2½ ins. diam., 3 ins. below the surface of road, with brass cap mkd.</p> <p style="text-align: center;">S-S 1/64 S27 S26 1986</p> <p>from which</p> <p>A ponderosa pine, 10 ins. diam., bears S 37¾° W, 191.5 lks. dist., mkd. S-S 1/64 S27 BT.</p> <p>A ponderosa pine, 9 ins. diam., bears S 70¾° W, 132 lks. dist., mkd. X at breast height and BT at base.</p> <p>A telephone pole, bears S 58¾° W, 46 lks. dist., lines extending N, S 60° E, S, and W.</p>	
--------	---	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>A rebar, $\frac{1}{2}$ in. diam., projecting 2 ins. above ground, bears N $89^{\circ}07'$ E, 0.45 chs. dist., with tag attached and mkd. LS 2473.</p> <p>Cor. is located in center of Koch Field Road, bears N and S.</p> <p>16.00 Rio de Flag Creek, 10 lks. wide, flows N 56° E.</p> <p>21.575 The S $\frac{1}{16}$ sec. cor. of secs. 26 and 27, monumented with a rebar, $\frac{1}{2}$ in. diam., 3 ins. below surface of road, with an aluminum cap attached, no marks visible, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 8 ins. long, $2\frac{1}{2}$ ins. diam., 1 in. below the surface of road, over the local cor., with brass cap mkd.</p> <p style="text-align: center;">T22N R8E S $\frac{1}{16}$ S27 S26 1986</p> <p>from which</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 33 ins. in the ground, for a reference monument, bears S $67^{\circ}34'$ W, 38.5 ft. dist., with aluminum cap mkd. RM T22N R8E 38.5 FT TO COR S27 1986 and an arrow pointing to the cor.</p> <p>Reference monument is located alongside a stop sign.</p> <p>An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 33 ins. in the ground, for a reference monument, bears N $47^{\circ}43'$ W, 35.9 ft. dist., with aluminum cap mkd. RM T22N R8E 35.9 FT TO COR S27 1986 and an arrow pointing to the cor.</p> <p>Reference monument is located alongside Koch Field Road and Anaya Ranch Road street sign.</p>
--------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

Cor. is located in Koch Field Road, 14 lks. S of Anaya Ranch Road, which extend E and W from Koch Field Road.

N 0°26' E, beginning new measurement.

21.575 The ¼ sec. cor. of secs. 26 and 27, monumented with a rebar, 5/8 in. diam., 3 ins. below surface of road, origin and date unknown and is accepted as a careful and faithful reestablishment of the position of the original cor., from which

An iron pipe, 1¼ ins. diam., projecting 2 ins. above ground, bears S 89°52' E, 45.4 lks. dist., with an aluminum cap attached and mkd. R.P. 30.00 ¼ 2007 and a cross in the center.

A T-bar, 1¼ x 1 in., projecting 2 ins. above ground, bears N 87°48' W, 75.8 lks. dist., with an aluminum cap attached, no marks.

At the cor. point

Set a stainless steel post, 8 ins. long, 2½ ins. diam., 2 ins. below the surface of road, over local cor., with brass cap mkd.

T22N R8E
¼
S27 | S26
1986

from which

An aluminum post, 36 ins. long, ¾ in. diam., set 32 ins. in the ground, for a reference monument, bears N 82°56' E, 27.7 ft. dist., with aluminum cap mkd. RM T22N R8E 27.7 FT TO COR S26 1986 and an arrow pointing to the cor.

Reference monument is located alongside a fence cor., fences extend E and S.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 32 ins. in the ground, for a reference monument, bears N $83^{\circ}17'$ E, 27.9 ft. dist., with aluminum cap mkd. RM T22N R8E 27.9 FT TO COR S27 1986 and an arrow pointing to the cor.

Reference monument is located alongside a fence cor., fences extend S and W.

Cor. is located 2 lks. W of center of Koch Field Road, 41 lks. S of a graded road extending E.

N $0^{\circ}26'$ E, beginning new measurement.

43.16

The cor. of secs. 22, 23, 26, and 27, monumented with a rebar, $\frac{3}{4}$ in. diam., 3 ins. below surface of road, with aluminum cap attached and mkd. 2007, 22, 23, 26, 27, and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is a perpetuation of the cor. set by the Coconino County Engineering Department in 1963, and is accepted as a careful and faithful reestablishment of the position of the original cor., from which

A rebar, $\frac{1}{2}$ in. diam., projecting 4 ins. above the ground, bears S $56^{\circ}56'$ W, 91 lks. dist., with an aluminum cap attached and mkd. LS 14671.

At the cor. point

Set a stainless steel post, 9 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. below surface of road, over local cor., with brass cap mkd.

T22N R8E
 S22 | S23
 S27 | S26
 1986

from which

An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 31 ins. in the ground, for a reference monument, bears S $36^{\circ}22'$ W, 58.5 ft. dist., with aluminum cap mkd. RM T22N R8E 58.5 FT TO COR S27 1986 and an arrow pointing to the cor.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

Reference monument is located alongside a pole marking a buried telephone cable.

An aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., set 33 ins. in the ground, for a reference monument, bears N 43°52' W, 44.3 ft. dist., with aluminum cap mkd. RM T22N R8E 44.3 FT TO COR S22 1986 and an arrow pointing to the cor.

Reference monument is located alongside a telephone pole, lines extending N, E, and W.

Cor. is located in the intersection of asphalt roads extending E, S, and W, and a graded gravel road extending N.

From the cor. of secs. 23, 24, 25, and 26.

N 89°53' W, bet. secs. 23 and 26.

Over nearly level open land, along a graded road.

40.39

The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented with a rebar, $\frac{3}{4}$ in. diam., projecting 1 in. above the ground, with an aluminum cap attached and mkd. $\frac{1}{4}$ 2007 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is accepted as a careful and faithful reestablishment of the position of the original cor.

At the cor. point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.

T22N R8E
 $\frac{1}{4}$ $\frac{S23}{S26}$
1986

Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.

Deposit the local cor. inside the stainless steel post.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a steel fence post near the cor.</p> <p>Cor. is located 42 lks. N of a graded road, bears easterly and westerly and 27 lks. S of a track road, bears easterly and westerly.</p> <hr/> <p>N 89°53' W, beginning new measurement.</p> <p>20.10 Asphalt road, curves N and W.</p> <p>40.39 The cor. of secs. 22, 23, 26, and 27.</p> <hr/> <p>N 0°14' W, bet. secs. 22 and 23.</p> <p>Along a graded gravel road.</p> <p>20.095 Point for the S 1/16 sec. cor. of secs. 22 and 23.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 6 ins. below surface of ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E S 1/16 S22 S23 1986</p> <p>from which</p> <p style="padding-left: 40px;">A telephone pole, bears E, 68 lks. dist., with line extending N 38° W.</p> <p style="padding-left: 40px;">A telephone pole, bears N 9° W, 121.5 lks. dist., with lines extending N, S 38° E, and S.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Cor. is located 25 lks. W of center of a graded gravel road, bears N 1° E and S 1° W.</p>	
--------	--	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>From this point, a local cor., bears N 86°49' E, 0.25 chs. dist., monumented with a rebar, $\frac{3}{4}$ in. diam., 2 ins. below surface of road, origin and date unknown. This cor. was established using improper procedures and is not utilized in the course of this resurvey.</p> <p>40.19 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, determined from an original bearing tree</p> <p style="padding-left: 40px;">A ponderosa pine, 27 ins. diam., bears S 33° E, 43 lks. dist., marks visible $\frac{1}{4}$ BT.</p> <p>Note: The original 1883 survey did not call for a bearing tree at this cor. In 1963, the Coconino County Engineering Department tied this tree in from a stone, 14 x 9 x 6 ins., mkd. $\frac{1}{4}$ on W face. A core sample of this tree was taken to the Northern Arizona University, Forestry Department, and was determined to be of an age to be an original bearing tree. Record also called for a post, 3 ft. long, 3 ins. diam., with a mkd. stone, 12 ins. in the ground. This is accepted as the best available evidence of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E $\frac{1}{4}$ S22 S23 1986</p> <p>from which new bearing trees</p> <p style="padding-left: 40px;">A ponderosa pine, 18 ins. diam., bears N 11° E, 321 lks. dist., mkd. $\frac{1}{4}$ S23 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears N 41° W, 164.5 lks. dist., mkd. $\frac{1}{4}$ S22 BT.</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p>
--------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22₄N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W of cor.</p> <p>Cor. is located 3 lks. SE of the cor. of fences extending S and W and 108 lks. W of a graded gravel road, bears N 30° E, curving northerly and S 30° W, curving southerly.</p> <p>From this point, a local cor., bears S 88°49' E, 0.534 chs. dist., monumented with a rebar, ¾ in. diam., projecting 2 ins. above the ground, with a tag attached and mkd. LS 2473. This cor. was set by Wilfred P. Hanson, Registered Land Surveyor No. 2473, Arizona, date unknown, was reestablished using improper procedures and is not utilized in the course of this resurvey.</p> <hr/> <p>N 1°21' E, beginning new measurement, ascending SE slope, through medium ponderosa pine, pinyon, and mountain mahogany.</p> <p>20.07 Point for the N 1/16 sec. cor. of secs. 22 and 23.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E N 1/16 S22 S23 1986</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S 11° E, 75 lks. dist., mkd. N 1/16 S23 BT.</p> <p style="padding-left: 40px;">A pinyon, 12 ins. diam., bears S 82¾° W, 12.5 lks. dist., mkd. N 1/16 S22 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a moderate E slope.</p> <p>Continue northerly descending NE slope.</p>
--------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 40.14</p>	<p>The cor. of secs. 14, 15, 22, and 23, monumented with an iron post, 2½ ins. diam., projecting 4 ins. above the ground, with brass cap mkd. as described in the official record of the 1966 remonumentation notes, from which the original bearing trees</p> <p>A ponderosa pine, 22 ins. diam., bears N 74½° E, 32 lks. dist., with healed blaze (1883 Record: N 39½° E, 30 lks. dist.).</p> <p>A ponderosa pine stump, 24 ins. diam., bears S 22½° W, 105 lks. dist., no marks visible (1883 and 1966 Record: S 25° W).</p> <p>A dead standing ponderosa pine, 22 ins. diam., bears N 16° W, 46 lks. dist., healed blaze (1883 Record: N 30° W).</p> <p>from which new bearing trees</p> <p>A ponderosa pine, 12 ins. diam., bears S 30° E, 84 lks. dist., mkd. T22N R8E S23 BT.</p> <p>A ponderosa pine, 14 ins. diam., bears S 74½° W, 75 lks. dist., mkd. T22N R8E S22 BT.</p> <p>A ponderosa pine, 15 ins. diam., bears N 44¼° W, 155 lks. dist., mkd. T22N R8E S15 BT.</p> <p>Add the marks 1986 to the brass cap.</p> <hr/> <p>From the cor. of secs. 13, 14, 23, and 24.</p> <p>S 88°52' W, bet. secs. 14 and 23.</p> <p>Over level open land.</p>
<p>40.595</p>	<p>Point for the ¼ sec. cor. of secs. 14 and 23, identical with cor. 1, H.E.S. No. 375 and cor. 1, H.E.S. No. 87, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p style="text-align: center;">T22N R8E $\frac{1}{4}$ $\frac{S14}{S23}$ 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 130 lks. N of a graded road, bears N 75° E and S 80° W.</p> <p>From this point a local cor. bears N 81°24' W, 1.11 chs. dist., monumented with a rebar, 1/2 in. diam., flush with ground, origin unknown.</p> <p>From this same point, another local cor., bears N 64°13' W, 0.363 chs. dist., monumented with an iron rod, 1/2 in. diam., flush with ground, origin unknown.</p> <p>60.985 Point for the W 1/16 sec. cor. of secs. 14 and 23.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E W 1/16 $\frac{S14}{S23}$ 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>75.625 Cor. 2, H.E.S. No. 87, monumented with a malpais stone, 19 x 18 x 7 ins., firmly set and projecting 2 ins. above ground, mkd. with a cross on top, CC 2 HES 87 on N face and 3 grooves on S face, from which original bearing trees</p> <p style="padding-left: 40px;">A ponderosa pine, 30 ins. diam., bears N 37°32' W, 107 lks. dist., marks visible T.</p> <p style="padding-left: 40px;">A ponderosa pine stump, 18 ins. diam., bears S 75°24' W, 210 lks. dist., mkd. 2 H.E.S. No. 87 CC T.</p>	
---------------	---	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E CC COR 2 S14 \ H.E.S. 87 ----- S23 1986</p> <p>from which a new bearing tree</p> <p style="text-align: center;">A ponderosa pine, 16 ins. diam., bears S 67¼° W, 117 lks. dist., mkd. 2 HES BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 4 lks. W of a fence, bears S 40° E and N 40° W, 34.5 lks. to a fence cor. from which fences extend S 40° E, S 50° W, and N 40° W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S 89°02' W, beginning new measurement.</p>	0.65
	<p>Point for the W-W-W 1/256 sec. cor. of secs. 14 and 23.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S14 W-W-W 1/256 S23 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>	


Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Cor. is located 14 lks. E of a fence, bears N 50° E and S 50° W.</p>
5.75	<p>The cor. of secs. 14, 15, 22, and 23.</p> <hr/> <p>N 0°56' W, bet. secs. 14 and 15.</p> <p>Over rolling land, through medium ponderosa pine.</p>
8.39	<p>Cor. 3, H.E.S. No. 87, monumented with a U.S. Department of Agriculture aluminum post, 2½ ins. diam., projecting 3 ins. above the ground. This cor. was reestablished by the Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is accepted as a careful and faithful reestablishment of the position of the original cor., with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>from which the original bearing trees</p> <p style="margin-left: 40px;">A ponderosa pine stump, 38 ins. diam., bears S 24°03' W, 143 lks. dist., no marks visible (1982 Record: S 25° W, 144 lks. dist.).</p> <p style="margin-left: 40px;">A ponderosa pine, 45 ins. diam., bears S 87°21' W, 180 lks. dist., healed blaze (1982 Record: S 86° W).</p> <p>from which a 1982 bearing tree</p> <p style="margin-left: 40px;">A ponderosa pine, 18 ins. diam., bears S 8¼° W, 154 lks. dist., mkd. 3 HES 87 BT (Record: S 9° W).</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

Remark the cap to read:




Cor. is located 75 lks. N of a fence, bears S 40° E and N 35° W.

From this point, cor. 4, H.E.S. No. 87, bears N 35°22' W, 7.94 chs. dist., hereinafter described.

N 0°56' W, beginning new measurement.

8.44

Cor. 6, H.E.S. 87, monumented with a U.S. Department of Agriculture aluminum post, 2½ ins. diam., projecting 3 ins. above the ground. This cor. was reestablished by the Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is accepted as a careful and faithful reestablishment of the position of the original cor., with aluminum cap mkd.



from which original bearing trees


A ponderosa pine, 34 ins. diam., bears N 89°17' E, 157 lks. dist., healed blaze (1913 Record: 158 lks. dist., 1982 Record: N 88° E, 157 lks. dist.).

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

A ponderosa pine, 35 ins. diam., bears
N 17°47' W, 331 lks. dist., opened healed
blaze to read 6 HES 87 CC (1913 Record: 232
lks. dist., 1982 Record: N 19° W, 331 lks.
dist.).

Remark the cap to read:




Cor. is located 120 lks. S of a fence, bears S 52° E
and N 52° W.

From this point, cor. 5, H.E.S. No. 87, bears
N 56°27' W, 4.30 chs. dist., hereinafter described.

N 0°56' W, beginning new measurement.

22.74

The ¼ sec. cor. of secs. 14 and 15, monumented with a
U.S. Department of Agriculture aluminum post, 2½ ins.
diam., projecting 2 ins. above the ground, This cor.
was reestablished by the Forest Service Cadastral
Surveyor, Wallace R. Ott, Registered Land Surveyor
No. 9431, Arizona, in 1982, and is accepted as a
careful and faithful reestablishment of the position
of the original cor., with aluminum cap mkd.



Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>from which the 1913 bearing trees</p> <p>A ponderosa pine stump, 16 ins. diam., bears N $79\frac{1}{4}^{\circ}$ E, 111 lks. dist., no marks visible (1913 Record: N $78^{\circ}52'$ E, 1982 Record: N 83° E.)</p> <p>A ponderosa pine, 22 ins. diam., bears N $26\frac{3}{4}^{\circ}$ W, 24 lks. dist., healed blaze (1913 Record: N $21^{\circ}58'$ W, 1982 Record: N 24° W.)</p> <p>and from which a 1982 bearing tree</p> <p>A ponderosa pine, 21 ins. diam., bears N $74\frac{1}{2}^{\circ}$ E, 67 lks. dist., mkd. $\frac{1}{4}$ S14 BT (Record: N 78° E).</p> <p>and from which a new bearing tree</p> <p>A ponderosa pine, 11 ins. diam., bears S 88° W, 37 lks. dist., mkd. $\frac{1}{4}$ S15 BT.</p> <p>Add the marks 1986 to the cap.</p> <p>Cor. is located 3.80 chs. N of a gas line, bears N 65° E and S 65° W.</p> <p>From this point, a local cor., bears S $85^{\circ}43'$ E, 0.71 chs. dist., monumented with a rebar $\frac{5}{8}$ in. diam., flush with ground, with an aluminum cap attached and mkd. Wildan Assoc.</p> <hr/> <p>N $0^{\circ}55'$ W, beginning new measurement.</p> <p>39.57 The cor. of secs. 10, 11, 14, and 15, monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 8 ins. above the ground, with brass cap mkd. as shown in the official record of the 1966 remonumentation notes, from which an original bearing tree</p> <p>A ponderosa pine, 40 ins. diam., bears N $71\frac{1}{2}^{\circ}$ W, 14 lks. dist., healed blaze (Record: N 70° W).</p>
--	--------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>and from which the 1915-19 bearing trees</p> <p>A ponderosa pine, 23 ins. diam., bears N $46\frac{1}{4}^{\circ}$ E, 147 lks. dist., illegible scribe marks (Record: 148 lks. dist.).</p> <p>A ponderosa pine, 26 ins. diam., bears S $22^{\circ}25'$ E, 166 lks. dist., healed blaze.</p> <p>Mound of stone, 2 ft. base, $\frac{1}{2}$ ft. high, is W of cor.</p> <p>Cor. is located 70 lks. E of an asphalt surface road, bears N 15° E and S 15° W.</p> <hr/> <p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>West, bet. secs. 11 and 14.</p> <p>Over nearly level land, through medium ponderosa pine.</p> <p>20.155 Point for the E 1/16 sec. cor. of secs. 11 and 14.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E E 1/16 <u>S11</u> S14 1986</p> <p>from which</p> <p>A ponderosa pine, 13 ins. diam., bears N $27\frac{1}{2}^{\circ}$ W, 147 lks. dist., mkd. E 1/16 S11 BT.</p> <p>A ponderosa pine, 15 ins. diam., bears S $75\frac{1}{2}^{\circ}$ W, 40.5 lks. dist., mkd. E 1/16 S14 BT.</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
--	--------	---

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS
40.31

The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, monumented with a U.S. Department of Agriculture aluminum post, $2\frac{1}{2}$ ins. diam., projecting 1 in. above ground. This cor. was set by the Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is a perpetuation of the cor. set by Wilfred P. Hanson, Registered Land Surveyor No. 2473, Arizona, of unknown date and is accepted as a careful and faithful reestablishment of the position of the original cor., with aluminum cap mkd.

T22N R8E
 $\frac{1}{4}$ S11
S14
1982
RLS 9431

from which an original bearing tree

A ponderosa pine stump, 32 ins. diam., bears N $60\frac{3}{4}^\circ$ W, 47 lks. dist., marks visible S1 BT (Record: N $59\frac{1}{2}^\circ$ W).

and from which a 1915-19 bearing tree

A ponderosa pine, 21 ins. diam., bears S 31° W, 11 lks. dist., mkd. $\frac{1}{4}$ S BT (Record: S $31^\circ 27'$ W).

and from which a 1982 bearing tree

A ponderosa pine, 28 ins. diam., bears N $33\frac{1}{2}^\circ$ W, 83.5 lks. dist., mkd. $\frac{1}{4}$ S11 BT (Record: N 32° W).

and from which a new bearing tree

A ponderosa pine, 15 ins. diam., bears S $63\frac{1}{4}^\circ$ E, 120 lks. dist., mkd. $\frac{1}{4}$ S14 BT.

Add the marks 1986 on the brass cap.

N $89^\circ 47'$ W, beginning new measurement.

40.28

The cor. of secs. 10, 11, 14, and 15.

Dependent Resurvey of Homestead Entry Survey No. 375,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS


Restoring the survey executed by
Charles D. Hodson and A.W. Hendrix in 1915-1919

From cor. 1, H.E.S. No. 375, identical with cor. 1, H.E.S. No. 87 and the $\frac{1}{4}$ sec.cor. of secs. 14 and 23, hereinbefore described.

N 55°09' W, on line 1-2, H.E.S. No. 375, identical with line 1-9, H.E.S. No. 87

22.83

Cor. 2, H.E.S. No. 375, identical with cor. 9, H.E.S. No. 87, monumented with a U.S. Department of Agriculture aluminum post, $2\frac{1}{2}$ ins. diam., projecting 3 ins. above the ground. This cor. was set by the Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is accepted as a careful and faithful perpetuation of the position of the original cor., with aluminum cap attached and mkd.



from which the 1982 bearing trees


A ponderosa pine, 38 ins. diam., bears S 51 $\frac{3}{4}$ ° W, 65 lks. dist., mkd. 9 HES 87 BT (1982 Record: S 56° W).

A ponderosa pine, 25 ins. diam., bears S 82 $\frac{3}{4}$ ° W, 93 lks. dist., mkd. 9 HES BT (1982 Record: S 89° W).

Dependent Resurvey of Homestead Entry Survey No. 375,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS


Remark the aluminum cap to read:

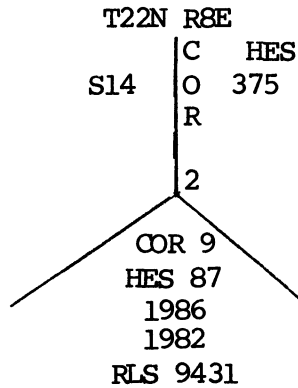

N 0°03' W, on line 2-3, H.E.S. No. 375.

16.015

Cor. 3, H.E.S. No. 375, monumented with a U.S. Department of Agriculture aluminum post, 2½ ins. diam., flush with ground. This cor. was set by the Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is accepted as a careful and faithful perpetuation of the position of the original cor., with aluminum cap attached and mkd.



from which the original bearing trees


A ponderosa pine, 39 ins. diam., bears S 11½° E, 88 lks. dist., marks visible through partly healed blaze 3 HES 375 (Record: S 13°08' E).

A ponderosa pine, 18 ins. diam., bears S 76°06' W, 59 lks. dist., no marks legible through partly healed blaze.

Dependent Resurvey of Homestead Entry Survey No. 375,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>and from which a new bearing tree</p> <p>A ponderosa pine, 22 ins. diam., bears N $69\frac{3}{4}^{\circ}$ E, 222 lks. dist., mkd. 3 HES 375 BT.</p> <p>and from which</p> <p>The NW corner of a house, bears S $16\frac{1}{2}^{\circ}$ E, 133 lks. dist., house is 33 x 28 ft., long side bears E and W.</p> <p>A steel fence post is alongside the cor.</p> <p>Cor. is located at the end of a fence, extending E only, and 30 lks. S of a dirt road, bears E and W for 70 lks. to a dirt road, bears N 15° E, curving NW and S 15° W, curving southerly.</p> <p>Remark the aluminum cap to read:</p> <div style="text-align: center;"> <p>T22N R8E S14 COR 3 HES 375 1986 1982 RLS 9431</p> </div> <hr/> <p>N $89^{\circ}34'$ E, on line 3-4, H.E.S. No. 375.</p> <p>18.06 Cor. 4, H.E.S. No. 375, hereinafter described.</p> <hr/> <p>S $1^{\circ}21'$ E, on line 4-1, H.E.S. No. 375, identical with a portion of the N and S center line of sec. 14.</p> <p>29.205 Cor. 1, H.E.S. No. 375, identical with cor. 1, H.E.S. No. 87 and the $\frac{1}{4}$ sec. cor. of secs. 14 and 23 and point of beginning.</p> <hr/> <p>Dependent Resurvey of Homestead Entry Survey No. 87, T 22 N, R 8 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>Restoring the survey executed by W.H. Finigan in 1913.</p>	
---------------	--	--

Dependent Resurvey of Homestead Entry Survey No. 87,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>From cor. 1, H.E.S. No. 87, identical with cor. 1, H.E.S. No. 375 and the $\frac{1}{4}$ sec. cor. of secs. 14 and 23.</p>
	<p>S 88°52' W, on line 1-2, H.E.S. No. 87, identical with a portion of the line bet. secs. 14 and 23.</p>
20.39	<p>The W $\frac{1}{16}$ sec. cor. of secs. 14 and 23, hereinbefore described.</p>
35.03	<p>Cor. 2, H.E.S. No. 87, hereinbefore described.</p>
	<p>_____</p> <p>N 35°22' W, on line 2-3, H.E.S. No. 87.</p>
10.165	<p>Cor. 3, H.E.S. No. 87 on the line bet. secs. 14 and 15, hereinbefore described.</p>
	<p>From this point, the cor. of secs. 14, 15, 22, and 23, bears S 0°56' E, 8.39 chs. dist.</p>
	<p>_____</p> <p>N 35°22' W, on line 3-4, H.E.S. No. 87.</p>
7.94	<p>Cor. 4, H.E.S. No. 87, monumented with a U.S. Department of Agriculture aluminum post, 2½ ins. diam., projecting 2 ins. above ground. This cor. was set by Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is accepted as a careful and faithful perpetuation of the position of the original cor., with aluminum cap mkd.</p>
	
	<p>from which the original bearing trees</p>
	<p>A ponderosa pine stump, 12 ins. diam., bears S 59°10' E, 128 lks. dist., no marks visible.</p>
	<p>A ponderosa pine, 28 ins. diam., bears S 41¼° W, 71 lks. dist., with healed blaze.</p>

Dependent Resurvey of Homestead Entry Survey No. 87,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

and from which a 1982 bearing tree

A ponderosa pine, 18 ins. diam., bears N 9° E, 74 lks. dist., mkd. 4 HES 87 BT (1982 Record: N 8° E).

A steel fence post is alongside the cor.

Remark the aluminum cap to read:

T22N R8E
COR 4
S15 HES 87
1986
1982
RLS 9431

N 11°23' E, on line 4-5, H.E.S. No. 87.

4.43

Cor. 5, H.E.S. No. 87, monumented with a U.S. Department of Agriculture aluminum post, 2½ ins. diam., projecting 2 ins. above the ground. This cor. was set by Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is accepted as a careful and faithful perpetuation of the position of the original cor., with aluminum cap mkd.


5
HES
87
1982
RLS 9431

from which the original bearing trees

A ponderosa pine stump, 20 ins. diam., bears N 23½° E, 9.5 lks. dist., marks visible 5 HES 87 (Record: N 2°10' W, 11.5 lks. dist.).

A ponderosa pine stump, 38 ins. diam., bears S 61° W, 53 lks. dist., no marks visible (Record: S 65°05' W, 55.5 lks. dist.).

Dependent Resurvey of Homestead Entry Survey No. 87,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>and from which 1982 bearing trees</p> <p>A ponderosa pine, 14 ins. diam., bears N 46° E, 39 lks. dist., mkd. 5 HES 87 BT.</p> <p>A ponderosa pine, 14 ins. diam., bears N 37° W, 15 lks. dist., mkd. 5 HES 87 BT.</p> <p>An aluminum fence post is alongside the cor.</p> <p>A fence cor., bears S 13° E, 11 lks. dist., fences extend N 63° E and S 9° W.</p> <p>Remark the aluminum cap to read:</p> <div style="text-align: center;"> <p>T22N R8E S15</p>  <p>COR 5 HES 87 1986 1982 RLS 9431</p> </div> <p>From this point, a local cor., bears N 59°38' W, 0.393 chs. dist., monumented with an iron pipe, 1 in. diam., projecting 4 ins. above the ground.</p> <hr/> <p>S 56°28' E, on line 5-6, H.E.S. No. 87.</p> <p>4.30 Cor. 6, H.E.S. No. 87, on the line bet. secs. 14 and 15, hereinbefore described.</p> <p>From this point, the ¼ sec. cor. of secs. 14 and 15, bears N 0°56' W, 22.74 chs. dist.</p> <hr/> <p>S 56°28' E, on line 6-7, H.E.S. No. 87.</p> <p>12.715 Cor. 7, H.E.S. No. 87, monumented with a ponderosa pine, 38 ins. diam., with healed blaze.</p> <p>from which the original bearing trees</p> <p>A ponderosa pine, 36 ins. diam., bears N 89° E, 182.5 lks. dist., healed blaze.</p>	
--------	--	--

Dependent Resurvey of Homestead Entry Survey No. 87,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

A ponderosa pine, 19 ins. diam., bears
N 11°35' W, 111.5 lks. dist., healed blaze.

and from which a new reference monument

A stainless steel post, 28 ins. long, 2½ ins.
diam., set 23 ins. in the ground for a
reference monument, bears N 9°23' W, 30.9 ft.
dist., with brass cap mkd. RM T22N R8E 30.9
FT. TO COR. S14 1986 and an arrow pointing to
the cor.

Deposit a magnet in a 1 x 1 x 2 5/8 in. orange
colored plastic case beneath the stainless steel
post.


Set a steel fence post near the reference
monument.

Cor. tree is located in a fence, fence extends S 70°
E and N 50° W.

S 66°05' E, on line 7-8, H.E.S. No. 87.

6.44

Cor. 8, H.E.S. No. 87, monumented with a U.S.
Department of Agriculture aluminum post, 2½ ins.
diam., projecting 2 ins. above the ground. This cor.
was set by Forest Service Cadastral Surveyor, Wallace
R. Ott, Registered Land Surveyor No. 9431, Arizona,
in 1982, and is accepted as a careful and faithful
perpetuation of the position of the original cor.,
with aluminum cap mkd.




8
HES 87
1982
RLS 9431

from which the original bearing trees

A ponderosa pine stump, 24 ins. diam., bears
N 12°07' E, 363 lks. dist., no scribe marks
visible.

Dependent Resurvey of Homestead Entry Survey No. 87,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

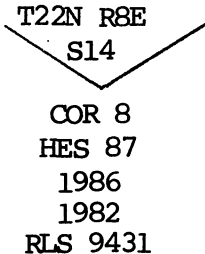	<p>CHAINS</p>	<p>A ponderosa pine stump, 26 ins. diam., bears N 54°27' W, 175 lks. dist., marks visible BT.</p> <p>and from which 1982 bearing trees</p> <p>A ponderosa pine, 21 ins. diam., bears N 61½° W, 186 lks. dist., mkd. 8 HES 87 BT (1982 Record: N 62° W).</p> <p>A ponderosa pine, 21 ins. diam., bears N 26¾° W, 171 lks. dist., mkd. 8 HES 87 BT (1982 Record: N 28° W).</p> <p>An aluminum fence post is alongside the cor.</p> <p>Remark the aluminum cap to read:</p> <div style="text-align: center;">  </div> <p>Cor. is located 260 lks. W of a dirt road, bears S 68° E and N 68° W.</p> <hr/> <p>N 41°12' E, on line 8-9, H.E.S. No. 87.</p> <p>8.84 Cor. 9, H.E.S. No. 87, identical with cor. 2, H.E.S. No. 375, hereinbefore described.</p> <hr/> <p>S 55°09' E, on line 9-1, H.E.S. No. 87, identical with line 2-1, H.E.S. No. 375.</p> <p>22.83 Cor. 1, H.E.S. No. 87, identical with cor. 1, H.E.S. No. 375 and the ¼ sec. cor. of secs. 14 and 23 and point of beginning.</p> <hr/>
--	---------------	--

Survey of Subdivisions in Section 13,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>From the $\frac{1}{4}$ sec. cor. of secs. 13 and 24.</p> <p>N $0^{\circ}45'$ W, on the N and S center line of sec. 13.</p> <p>Over nearly level open land.</p> <p>19.61 Point for the center S $\frac{1}{16}$ sec. cor. of sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C S $\frac{1}{16}$ S13 C 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 11 ins. diam., bears S $78\frac{3}{4}^{\circ}$ E, 305 lks. dist., mkd. CS $\frac{1}{16}$ S13 BT.</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 118 lks. W of an abandoned N and S fence; 80 lks. W of a track road, bears N 8° E and S 8° W; and 57 lks. E of an underground telephone line, bears N and S.</p> <p>39.22 Point for the center $\frac{1}{4}$ sec. cor. of sec. 13, at the intersection with the E and W center line of sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C $\frac{1}{4}$ S13 1986</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p>	
---------------	--	--

Survey of Subdivisions in Section 13,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>Set a steel fence post near the cor.</p> <p>Cor. is located 95 lks. W of a track road, bears N 24° E and S 16° E; 165 lks. W of a N and S fence; and 40 lks. E of an underground telephone line, bears N and S.</p> <p>From this point, a local cor., bears S 44°57' W, 0.728 chs. dist., monumented with a rebar, ½ in. diam., projecting 4 ins. above the ground, origin and date unknown, and was established using improper procedures and is not utilized in the course of this survey.</p>
58.96	<p>Point for the center N 1/16 sec. cor. of sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C N 1/16 S13 C 1986</p> <p>from which</p> <p>A ponderosa pine, 15 ins. diam., bears N 56½° E, 166.5 lks. dist., mkd. C-N 1/16 S13 BT.</p> <p>A ponderosa pine, 9 ins. diam., bears N 68½° W, 31 lks. dist., mkd. C-N 1/16 S13 BT.</p> <p>A steel fence post, bears S 14½° W, 26.5 lks. dist.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
78.70	<p>The ¼ sec. cor. of secs. 12 and 13.</p> <hr/>

Survey of Subdivisions in Section 13,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>19.89</p> <p>39.78</p> <p>60.155</p>	<p>From the $\frac{1}{4}$ sec. cor. of sec. 13 only, on the E bdy. of the Tp.</p> <p>N 89°41' W, on the E and W center line of sec. 13.</p> <p>Over rolling land, through medium ponderosa pine.</p> <p>Point for the center E 1/16 sec. cor. of sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> $\begin{array}{c} \text{T22N R8E} \\ \text{C } \frac{\text{E } 1/16}{\text{S13}} \text{C} \\ 1986 \end{array}$ <p>from which</p> <p>A ponderosa pine, 23 ins. diam., bears N 25¾° W, 199 lks. dist., mkd. C-E 1/16 S13 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a gentle S slope.</p> <p>The center $\frac{1}{4}$ sec. cor. of sec. 13.</p> <p>Point for the center W 1/16 sec. cor. of sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> $\begin{array}{c} \text{T22N R8E} \\ \text{C } \frac{\text{W } 1/16}{\text{S13}} \text{C} \\ 1986 \end{array}$ <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.</p> <p>Set a steel fence post near the cor.</p>	
---	---	--

Survey of Subdivisions in Section 13,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>Cor. is located 10 lks. N of an abandoned E and W fence and 30 lks. N of an E and W track road.</p> <p>From this point, a local cor., bears S 11°37' W., 0.655 chs. dist., monumented with an open end pipe, 1 in. diam., projecting 1½ in. above the ground, origin and date unknown and was established using improper procedures and is not utilized in the course of this survey.</p> <p>80.53 The ¼ sec. cor. of secs. 13 and 14.</p> <hr/> <p style="text-align: center;">SE¼ of Section 13</p> <hr/> <p>From the E 1/16 sec. cor. of secs. 13 and 24.</p> <p>N 0°25' W, on the N and S center line of the SE¼ of sec. 13.</p> <p>9.92 Point for the center S-SE 1/64 sec. cor. of sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S13 C-S-SE 1/64 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 22 ins. diam., bears S 18° W, 65 lks. dist., mkd. C-S-SE 1/64 S13 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 105 lks. W of a track road, bears N and S 7° E and on a gentle SW slope in scattered ponderosa pine.</p> <p>19.84 Point for the SE 1/16 sec. cor. at intersection with the E and W center line of the SE¼ of sec. 13.</p>
--	---------------	---

Survey of Subdivisions in Section 13,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E SE 1/16 S13 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 19 ins. diam., bears S 31½° W, 59 lks. dist., mkd. SE 1/16 S13 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a gentle SW slope 50 lks. W of a track road, bears N 16° E and S 16° W.</p> <p>39.675 The center E 1/16 sec. of sec. 13.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the S 1/16 sec. cor. of sec. 13 only, on the E. bdy. of the Tp.</p> <p>N 89°01' W, on the E and W center line of the SE¼ of sec. 13.</p> <p>19.78 The SE 1/16 sec. cor. of sec. 13.</p> <p>39.56 The center S 1/16 sec. cor. of sec. 13.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">SE¼ of the SE¼ of Section 13</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the S-S 1/64 sec. cor. of sec. 23 only, on the E bdy. of the Tp.</p> <p>N 88°41' W, on the E and W center line of the SE¼ of the SE¼ of sec. 13.</p> <p>19.73 The center S-SE 1/64 sec. cor. of sec. 13.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">NW¼ of Section 13</p> <hr style="width: 20%; margin: 10px auto;"/>	
---------------	--	--

Survey of Subdivisions in Section 13,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>From the center W 1/16 sec. cor. of sec. 13.</p> <p>N 0°27' W, on the N and S center line of the NW¼ of sec. 13.</p> <p>9.82 Point for the center S-NW 1/64 sec. cor. of sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S13 C-S-NW 1/64 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 22 ins. diam., bears N 27° W, 288 lks. dist., mkd. C-S-NW 1/64 S13 BT.</p> <p style="padding-left: 40px;">Cor. of an abandoned fence bears N 85° E, 193 lks. dist., fences extend N and W.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 32 lks. N of a track road, bears E curving northerly and westerly.</p> <p>19.64 Point for the NW 1/16 sec. cor. at intersection with the E and W center line of the NW¼ of sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NW 1/16 S13 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 16 ins. diam., bears N 32° E, 31.5 lks. dist., mkd. NW 1/16 S13 BT.</p>	
---------------	---	--

Survey of Subdivisions in Section 13,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>A ponderosa pine, 15 ins. diam., bears N 80$\frac{1}{4}$° W, 196 lks. dist., mkd. NW 1/16 S13 BT.</p> <p>Cor. of an abandoned fence, bears S 82° E, 219.5 lks. dist., fences extend N and W.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 159 lks. S of a gas pipeline track road, bears N 85° E and S 85° W.</p> <p>39.28 The W 1/16 sec. cor. of secs. 12 and 13.</p> <hr/> <p>From the center N 1/16 sec. cor. of sec. 13.</p> <p>N 89°57' W, on the E and W center line of the NW$\frac{1}{4}$ of sec. 13.</p> <p>20.27 The NW 1/16 sec. cor. of sec. 13.</p> <p>40.54 The N 1/16 sec. cor. of secs. 13 and 14.</p> <hr/> <p>SW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of Section 13</p> <hr/> <p>From the center S-NW 1/64 sec. cor. of sec. 13.</p> <p>N 89°48' W, on the E and W center line of the SW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 13.</p> <p>20.32 The S-N 1/64 sec. cor. of secs. 13 and 14.</p> <hr/> <p>Survey of Subdivisions in Section 14, T 22 N, R 8 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the $\frac{1}{4}$ sec. cor. of secs. 14 and 23, identical with cor. 1, H.E.S. No. 375 and cor. 1, H.E.S. No. 87.</p> <p>N 1°21' W, on the N and S center line of sec. 14.</p> <p>Over level open land.</p>
---------------	---

Survey of Subdivisions in Section 14,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS
29.205

The center N-S 1/64 sec. cor. of sec. 14, identical with cor. 4, H.E.S. No. 375, monumented with a U.S. Department of Agriculture aluminum post, 2½ ins. diam., projecting 2 ins. above the ground. This is a remonumentation of the original cor. set by Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, with aluminum cap mkd.

C-N-S 1/64
4 | S14
HES |
375 |
1982
RLS 9431

from which the original bearing trees

A ponderosa pine, 31 ins. diam., bears N 0°50' E,
265 lks. dist., marks visible 4 HES 37.

A ponderosa pine, 37 ins. diam., bears
N 43°57' W, 171 lks. dist., illegible scribe
marks through partly healed blaze (Record:
161 lks. dist.).

A mound of stone, 2 ft. base, 1 ft. high, is W of cor.

Cor. is located 35 lks. S on an E and W graded road.

Remark cap to read

S14
C-N-S
1/64
1986
1982
RLS 9431

From this point, a U.S. Department of Agriculture aluminum post, 2½ ins. diam., projecting 9 ins. above ground, bears N 85°51' W, 0.15 chs. dist. This monument was furnished by the Forest Service and set by Charles W. Dryden, Registered Land Surveyor No. 4321, Arizona, in 1976, who overlooked the original cor. and reestablished this cor. using the original bearing trees. One of these trees had an incorrect recorded dist. in the original record. Aluminum cap mkd.

Survey of Subdivisions in Section 14,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<div style="text-align: center;"> <p>4 HES 375 C 1/64 E¹/₂ S¹/₂ R.L.S. 43 21 1976</p> <hr/> </div> <p>N 1°15' W, beginning new measurement.</p> <p>Over level land through medium ponderosa pine.</p> <p>9.745 The center $\frac{1}{4}$ sec. cor. of sec. 14, monumented with a U.S. Department of Agriculture aluminum post, 2$\frac{1}{2}$ ins. diam., projecting 4 ins. above the ground. This cor. was set by Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is accepted as a careful and faithful determination of the position of the cor., with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T22N R8E C¹/₄ S14 1982 RLS 9431</p> </div> <p>from which the 1982 bearing trees</p> <p>A ponderosa pine, 18 ins. diam., bears S 84°30' W, 182 lks. dist., mkd. C¹/₄ BT (Record: S 88° W).</p> <p>A ponderosa pine, 19 ins. diam., bears N 44° W, 145.5 lks. dist., mkd. C¹/₄ BT (Record: N 43° W).</p> <p>A mound of stone, 2$\frac{1}{2}$ ft. base, 1$\frac{1}{2}$ ft. high, is W of cor.</p> <hr/> <p>N 1°16' W, beginning new measurement.</p>
---------------	--

Survey of Subdivisions in Section 14,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 9.81</p>	<p>The center S-N 1/64 sec. cor. of sec. 14, monumented with U.S. Department of Agriculture aluminum post, 2½ ins. diam., projecting 1 in. above ground. This cor. was set by Forest Service Cadastral Surveyor, Wallace R. Ott, Registered Land Surveyor No. 9431, Arizona, in 1982, and is accepted as a careful and faithful determination of the position of the cor., with aluminum cap mkd.</p> <p style="text-align: center;">S14 C-S-N 1/64 1982 RLS 9431</p> <p>from which the 1982 bearing trees</p> <p style="padding-left: 40px;">A ponderosa pine, 23 ins. diam., bears S 84° W, 53 lks. dist., mkd. C-S-N 1/64 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 15 ins. diam., bears N 24° W, 143 lks. dist., marks visible SN 1/64 BT (Record: N 23° W).</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N 1°16' W, beginning new measurement.</p>	
<p>9.81</p>	<p>Point for the center N 1/16 sec. cor. of sec. 14.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C N 1/16 S14 C 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears S 16¾° E, 69 lks. dist., mkd. C-N 1/16 S14 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 18 ins. diam., bears N 40° W, 110 lks. dist., mkd. C-N 1/16 S14 BT.</p>	

Survey of Subdivisions in Section 14,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>29.43 The 1/4 sec. cor. of secs. 11 and 14.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 13 and 14.</p> <p>S 89°46' W, on the E and W center line of sec. 14.</p> <p>Over level open land.</p> <p>19.78 The center E 1/16 sec. cor. of sec. 14, monumented with a rebar, 18 ins. long, 5/8 in. diam., projecting 2 ins. above ground, with an aluminum cap attached and mkd. ARENCO PE 8218 LS 13010. This cor. was set by Charles W. Dryden, Registered Civil Engineer No. 8218 and Registered Land Surveyor No. 13010, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T22N R8E C <u>E 1/16</u> C S14 1986</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Cor. is located 24 lks. S of a fence cor., fences extend N and W, and 23 lks. N of a fence cor., fences extend S and W.</p>	
--------	---	--

Survey of Subdivisions in Section 14,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>From this point, a local cor., bears S 22°22' E, 0.39 chs. dist., monumented with a rebar, 5/8 in. diam., projecting 1½ ins. above ground. This cor. was set by Lee Martin Del Giorgio, Registered Civil Engineer No. 6744, Arizona, in 1978, using erroneous control cors. and not utilized in the course of this resurvey.</p> <hr/> <p>S 89°45' W, beginning new measurement.</p> <p>19.78 The center ¼ sec. cor. of sec. 14.</p> <hr/> <p>S 89°45' W, beginning new measurement.</p> <p>Over nearly level land, through medium ponderosa pine.</p> <p>40.51 The ¼ sec. cor. of secs. 14 and 15.</p> <hr/> <p style="text-align: center;">NE¼ of Section 14</p> <hr/> <p>From the center E 1/16 sec. cor. of sec. 14.</p> <p>N 0°44' W, on the N and S center line of the NE¼ of sec. 14.</p> <p>9.79 The center S-NE 1/64 sec. cor. of sec. 14, monumented with a rebar, 18 ins. long, 5/8 in. diam., projecting 1 in. above the ground, with an aluminum cap attached and mkd. ARENCO PE 8218 LS 13010. This cor. was set by Charles W. Dryden, Registered Civil Engineer No. 8218 and Registered Land Surveyor No. 13010, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S14 C-S-NE 1/64 1986</p>
--------	---

Survey of Subdivisions in Section 14,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>from which</p> <p>A ponderosa pine, 15 ins. diam., bears N 57$\frac{3}{4}$° E, 120 lks. dist., mkd. C-S-NE 1/64 S14 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Raise a mound of stone, 2$\frac{1}{2}$ ft. base, 2 ft. high, W of cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 1 lk. N of a fence cor., fences extend S and W, and 88 lks. S of a track road, bears S 55° E and NW.</p> <hr/> <p>N 0°42' W, beginning new measurement.</p> <p>9.79 Point for the NE 1/16 sec. cor., at intersection with the E and W center line of the NE $\frac{1}{4}$ of sec. 14.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NE 1/16 S14 1986</p> <p>from which</p> <p>A ponderosa pine, 14 ins. diam., bears N 14$\frac{3}{4}$° E, 126 lks. dist., mkd. NE 1/16 S14 BT.</p> <p>A ponderosa pine, 11 ins. diam., bears N 78$\frac{1}{2}$° W, 170 lks. dist., mkd. NE 1/16 S14 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
--	---------------	--

Survey of Subdivisions in Section 14,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>29.37</p> <p>19.97</p> <p>39.93</p> <p>19.875</p> <p>19.87</p> <p>13.30</p> <p>39.55</p>	<p>Cor. is located 265 lks. N of a track road, bears N 72° E and S 72° W, and 375 lks. N of a gas pipeline, bears N 80° E and S 75° W.</p> <hr/> <p>The E 1/16 sec. cor. of secs. 11 and 14.</p> <hr/> <p>From the N 1/16 sec. cor. of secs. 13 and 14.</p> <p>S 89°53' W, on the E and W center line of the NE¹/₄ of sec. 14.</p> <p>The NE 1/16 sec. cor. of sec. 14.</p> <p>The center N 1/16 sec. cor. of sec. 14.</p> <hr/> <p>From the S-N 1/64 sec. cor. of secs. 13 and 14.</p> <p>S 89°49' W, on the E and W center line of the SE¹/₄ of the NE¹/₄ of sec. 14.</p> <p>The center S-NE 1/64 sec.cor. of sec. 14.</p> <hr/> <p>S 89°48' W, on the E and W center line of the SW¹/₄ of the NE¹/₄ of sec. 14.</p> <p>The center S-N 1/64 sec. cor. of sec. 14.</p> <hr/> <p style="text-align: center;">Survey of Subdivisions in Section 23, T 22 N, R 8 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the ¹/₄ sec. cor. of secs. 23 and 26.</p> <p>N 0°50' E, on the N and S center line of sec. 23.</p> <p>Over level open land.</p> <p>Landing strip, graded dirt surface, 55 lks. wide, bears N 55° E and S 55° W.</p> <p>Asphalt surface road, bears E and W.</p>
---	---

Survey of Subdivisions in Section 23,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>From this same point, a local cor., bears S 38°48' E, 0.293 chs. dist., monumented with a rebar, 5/8 in. diam., projecting 1 in. above the ground, with tag attached and mkd. IS 5357. This cor. was set by Vance L. McDonald, Registered Land Surveyor No. 5357, Arizona, in 1973, using erroneous control cors. and not utilized in the course of this survey.</p> <p>From this same point, another local cor., bears S 37°13' E, 0.27 chs. dist., monumented with a rebar 1/2 in. diam., projecting 2 ins. above the ground, origin and date unknown. This cor. was established using erroneous control cors. and not utilized in the course of this survey.</p> <p>81.63 The 1/4 sec. cor. of secs. 22 and 23.</p> <hr/> <p style="text-align: center;">NW 1/4 of Section 23</p> <hr/> <p>From the center W 1/16 sec. cor. of sec. 23.</p> <p>N 1°05' E, on the N and S center line of the NW 1/4 of sec. 23.</p> <p>20.18 Point for the NW 1/16 sec. cor., at intersection with the E and W center line of the NW 1/4 of sec. 23.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NW 1/16 S23 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>40.35 The W 1/16 sec. cor. of secs. 14 and 23.</p> <hr/> <p>From the center N 1/16 sec. cor. of sec. 23.</p>
--	---------------	--

Survey of Subdivisions in Section 23,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>S 89°12' W, on the E and W center line of the NW$\frac{1}{4}$ of sec. 23.</p> <p>20.475 The NW 1/16 sec. cor. of sec. 23.</p> <p>25.595 Point for the center E-W-NW 1/256 sec. cor. of sec. 23.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">23 C-E-W-NW 1/256 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>27.75 Fence, bears N and S.</p> <p>31.05 Graded road, bears N 15° E and S 15° W, thence ascend E slope, through medium ponderosa pine.</p> <p>40.95 The N 1/16 sec. cor. of secs. 22 and 23.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">SW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of Section 23</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center E-W-W 1/256 sec. cor. of sec. 23.</p> <p>N 1°09' E, on the N and S center line of the E$\frac{1}{2}$ of the SW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 23.</p> <p>20.15 The center E-W-NW 1/256 sec. cor. of sec. 23.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">NW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of Section 23</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center E-W-NW 1/256 sec. cor. of sec. 23.</p> <p>N 1°09' E, on the N and S center line of the SE$\frac{1}{4}$ of the NW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 23.</p>
--------	--

Survey of Subdivisions in Section 23,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 10.075</p>	<p>Point for the center E-NW-NW 1/256 sec. cor. of sec. 23.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S23 C-E-NW-NW 1/256 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this point, a local cor., bears S 13°27' W, 0.385 chs. dist., monumented with a rebar, ½ in. diam., projecting 1 in. above the ground, with a 1 in. diam. open end pipe along side, projecting 30 ins. above the ground. The origin and date of these cors. are unknown. These cors. were established using improper procedures and are not utilized in the course of this survey.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S 89°03' W, on a portion of the E and W center line of the NW¼ of NW¼ of sec. 23.</p>
<p>2.40</p>	<p>Fence, bears N 5° E and S 5° W.</p>
<p>3.50</p>	<p>Graded road, bears N 10° E and S 10° W.</p>
<p>5.11</p>	<p>Point for the NW-NW 1/64 sec. cor. of sec. 23.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S23 NW-NW 1/64 1986</p>

Survey of Subdivisions in Section 23,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>from which</p> <p>A ponderosa pine, 11 ins. diam., bears S $38\frac{1}{4}^{\circ}$ W, 91 lks. dist., mkd. NW-NW 1/64 S23 BT.</p> <p>A ponderosa pine, 5 ins. diam., bears N $64\frac{1}{4}^{\circ}$ W, 57 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N $1^{\circ}13'$ E, on a portion of the N and S center line of the NW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 23.</p> <p>2.515 Point for the 1/1024 sec. cor. of sec. 23.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">1/1024 1986</p> <p>from which</p> <p>A ponderosa pine, 15 ins. diam., bears S $77\frac{3}{4}^{\circ}$ W, 61 lks. dist., mkd. 1/1024 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 17 lks. S of a fence, bears S 75° E and N 75° W, and 125 lks. W of a dirt driveway to house, bears S 22° E and N 27° W.</p> <p>5.03 Point for the center N-NW-NW 1/256 sec. cor. of sec. 23.</p>	
---------------	--	--

Survey of Subdivisions in Section 23,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 1°18' E, on a portion of the N and S center line of the NW¹/₄ of the NW¹/₄ of the NW¹/₄ of sec. 23.</p> <p>5.01 The W-W-W 1/256 sec. cor. of secs. 14 and 23.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the 1/1024 sec. cor. of sec. 23.</p> <p>S 89°01' W, on the E and W center line of the SE¹/₄ of the NW¹/₄ of the NW¹/₄ of sec. 23.</p> <p>5.105 Point for the 1/1024 sec. cor. of sec. 23.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">1/1024 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 6 ins. diam., bears S 30° W, 101 lks. dist., mkd. 1/1024 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this point, the southerly cor. of a round steel tank, 8 ft. diam., 26 ft. long, partly buried below ground, bears N 19°36' E, 2.42 chs. dist., long side extends N 49° E.</p> <p>From this same point, the northerly end of a small steel tank, bears N 23°44' E, 2.77 chs. dist.</p> <p>From this same point, the SW cor. of a steel tank, 2½ x 7½ x 6 ft. deep, projecting 2 ft. above ground, bears N 37°17' E, 2.73 chs. dist., long side extends N 32° W.</p>
--------	---

Survey of Subdivisions in Section 23,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>From this same point, the NW cor. of a chain link fence, bears N 40°59' E, 4.14 chs. dist., fences extend N 53° E and S 37° E.</p> <p>From this same point, the NW cor. of Robert Piper's house, bears N 44°19' E, 4.44 chs. dist., sides extend N 59½° E and S 30½° E.</p> <p>From this same point, the cor. of a barbed wire fence, bears N 47°54' E, 1.51 chs. dist., fences extend S 79° E and N 38° W.</p> <p>From this same point, the SW cor. of a wooden shed, 17 x 12 ft., bears N 49°27' E, 3.815 chs. dist., long side extends N 37° W.</p> <p>From this same point, the southerly cor. of Robert Piper's house, bears N 51°54' E, 4.45 chs. dist., sides extend N 59½° E and N 30½° W.</p> <p>From this same point, the SW cor. of a metal shed, 9½ x 8½ ft., bears N 53°59' E, 4.11 chs. dist., long side extends N 34° W.</p> <p>From this same point, the SW cor. of a porch, bears N 54°43' E, 4.425 chs. dist., sides of porch extend N 59½° E and N 30½° W.</p> <p>From this same point, the SW cor. of a chain link fence, bears N 58°47' E, 4.07 chs. dist., fences extend N 53° E and N 37° W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 1°18' E, on a portion of the N and S center line of the NW¼ of the NW¼ of the NW¼ of sec. 23.</p>
2.51	<p>The NW-NW-NW 1/256 sec. cor. of sec. 23.</p> <hr/> <p style="text-align: center;">Survey of Subdivisions in Section 24, T 22 N, R 8 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the ¼ sec. cor. of secs. 24 and 25.</p> <p>N 0°52' E, on the N and S center line of sec. 24.</p>

Survey of Subdivisions in Section 24,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Over gently rolling open land.</p> <p>20.25 Point for the center S 1/16 sec. cor. of sec. 24.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 8 ins. below ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C S 1/16 S24 C 1986</p> <p>Cor. falls in a dirt road, bears E and W. from which</p> <p style="padding-left: 40px;">An aluminum post, 36 ins. long, ¾ in. diam., set 36 ins. in the ground, for a reference monument, bears S 0°57' W, 27.7 ft. dist., with aluminum cap mkd. RM T22N R8E 27.7 FT TO COR S24 1986 and an arrow pointing to the cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>40.50 Point for the center ¼ sec. cor. of sec. 24, at the intersection with the E and W center line of sec. 24.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C ¼ S24 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, W of cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 45 lks. N of a dirt road, bears easterly and westerly and N 66° W, 23 lks. dist., from the cor. of fences extending N and E.</p>	
---------------	---	--

Survey of Subdivisions in Section 24,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>From this point, a local cor., bears S 22°32' W, 0.635 chs. dist., monumented with a rebar, ½ in. diam., flush with ground, with an aluminum cap attached and mkd. 2007 CTR and a cross in the center. This cor. was established by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, in 1975, using erroneous control cors. and is not utilized in the course of this survey.</p> <p>From this same point, a local cor., bears S 22°39' W, 0.785 chs. dist., monumented with an iron pipe, ¾ in. diam., 1 in. below ground, with a tag attached and mkd. LS 4021. This cor. was established by Todd Rockwell, Registered Land Surveyor No. 4021, Arizona, in 1967. This cor. was established using an erroneous control cor. and is not utilized in the course of this survey.</p> <p>From this same point, a local cor., bears S 61°39' W, 0.275 chs. dist., monumented with an open end pipe, ¾ in. diam., projecting 4 ins. above the ground, origin and date unknown. This cor. was established using improper procedures and is not utilized in the course of this survey.</p>
60.79	<p>Point for the center N 1/16 sec. cor. of sec. 24.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C N 1/16 S24 C 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is N 17° W, 87 lks. dist., from the cor. of fences extending E and S.</p>
81.08	<p>The ¼ sec. cor. of secs. 13 and 24.</p> <hr/>

Survey of Subdivisions in Section 24,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>From the $\frac{1}{4}$ sec. cor. of sec. 24 only, on the E bdy. of Tp.</p> <p>N 89°00' W, on the E and W center line of sec. 24.</p> <p>Over level open land.</p>
40.00	<p>The center $\frac{1}{4}$ sec. cor. of sec. 24.</p>
59.705	<p>Point for the center W 1/16 sec. cor. of sec. 24.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 28 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} T22N R8E \\ W 1/16 \\ C \quad \quad \quad C \\ S24 \\ 1986 \end{array}$ </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 3.5 lks. E of a fence, bears N and S for 40 lks. to a fence cor., thence W; and 20 lks. W of a track road, bears N and S; and 82 lks. N of an E and W dirt road.</p>
79.41	<p>The $\frac{1}{4}$ sec. cor. of secs. 23 and 24.</p>
	<hr/> <p style="text-align: center;">SW$\frac{1}{4}$ of Section 24</p> <hr/> <p>From the W 1/16 sec. cor. of secs. 24 and 25.</p> <p>N 0°55' E, on the N and S center line of the SW$\frac{1}{4}$ of sec. 24.</p>
20.38	<p>Point for the SW 1/16 sec. cor., at intersection with the E and W center line of the SW$\frac{1}{4}$ of sec. 24.</p>

Survey of Subdivisions in Section 24,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E SW 1/16 S24 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 2 ft. base, 2 ft. high, W of cor.</p> <p>Set a steel fence post near the cor.</p> <p>A fence cor., bears S 89° W, 16 lks. dist., fences extend N and W, an older fence extends S, 38 lks. dist. to another fence cor., thence W.</p> <p>40.77 The center W 1/16 sec. cor. of sec. 24.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center S 1/16 sec. cor. of sec. 24.</p> <p>N 89°24' W, on the E and W center line of the SW¼ of sec. 24.</p> <p>19.72 The SW 1/16 sec. cor. of sec. 24.</p> <p>34.51 Point for the center W-W-SW 1/256 sec. cor. of sec. 24.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S24 C-W-W-SW 1/256 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 15.5 lks. N of an E and W fence and 45 lks. N of an E and W track road.</p>
---------------	---

Survey of Subdivisions in Section 24,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 39.44</p>	<p>The S 1/16 sec. cor. of secs. 23 and 24.</p> <hr/> <p>NW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of Section 24</p> <hr/> <p>From the center W-W-SW 1/256 sec. cor. of sec. 24.</p> <p>S 0°57' W, on a portion of the N and S center line of the NW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of sec. 24.</p>
<p>5.12</p>	<p>Point for the NW-SW-SW 1/256 sec. cor. of sec. 24.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S24 NW-SW-SW 1/256 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 16 lks. E of a N and S fence.</p>
<p>4.93</p>	<p>The N-S-S 1/256 sec. cor. of secs. 23 and 24.</p> <hr/> <p>NW$\frac{1}{4}$ of Section 24</p> <hr/> <p>From the center W 1/16 sec. cor. of sec. 24.</p> <p>N 0°54' E, on the N and S center line of the NW$\frac{1}{4}$ of sec. 24.</p>
<p>20.405</p>	<p>Point for the NW 1/16 sec. cor., at intersection with the E and W center line of the NW$\frac{1}{4}$ of sec. 24.</p>

Survey of Subdivisions in Section 24,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NW 1/16 S24 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>35.705 Point for the center N-N-NW 1/256 sec. cor. of sec. 24.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S24 C-N-N-NW 1/256 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 17 lks. W of an abandoned N and S fence.</p> <p>From this point, a 2 x 2 in. wooden hub, bears S 15°48' W, 3.377 chs. dist.</p> <p>40.805 The W 1/16 sec. cor. of secs. 13 and 24.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center N 1/16 sec. cor. of sec. 24.</p> <p>N 88°41' W, on the E and W center line of the NW¼ of sec. 24.</p> <p>19.69 The NW 1/16 sec. cor. of sec. 24.</p> <p>39.38 The N 1/16 sec. cor. of secs. 23 and 24.</p> <hr style="width: 20%; margin: 10px auto;"/>	
--	---------------	---	--

Survey of Subdivisions in Section 24,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p style="text-align: center;">NW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of Section 24</p> <hr/> <p>From the center N-N-NW 1/256 sec. cor. of sec. 24.</p> <p>N 88°26' W, on the E and W center line of the N$\frac{1}{2}$ of the NW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 24.</p> <p>19.68 The N-N-N 1/256 sec. cor. of secs. 23 and 24.</p> <hr/> <p style="text-align: center;">Survey of Subdivisions in Section 25, T 22 N, R 8 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the $\frac{1}{4}$ sec. cor. of secs. 25 and 36.</p> <p>N 0°38' W, on the N and S center line of sec. 25.</p> <p>Over rolling land, through sparse mountain mahogany and juniper.</p> <p>19.44 The center S 1/16 sec. cor. of sec. 25, monumented with a rebar, $\frac{1}{2}$ in. diam., 19 ins. long, with a yellow plastic cap attached and mkd. RLS 11755, in a mound of stone, 2$\frac{1}{2}$ ft. base. This cor. was set by Russel R. Penland, Registered Land Surveyor No. 11755, Arizona, in 1984, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C S 1/16 S25 C 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p>	
--------	---	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 136 lks. S of a fence, bears S 88° E and S 83° W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°38' W, beginning new measurement.</p>
19.45	<p>Point for the center ¼ sec. cor. of sec. 25, at the intersection with the E and W center line of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C ¼ S25 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears S 65½° W, 48 lks. dist., mkd. T22N R8E C¼ S25 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 22 ins. diam., bears N 33½° W, 122 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 100 lks. N of the saddle in a ridge, bears N 50° E and S 87° W.</p>
40.27	<p>Point for the center N 1/16 sec. cor. of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C N 1/16 S25 C 1986</p>

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
61.09	<p>from which</p> <p>A pinyon, 8 ins. diam., bears N 67° E, 114 lks. dist., mkd. C-N 1/16 S25 BT.</p> <p>A ponderosa pine, 11 ins. diam., bears N 36° W, 142 lks. dist., mkd. C-N 1/16 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a steep W slope in moderate ponderosa pine and pinyon timber.</p> <p>The ¼ sec. cor. of secs. 24 and 25.</p>
10.07	<hr/> <p>From the ¼ sec. cor. of sec. 25 only, on the E bdy. of the Tp.</p> <p>S 88°10' W, on the E and W center line of sec. 25.</p> <p>Over rolling land, through medium ponderosa pine and pinyon.</p> <p>The center E-E 1/64 sec. cor. of sec. 25, monumented with a local ¾ in. open end pipe, 16 ins. long, projecting 3 ins. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C <u>E-E 1/64</u> C S25 1986</p> <p>from which</p> <p>A ponderosa pine, 25 ins. diam., bears N 80¾° W, 110.5 lks. dist., mkd. C-E-E 1/64 S25 BT.</p>

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Cor. is located 2 lks. S of a fence cor., fences extend N, E, and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S 88°00' W, beginning new measurement.</p> <p>10.04 Point for the center E 1/16 sec. cor. of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} \text{T22N R8E} \\ \text{C } \frac{\text{E } 1/16}{\text{C}} \text{ C} \\ \text{S25} \\ \text{1986} \end{array}$ </div> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 11 ins. diam., bears N 57½° E, 27 lks. dist., mkd. C-E 1/16 S25 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears N 38¾° W, 8 lks. dist., mkd. C-E 1/16 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a moderate NE slope.</p> <p>30.12 The center ¼ sec. cor. of sec. 25.</p> <p>50.35 Point for the center W 1/16 sec. cor. of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} \text{T22N R8E} \\ \text{C } \frac{\text{W } 1/16}{\text{C}} \text{ C} \\ \text{S25} \\ \text{1986} \end{array}$ </div>	
---------------	--	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>55.41</p>	<p>from which</p> <p>A ponderosa pine, 9 ins. diam., bears N 50$\frac{3}{4}$° E, 141 lks. dist., mkd. X at breast height and BT at base.</p> <p>A ponderosa pine, 15 ins. diam., bears N 76$\frac{1}{4}$° E, 135 lks. dist., mkd. C-W 1/16 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The center E-W-W 1/256 sec. cor. of sec. 25, monumented with a rebar, 19 ins. long, $\frac{1}{2}$ in. diam., projecting 2 ins. above the ground, with a yellow plastic cap attached and mkd. RLS 11755. This cor. was set by Russel R. Penland, Registered Land Surveyor No. 11755, Arizona, date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C $\frac{\text{E-W-W } 1/256}{\text{S25}}$ C 1986</p> <p>from which</p> <p>A ponderosa pine, 11 ins. diam., bears N 39$\frac{1}{2}$° E, 183 lks. dist., mkd. C-E-W-W 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a gentle W slope.</p> <hr style="width: 20%; margin-left: auto; margin-right: auto;"/>	
----------------------------	--	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>5.06</p> <p>10.11</p> <p>20.43</p>	<p>S 88°01' W, beginning new measurement.</p> <p>The center W-W 1/64 sec. cor. of sec. 25, monumented with a rebar, 18 ins. long, ½ in. diam., flush with ground, with a yellow plastic cap attached and mkd. RLS 11755. This cor. was set by Russel R. Penland, Registered Land Surveyor No. 11755, Arizona, date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C $\frac{W-W 1/64}{S25}$ C 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on the S edge of an E and W dirt road.</p> <hr/> <p>S 88°01' W, beginning new measurement.</p> <p>The ¼ sec. cor. of secs. 25 and 26.</p> <hr/> <p style="text-align: center;">NE¼ of Section 25</p> <hr/> <p>From the center E 1/16 sec. cor. of sec. 25.</p> <p>N 0°17' W, on the N and S center line of the NE¼ of sec. 24.</p> <p>Point for NE 1/16 sec. cor. of sec. 25, at intersection with the E and W center line of the NE¼ of sec. 25.</p>	
---	---	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NE 1/16 S25 1986</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon, 13 ins. diam., bears N 58¼° E, 81 lks. dist., mkd. NE 1/16 S25 BT.</p> <p style="padding-left: 40px;">A pinyon, 7 ins. diam., bears N 85° W, 34.5 lks. dist., mkd. NE 1/16 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>30.65 Point for the center N-NE 1/64 sec. cor. of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-N-NE 1/64 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears S ¾° W, 83 lks. dist., mkd. C-N-NE 1/64 S25 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears N 21¾° W, 37.5 lks. dist., mkd. C-N-NE 1/64 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 7 lks. SE of a fence cor., fences extend N and E.</p> <p>40.87 The E 1/16 sec. cor. of secs. 24 and 25.</p> <hr style="width: 20%; margin-left: auto; margin-right: auto;"/>	
--------	--	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>From the N 1/16 sec. cor. of sec. 25 only, on the E bdy. of the Tp.</p> <p>S 89°07' W, on the E and W center line of the NE$\frac{1}{4}$ of sec. 25.</p>
15.16	<p>Point for the center W-E-NE 1/256 sec. cor. of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-W-E-NE 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 20 ins. diam., bears S 53$\frac{1}{4}$° W, 78 lks. dist., mkd. C-W-E-NE 1/256 S25 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears N 12$\frac{1}{2}$° W, 111 lks. dist., mkd. C-W-E-NE 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
20.215	The NE 1/16 sec. cor. of sec. 25.
40.425	The center N 1/16 sec. cor. of sec. 25.
10.17	<p style="text-align: center;">————— NE$\frac{1}{4}$ of the NE$\frac{1}{4}$ of Section 25 —————</p> <p>From the center W-E-NE 1/256 sec. cor. of sec. 25.</p> <p>N 0°13' W, on the N and S center line of the SW$\frac{1}{4}$ of the NE$\frac{1}{4}$ of the NE$\frac{1}{4}$ of sec. 25.</p> <p>Point for the center W-NE-NE 1/256 sec. cor. of sec. 25.</p>

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-W-NE-NE 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears S 2¾° W, 157 lks. dist., mkd. C-W-NE-NE 1/256 S25 BT.</p> <p style="padding-left: 40px;">A pinyon, 5 ins. diam., bears S 79½° W, 84 lks. dist., mkd. C-W-NE-NE 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located N 70° W, 16 lks. dist. from a fence cor., fences extend N, E, and W; N 50° E, 6 lks. dist. from a fence cor., fences extend N, E, and S; and S 45° E, 6 lks. dist. from a fence cor., fences extend S and W.</p> <p style="text-align: center;">_____</p> <p>S 89°38' W, on a portion of the E and W center line of the NE¼ of the NE¼ of sec. 25.</p> <p>5.07 The center N-NE 1/64 sec. cor. of sec. 25.</p> <p style="text-align: center;">_____</p> <p style="text-align: center;">SE¼ of the NE¼ of Section 25</p> <p style="text-align: center;">_____</p> <p>From the center E-E 1/64 sec. cor. of sec. 25.</p> <p>N 0°12' W, on a portion of the N and S center line of the SE¼ of the NE¼ of sec. 25.</p>
---------------	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 5.085</p>	<p>The center S-SE-NE 1/256 sec. cor. of sec. 25, monumented with a rebar, 24 ins. long, ½ in. diam., projecting 3 ins. above the ground, with an aluminum cap attached and mkd. 14671. This cor. was set by Kenneth Krenke, Registered Land Surveyor No. 14671, Arizona, date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-S-SE-NE 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 11 ins. diam., bears S 26° W, 47.5 lks. dist., mkd. C-S-SE-NE 1/256 S25 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 10 ins. diam., bears N 49° W, 47.5 lks. dist., mkd. C-S-SE-NE 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 4 lks. W of a N and S fence.</p> <p style="text-align: center;">_____</p> <p>N 0°14' W, beginning new measurement.</p>
<p>5.085</p>	<p>The SE-NE 1/64 sec. cor. of sec. 25, monumented with an open end pipe, 16 ins. long, ¾ in. diam., projecting 4 ins. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>4.995</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 SE-NE 1/64 1986</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 3 ins. diam., bears S 61½° W, 36 lks. dist., mkd. X at breast height and BT at base.</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears N 76¾° W, 194 lks. dist., mkd. SE-NE 1/64 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 2.5 lks. E of a fence cor., fences extend N and 11.5 lks. E to another fence cor. fences extend E and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°15' E, beginning new measurement.</p> <p>The center N-SE-NE 1/256 sec. cor. of sec. 25, monumented with a rebar, 20 ins. long, ½ in. diam., projecting 2 ins. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-N-SE-NE 1/256 1986</p>	
----------------------------	---	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>from which bearing objects</p> <p>A ponderosa pine, 13 ins. diam., bears S $80\frac{1}{2}^{\circ}$ W, 211.5 lks. dist., mkd. C-N-SE-NE 1/256 S25 BT.</p> <p>The NE cor. of a concrete and rock water tank, $8\frac{1}{2} \times 4 \times 4$ ft. high, bears S $39\frac{1}{2}^{\circ}$ W, 106 lks. dist.</p> <p>The center of a propane tank, bears S 26° W, 65 lks. dist., long side bears N and S.</p> <p>Deposit a magnet in a $1 \times 1 \times 2 \frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 20 lks. S of center of a dirt driveway, bears E and W.</p> <hr/> <p>S $88^{\circ}29'$ W, on a portion of the E and W center line of the NW$\frac{1}{4}$ of the SE$\frac{1}{4}$ of the NE$\frac{1}{4}$ of sec. 25.</p> <p>5.01 The NW-SE-NE 1/256 sec. cor. of sec. 25, monumented with a rebar, 16 ins. long, $\frac{1}{2}$ in. diam., flush with ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 NW-SE-NE 1/256 1986</p>
--------	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>from which</p> <p>A ponderosa pine, 8 ins. diam., bears S 49½° W, 17.5 lks. dist., mkd. NW-SE-NE 1/256 S25 BT.</p> <p>A ponderosa pine, 19 ins. diam., bears N 34¾° W, 50 lks. dist., mkd. NW-SE-NE 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N 0°40' W, on a portion of the N and S center line of the NW¼ of the SE¼ of the NE¼ of sec. 25.</p> <p>5.12 The center W-E-NE 1/256 sec. cor. of sec. 25.</p> <hr/> <p>SE¼ of Section 25</p> <hr/> <p>From the E 1/16 sec. cor. of secs. 25 and 36.</p> <p>N 0°21' W, on the N and S center line of the SE¼ of sec. 25.</p> <p>Ascending moderate slope, through medium to dense pinyon, sparse ponderosa pine, oak, and mountain mahogany.</p> <p>19.71 Point for the SE 1/16 sec cor. of sec. 25, at intersection with the E and W center line of the SE¼ of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E SE 1/16 S25 1986</p>
--	---------------	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>from which</p> <p>A pinyon, 4 ins. diam., bears S 37$\frac{3}{4}$° E, 9 lks. dist., mkd. X at breast height and BT at base.</p> <p>A pinyon, 9 ins. diam., bears S 71$\frac{1}{2}$° W, 79 lks. dist., mkd. SE 1/16 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>39.485 The center E 1/16 sec. cor. of sec. 25.</p> <hr/> <p>From the S 1/16 sec. cor. of sec. 25 only, on the E bdy. of the Tp.</p> <p>S 88°54' W, on the E and W center line of the SE$\frac{1}{4}$ of sec. 25.</p> <p>Over cultivated land.</p> <p>5.005 Point for the center E-E-SE 1/256 sec. cor. of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-E-E-SE 1/256 1986</p> <p>from which</p> <p>A pinyon, 4 ins. diam., bears S 54$\frac{1}{2}$° W, 34 lks. dist., mkd. X at breast height and BT at base.</p> <p>A ponderosa pine, 11 ins. diam., bears N 82° W, 40 lks. dist., mkd. C-E-E-SE 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>	
---------------	--	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>20.015</p> <p>29.995</p>	<p>Cor. is located 2 lks. SW of a fence cor., fences extend N, S 65° E, and S.</p> <p>Continue over rolling land, through moderate pinyon, oak, and ponderosa pine.</p> <p>The SE 1/16 sec. cor. of sec. 25.</p> <p>The center W-SE 1/64 sec. cor. of sec. 25, monumented with a rebar, 19 ins. long, ½ in. diam., projecting 2 ins. above the ground, with a yellow plastic cap attached and mkd. RLS 11755. This cor. was set by Russel R. Penland, Registered Land Surveyor No. 11755, Arizona, in 1984, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-W-SE 1/64 1986</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon, 15 ins. diam., bears S 37½° E, 245 lks. dist., mkd. C-W-SE 1/64 S25 BT.</p> <p style="padding-left: 40px;">A pinyon, 11 ins. diam., bears N 1° W, 66 lks. dist., mkd. C-W-SE 1/64 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 15 lks. W of an old fence, bears N and S.</p> <p>From this point, a local cor. bears S 88°38' W, 0.10 chs. dist., monumented with an open end pipe, ¾ in. diam., projecting 3 ins. above ground, origin and date unknown, and is not utilized in the course of this survey.</p> <hr style="width: 20%; margin-left: auto; margin-right: auto;"/>
---	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>S 88°53' W, beginning new measurement.</p> <p>9.995 The center S 1/16 sec. cor. of sec. 25.</p> <hr/> <p>NE¹/₄ of the SE¹/₄ of Section 25</p> <hr/> <p>From the center E-E-SE 1/256 sec. cor. of sec. 25.</p> <p>N 0°04' W, on a portion of the N and S center line of the SE¹/₄ of the NE¹/₄ of the SE¹/₄ of sec. 25.</p> <p>5.00 Point for the SE-NE-SE 1/256 sec. cor. of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 SE-NE-SE 1/256 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 15 ins. diam., bears S 47¾° W, 150.5 lks. dist., mkd. SE-NE-SE 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located at the N side of a fence cor., fences extend E and S.</p> <hr/> <p>S 88°45' W, on a portion of the E and W center line of the SE¹/₄ of the NE¹/₄ of the SE¹/₄ of sec. 25.</p> <p>5.01 The center S-NE-SE 1/256 sec. cor. of sec. 25, monumented with an open end iron pipe, 16 ins. long, ¾ in. diam., projecting 3 ins. above the ground, with tag attached and mkd. LS 4021. This cor. was set by Todd Rockwell, Registered Land Surveyor No. 4021, Arizona, in 1967, and is accepted as a careful and faithful determination of the position of the cor.</p>
---------------	---

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-S-NE-SE 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears S 67° W, 101 lks. dist., mkd. C-S-NE-SE 1/256 S25 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears N 27¾° W, 98 lks. dist., mkd. C-S-NE-SE 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°22' W, on a portion of the N and S center line of the NE¼ of the SE¼ of sec. 25.</p> <p>4.975 The NE-SE 1/64 sec. cor. of sec. 25, monumented with an open end pipe, 15 ins. long, ¾ in. diam., projecting 1 in. above the ground, with tag attached and mkd. LS 4021. This cor. was set by Todd Rockwell, Registered Land Surveyor No. 4021, Arizona, in 1967, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 NE-SE 1/64 1986</p>
--------	---

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>4.975</p>	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N 0°19' W, beginning new measurement.</p> <p>The center N-NE-SE 1/256 sec. cor. of sec. 25, monumented with an open end pipe, 16 ins. long, 3/4 in. diam., projecting 2 ins. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-N-NE-SE 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears S 18° W, 81.5 lks. dist., mkd. C-N-NE-SE 1/256 S25 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears N 49 1/2° W, 48 lks. dist., mkd. C-N-NE-SE 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 2 lks. NW of the end of a fence, fence extends northerly only.</p> <hr/>	
----------------------------	---	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>5.005</p> <p>5.00</p>	<p>N 0°10' W, beginning new measurement.</p> <p>The center E-E 1/64 sec. cor. of sec. 25.</p> <hr/> <p>NE¹/₄ of the SE¹/₄ of the SE¹/₄ of Section 25</p> <hr/> <p>From the N-S-S 1/256 sec. cor. of sec. 25 only, on the E bdy. of Tp.</p> <p>S 89°11' W, on a portion of the E and W center line of the NE¹/₄ of the SE¹/₄ of the SE¹/₄ of sec. 25.</p> <p>The NE-SE-SE 1/256 sec. cor. of sec. 25 monumented with an open end iron pipe, 16 ins. long, ³/₄ in. diam., projecting 1 in. above the ground, with a tag attached and mkd. LS 4021. This cor. was set by Todd Rockwell, Registered Land Surveyor No. 4021, Arizona, in 1967, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 NE-SE-SE 1/256 1986</p> <p>from which</p> <p>A ponderosa pine, 18 ins. diam., bears S 4³/₄° E, 193 lks. dist., mkd. NE-SE-SE 1/256 S25 BT.</p> <p>A ponderosa pine, 14 ins. diam., bears N 25³/₄° W, 178 lks. dist., mkd. NE-SE-SE 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 1 lk. SW of a fence cor., fences extend N and E.</p> <hr/>	
--	--	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>N 0°08' W, on a portion of the N and S center line of the NE¹/₄ of the SE¹/₄ of the SE¹/₄ of sec. 25.</p> <p>4.995 The center E-E-SE 1/256 sec. cor. of sec. 25.</p> <hr/> <p>SW¹/₄ of the SE¹/₄ of Section 25</p> <hr/> <p>From the W-E 1/64 sec. cor. of secs. 25 and 36.</p> <p>N 0°28' W, on the N and S center line of the SW¹/₄ of the SE¹/₄ of sec. 25.</p> <p>Over rolling land, through moderate pinyon, juniper, and ponderosa pine.</p> <p>19.58 The center W-SE 1/64 sec. cor. of sec. 25.</p> <hr/> <p>SW¹/₄ of Section 25</p> <hr/> <p>From the W 1/16 sec. cor. of secs. 25 and 36.</p> <p>N 0°03' E, on the N and S center line of the SW¹/₄ of sec. 25.</p> <p>Over gently rolling open land.</p> <p>20.51 The SW 1/16 sec. cor. of sec. 25, monumented with a rebar, 14 ins. long, 1/2 in. diam., projecting 2 ins. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E SW 1/16 S25 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
---------------	---

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this point, a local cor. bears N 59° E, 0.006 chs. dist., monumented with a rebar, ½ in. diam., projecting 2 ins. above the ground, with a yellow plastic cap attached and mkd. RLS 11755. This cor. was established by Russel R. Penland, Registered Land Surveyor No. 11755, Arizona, in 1984, and was set subsequent to accepted cor. and not utilized in the course of this survey.</p> <hr/> <p>N 0°05' E, beginning new measurement.</p> <p>10.265 The center N-SW 1/64 sec. cor. of sec. 25, monumented with a rebar, 21 ins. long, ½ in. diam., projecting 3 ins. above the ground, in a mound of stone, 1½ ft. base, with a plastic cap attached and mkd. RLS 11755. This cor. was set by Russel R. Penland, Registered Land Surveyor No. 11755, Arizona, in 1984, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-N-SW 1/64 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 11 ins. diam., bears N 41¾° E, 66.5 lks. dist., mkd. C-N-SW 1/64 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p>
--	--------	---

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Rebuild the mound of stone, 1½ ft. base, around the stainless steel post.</p> <hr/> <p>N 0°03' E, beginning new measurement.</p> <p>Continue through scattered ponderosa pine and juniper.</p> <p>10.26 The center W 1/16 sec. cor. of sec. 25.</p> <hr/> <p>From the center S 1/16 sec. cor. of sec. 25.</p> <p>S 85°02' W, on the E and W center line of the SW¼ of sec. 25.</p> <p>Over gently rolling open land.</p> <p>15.39 The center W-E-SW 1/256 sec. cor. of sec. 25, monumented with an open end pipe, 17 ins. long, ½ in. diam., projecting 2 ins. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-W-E-SW 1/256 1986</p> <p>from which a bearing object</p> <p style="padding-left: 40px;">The NW cor. of a house, bears N 89¼° E, 339 lks. dist., N wall extends S 86° E, W wall extends S 4° W.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/>
---------------	---

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>5.135</p> <p>20.515</p> <p>10.12</p>	<p>S 84°58' W, beginning new measurement.</p> <hr/> <p>The SW 1/16 sec. cor. of sec. 25.</p> <p>S 85°02' W, beginning new measurement.</p> <hr/> <p>The S 1/16 sec. cor. of secs. 25 and 26.</p> <hr/> <p>NE¹/₄ of the SW¹/₄ of Section 25</p> <hr/> <p>From the center W-E-SW 1/256 sec. cor. of sec. 25.</p> <p>N 0°11' W, on the N and S center line of the SW¹/₄ of the NE¹/₄ of the SW¹/₄ of sec. 25.</p> <p>The center W-NE-SW 1/256 sec. cor. of sec. 25, monumented with an iron pipe, 18 ins. long, 1/2 in. diam., projecting 1 in. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-W-NE-SW 1/256 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 28 ins. diam., bears N 53 3/4° E, 315 lks. dist., mkd. C-W-NE-SW 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>There is a steel fence post alongside the cor.</p> <hr/>	
---	---	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>S 86°31' W, on a portion of the E and W center line of the NE$\frac{1}{4}$ of the SW$\frac{1}{4}$ of sec. 25.</p> <p>5.08 The center N-SW 1/64 sec. cor. of sec. 25.</p> <hr/> <p>NW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of Section 25</p> <hr/> <p>From the center N-SW 1/64 sec. cor. of sec. 25.</p> <p>S 86°30' W, on a portion of the E and W center line of the NW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of sec. 25.</p> <p>5.09 The center E-NW-SW 1/256 sec. cor. of sec. 25, monumented with a rebar, 21 ins. long, $\frac{1}{2}$ in. diam., projecting 2 ins. above the ground, in a mound of stone, 1$\frac{1}{2}$ ft. diam., with a yellow plastic cap attached and mkd. RLS 11755. This cor. was set by Russel R. Penland, Registered Land Surveyor No. 11755, Arizona, in 1984, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C-E-NW-SW 1/256 1986</p> <p>from which</p> <p style="text-align: center;">A juniper, 10 ins. diam., bears N 27$\frac{1}{4}$° E, 284 lks. dist., mkd. C-E-NW-SW 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Rebuild mound of stone, 1$\frac{1}{2}$ ft. base, around the cor.</p> <p>Set a steel fence post near the cor.</p> <hr/>
--------	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>N 0°12' E, on the N and S center line of the NE¹/₄ of the NW¹/₄ of the SW¹/₄ of sec. 25.</p> <p>10.395 The center E-W-W 1/256 sec. cor. of sec. 25.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">NW¹/₄ of Section 25</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center W 1/16 sec. cor. of sec. 25.</p> <p>N 0°01' E, on the N and S center line of the NW¹/₄ of sec. 25.</p> <p>Over rolling land, through moderate ponderosa pine and pinyon.</p> <p>21.21 Point for the NW 1/16 sec. cor., at intersection with the E and W center line of the NW¹/₄ of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NW 1/16 S25 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 25 ins. diam., bears S 88½° E, 114 lks. dist., mkd. NW 1/16 S25 BT.</p> <p style="padding-left: 40px;">A pinyon, 7 ins. diam., bears S 74° W, 144 lks. dist., mkd. NW 1/16 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>37.12 Point for the center N-N-NW 1/256 sec. cor. of sec. 25.</p>	
---------------	--	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-N-N-NW 1/256 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 15 ins. diam., bears S 65¼° E, 51 lks. dist., mkd. C-N-N-NW 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 9 lks. N of a fence, bears E and W.</p> <p>42.425 The W 1/16 sec. cor. of secs. 24 and 25.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center N 1/16 sec. cor. of sec. 25.</p> <p>S 89°04' W, on the E and W center line of the NW¼ of sec. 25.</p> <p>Over rolling land, through scattered ponderosa pine, pinyon, and juniper.</p> <p>19.99 The NW 1/16 sec. cor. of sec. 25.</p> <p>29.98 Point for the center W-NW 1/64 sec. cor. of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-W-NW 1/64 1986</p>
--	---------------	---

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>from which a bearing object</p> <p>A telephone pole, 9 ins. diam., bears S 36½° E, 71 lks. dist., mkd. BXO, lines extend N 44° E and S 5° W.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 120 lks. S of a curve in a dirt road, bears N 40° E and W.</p> <p>39.97 The N 1/16 sec. cor. of secs. 25 and 26.</p> <hr/> <p>NE¼ of the NW¼ of Section 25</p> <hr/> <p>From the E-E-W 1/256 sec. cor. of secs. 24 and 25.</p> <p>S 0°28' E, on a portion of the N and S center line of the NE¼ of the NE¼ of the NW¼ of sec. 25.</p> <p>5.23 Point for the NE-NE-NW 1/256 sec. cor. of sec. 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 NE-NE-NW 1/256 1986</p> <p>from which</p> <p>A ponderosa pine, 5 ins. diam., bears S 86¼° E, 43.5 lks. dist., mkd. NE-NE-NW 1/256 S25 BT.</p> <p>A pinyon, 7 ins. diam., bears S 24° W, 111.5 lks. dist., mkd. NE-NE-NW 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
--	---------------	---

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>From this point, a local cor., bears N 63°44' E, 0.31 chs. dist., monumented with an open end pipe, ½ in. diam., projecting 2 ins. above the ground. This cor. was established by landowner of unknown date, using improper procedures and is not utilized in the course of this survey.</p> <hr/> <p>S 89°55' W, on a portion of the E and W center line of the N½ of the NE¼ of the NW¼ of sec. 25.</p> <p>14.85 The center N-N-NW 1/256 sec. cor. of sec. 25.</p> <hr/> <p>SW¼ of the NW¼ of Section 25</p> <hr/> <p>From the center W-W 1/64 sec. cor. of sec. 25.</p> <p>N 0°20' E, on the N and S center line of the SW¼ of the NW¼ of sec. 25.</p> <p>21.40 The center W-NW 1/64 sec. cor. of sec. 25.</p> <hr/> <p>NW¼ of the NW¼ of Section 25</p> <hr/> <p>From the center W-NW 1/64 sec. cor. of sec. 25.</p> <p>N 0°21' E, on a portion of the N and S center line of the NW¼ of the NW¼ of sec. 25.</p> <p>16.05 Point for the center N-NW-NW 1/256 sec. cor. of sec 25.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S25 C-N-NW-NW 1/256 1986</p>	
---------------	---	--

Survey of Subdivisions in Section 25,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>from which</p> <p>A juniper, 16 ins. diam., bears S $38\frac{1}{2}^{\circ}$ E, 70.5 lks. dist., mkd. C-N-NW-NW 1/256 S25 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 $\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 2$\frac{1}{2}$ ft. base, 2 ft. high, W of cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 45 lks. S of a fence, bears S 65° E and N 65° W, 25 lks. E of a fence, bears S 20° E and N 20° W, and 85 lks. E of a ridge, bears S 10° E and N 10° W.</p> <hr/> <p>N $89^{\circ}54'$ E, on the E and W center line of the NE$\frac{1}{4}$ of the NW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 25.</p> <p>9.895 The center N-N-NW 1/256 sec. cor. of sec. 25.</p> <hr/> <p style="text-align: center;">Survey of Subdivisions in Section 26, T 22 N, R 8 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the $\frac{1}{4}$ sec. cor. of secs. 26 and 35.</p> <p>N $0^{\circ}34'$ E, on the N and S center line of sec. 26.</p> <p>Over nearly level open land.</p> <p>5.40 The center S-S-S 1/256 sec. cor. of sec. 26, monumented with a rebar, 21 ins. long, $\frac{5}{8}$ in. diam., flush with ground, with a tag attached and mkd. LS 2473 and a 2$\frac{1}{4}$ in. water pipe, projecting 34 ins. above ground alongside. This cor. was set by Wilfred P. Hanson, Registered Land Surveyor No. 2473, Arizona, in 1968, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>
--	--------	--

Survey of Subdivisions in Section 26,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>C S-S-S S26 1/256 C 1986</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 3 lks. E of a fence line, fences extend S and N 75 lks. to a fence cor. of fences, extending N, S, and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°32' E, beginning new measurement.</p> <p>5.40 The center S-S 1/64 sec. cor. of sec. 26, monumented with a rebar, 15 ins. long, 5/8 in. diam., 1 in. below ground, with a tag attached and mkd. LS 2473. This cor. was set by Wilfred P. Hanson, Registered Land Surveyor No. 2473, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>C S-S 1/64 S26 C 1986</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p>	
---------------	--	--

Survey of Subdivisions in Section 26,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p> <p>10.80</p>	<p>Set a steel fence post near the cor.</p> <p>Cor. is located 6 lks. E of an old fence, bears N and S.</p> <hr/> <p>N 0°31' E, beginning new measurement.</p> <p>Point for the center S 1/16 sec. cor. of sec. 26, monumented with a rebar, 28 ins. long, 5/8 in. diam., projecting 9 ins. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C S 1/16 S26 C 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Cor. is located in a fence, bears easterly and W 8 lks. to a fence cor., fences extend N, E, and S, and 23 lks. S of center of Rio De Flag Creek, 13 lks. wide, flows N 70° E.</p> <p>From this point, a local cor. bears S 42°30' W, 0.006 chs. dist., monumented with a rebar, 5/8 in. diam., projecting 6 ins. above the ground, origin and date unknown, and is not utilized in the course of this survey.</p> <hr/> <p>N 0°31' E, beginning new measurement.</p>
--	----------------------------	--

Survey of Subdivisions in Section 26,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 21.61</p>	<p>The center $\frac{1}{4}$ sec. cor. of sec. 26, monumented with a rebar, 15 ins. long, $\frac{5}{8}$ in. diam., projecting 1 in. above the ground, with an aluminum cap attached and mkd. CTR 2007 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C $\frac{1}{4}$ S26 1986</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 3 lks. S 35° E from a fence cor., fences extend E, S, and W, and 34 lks. S of a graded road, bears E and W.</p> <hr/> <p>N $0^{\circ}31'$ E, beginning new measurement.</p>
<p>43.155</p>	<p>The $\frac{1}{4}$ sec. cor. of secs. 23 and 26.</p>
<p>20.155</p>	<p>From the $\frac{1}{4}$ sec. cor. of secs. 25 and 26.</p> <p>N $89^{\circ}53'$ W, on the E and W center line of sec. 26.</p> <p>Over gently rolling open land.</p> <p>Point for the center E $\frac{1}{16}$ sec. cor. of sec. 26.</p>

Survey of Subdivisions in Section 26,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.</p> $\begin{array}{c} \text{T22N R8E} \\ \text{C } \frac{\text{E } 1/16}{\text{S26}} \text{ C} \\ 1986 \end{array}$ <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 4.5 lks. S of an E and W fence and 30 lks. S of center of an E and W graded road.</p> <p>40.31 The center ¼ sec. cor. of sec. 26.</p> <hr/> <p>N 89°56' W, beginning new measurement.</p> <p>20.165 Point for the center W 1/16 sec. cor. of sec. 26.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.</p> $\begin{array}{c} \text{T22N R8E} \\ \text{C } \frac{\text{W } 1/16}{\text{S26}} \text{ C} \\ 1986 \end{array}$ <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 3 lks. S of an E and W fence and 40 lks. S of center of an E and W graded road.</p> <p>40.33 The ¼ sec. cor. of secs. 26 and 27.</p> <hr/> <p>SE¼, Section 26</p> <hr/> <p>From the E 1/16 sec. cor. of secs. 26 and 35.</p> <p>N 0°33' E, on the N and S center line of the SE¼ of sec. 26.</p>	
---------------	--	--

Survey of Subdivisions in Section 26,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Over gently rolling open land.</p> <p>10.795 The center S-SE 1/64 sec. cor. of sec. 26, monumented with a rebar, 15 ins. long, 5/8 in. diam., flush with ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S26 C-S-SE 1/64 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located S 85½° W, 92.5 lks. dist., from a fence cor., fences extend N, E, and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°36' E, beginning new measurement.</p> <p>10.805 Point for the SE 1/16 sec. cor. of sec. 26, at intersection with the E and W center line of the SE¼ of sec. 26.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 10 ins. below the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E SE 1/16 S26 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Cor. is located in a meadow.</p>	
---------------	---	--

Survey of Subdivisions in Section 26,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 32.41</p>	<p>The center E 1/16 sec. cor. of sec. 26.</p> <hr/> <p>From the S 1/16 sec. cor. of secs. 25 and 26.</p> <p>N 89°54' W, on the E and W center line of the SE¹/₄ of sec. 26.</p> <p>Over gently rolling open land.</p>
<p>20.14</p>	<p>The SE 1/16 sec. cor. of sec. 26.</p>
<p>40.265</p>	<p>The center S 1/16 sec. cor. of sec. 26.</p> <hr/> <p>SW¹/₄ of the SE¹/₄ of Section 26</p> <hr/> <p>From the center S-SE 1/64 sec. cor. of sec. 26.</p> <p>N 89°54' W, on the E and W center line of the SW¹/₄ of the SE¹/₄ of sec. 26.</p>
<p>20.11</p>	<p>The center S-S 1/64 sec. cor. of sec. 26.</p> <hr/> <p>SW¹/₄ of Section 26</p> <hr/> <p>From the W 1/16 sec. cor. of secs. 26 and 35.</p> <p>N 0°28' E, on the N and S center line of the SW¹/₄ of sec. 26.</p> <p>Over rolling land, through scattered ponderosa pine.</p>
<p>5.395</p>	<p>The center S-S-SW 1/256 sec. cor. of sec. 26, monumented with a rebar, 15 ins. long, 5/8 in. diam., projecting 1 in. above the ground, with a tag attached and mkd. PE 2007. This cor. was set by James B. Holmquist, Registered Civil Engineer, No. 2007, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>

Survey of Subdivisions in Section 26,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S26 C-S-S-SW 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 6 ins. diam., bears S 16¼° E, 239 lks. dist., mkd. X at breast height and BT at base.</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears S 19¼° W, 211 lks. dist., mkd. C-S-S-SW 1/256 S26 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 88 lks. N of a fence; bears S 85° E and N 85° W; and 137 lks. S of a telephone line, bears S 80° E and N 80° W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°30' E, beginning new measurement.</p> <p>16.19 Point for the SW 1/16 sec. cor. at intersection with the E and W center line of the SW¼ of sec. 26.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 7 ins. below the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E SW 1/16 S26 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
--	---------------	--

Survey of Subdivisions in Section 26,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	Cor. is located at the N edge of an E and W graded road; 3 lks. S of an E and W fence, 42 lks. N of an E and W fence, and 80 lks. N of Rio De Flag Creek, 10 lks. wide, flows N 85° E.
37.785	The center W 1/16 sec. cor. of sec. 26. <hr/>
	From the center S 1/16 sec. cor. of sec. 26. N 89°53' W, on the E and W center line of the SW ¹ / ₄ of sec. 26.
	Over gently rolling open land.
20.155	The SW 1/16 sec. cor. of sec. 26.
40.30	The S 1/16 sec. cor. of secs. 26 and 27. <hr/>
	SE ¹ / ₄ of the SW ¹ / ₄ of Section 26 <hr/>
	From the center S-S-S 1/256 sec. cor. of sec. 26. N 89°51' W, on the E and W center line of the S ¹ / ₂ of the SE ¹ / ₄ of the SW ¹ / ₄ of sec. 26.
20.15	The center S-S-SW 1/256 sec. cor. of sec. 26. <hr/>
	SW ¹ / ₄ of the SW ¹ / ₄ of Section 26 <hr/>
	From the center S-S-SW 1/256 sec. cor. of sec. 26. N 89°48' W, on the E and W center line of the S ¹ / ₂ of the SW ¹ / ₄ of the SW ¹ / ₄ of sec. 26.
5.03	The SE-SW-SW 1/256 sec. cor. of sec. 26, monumented with a rebar, 18 ins. long, 5/8 in. diam., projecting 5 ins. above the ground, with a tag attached and mkd. LS 2473. This cor. was set by Wilfred P. Hanson, Registered Land Surveyor No. 2473, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.

Survey of Subdivisions in Section 26,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>At the cor. point</p> <p>Set an aluminum post, 36 ins. long, $\frac{3}{4}$ in. diam., 24 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p> <p style="text-align: center;">S26 SE-SW-SW 1/256 1986</p> <p>Cor. is located in a fence, 77 lks. N of a fence cor., fences extend N, S 85° E, and N 85° W, and 230 lks. S of a telephone line, bears S 80° E and N 80° W.</p> <p>Deposit the rebar alongside the cor.</p> <hr style="width: 20%; margin: auto;"/> <p>N 89°52' W, beginning new measurement.</p> <p>15.105 The S-S-S 1/256 sec. cor. of secs. 26 and 27.</p> <hr/> <p style="text-align: center;">Survey of Subdivisions in Section 35, T 22 N, R 8 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the $\frac{1}{4}$ sec. cor. of secs. 2 and 35, on the S bdy. of the Tp.</p> <p>N 0°56' W, on the N and S center line of sec. 35.</p> <p>Over northeasterly slope, through moderate ponderosa pine, oak, and scattered Douglas fir.</p> <p>19.96 Point for the center S 1/16 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C S 1/16 S35 C 1986</p> <p>from which</p>
--	---------------	---

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>A ponderosa pine, 11 ins. diam., bears S 81° E, 68 lks. dist., mkd. C-S 1/16 S35 BT.</p> <p>A ponderosa pine, 6 ins. diam., bears N 7½° W, 11 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 270 lks. S of El Paso gas line track road, bears N 85° E and S 85° W.</p> <p>From this point, a local cor. bears N 18°31' W, 1.773 chs. dist, monumented with a rebar, 5/8 in. diam., projecting 3 ins. above the ground, with a tag attached and mkd. P.E. 2007. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is not utilized in the course of this survey.</p> <p>39.92 Point for the center ¼ sec. cor. of sec. 35, at the intersection with the E and W center line of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C ¼ S35 1986</p> <p>from which</p> <p>A ponderosa pine, 11 ins. diam., bears N 4¾° E, 40 lks. dist., mkd. C¼ S35 BT.</p> <p>A ponderosa pine, 10 ins. diam., bears S 66° W, 36.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>	
--------	--	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>From this point, a local cor. bears S 88°18' W, 0.37 chs. dist., monumented with a rebar, 5/8 in. diam., projecting 1 in. above the ground, with an aluminum cap attached and mkd. 2007 and a cross in center. This cor. was set by James B. Holmquist, Registered Civil Engineer, No. 2007, Arizona, of unknown date and is not utilized in the course of this survey.</p> <p>59.405 Point for the center N 1/16 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C N 1/16 S35 C 1986</p> <p>from which</p> <p>A ponderosa pine, 13 ins. diam., bears S 20¼° E, 63.5 lks. dist., mkd. C-N 1/16 S35 BT.</p> <p>A ponderosa pine, 10 ins. diam., bears S 32¼° W, 94.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>A fence cor., bears S 2° W, 142.5 lks. dist., fences extend N, N 40° E, and S 40° W.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this point, a local cor. bears S 89°24' W, 0.19 chs. dist., monumented with a rebar, 5/8 in. diam., flush with ground, with an aluminum cap attached and mkd. 2007 1/16 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is not utilized in the course of this survey.</p> <p>78.89 The ¼ sec. cor. of secs. 26 and 35.</p>	
---------------	---	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>10.025</p> <p>11.75</p> <p>20.05</p>	<p>From the $\frac{1}{4}$ sec. cor. of secs. 35 and 36.</p> <p>S 88°29' W, on the E and W center line of sec. 35.</p> <p>Over gently rolling land, through medium ponderosa pine and scattered oak, juniper, and pinyon.</p> <p>Point for the center E-E 1/64 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C $\frac{E-E\ 1/64}{S35}$ C 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 11 ins. diam., bears S 73° E, 63.5 lks. dist., mkd. X at breast height and BT at base.</p> <p style="padding-left: 40px;">A ponderosa pine, 10 ins. diam., bears N 30½° W, 175.5 lks. dist., mkd. C-E-E 1/64 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 50 lks. N of a right-a-way fence, bears S 55° E and N 55° W.</p> <p>From this point, a local cor. bears S 86°51' W, 0.09 chs. dist., monumented with a rebar, 5/8 in. diam., flush with the ground, with an aluminum cap attached and mkd. 2007 1/64 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is not utilized in the course of the survey.</p> <p>Center of asphalt road No. 510, bears S 55° E and N 55° W.</p> <p>Point for the center E 1/16 sec. cor. of sec. 35.</p>	
---	---	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> $C \frac{T22N R8E}{E 1/16} C$ <p style="text-align: center;">S35 1986</p> <p>from which</p> <p>A ponderosa pine, 9 ins. diam., bears S 63° W, 40.5 lks. dist., mkd. C-E 1/16 S35 BT.</p> <p>A ponderosa pine, 5 ins. diam., bears N 51¼° W, 21.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this point, a local cor. bears S 87°46' W, 0.18 chs. dist., monumented with a rebar, 5/8 in. diam., projecting 2 ins. above the ground, with an aluminum cap attached and mkd. 2007 1/16 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is not utilized in the course of this survey.</p> <p>40.10 The center ¼ sec. cor. of sec. 35.</p> <p>54.14 Point for the 1/4096 cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> $1/4096$ <p style="text-align: center;">1986</p> <p>from which</p> <p>A ponderosa pine, 20 ins. diam., bears S 57¼° W, 162.5 lks. dist., mkd. 1/4096 BT.</p>	
---------------	--	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Cor. is located S 87° W, 25 lks. dist., from a fence cor., fences extend N 4° E and N 88° W.</p> <p>From this point, a local cor. bears S 88°12' W, 0.24 chs. dist., monumented with a rebar, 5/8 in. diam., flush with the ground, with an aluminum cap attached and mkd. 2007 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is not utilized in the course of this survey.</p> <p>60.52 Point for the center W 1/16 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> $\begin{array}{c} \text{T22N R8E} \\ \text{W } 1/16 \\ \text{C} \quad \text{C} \\ \text{S35} \\ 1986 \end{array}$ </p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 6 ins. diam., bears S 65¼° E, 161.5 lks. dist., mkd. X at breast height and BT at base.</p> <p style="padding-left: 40px;">A ponderosa pine, 38 ins. diam., bears S 64¾° W, 173.5 lks. dist., mkd. C-W 1/16 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 1 lk. N of a fence, bears E and W.</p> <p>From this point, a local cor. bears S 88°26' W, 0.18 chs. dist., monumented with a rebar, 5/8 in. diam., projecting 1 in. above the ground, with an aluminum cap attached and mkd. 2007 1/16 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is not utilized in the course of this survey.</p> <p>75.835 Point for the center W-W-W 1/256 sec. cor. of sec. 35.</p>	
---------------	--	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C $\frac{W-W-W 1/256}{S35}$ C 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 30 ins. diam., bears S 26° E, 97 lks. dist., mkd. C-W-W-W 1/256 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 4 lks. E. of a fence cor., fences extend E, S, and W, and 26 lks. S of center of a track road, bears E and W.</p> <p>From this point, a local cor. bears N 88°45' W, 0.046 chs. dist., monumented with a rebar, 5/8 in. diam., projecting 1 in. above the ground, with an aluminum cap attached and mkd. 2007 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is not utilized in the course of this survey.</p>	
<p>80.94</p>	<p>The ¼ sec. cor. of secs. 34 and 35.</p>	
	<p style="text-align: center;">NE¼ of Section 35</p> <hr style="width: 20%; margin: auto;"/> <p>From the center E 1/16 sec. cor. of sec. 35.</p> <p>N 0°51' W, on the N and S center line of the NE¼ of sec. 35.</p> <p>Over rolling land, through medium ponderosa pine, scattered pinyon, and juniper.</p>	
<p>8.60</p>	<p>Center of asphalt road No. 510, bears SE and NW.</p>	

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 19.205</p>	<p>Point for the NE 1/16 sec. cor. at intersection with the E and W center line of the NE$\frac{1}{4}$ of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NE 1/16 S35 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears N 77$\frac{1}{2}$° E, 40 lks. dist., mkd. NE 1/16 S35 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 7 ins. diam., bears S 53° E, 9.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>	
<p>28.805</p>	<p>Point for the center N-NE 1/64 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S35 C-N-NE 1/64 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears S 29$\frac{1}{4}$° W, 211 lks. dist., mkd. X at breast height and BT at base.</p> <p style="padding-left: 40px;">A ponderosa pine, 17 ins. diam., bears N 76$\frac{1}{2}$° W, 28.5 lks. dist., mkd. C-N-NE 1/64 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>	

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Cor. is located 3 lks. E of a fence cor., fence extends N only; and 9 lks. W of center of a driveway, bears N 25° E and S 25° W; 12 lks. E of center of another driveway, bears S 5° E and N 5° W; and 21 lks. S of a telephone line, bears S 50° E and N 50° W.</p> <p>From this point, a local cor. bears West, 0.03 chs. dist., monumented with an open end pipe, 1 in. diam., 4 ins. below surface of ground, origin and date unknown and is not utilized in the course of this survey.</p> <p>From this same point, the most southerly cor. of a mobile home, 14 x 52 ft., bears S 76°50' E, 2.12 chs. dist., long side extends N 40° E.</p> <p>From this same point, the SW cor. of a shed, 8 x 6 ft., bears N 3°35' W, 1.00 ch. dist.</p> <p>From this same point, the SW cor. of a patio attached to a mobile home, bears N 4°30' W, 1.13 chs. dist.</p> <p>From this same point, a fence cor., bears N 36½° W, 1.60 chs. dist., fences extend S 40° E and N 5° W.</p> <p>38.405 The E 1/16 sec. cor. of secs. 26 and 35.</p> <hr/> <p>From the N 1/16 sec. cor. of secs. 35 and 36.</p> <p>S 89°17' W, on the E and W center line of the NE¼ of sec. 35.</p> <p>Ascending over open land.</p> <p>11.20 Enter medium ponderosa pine and scattered pinyon, edge bears S 35° E and N 25° W.</p> <p>15.06 Point for the center W-E-NE 1/256 sec. cor. of sec. 35.</p>	
---------------	---	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S35 C-W-E-NE 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears S 57¼° W, 52 lks. dist., mkd. C-W-E-NE 1/256 S35 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears N 59° W, 52 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a gentle NE slope.</p> <p>20.08 The NE 1/16 sec. cor. of sec. 35.</p> <p>40.16 The center N 1/16 sec. cor. of sec. 35.</p> <p style="text-align: center;">————— NE¼ of the NE¼ of Section 35 —————</p> <p>From the center W-E-NE 1/256 sec. cor. of sec. 35.</p> <p>N 0°49.5' W, on the N and S center line of the SW¼ of the NE¼ of the NE¼ of sec. 35.</p> <p>9.57 Point for the center W-NE-NE 1/256 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S35 C-W-NE-NE 1/256 1986</p>	
---------------	---	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>from which</p> <p>A juniper, 5 ins. diam., bears S $14\frac{1}{2}^{\circ}$ W, 135.5 lks. dist., mkd. C-W-NE-NE 1/256 S35 BT.</p> <p>A well, bears S $9\frac{3}{4}^{\circ}$ E, 183.5 lks. dist.</p> <p>A fence cor., bears S $75\frac{1}{2}^{\circ}$ W, 282.5 lks. dist., fences extend N 40° E and N 50° W.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in an abandoned E and W fence.</p> <p>From this point, a local cor. bears N $86^{\circ}54'$ W, 0.037 chs. dist., monumented with a rebar, 5/8 in. diam., 5 ins. below ground, with an aluminum cap attached and mkd. 2007 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is not utilized in the course of this survey.</p> <p>From this same point, the northeasterly cor. of a mobile home, 14 x 52 ft., bears N $88^{\circ}12'$ W, 2.43 chs. dist., long side extends S 40° W.</p> <hr/> <p>S $89^{\circ}41'$ W, on a portion of the E and W center line of the NE$\frac{1}{4}$ of the NE$\frac{1}{4}$ of sec. 35.</p> <p>5.025 The center N-NE 1/64 sec. cor. of sec. 35.</p> <hr/> <p>SE$\frac{1}{4}$ of the NE$\frac{1}{4}$ of Section 35</p> <hr/> <p>From the center E-E 1/64 sec. cor. of sec. 35.</p> <p>N $0^{\circ}47.5'$ W on a portion of the N and S center line of the SE$\frac{1}{4}$ of the NE$\frac{1}{4}$ of sec. 35.</p> <p>14.30 Point for the center N-SE-NE 1/256 sec. cor. of sec. 35.</p>
--	---------------	---

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S35 C-N-SE-NE 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon, 9 ins. diam., bears S 28½° W, 58.5 lks. dist., mkd. X at breast height and BT at base.</p> <p style="padding-left: 40px;">A ponderosa pine, 21 ins. diam., bears S 74¼° W, 110.5 lks. dist., mkd. C-N-SE-NE 1/256 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S 89°04.5' W, on a portion of the E and W center line of the NW¼ of the SE¼ of the NE¼ of sec. 35.</p> <p>5.02 Point for the NW-SE-NE 1/256 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S35 NW-SE-NE 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 7 ins. diam., bears S 87½° E, 26 lks. dist., mkd. X at breast height and BT at base.</p> <p style="padding-left: 40px;">A ponderosa pine, 14 ins. diam., bears S 40¼° W, 55 lks. dist., mkd. NW-SE-NE 1/256 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	
---------------	--	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°51' W, on a portion of the N and S center line of the NW$\frac{1}{4}$ of the SE$\frac{1}{4}$ of the NE$\frac{1}{4}$ of sec. 35.</p>
4.785	<p>The center W-E-NE 1/256 sec. cor. of sec. 35.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">SW$\frac{1}{4}$ of Section 35</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the W 1/16 sec. cor. of secs. 2 and 35.</p> <p>N 0°31.5' W, on the N and S center line of the SW$\frac{1}{4}$ of sec. 35.</p> <p>Over rolling land, through medium ponderosa pine and scattered oak and pinyon.</p>
20.015	<p>Point for the SW 1/16 sec. cor., at intersection with the E and W center line of the SW$\frac{1}{4}$ of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E SW 1/16 S35 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears S 89$\frac{3}{4}$° W, 52.5 lks. dist., mkd. SW 1/16 S35 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 6 ins. diam., bears N 6° W, 47.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 159 lks. S of an El Paso gas line track road, bears N 80° E and S 80° W.</p>

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS 40.025	The center W 1/16 sec. cor. of sec. 35. <hr style="width: 20%; margin: 10px auto;"/> From the center S 1/16 sec. cor. of sec. 35. S 88°21' W, on the E and W center line of the SW ¹ / ₄ of sec. 35. Over rolling land, through medium ponderosa pine and scattered oak and pinyon.
20.565	The SW 1/16 sec. cor. of sec. 35.
41.13	The S 1/16 sec. cor. of secs. 34 and 35. <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">NW¹/₄ of the SW¹/₄ of Section 35</p> <hr style="width: 20%; margin: 10px auto;"/> From the N-N-S 1/256 sec. cor. of secs. 34 and 35. N 88°27' E, on a portion of the E and W center line of the NW ¹ / ₄ of the NW ¹ / ₄ of the SW ¹ / ₄ of sec. 35.
5.115	Point for the NW-NW-SW 1/256 sec. cor. of sec. 35. Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. <p style="text-align: center;">NW-NW-SW 1/256 1986</p> from which A ponderosa pine, 16 ins. diam., bears N 77° E, 52 lks. dist., mkd. X at breast height and BT at base. A ponderosa pine, 18 ins. diam., bears S 18½° W, 54 lks. dist., mkd. NW-NW-SW 1/256 S35 BT. Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post. Set a steel fence post near the cor.

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Cor. is located S 65° W, 5 lks. dist. from a fence cor., fences extend N and W.</p> <hr/> <p>N 0°13' W, on a portion of the N and S center line of the NW¹/₄ of the NW¹/₄ of the SW¹/₄ of sec. 35.</p> <p>5.01 The center W-W-W 1/256 sec. cor. of sec. 35.</p> <hr/> <p>NW¹/₄ of Section 35</p> <hr/> <p>From the center W 1/16 sec. cor. of sec. 35.</p> <p>N 0°32' W, on the N and S center line of the NW¹/₄ of sec. 35.</p> <p>Over gently rolling land, through medium ponderosa pine and scattered oak and pinyon.</p> <p>6.18 Point for the center S-S-NW 1/256 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">1/4096 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 10 ins. diam., bears N 36¾° W, 72.5 lks. dist., mkd. 1/4096 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 6 ins. diam., bears N 60° W, 156.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 41 lks. S of a bladed dirt road, bears E and W.</p>	
---------------	--	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 19.78</p>	<p>Point for the NW 1/16 sec. cor., at intersection with the E and W center line of the NW$\frac{1}{4}$ of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NW 1/16 S35 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 10 ins. diam., bears S 53$\frac{1}{2}$$^{\circ}$ W, 55 lks. dist., mkd. NW 1/16 S35 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 5 ins. diam., bears N 42$\frac{1}{2}$$^{\circ}$ W, 25.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 27 lks. W of a telephone pole, lines extend S 10$^{\circ}$ E and N 7$^{\circ}$ W.</p> <p>From this point, a local cor. bears West 0.09 chs. dist., monumented with a rebar, 5/8 in. diam., projecting 2 ins. above the ground, with an aluminum cap attached and mkd. 2007 1/16 and a cross in the center. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is not utilized in the course of this survey.</p>	
<p>39.56</p>	<p>The W 1/16 sec. cor. of secs. 26 and 35.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center N 1/16 sec. cor. of sec. 35.</p> <p>S 89$^{\circ}$19' W, on the E and W center line of the NW$\frac{1}{4}$ of sec. 35.</p> <p>Over gently rolling land, through medium ponderosa pine and scattered oak and pinyon.</p>	

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 20.28</p> <p>25.345</p> <p>40.55</p> <p>6.155</p>	<p>The NW 1/16 sec. cor. of sec. 35.</p> <p>Point for the center E-W-NW 1/256 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S35 C-E-W-NW 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 6 ins. diam., bears N 47½° E, 79.5 lks. dist., mkd. X at breast height and BT at base.</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears S 59¼° E, 59.5 lks. dist., mkd. C-E-W-NW 1/256 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 157 lks. W of a dirt road, bears S 20° E and N 10° W.</p> <p>The N 1/16 sec. cor. of secs. 34 and 35.</p> <p style="text-align: center;">————— SE¼ of the NW¼ of Section 35 —————</p> <p>From the 1/4096 sec. cor. of sec. 35, on the E and W center line of sec. 35.</p> <p>N 0°40' W, on a 1/4096 line.</p> <p>Point for the 1/4096 sec. cor. of sec. 35.</p>
---	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">1/4096 1986</p> <p>from which</p> <p>A ponderosa pine, 12 ins. diam., bears N 76¾° W, 120.5 lks. dist., mkd. X breast height and BT at base.</p> <p>A ponderosa pine, 7 ins. diam., bears N 41° W, 6 lks. dist., mkd. 1/4096 BT.</p> <p>An iron rod, 1½ ins. diam., projecting 12 ins. above the ground, bears N 49¼° W, 27 lks. dist.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 29 lks. W of center of a bladed dirt road, bears N 33° E and S 33° W, and 182 lks. W of a fence, bears N 50° E and S 50° W.</p> <hr/> <p>S 88°44' W, on a 1/4096 line.</p> <p>6.365 The 1/4096 sec. cor. of sec. 35, on the N and S center line of the NW¼ of sec. 35.</p> <hr/> <p style="text-align: center;">SW¼ of the NW¼ of Section 35</p> <hr/> <p>From the 1/4096 sec. cor. of sec. 35, on the N and S center line of the NW¼ of sec. 35.</p> <p>S 88°44' W, on a 1/4096 line.</p> <p>5.095 Point for the 1/4096 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">1/4096 1986</p>	
---------------	--	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>from which</p> <p>A ponderosa pine, 11 ins. diam., bears N $16\frac{3}{4}^{\circ}$ E, 85 lks. dist., mkd. 1/4096 BT.</p> <p>A rebar, $\frac{3}{4}$ in. diam., flush with ground, bears N $16\frac{1}{2}^{\circ}$ W, 40.3 lks. dist.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 78 lks. W of center of a dirt road, bears S and N 5° W; 57 lks. E of an abandoned N and S fence; and 26 lks. E of center of a track road, bears N and S.</p> <hr/> <p>N $0^{\circ}25.5'$ W, on a portion of N and S center line of the E$\frac{1}{2}$ of the SW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 35.</p> <p>13.65 The center E-W-NW 1/256 sec. cor. of sec. 35.</p> <hr/> <p>NW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of Section 35</p> <hr/> <p>From the center E-W-NW 1/256 sec. cor. of sec. 35.</p> <p>N $0^{\circ}25.5'$ W, on a portion of the N and S center line of the SE$\frac{1}{4}$ of the NW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 35.</p> <p>4.965 Point for the SE-NW-NW 1/256 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S35 SE-NW-NW 1/256 1986</p>
--	---------------	--

Survey of Subdivisions in Section 35,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>from which</p> <p>A ponderosa pine, 6 ins. diam., bears S 42$\frac{3}{4}$° E, 108 lks. dist., mkd. X at breast height and BT at base.</p> <p>A ponderosa pine, 11 ins. diam., bears N 29$\frac{3}{4}$° W, 129 lks. dist., mkd. SE-NW-NW 1/256 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 20 lks. E of a dirt road intersection, road extending N 35° E, S, S 50° W and N 35° W; 70 lks. S of a dirt road, bears S 85° E and N 80° W; 160 lks. W of a bladed dirt road, bears S 8° E and N 5° W; and 5 lks. N of an E and W fence.</p> <p>From this point, a local cor. bears S 87°45' W, 0.05 chs. dist., monumented with an open end pipe, 1 in. diam., projecting 8 ins. above the ground, origin and date unknown and is not utilized in the course of this survey.</p> <hr/> <p>S 89°31' W, on a portion E and W center line of the S$\frac{1}{2}$ of the NW$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 35.</p> <p>15.175 The S-N-N 1/256 sec. cor. of secs. 34 and 35.</p> <hr/> <p style="text-align: center;">Survey of Subdivisions in Section 36, T 22 N, R 8 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on the S bdy. of the Tp.</p> <p>N 0°03' E, on the N and S center line of sec. 36.</p> <p>Over gently rolling land, through medium ponderosa pine and pinyon.</p> <p>19.055 Point for the center S 1/16 sec. cor. of sec. 36.</p>
--	---------------	---

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C S 1/16 S36 C 1986</p> <p>from which</p> <p>A ponderosa pine, 7 ins. diam., bears N 71½° E, 74 lks. dist., mkd. X at breast height and BT at base.</p> <p>A ponderosa pine, 13 ins. diam., bears S 36¼° W, 64.5 lks. dist., mkd. C-S 1/16 S36 BT.</p> <p>A rebar, ¼ in. diam., bears N 74°56' W, 1.96 chs. dist.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 180 lks. E of a fence, bears S 20° E and N 20° W.</p> <p>21.40 El Paso gas line, bears N 85° E and S 85° W.</p> <p>38.11 The center ¼ sec. cor. of sec. 36, monumented with an iron pipe, 20 ins. long, 2 ins. diam., flush with the ground, in a mound of stone, 2 ft. base, 6 ins. high. This cor. was set by Jesse D. Roeder, Registered Land Surveyor No. 2308, Arizona, in 1959, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C ¼ S36 1986</p>	
---------------	--	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>from which</p> <p>A ponderosa pine, 7 ins. diam., bears S 39½° E, 38.5 lks. dist., mkd. C¼ S36 BT.</p> <p>A pinyon, 12 ins. diam., bears N 65½° W, 76.5 lks. dist., mkd. C¼ S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the local cor. alongside the stainless steel post.</p> <p>Raise a mound of stone, 3½ ft. base, 2 ft. high, W of the cor.</p> <hr/> <p>N 0°10' E, beginning new measurement.</p> <p>15.495 The center N-S-N 1/256 sec. cor. of sec. 36, monumented with an open end pipe, 18 ins. long, ¾ in. diam., projecting 1 in. above the ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-N-S-N 1/256 1986</p> <p>from which</p> <p>A ponderosa pine, 7 ins. diam., bears S 66¼° E, 175.5 lks. dist., mkd. C-N-S-N 1/256 S36 BT.</p> <p>A juniper, 11 ins. diam., bears S 64¼° W, 78 lks. dist., mkd. C-N-S-N 1/256 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	
--	---------------	--	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 90 lks. S of an E and W fence.</p> <hr/> <p>N 0°01' E, beginning new measurement.</p> <p>5.165 The center N 1/16 sec. cor. of sec. 36, monumented with an open end pipe, 32 ins. long, 2 ins. diam., flush with ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E C N 1/16 S36 C 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the local cor. alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in an open level meadow.</p> <hr/> <p>N 0°10' E, beginning new measurement.</p> <p>20.655 The ¼ sec. cor. of secs. 25 and 36.</p> <hr/> <p>From the ¼ sec. cor. of sec. 36 only, on the E bdy. of Tp., hereinbefore described.</p> <p>S 86°51' W, on the E and W center line of sec. 36.</p>
--	---------------	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>20.08</p> <p>20.06</p>	<p>Over nearly level land, through medium ponderosa pine, juniper, and pinyon.</p> <p>The center E 1/16 sec. cor. of sec. 36, monumented with a basalt stone, 7 x 7 x 6 ins., projecting 1 in. above the ground, mkd. with a cross on top, in an embedded mound of stone, 2 ft. base, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T22N R8E C <u>E 1/16</u> C S36 1986</p> </div> <p>from which</p> <p>A ponderosa pine, 9 ins. diam., bears S 21° E, 13.5 lks. dist., mkd. C-E 1/16 S36 BT.</p> <p>A pinyon, 14 ins. diam., bears S 45½° W, 54 lks. dist., mkd. C-E 1/16 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the local cor. alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S 86°49' W, beginning new measurement.</p> <p>The center ¼ sec. cor. of sec. 36.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S 86°54' W, beginning new measurement.</p>	
---	---	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 10.205</p>	<p>The center E-W 1/64 sec. cor. of sec. 36, monumented with an open end pipe, 18 ins. long, $\frac{3}{4}$ in. diam., projecting 2 ins. above the ground, in a mound of stone, 1 ft. base, 6 ins. high. This cor. was set by Jesse D. Roeder, Registered Land Surveyor No. 2308, Arizona, in 1959, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C $\frac{\text{E-W } 1/64}{\text{S36}}$ C 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 6 ins. diam., bears S $25\frac{1}{2}^\circ$ E, 12.5 lks. dist., mkd. C-E-W 1/64 S36 BT.</p> <p style="padding-left: 40px;">A pinyon, 4 ins. diam., bears S $40\frac{3}{4}^\circ$ W, 20.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 75 lks. S of center of asphalt road No. 510, bears S 80° E and N 85° W and 45 lks. S of a highway right-of-way fence, bears S 80° E and N 85° W.</p> <p style="text-align: center;">_____</p> <p>S $86^\circ 49'$ W, beginning new measurement.</p>
<p>10.20</p>	<p>Point for the center W 1/16 sec. cor. of sec. 36.</p>

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>Set an aluminum post, 10 ins. long, $\frac{3}{4}$ in. diam., 3 ins. below surface of asphalt road No. 510, with aluminum cap mkd.</p> <p style="text-align: center;"> $C \frac{T22N R8E}{W 1/16} C$ S36 1986 </p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 15 ins. diam., bears S 22° E, 129.5 lks. dist., mkd. C-W 1/16 S36 BT.</p> <p>Cor. is located 13 lks. S of center of road No. 510, bears N 72° E and S 72° W.</p> <p>From this point, an Arizona Highway Department monument, bears N 46°43' E, 2.118 chs. dist., monumented with a 3 in. diam. brass disk, set in a 6 in. diam. base of concrete, projecting 3 ins. above ground, mkd. Arizona Highway Dept. PC 204+3776 1968.</p> <p>From this same point, an Arizona Highway Department monument, bears N 67°53' E, 1.002 chs. dist., monumented with a 3 in. diam. brass disk, set in a 6 in. base of concrete, projecting 3 ins. above the ground, mkd. Arizona Highway Dept. 1968.</p> <p>From this same point, an Arizona Highway Department monument, bears N 89°38' E, 2.017 chs. dist., monumented with a 3 in. diam. brass disk, set in a 6 in. diam. base of concrete, projecting 5 ins. above ground, mkd. Arizona Highway Dept. PC 204+3776 1968.</p> <p>30.60 The $\frac{1}{4}$ sec. cor. of secs. 35 and 36.</p> <p style="text-align: center;"> <hr/> NE$\frac{1}{4}$ of Section 36 <hr/> </p> <p>From the center E 1/16 sec. cor. of sec. 36.</p> <p>N 0°01' E, on the N and S center line of the NE$\frac{1}{4}$ of sec. 36.</p>
--	---------------	---

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Over gently rolling land, through medium ponderosa pine, scattered pinyon, and oak.</p> <p>9.80 Fence, bears E and W, thence over open land.</p> <p>15.14 Point for the center N-S-NE 1/256 sec. cor. of sec. 36, monumented with an open end pipe, 18 ins. long, 3/4 in. diam., projecting 1 in. above the ground, origin and date unknown, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-N-S-NE 1/256 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a meadow, N 15° W, 552 lks. dist. from a fence cor., fences extend N and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°03' W, beginning new measurement.</p> <p>5.035 The NE 1/16 sec. cor. of sec. 36, monumented with an open end pipe, 18 ins. long, 3/4 in. diam., flush with ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>	
---------------	--	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NE 1/16 S36 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a meadow, 210 lks. W of a N and S fence.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°03' W, beginning new measurement.</p> <p>5.04 The center S-N-NE 1/256 sec. cor. of sec. 36, monumented with an open end pipe, 18 ins. long, ¾ in. diam., flush with ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-S-N-NE 1/256 1986</p> <p>from which</p> <p style="text-align: center;">A ponderosa pine, 10 ins. diam., bears N 48½° E, 216 lks. dist., mkd. C-S-N-NE 1/256 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p>
--	---------------	---

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a steel fence post near the cor.</p> <p>Cor. is located 185 lks. W of a fence, bears S 15° E and N 15° W.</p> <hr/> <p>N 0°08' W, beginning new measurement.</p> <p>15.095 The E 1/16 sec. cor. of secs. 25 and 36.</p> <hr/> <p>From the N 1/16 sec. cor. of sec. 36 only, on the E bdy. of the Tp., hereinbefore described.</p> <p>S 88°32' W, on the E and W center line of the NE$\frac{1}{4}$ of sec. 36.</p> <p>Over rolling land, through dense ponderosa pine, pinyon, and juniper.</p> <p>9.995 The center E-NE 1/64 sec. cor. of sec. 36, monumented with an open end pipe, 18 ins. long, $\frac{3}{4}$ in. diam., projecting 1 in. above the ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-E-NE 1/64 1986</p> <p>from which</p> <p style="text-align: center;">A pinyon, 8 ins. diam., bears N 56$\frac{1}{2}$° E, 45 lks. dist., mkd. C-E-NE 1/64 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p>
--------	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a steel fence post near the cor. Cor. located on a moderate SW slope.</p> <hr/> <p>S 88°14' W, beginning new measurement.</p> <p>4.00 Leave dense timber, thence across a meadow.</p> <p>9.975 The NE 1/16 sec. cor. of sec. 36.</p> <hr/> <p>S 88°10' W, beginning new measurement.</p> <p>19.985 The center N 1/16 sec. cor. of sec. 36.</p> <hr/> <p>NE¹/₄ of the NE¹/₄ of Section 36</p> <hr/> <p>From the center E-NE 1/64 sec. cor. of sec. 36.</p> <p>N 0°10' W, on a portion of the N and S center line of the NE¹/₄ of the NE¹/₄ of sec. 36.</p> <p>4.96 The center S-NE-NE 1/256 sec. cor. of sec. 36, monumented with an open end pipe, 18 ins. long, ³/₄ in. diam., projecting 1 in. above the ground, origin and date unknown and is accepted as a careful and faithful determination of the position of cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-S-NE-NE 1/256 1986</p> <p>from which</p> <p>A pinyon, 8 ins. diam., bears N 41¼° E, 37.5 lks. dist., mkd. C-S-NE-NE 1/256 S36 BT.</p> <p>A ponderosa pine, 14 ins. diam., bears S 80¾° E, 76.5 lks. dist., mkd. C-S-NE-NE 1/256 S36 BT.</p>
--------	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a moderate W slope.</p> <hr/> <p>S 88°41' W, on the E and W center line of the SW¹/₄ of the NE¹/₄ of the NE¹/₄ of sec. 36.</p>
9.965	<p>The center S-N-NE 1/256 sec. cor. of sec. 36.</p> <hr/> <p>SW¹/₄ of the NE¹/₄ of Section 36</p> <hr/>
20.00	<p>From the center N-S-NE 1/256 sec. cor. of sec. 36, on the S bdy. of the Tp.</p> <p>S 87°49' W, on the E and W line of the N¹/₂ of the SW¹/₄ of the NE¹/₄ of sec. 36.</p>
19.005	<p>The center N-S-N 1/256 sec. cor. of sec. 36.</p> <hr/> <p>SW¹/₄ of Section 36</p> <hr/> <p>From the W 1/16 sec. cor. of secs. 1 and 36, on the S bdy. of the Tp.</p> <p>N 0°22' W, on the N and S center line of the SW¹/₄ of sec. 36.</p> <p>Over level open land.</p>
19.005	<p>The SW 1/16 sec. cor. of sec. 36, monumented with a rebar, 19 ins. long, 3/4 in. diam., projecting 2 ins. above the ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.

T22N R8E
SW 1/16 S36
1986

from which

The NW cor. of a wooden shed, 19.5 x 10.5 ft., bears N 70° E, 2.3 lks. dist., long side extends S 7° W.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Deposit the local cor. inside the stainless steel post.

Cor. is located 110 lks. N of a graded road, bears N 84° E and N 59° W.

N 0°13' W, beginning new measurement.

4.74

The center S-N-SW 1/256 sec. cor. of sec. 36, monumented with a rebar, 24 ins. long, ½ in. diam., 4 ins. below ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.

At the cor. point

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

S36
C-S-N-SW
1/256
1986

from which

A pinyon, 14 ins. diam., bears N 32¾° W, 100.5 lks. dist., mkd. C-S-N-SW 1/256 S36 BT.

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>The NE cor. of a wooden building, 105 x 33 ft., bears N 64°23' W, 133.5 lks. dist., long side extends S 7° W.</p> <p>A fence cor., bears N 62½° W, 62 lks. dist., fences extend N and E.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 33 lks. W of graded road intersections, roads extend N 18° E, E, and S 15° W.</p> <hr/> <p>N 0°10' W, beginning new measurement.</p> <p>4.735 The center N-SW 1/64 sec. cor. of sec. 36, monumented with a rebar, 18 ins. long, 5/8 in. diam., flush with ground, with tag attached and mkd. LS 5357. This cor. was set by Vance L. McDonald, Registered Land Surveyor No. 5357, Arizona, in 1973, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-N-SW 1/64 1986</p> <p>from which</p> <p>A pinyon, 8 ins. diam., bears S 64¾° W, 49 lks. dist., mkd. C-N-SW 1/64 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
--	---------------	---

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>The center of propane tank, bears S 4° W, 74.5 lks. dist.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this point, a local cor., bears S 5° W, .008 chs. dist., monumented with a 2 x 1 in. wooden stake, projecting 12 ins. above the ground, mkd. Del Giorgio.</p> <hr/> <p>N 0°29' W, beginning new measurement.</p> <p>4.75 Point for the center N-N-SW 1/256 sec. cor. of sec. 36, monumented with a rebar, 18 ins. long, 5/8 in. diam., projecting 2 ins. above the ground, with tag attached and mkd. LS 5357. This cor. was set by Vance L. McDonald, Registered Land Surveyor No. 5357, Arizona, in 1973, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-N-N-SW 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 4 ins. diam., bears N 55¼° E, 66 lks. dist., mkd. X at breast height and BI at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>	
--------	---	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Cor. is located at the N side of a fence cor., fences extend S 75° E and S 2° W; 32 lks. S of a dirt road, bears S 60° E and N 60° W; and 145 lks. S of a dirt road, bears S 73° E and N 73° W.</p> <hr/> <p>N 0°22' W, beginning new measurement.</p> <p>4.76 The center W 1/16 sec. cor. of sec. 36.</p> <hr/> <p>From the center S 1/16 sec. cor. of sec. 36.</p> <p>S 86°58' W, on the E and W center line of the SW¹/₄ of sec. 36.</p> <p>Over rolling land, through medium ponderosa pine, pinyon, and juniper.</p> <p>10.155 The center E-SW 1/64 sec. cor. of sec. 36, monumented with a rebar, 5/8 in. diam., projecting 1/2 in. above ground, with tag attached and mkd. LS 5357. This cor. was set by Vance L. McDonald, Registered Land Surveyor No. 5357, Arizona, in 1971, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 12 ins. long, 3/4 in. diam., in a drill hole in bed rock, 5 ins. below ground, with aluminum cap mkd.</p> <p style="text-align: center;">S36 C-E-SW 1/64 1986</p> <p>from which</p> <p>A pinyon, 6 ins. diam., bears N 68³/₄° E, 127 lks. dist., mkd. X at breast height and BT at base.</p> <p>A pinyon, 6 ins. diam., bears S 65³/₄° E, 108 lks. dist., mkd. C-E-SW 1/64 S36 BT.</p>	
---------------	--	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>A fence cor., bears S $38\frac{1}{4}^{\circ}$ E, 69 lks. dist., fences extend S and W.</p> <p>A fence cor., bears S $1\frac{3}{4}^{\circ}$ W, 44 lks. dist., fences extend N, E, and W.</p> <p>Bury the local cor. alongside the aluminum post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a N and S fence.</p> <hr/> <p>S $87^{\circ}04'$ W, beginning new measurement.</p> <p>Through a subdivision.</p> <p>10.13 The SW 1/16 sec. cor. of sec. 36.</p> <hr/> <p>S $86^{\circ}54'$ W, beginning new measurement.</p> <p>5.06 The center E-W-SW 1/256 sec. cor. of sec. 36, monumented with an iron rod, 18 ins. long, $\frac{1}{2}$ in. diam., 1 in. below the ground. This cor. was set by Charles W. Dryden, Registered Land Surveyor No. 4321, Arizona, in 1963, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-E-W-SW 1/256 1986</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of cor.</p>
--	--------	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a steel fence post near the cor.</p> <p>Cor. is located 1 lk. SW of a fence cor., fences extend N and E, and 20 lks. N of a curve in a graded road, bears easterly and westerly curving NNW.</p> <p>From this point, a local cor. bears S 71° E, 0.007 chs. dist., monumented with a wooden stake 2 x 1 in., projecting 12 ins. above the ground, mkd. Del Giorgio.</p> <hr/> <p>S 86°59' W, beginning new measurement.</p> <p>2.00 Enter ponderosa pine, pinyon, and juniper, edge bears N and S.</p> <p>15.19 The S 1/16 sec. cor. of secs. 35 and 36.</p> <hr/> <p>NE$\frac{1}{4}$ of the SW$\frac{1}{4}$ of Section 36</p> <hr/> <p>From the center E-SW 1/64 sec. cor. of sec. 36.</p> <p>N 0°03' E, on a portion of the N and S center line of the NE$\frac{1}{4}$ of the SW$\frac{1}{4}$ of sec. 36.</p> <p>9.515 The NE-SW 1/64 sec. cor. of sec. 36, monumented with a rebar, 18 ins. long, 5/8 in. diam., projecting 3 ins. above the ground, with tag attached and mkd. LS 5357. This cor. was set by Vance L. McDonald, Registered Land Surveyor No. 5357, Arizona, in 1973, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 NE-SW 1/64 1986</p>
--------	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>from which</p> <p>A pinyon, 7 ins. diam., bears N 39½° E, 77.5 lks. dist., mkd. NE-SW 1/64 S36 BT.</p> <p>A ponderosa pine, 10 ins. diam., bears S 47° E, 43 lks. dist., mkd. NE-SW 1/64 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located N of a fence cor., fences extend N, S, and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°02' W, beginning new measurement.</p> <p>4.755 The center N-NE-SW 1/256 sec. cor. of sec. 36, monumented with a rebar, 16 ins. long, ½ in. diam., projecting 1 in. above the ground. According to a land owner, this cor. was set by Martin L. Del Giorgio, Registered Civil Engineer No. 6744, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-N-NE-SW 1/256 1986</p> <p>from which</p> <p>A ponderosa pine, 10 ins. diam., bears N 65½° E, 206 lks. dist., mkd. C-N-NE-SW 1/256 S36 BT.</p> <p>A pinyon, 7 ins. diam., bears S 34° E, 114 lks. dist., mkd. X at breast height and BT at base.</p>
---------------	---

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located at the end of a cyclone fence, extending W only; 55 lks. N of a power line, bears S 80° E and N 80° W; 65 lks. N of a telephone line, bears S 80° E and N 80° W; and 25 lks. N of an old fence cor., fences extend S and W.</p> <p>From this point, a local cor. bears N 87°56' E, 0.13 chs. dist., monumented with a rebar, 3/8 in. diam., projecting 1/2 in. above the ground, origin and date unknown and is not utilized in the course of this survey.</p> <hr/> <p>From the center N-NE-SW 1/256 sec. cor. of sec. 36.</p> <p>S 86°51' W, on the E and W center line of the NW 1/4 of the NE 1/4 of the SW 1/4 of sec. 36.</p> <p>5.85 From this point on line, a local cor., bears North 0.007 chs. dist., monumented with a wooden stake 2 x 1 in., projecting 15 ins. above the ground, mkd. Del Giorgio.</p> <p>5.86 A local cor., monumented with a rebar, 1/2 in. diam., projecting 1/2 in. above the ground, origin and date unknown.</p> <p>5.87 A local cor., monumented with a rebar, 1/2 in. diam., projecting 2 ins. above the ground, with tag attached and mkd. LS 5357. This cor. was set by Vance L. McDonald, Registered Land Surveyor No. 5357, Arizona, in 1973 as a 50 ft. right-of-way cor.</p> <p>10.21 the center N-N-SW 1/256 sec. cor. of sec. 36.</p> <hr/> <p>SE 1/4 of the SW 1/4 of Section 36</p> <hr/>	
---------------	--	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>From the E-W 1/64 sec. cor. of secs. 1 and 36, on the S bdy. of the Tp.</p> <p>N 0°12' W, on the N and S center line of the SE$\frac{1}{4}$ of the SW$\frac{1}{4}$ of sec. 36.</p> <p>19.02 The center E-SW 1/64 sec. cor. of sec. 36.</p> <p style="text-align: center;">————— SW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of Section 36 —————</p> <p>From the W-W 1/64 sec. cor. of secs. 1 and 36, on the S bdy. of the Tp.</p> <p>N 0°28' W, on a portion of the N and S center line of the SW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of sec. 36.</p> <p>Over level open land.</p> <p>8.40 Enter timber, edge bears N 75° E and S 55° W.</p> <p>9.49 The SW-SW 1/64 sec. cor. of sec. 36, monumented with an open end pipe, 18 ins. long, $\frac{3}{4}$ in. diam., projecting 4 ins. above the ground. This cor. was set by Charles W. Dryden, Registered Land Surveyor No. 4321, Arizona, in 1963, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S36 SW-SW 1/64 1986</p> <p>from which</p> <p>A ponderosa pine, 11 ins. diam., bears N 26$\frac{1}{4}$° E, 120 lks. dist., mkd. SW-SW 1/64 S36 BT.</p> <p>A ponderosa pine, 9 ins. diam., bears N 25$\frac{1}{2}$° W, 85.5 lks. dist., mkd. X at breast height and BT at base.</p>
--------	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	<p>CHAINS</p>	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 18 lks. E of an old N and S fence.</p> <p>From this point, a local cor. bears North 0.005 chs. dist., monumented with a rebar, 1/2 in. diam., projecting 2 ins. above the ground, with tag attached and mkd. P.E. 2007. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, was established subsequent to Dryden's monument, and is not utilized in the course of this survey.</p> <hr/> <p>N 87°07' E, on a portion of the E and W center line of the SW 1/4 of the SW 1/4 of sec. 36.</p> <p>2.00 Leave timber, edge bears N and S.</p> <p>5.04 The center E-SW-SW 1/256 sec. cor. of sec. 36, monumented with an iron rod, 18 ins. long, 1/2 in. diam., flush with ground. This cor. was set by Charles W. Dryden, Registered Land Surveyor No. 4321, Arizona, in 1963, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-E-SW-SW 1/256 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p>
--	---------------	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

	CHAINS	<p>Set a steel fence post near the cor.</p> <p>From this point, a local cor. bears N 48° E, 0.008 chs. dist., monumented with a rebar, ½ in. diam., projecting 3 ins. above the ground, with tag attached and mkd. P.E. 2007. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, was established subsequent to Dryden's monument, and is not utilized in the course of this survey.</p> <hr/> <p>N 0°24' W, on the N and S center line of the NE¼ of the SW¼ of the SW¼ of sec. 36.</p> <p>4.745 The NE-SW-SW 1/256 sec. cor. of sec. 36, monumented with a rebar, 22 ins. long, ¾ in. diam., projecting 3 ins. above the ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 NE-SW-SW 1/256 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N 0°27' W, beginning new measurement.</p> <p>4.745 The center E-W-SW 1/256 sec. cor. of sec. 36.</p> <hr/> <p style="text-align: center;">NW¼ of the SW¼ of Section 36</p> <hr/>	
--	--------	--	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>From the center N-SW 1/64 sec. cor. of sec. 36.</p> <p>S 87°02' W, on the E and W center line of the NW¹/₄ of the SW¹/₄ of sec. 36.</p> <p>5.075 The center E-NW-SW 1/256 sec. cor. of sec. 36, monumented with a rebar, 15 ins. long, 5/8 in. diam., projecting 3 ins. above the ground, with tag attached and mkd. P.E. 2007. This cor. was set by James B. Holmquist, Registered Civil Engineer No. 2007, Arizona, of unknown date and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-E-NW-SW 1/256 1986</p> <p>from which</p> <p style="text-align: center;">A pinyon, 10 ins. diam., bears S 60½° W, 59 lks. dist., mkd. C-E-NW-SW 1/256 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S 86°56' W, beginning new measurement.</p> <p>15.265 The N-S 1/64 sec. cor. of secs. 35 and 36.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center E-W-SW 1/256 sec. cor. of sec. 36.</p> <p>N 0°14' W, on the N and S center line of the SE¹/₄ of the NW¹/₄ of the SW¹/₄ of sec. 36.</p>	
---------------	--	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS 1.32</p> <p>3.135</p> <p>4.75</p>	<p>From this point on line, a local cor., bears East 0.009 chs. dist., monumented with a rebar, $\frac{1}{2}$ in. diam., projecting 2 ins. above the ground, with tag attached and mkd. PE 2007.</p> <p>A local cor., monumented with a rebar, $\frac{1}{2}$ in. diam., projecting 5 ins. above the ground, with tag attached and mkd. PE 2007.</p> <p>The SE-NW-SW 1/256 sec. cor. of sec. 36, monumented with an open end pipe, 22 ins. long, 2 ins. diam., flush with ground, origin and date unknown and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 SE-NW-SW 1/256 1986</p> <p>from which</p> <p>A pinyon, 10 ins. diam., bears S $5\frac{1}{4}^{\circ}$ W, 67 lks. dist., mkd. SE-NW-SW 1/256 S36 BT.</p> <p>A pinyon, 21 ins. diam., bears N $25\frac{1}{2}^{\circ}$ W, 30 lks. dist., mkd. X at breast height and BT at base.</p> <p>The SW cor. of Mr. Homer Bullion's house, bears S $89^{\circ}47'$ E, 89.5 lks. dist., long side extends S $85\frac{3}{4}^{\circ}$ E.</p> <p>Deposit a magnet in a 1 x 1 x $2\frac{5}{8}$ in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin-left: auto; margin-right: auto;"/>	
---	---	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p>	<p>N 0°22' W, beginning new measurement.</p> <p>1.35 Graded road, bears NE and NW.</p> <p>4.74 The center E-NW-SW 1/256 sec. cor. of sec. 36.</p> <hr/> <p>From the center S-N-SW 1/256 sec. cor. of sec. 36.</p> <p>S 87°00' W, on a portion of the E and W center line of the SE¹/₄ of the NW¹/₄ of the SW¹/₄ of sec. 36.</p> <p>1.285 Intersect the E side of a wood construction chicken house, at a point from which the NE cor. bears N 7° E, 65 lks. dist., thence through chicken house.</p> <p>1.79 Intersect the W side of chicken house, at a point from which the NW cor. bears N 7° E, 74 lks. dist.</p> <p>3.545 Intersect the E side of Mr. Homer Bullion's house, at a point from which the SE cor. of house bears S 4¹/₄° W, 13 lks. dist., thence through house.</p> <p>4.16 Intersect the W side of same house, at a point from which the SW cor. bears S 4¹/₄° W, 5 lks. dist.</p> <p>5.06 The SE-NW-SW 1/256 sec. cor. of sec. 36.</p> <hr/> <p style="text-align: center;">NW¹/₄ of Section 36</p> <hr/> <p>From the center W 1/16 sec. cor. of sec. 36.</p> <p>N 0°17' W, on the N and S center line of the NW¹/₄ of sec. 36.</p> <p>Over gently rolling open land.</p> <p>19.795 Point for the NW 1/16 sec. cor. of sec. 36, at intersection with the E and W center line of the NW¹/₄ of sec. 36.</p>
---------------	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R8E NW 1/16 S36 1986</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 55 lks. W of Rio De Flag Creek, 5 lks. wide, flow S 30° W from NW, and 210 lks. N of a fence, bears E and W.</p> <p>From this point, a local cor. bears S 55°21' W, 0.874 chs. dist., monumented with a rebar, 5/8 in. diam., projecting 1 in. above the ground.</p> <p>39.585 The W 1/16 sec. cor. of secs. 25 and 36.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center N 1/16 sec. cor. of sec. 36.</p> <p>S 84°30' W, on the E and W center line of the NW¼ of sec. 36.</p> <p>Over nearly level open land.</p> <p>10.315 The center E-NW 1/64 sec. cor. of sec. 36, monumented with an open end pipe, 18 ins. long, ¾ in. diam., projecting 1 in. above the ground. This cor. was set by Jesse D. Roeder, Registered Land Surveyor No. 2308, Arizona, in 1959, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>
--------	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36 C-E-NW 1/64 1986</p> <p>from which</p> <p style="padding-left: 40px;">A telephone pole with transformer, bears S 2½° E, 513.6 lks. dist.</p> <p style="padding-left: 40px;">The NE cor. of a Bell Telephone metal building, 70 x 8 ft., on a slab of concrete 22½ x 16 ft., bears S 0°41' E, 393 lks. dist., long side bears N and S.</p> <p style="padding-left: 40px;">A fence cor., bears S 18½° W, 333 lks. dist., fences extend E, S, and W.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the local cor. inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a meadow.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="padding-left: 40px;">S 84°26' W, beginning new measurement.</p> <p>10.295 The NW 1/16 sec. cor. of sec 36.</p> <p>30.915 The N 1/16 sec. cor. of secs. 35 and 36.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">SE¼ of the NW¼ of Section 36</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center E-W 1/64 sec. cor. of sec. 36.</p> <p>N 0°06' W, on the N and S center line of the SE¼ of the NW¼ of sec. 36.</p>	
--------	--	--

Survey of Subdivisions in Section 36,
T 22 N, R 8 E, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>20.23</p>	<p>Over gently rolling land, through moderate to dense pinyon, ponderosa pine, and scattered juniper.</p> <hr/> <p>The center E-NW 1/64 sec. cor. of sec. 36.</p> <hr/> <p style="text-align: center;">General Description</p> <p>The land encompassed in this survey is located at the NE side of Flagstaff, Arizona. The elevation ranges from about 6,540 ft. to 7,280 ft. above sea level.</p> <p>The land varies from nearly level to mountainous, and vegetation consist of ponderosa pine, pinyon, juniper, oak, and mountain mahogany, with large open areas. The private land has been subdivided with numerous houses built throughout the area. The public land is used for recreation, lumber, and cattle grazing.</p> <p>Access is by way of U.S. Highway No. 89, Forest Service Road No. 510, and numerous other roads.</p> <hr/>	
----------------------------	---	--

CERTIFICATE OF SURVEY

I, Paul L. Reeves, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 30th day of April 1986, I have dependently resurveyed a portion of the south boundary, a portion of the east boundary, portions of the subdivisional lines, and the resurveys of Homestead Entry Surveys Nos. 87 and 375, and the survey of the subdivisions of sections 13, 14, 23, 24, 25, 26, 35, and 36, of Township 22 North, Range 8 East, of the Gila and Salt River Meridian, in the State of Arizona which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

NOV 25 1987

(Date)

Paul L. Reeves
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the south boundary, a portion of the east boundary, portions of the subdivisional lines, and the resurveys of Homestead Entry Surveys Nos. 87 and 375, and the survey of the subdivisions of sections 13, 14, 23, 24, 25, 26, 35, and 36, T 22 N, R 8 E, Gila and Salt River Meridian, Arizona, executed by Paul L. Reeves, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

DEC 08 1987

(Date)

Arnold E. Smith
(Chief Cadastral Surveyor of Arizona)
Acting

CERTIFICATE OF TRANSCRIPT

I Certify That the foregoing transcript of the field notes of the above-described surveys in T 22 N, R 8 E, Gila and Salt River Mer., Arizona, is a true copy of the original field notes.

(Date)

(Chief Cadastral Surveyor of Arizona)