


INDEX DIAGRAM

TOWNSHIP 20 NORTH, RANGE 15 WEST, SEC. 30,

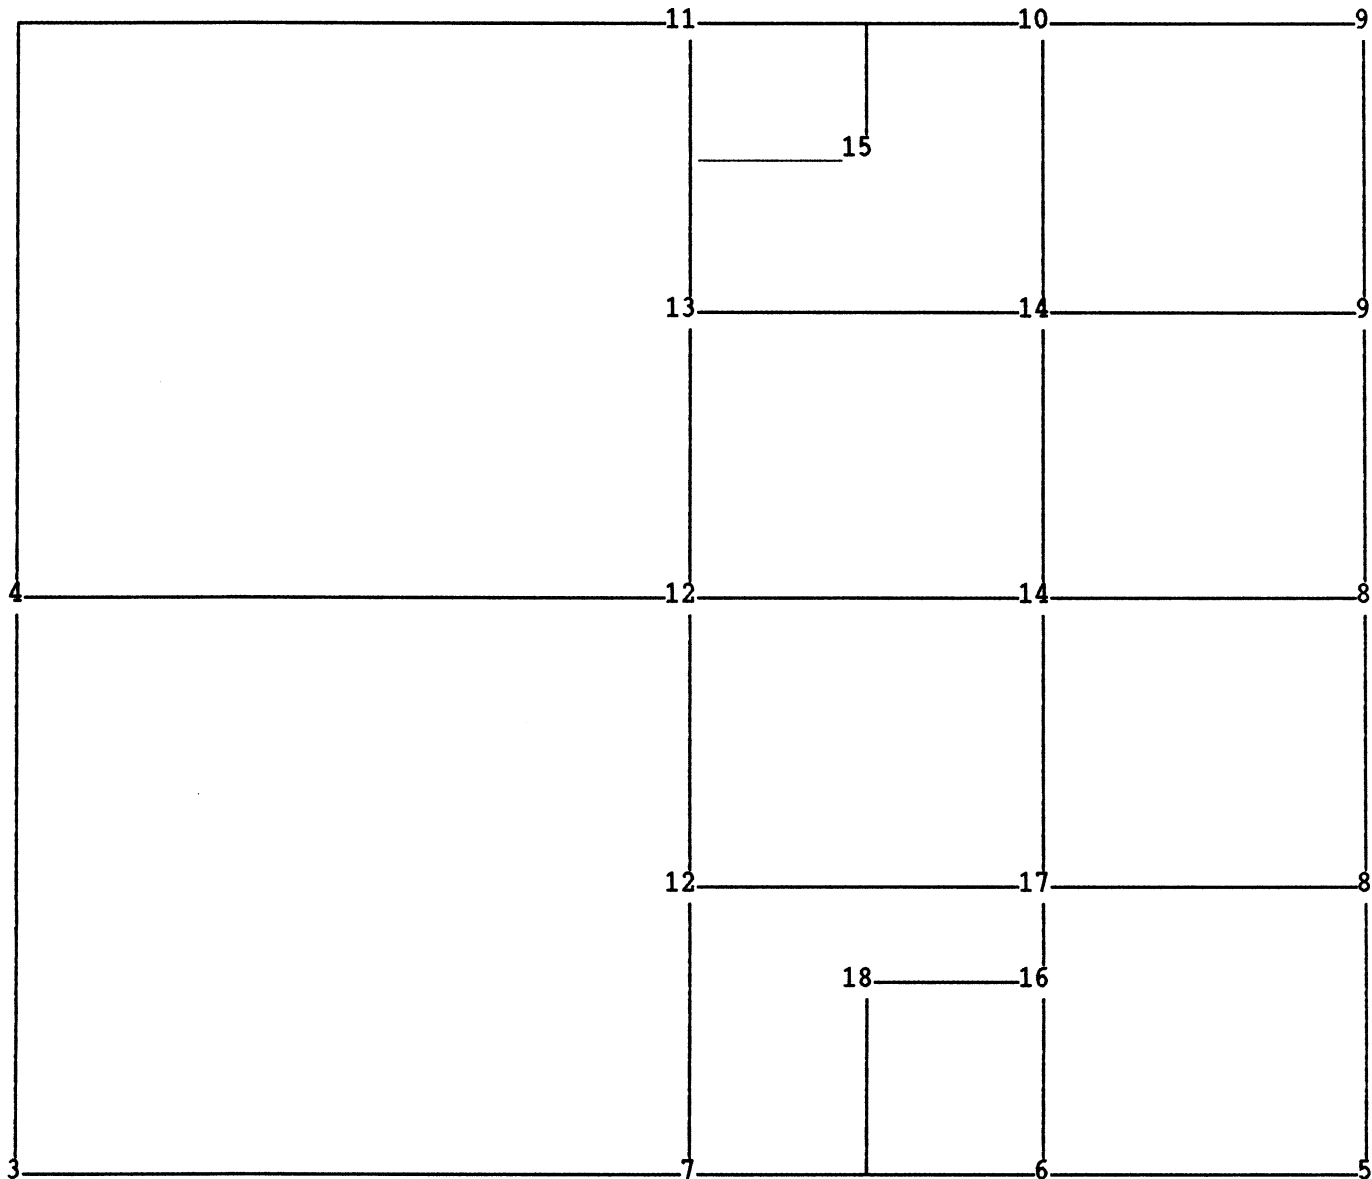

T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS

The following field notes are those of a dependent resurvey of portions of the west boundary, and of the subdivisional lines, and the survey of the subdivision of section 30, Township 20 North, Range 15 West, Gila and Salt River Meridian, Arizona.

The west boundary was surveyed by Howard G. Mason, U.S. Transitman, in 1916. The subdivision lines were surveyed by Albert Smith, Jr., U.S. Surveyor, William L. Nash, U.S. Transitman, and Ray D. Armstrong, U.S. Transitman in 1916.

The survey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instruction for Group No. 676, Arizona, dated March 4, 1986.

The direction of the lines of this survey was determined by altitude observations on the sun and refer to the true meridian. Angles and distances were measured electronically with a Zeiss Elta 46 instrument.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The geographic position of the southeast cor. of section 30, T 20 N, R 15 W, as computed from a tie to U.S. Coast and Geodetic Survey triangulation station "HUALAPAI," located in section 32, T 20 N, R 15 W, is as follows:

NAD 27: Latitude: 35°04'47.96" N Longitude 113°53'52.06" W

The mean magnetic declination is 15° E.

Dependent Resurvey of a Portion of the W Boundary,
T 20 N, R 15 W, Gila and Salt River Mer. Arizona

Restoring the survey executed by
Howard G. Mason in 1916.

Beginning at the cor. of secs. 25, 30, 31, and 36, monumented with a granite stone, 22 x 17 x 8 ins. set 15 ins. in a mound of stone, 3 ft. base, 1 ft. high, mkd. with 5 notches on N face and 1 notch on S face.

Dependent Resurvey of a Portion of the W Boundary,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<p>At the cor. point</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <table style="margin: auto;"> <tr><td colspan="2">T20N</td></tr> <tr><td>R16W</td><td>R15W</td></tr> <tr><td>S25</td><td>S30</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S36</td><td>S31</td></tr> <tr><td colspan="2">1986</td></tr> </table> </div> <p>from which</p> <p style="margin-left: 40px;">A granite boulder, 35 x 20 x 10 ft., bears N 56°19' E, 19.5 lks. dist., mkd. X BO.</p> <p style="margin-left: 40px;">A granite boulder, 15 x 8 x 6 ft., bears S 9°31' E, 20.5 lks. dist., mkd. X BO.</p> <p>Bury the original stone, in the mound of stone.</p> <p>N 0°04' E, bet. secs. 25 and 30.</p> <p>Over mountainous land, through dense oak brush and manzanita.</p> <p>39.65 True point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate dist., not monumented.</p> <p>40.64 The 1/4 witness cor. of secs. 25 and 30, monumented with an iron post, 1 in. diam., projecting 16 ins. above a mound of stone and boulders, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <table style="margin: auto;"> <tr><td colspan="2">1/4</td></tr> <tr><td>S25</td><td>S30</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td colspan="2">1916</td></tr> </table> </div> <p>Note: This brass cap is not mkd. as a witness cor. as described in the official record of the 1916 survey by Howard G. Mason.</p> <hr style="width: 60%; margin-left: 0;"/>	T20N		R16W	R15W	S25	S30			S36	S31	1986		1/4		S25	S30			1916	
T20N																					
R16W	R15W																				
S25	S30																				
S36	S31																				
1986																					
1/4																					
S25	S30																				
1916																					

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS

Restoring the survey executed by Albert Smith, Jr.,
William L. Nash, and Ray D. Armstrong, in 1916.

From the cor. of secs. 29, 30, 31, and 32, monumented with a granite stone, 22 x 10 x 10 ins. firmly set with 12 ins. above ground, mkd. with 1 groove on S face and 5 grooves on E face, from which the original bearing trees

A dead and down ponderosa pine, 10 ins. diam., bears N 77° E, 25 lks. dist., mkd. T20N R15W S29 BT.

A dead and down ponderosa pine, 10 ins. diam., bears S 23 1/2° E, 101 lks. dist., mkd. T20N R15W S32 BT.

A ponderosa pine, 22 ins. diam., bears S 57 1/4° W, 76 lks. dist., mkd. T20N R15W S31 BT. (Record: S 55° W)

A ponderosa pine, 25 ins. diam., bears N 45 3/4° W, 78 lks. dist., mkd. T20N R15W S30 BT (Record: 76 lks. dist.).

At the cor. point

Set an aluminum post, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, with aluminum cap mkd.

T20N R15W	
S30	S29

S31	S32
1986	

from which new bearing trees

A ponderosa pine, 10 ins. diam., bears N 19 1/4° E, 87.5 lks. dist., mkd. T20N R15W S29 BT.

A ponderosa pine, 14 ins. diam., bears S 51 1/2° E, 72 lks. dist., mkd. T20N R15W S32 BT.

Bury the original stone, alongside the aluminum post.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<p>From this point, U.S. Coast and Geodetic Survey triangulation station "HUALAPAI," bears S 5°48'01" E, (forward bearing) 27.322 chs. dist., monumented with brass disc, 3 1/2 ins. diam., set in a granite boulder, with top mkd. HUALAPAI 1925 and a triangle. Reference points are in and in good order.</p> <p>S 89°55' W, bet. secs. 30 and 31.</p> <p>Over rugged mountainous land, through ponderosa pine, Douglas Fir, aspen, oak brush, and manzanita.</p>
20.045	<p>Point for the E 1/16 sec. cor. of secs. 30 and 31.</p> <p>Set an aluminum post, 6 ins. long, 3/4 in. diam., in a drill hole in a granite outcrop, with aluminum cap attached and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T20N R15W</p> <p>S30</p> <p>E 1/16 _____</p> <p>S31</p> <p>1986</p> </div> <p>A ponderosa pine, 15 ins. diam., bears S 31 3/4° E, 43.5 lks. dist., mkd. E 1/16 S31 BT.</p> <p>A granite rock outcrop, 10 x 8 x 2 ft., bears N 79°35' W, 32.5 lks. dist., mkd. X BO.</p> <p>Cor. is located 25 lks. S of a granite cliff, 40 ft. high, bears NE and SW.</p>
35.079	<p>Point for the W-W-E 1/256 sec. cor. of secs. 30 and 31.</p> <p>Set an aluminum post, 6 ins. long, 3/4 in. diam., in a drill hole in a granite outcrop, with aluminum cap attached and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>S30</p> <p>W-W-E 1/256 _____</p> <p>S31</p> <p>1986</p> </div>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears N 75° E, 75.5 lks. dist., mkd. W-W-E 1/256 S30 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 4 ins. diam., bears S 63 1/4° E, 69 lks. dist., mkd. X at breast height and BT at base.</p> <p>40.09 The 1/4 sec. cor. of secs. 30 and 31, is mkd. with a cross at cor. point and 1/4 on N side of a granite boulder, 5 x 4 x 3 ft., from which the remains of the original bearing trees</p> <p style="padding-left: 40px;">A dead and down ponderosa pine, 9 ins. diam., bears S 23 1/2° E, 38 lks. dist., mkd. 1/4 S31 BT.</p> <p style="padding-left: 40px;">A dead and down ponderosa pine, 14 ins. diam., bears N 12 1/2° W, 60 lks. dist., mkd. 1/4 S30 BT.</p> <p>At the cor. point</p> <p>Set an aluminum post, 6 ins. long, 3/4 in. diam., in a drill hole, with aluminum cap attached and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T20N R15W</p> <p>S30</p> <p>1/4 ———</p> <p>S31</p> <p>1986</p> </div> <p>from which</p> <p style="padding-left: 40px;">A granite boulder, 8 x 8 x 10 ft., bears N 51°26' E, 29.3 lks. dist., mkd. X BO on W face.</p> <p style="padding-left: 40px;">A granite boulder, 30 x 10 x 8 ft., bears S 18°11' E, 37 lks. dist., mkd. X BO on the NW top.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>S 89°47' W, beginning new measurement.</p> <p>36.85 The cor. of secs. 25, 30, 31, and 36, on the W bdy. of Tp.</p> <hr style="width: 80%; margin: 10px auto;"/>
--------	--

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<p>From the cor. of secs. 29, 30, 31, and 32.</p> <p>N 0°01' W, bet. secs. 29 and 30.</p> <p>Over rugged mountainous land, through ponderosa pine, Douglas Fir, and aspen.</p> <p>19.995 Point for the S 1/16 sec. cor. of secs. 29 and 30.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T20N R15W S 1/16</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S30</td> <td style="padding: 0 5px;">S29</td> </tr> <tr> <td colspan="2" style="text-align: center; padding-top: 5px;">1986</td> </tr> </table> </div> <p>from which</p> <p style="margin-left: 40px;">A ponderosa pine, 14 ins. diam., bears N 45 1/4° E, 52 lks. dist., mkd. S 1/16 S29 BT.</p> <p style="margin-left: 40px;">A ponderosa pine, 15 ins. diam., bears N 63° W, 27.5 lks. dist., mkd. S 1/16 S30 BT.</p> <p>Cor. falls at the base of the N side of a 14 ins. diam. ponderosa pine.</p> <p>39.99 The 1/4 sec. cor. of secs. 29 and 30, monumented with a granite stone, 20 x 12 x 9 ins. firmly set with 8 ins. above ground, mkd. 1/4 on W face from which remains of the original bearing trees</p> <p style="margin-left: 40px;">A dead standing ponderosa pine, 30 ins. diam., bears N 81 1/4° E, 86 lks. dist., no marks visible. (Record: N 82 1/2° E).</p> <p style="margin-left: 40px;">The remains of a rotted oak stump, bears N 45 3/4° W, 43 lks. dist., no marks visible.</p> <p>At the cor. point</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 32 ins. in the ground, with aluminum cap mkd.</p>	S30	S29	1986	
S30	S29				
1986					

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	
	<p style="text-align: center;">T20N R15W 1/4 S30 S29 1986</p> <p>from which a new bearing tree</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears N 26 3/4° E, 87 lks. dist., mkd. 1/4 S29 BT.</p> <p>Bury the original stone, alongside the aluminum post.</p> <p>Cor. is located at the E base of a granite boulder, 15 x 8 x 8 ft.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>North, beginning new measurement.</p>
20.02	<p>Point for the N 1/16 sec. cor. of secs. 29 and 30.</p> <p>Set a 6 in. long aluminum post, 3/4 in. diam., in a drill hole in a granite outcrop, 12 x 10 x 4 ft., with aluminum cap attached and mkd.</p>
	<p style="text-align: center;">T20N R15W N 1/16 S30 S29 1986</p> <p>from which</p> <p style="padding-left: 40px;">A granite boulder, 12 x 4 x 3 ft., bears S 39°23' E, 36.5 lks. dist., mkd. X BO.</p> <p style="padding-left: 40px;">A granite boulder, 20 x 20 x 15 ft., bears N 17°06' W, 46.8 lks. dist., mkd. X BO.</p>
40.04	<p>The cor. of secs. 19, 20, 29, and 30, monumented with an iron post, 2 ins. diam., projecting 12 ins. above the ground in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<div style="text-align: center; margin-bottom: 20px;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2">T20N R15W</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">S19</td><td style="padding: 0 5px;">S20</td></tr> <tr><td colspan="2" style="border-top: 1px solid black; border-bottom: 1px solid black;"></td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">S30</td><td style="padding: 0 5px;">S29</td></tr> <tr><td colspan="2">1916</td></tr> </table> </div> <p>from which the remains of original bearing trees</p> <p style="margin-left: 40px;">A dead standing pine, 32 ins. diam., bears N 49 1/2° E, 47 lks. dist., mkd. T20N R15W S20 BT.</p> <p style="margin-left: 40px;">A dead and down pine, 24 ins. diam., bears S 35 3/4° E, 33 lks. dist., mkd. T20N R15W S29 BT.</p> <p style="margin-left: 40px;">An oak, 11 ins. diam., bears N 23° W, 62 lks. dist., healed blaze.</p> <p>and from which new bearing trees</p> <p style="margin-left: 40px;">A white fir, 8 ins. diam., bears N 10 3/4° E, 78 lks. dist., mkd. T20N R15W S20 BT.</p> <p style="margin-left: 40px;">A white fir, 9 ins. diam., bears S 44 3/4° W, 43.5 lks. dist., mkd. T20N R15W S30 BT.</p> <p>Add the marks 1986 to the brass cap.</p> <hr style="border: 0.5px solid black; margin: 10px 0;"/> <p>West, bet. secs. 19 and 30.</p> <p>Over mountainous land, through ponderosa pine, Douglas Fir, white fir, and aspen.</p> <p>19.96 Point for the E 1/16 sec. cor. of secs. 19 and 30.</p> <p style="margin-left: 40px;">Set an aluminum post, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2">T20N R15W</td></tr> <tr><td colspan="2">S19</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">E 1/16</td><td style="border-bottom: 1px solid black; padding: 0 5px;"></td></tr> <tr><td colspan="2">S30</td></tr> <tr><td colspan="2">1986</td></tr> </table> </div>	T20N R15W		S19	S20			S30	S29	1916		T20N R15W		S19		E 1/16		S30		1986	
T20N R15W																					
S19	S20																				
S30	S29																				
1916																					
T20N R15W																					
S19																					
E 1/16																					
S30																					
1986																					

Dependent Resurvey of a Portion of the Subdivisional Lines,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	
	<p>from which</p> <p>A ponderosa pine, 8 ins. diam., bears N 69 1/4° E, 69.5 lks. dist., mkd. E 1/16 S19 BT.</p> <p>A ponderosa pine, 6 ins. diam., bears S 33° W, 8.5 lks. dist., mkd. E 1/16 S30 BT.</p>
29.00	Graded dirt road, bears N 10° W and S 10° E.
29.94	<p>Point for the W-E 1/64 sec. cor. of secs. 19 and 30.</p> <p>Set an aluminum post, 6 ins. long, 3/4 in. diam., in a drill hole in a granite boulder, 7 x 6 x 2 ft., with aluminum cap attached and mkd.</p> <p style="text-align: right;">S19 W-E 1/64 _____ S30 1986</p>
	<p>from which</p> <p>A ponderosa pine, 8 ins. diam., bears N 7° E, 40.5 lks. dist., mkd. W-E 1/64 S19 BT.</p> <p>A ponderosa pine, 14 ins. diam., bears S 30 1/4° E, 57 lks. dist., mkd. W-E 1/64 S30 BT.</p>
39.92	<p>The 1/4 sec. cor. of secs. 19 and 30, monumented with an iron post, 1 in. diam., projecting 15 ins. above the ground, with brass cap mkd.</p> <p style="text-align: right;">S19 1/4 _____ S30 1916</p>
	<p>There is no remaining evidence of the original bearing trees.</p> <p>from which new bearing trees</p> <p>A ponderosa pine, 9 ins. diam., bears N 15 1/4° E, 110.5 lks. dist., mkd. 1/4 S19 BT.</p> <p>A ponderosa pine, 12 ins. diam., bears S 56 3/4° E, 22.5 lks. dist., mkd. 1/4 S30 BT.</p> <p>Add the marks 1986 to the brass cap</p>

Subdivision of Section 30,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<p>From this point, Mohave County Department of Engineering triangulation station "TOWER II," bears S 56°56' E, 8.018 chs. dist., monumented with an aluminum cap, 2 ins. diam., set in concrete, with cap mkd. MOHAVE COUNTY DEPT. ENG. TOWER II 1983 LS 13023.</p> <hr/> <p style="text-align: center;">Subdivision of Section 30, T 20 N, R 15 W, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 30 and 31.</p> <p>N 0°06' E, on the N and S center line of sec. 30.</p> <p>Over rugged mountains, through dense undergrowth.</p> <p>19.885 Point for the center S 1/16 sec. cor. of sec. 30.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T20N R15W C S 1/16 S30 C 1986</p> </div> <p>39.77 Point for the center 1/4 sec. cor. of sec. 30, at the intersection with the E and W center line of sec. 30.</p> <p>Set an aluminum post, 6 ins. long, 3/4 in. diam., in a drill hole in a granite rock outcrop, 8 x 4 x 2 1/2 ft., with aluminum cap attached and mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T20N R15W C 1/4 S30 1986</p> </div> <p>from which</p> <p style="margin-left: 40px;">A ponderosa pine, 11 ins. diam., bears S 35° E, 67.5 lks. dist., mkd. C 1/4 S30 BT.</p> <p style="margin-left: 40px;">A ponderosa pine, 7 ins. diam., bears S 84 3/4° W, 85.5 lks. dist., mkd. C 1/4 S30 BT.</p>
--------	--

Subdivision of Section 30,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<p>59.92 Point for the center N 1/16 sec. cor. of sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T20N R15W C N 1/16 S30 C 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears S 9 1/2° E, 11.5 lks. dist., mkd. C N 1/16 S30 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 14 ins. diam., bears N 81 1/4° W, 49.5 lks. dist., mkd. C N 1/16 S30 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
69.995	<p>Point for the center N-N 1/64 sec. cor. of sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">C N-N 1/64 S30 C 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears S 40 1/4° E, 51 lks. dist., mkd. C-N-N 1/64 S30 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 10 ins. diam., bears S 79 1/4° W, 48.5 lks. dist., mkd. C-N-N 1/64 S30 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.07	<p>The 1/4 sec. cor. of secs. 19 and 30.</p> <hr style="border: 0.5px solid black; margin-top: 10px;"/>

Subdivision of Section 30,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<p>From the 1/4 sec. cor. of secs. 29 and 30.</p> <p>S 89°36' W, on the E and W center line of sec. 30.</p> <p>Over rugged mountainous land, through ponderosa pine, white fir, Douglas Fir, aspen, and undergrowth.</p>
20.005	<p>Point for the center E 1/16 sec. cor. of sec. 30.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 32 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T20N R15W E 1/16 C-----C S30 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears S 47 1/4° E, 42 lks. dist., mkd. C-E 1/16 S30 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 11 ins. diam., bears S 7° W, 16.5 lks. dist., mkd. C-E 1/16 S30 BT.</p>
40.01	<p>The center 1/4 sec. cor. of sec. 30.</p>
76.88	<p>The true point for the 1/4 sec. cor. of secs. 25 and 30, on the W bdy. of the Tp.</p> <hr style="width: 60%; margin: 10px auto;"/> <p style="text-align: center;">NE 1/4, Section 30</p> <hr style="width: 60%; margin: 10px auto;"/> <p>From the center E 1/16 sec. cor. of sec. 30.</p> <p>N 0°03' E, on the N and S center line of the NE 1/4 of sec. 30.</p> <p>Over mountainous land, through ponderosa pine, aspen, and oak underbrush.</p>
20.085	<p>Point for the NE 1/16 sec. cor., at intersection with E and W center line of the NE 1/4 of sec. 30.</p>

Subdivision of Section 30,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	
	<p>Set an aluminum post, 8 ins. long, 3/4 in. diam., in a drill hole in a granite boulder, 9 x 8 x 8 ft., with aluminum cap attached and mkd.</p> <p style="text-align: center;">T20N R15W NE 1/16 S30 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 14 ins. diam., bears S 52 1/2° E, 73.5 lks. dist., mkd. NE 1/16 S30 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 12 ins. diam., bears N 3/4° W, 77 lks. dist., mkd. NE 1/16 S30 BT.</p>
40.17	<p>The E 1/16 sec. cor. of secs. 19 and 30.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the N 1/16 sec. cor. of secs. 29 and 30.</p> <p>S 89°47' W, on the E and W center line of the NE 1/4 of sec. 30.</p> <p>Over mountainous land, through ponderosa pine, aspen, and oak brush.</p>
19.985	The NE 1/16 sec. cor. of sec. 30.
39.97	The center N 1/16 sec. cor. of sec. 30.
	<hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">NW 1/4 of NE 1/4, Section 30</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>From the center N-N 1/64 sec. cor. of sec. 30.</p> <p>N 89°53' E, on a portion of the E and W center line of the NW 1/4 of the NE 1/4 of sec. 30.</p>
9.985	<p>Point for the NW-NE 1/64 sec. cor. of sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Subdivision of Section 30,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<p style="text-align: center;">S30 NW-NE 1/64 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears S 77 1/4° E, 19.5 lks. dist., mkd. NW-NE 1/64 S30 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears N 28 3/4° W, 10 lks. dist., mkd. NW-NE 1/64 S30 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°05' E, on a portion of the N and S center line of the NW 1/4 of the NE 1/4 of sec. 30.</p> <p>2.30 Intersection of graded dirt roads, extending NE curving northerly, NW curving northerly, and S curving S-SE.</p> <p>10.06 The W-E 1/64 sec. cor. of secs. 19 and 30.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">SE 1/4, Section 30</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the E 1/16 sec. cor. of secs. 30 and 31.</p> <p>N 0°02' E, on the N and S center line of the SE 1/4 of sec. 30.</p> <p>Over rugged mountainous land, through ponderosa pine, white fir, Douglas Fir, aspen, and oak and manzanita underbrush.</p> <p>14.955 Point for the C-N-S-SE 1/256 sec. cor. of sec. 30.</p> <p>Set an aluminum post, 6 ins. long, 3/4 in. diam., in a drill hole in a granite boulder 3 1/2 x 2 x 1 1/2 ft., with aluminum cap attached and mkd.</p> <p style="text-align: center;">S30 C-N-S-SE 1/256 1986</p>
--------	---

Subdivision of Section 30,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

CHAINS	<p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears N 64° E, 19 lks. dist., mkd. C-N-S-SE 1/256 S30 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 19 ins. diam., bears N 36 1/2° W, 21.5 lks. dist., mkd. C-N-S-SE 1/256 S30 BT.</p> <p>19.94 Point for the SE 1/16 sec. cor., at intersection with the E and W center line of the SE 1/4 of sec. 30.</p> <p style="padding-left: 40px;">Set an aluminum post, 6 ins. long, 3/4 in. diam., in a drill hole in a granite boulder, 3 x 2 x 2 ft., with aluminum cap attached and mkd.</p> <p style="text-align: center; padding-left: 100px;">T20N R15W SE 1/16 S30 1986</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears N 15 1/2° E, 38 lks. dist., mkd. SE 1/16 S30 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears S 73 1/2° E, 67.5 lks. dist., mkd. SE 1/16 S30 BT.</p> <p>39.88 The center E 1/16 sec. cor. of sec. 30.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the S 1/16 sec. cor. of secs. 29 and 30.</p> <p>S 89°45' W, on the E and W center line of the SE 1/4 of sec. 30.</p> <p>Over rugged mountainous land, through ponderosa pine, white fir, Douglas Fir, aspen, and oak and manzanita underbrush.</p> <p>20.025 The SE 1/16 sec. cor. of sec. 30.</p> <p>40.05 The center S 1/16 sec. cor. of sec. 30.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center; padding-left: 100px;">SW 1/4 of SE 1/4, Section 30</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the W-W-E 1/256 sec. cor. of secs. 30 and 31.</p>
--------	---

Subdivision of Section 30,
T 20 N, R 15 W, Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>14.92</p> <p>15.025</p>	<p>N 0°05' E, on a portion of the N and S center line of the W 1/2 of the SW 1/4, of the SE 1/4, sec. 30.</p> <p>Point for the NW-SW-SE 1/256 sec. cor. of sec. 30.</p> <p>Set an aluminum post, 6 ins. long, 3/4 in. diam., in a drill hole in a granite boulder, 5 x 4 x 5 ft., with aluminum cap attached and mkd.</p> <p style="text-align: center;">S30 NW-SW-SE 1/4 1/256 1986</p> <p>from which</p> <p style="padding-left: 40px;">A granite boulder, 5 x 4 x 15 ft., bears N 50°31' E, 9.2 lks. dist., mkd. X BO.</p> <p style="padding-left: 40px;">A granite boulder, 20 x 20 x 15 ft., bears N 18°25' W, 15.7 lks. dist., mkd. X BO.</p> <hr/> <p>N 89°48' E, on a portion of the E and W center line of the N 1/2 of the SW 1/4 of the SE 1/4, sec. 30.</p> <p>The center N-S-SE 1/256 sec. cor. of sec. 30.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The land encompassed in this survey is located about 12 miles southeast of Kingman, Arizona, in the Hualapai Mountain Range. The elevation ranges from about 7,300 to 8,400 ft. above sea level.</p> <p>The land is very rugged and mountainous, with very large granite boulders and outcroppings, covered with medium ponderosa pine, scattered white fir, Douglas Fir, and aspen. Some areas are covered so densely with oak brush, manzanita, and thorns, that it is impossible to walk through.</p> <p>Access is by way of a very dangerous dirt road, with numerous switch backs built to reach the numerous communication sites in section 30.</p>
--	--

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Robert J. Lyle	Survey Technician
David L. Belcher	Survey Technician
Rebecca Ramirez	Survey Aid

CERTIFICATE OF SURVEY

I, Paul L. Reeves, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 4th day of March 1986, I have dependently resurveyed portions of the west boundary and of the subdivisional lines, and surveyed the subdivision of Section 30, Township 20 North, Range 15 West, of the Gila and Salt River Meridian, in the State of Arizona which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

AUG 22 1988

(Date)

Paul L. Reeves

(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

Bureau of Land Management
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of portions of the west boundary and of the subdivisional lines, and the survey of the subdivision of Section 30, Township 20 North, Range 15 West, Gila and Salt River Meridian, Arizona, executed by Paul L. Reeves, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

AUG 24 1988

(Date)

Arnold E. Knapp
Acting (Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I Certify That the foregoing transcript of the field notes of the above- described surveys in T 20 N, R 15 W, Gila and Salt River Mer., Arizona, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief Cadastral Surveyor of Arizona)~~