

ORIGINAL

1 BOOK 5375

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,

TOWNSHIPS 14 AND 15 NORTH, RANGE 11 EAST,

AND

A PORTION OF THE NORTH BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTION 6 AND METES-AND-BOUNDS SURVEYS,

IN TOWNSHIP 14 NORTH, RANGE 12 EAST,

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Stephen K. Hansen, Cadastral Surveyor


Under Special Instructions dated July 9, 1992, approved July 13, 1992, which provided for the surveys included under Group Number 745 and assignment instructions dated August 17, 1992.

Survey commenced August 24, 1992

Survey completed October 21, 1992

INDEX DIAGRAM

TOWNSHIP 14 NORTH, RANGE 12 EAST,

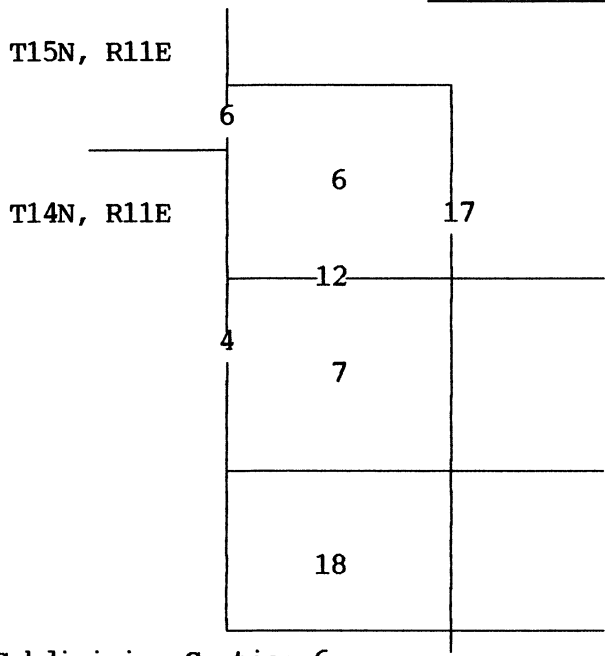

Subdivision Section 6
Metes-and-Bounds Survey State Highway No. 87
Metes-and-Bounds Survey S. R.O.W. Enchanted Lane

pp. 19-25
pp. 26-34
pp. 35-36

T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the east boundary, Townships 14 and 15 North, Range 11 East and a portion of the north boundary, a portion of the subdivisional lines, the subdivision of section 6, and metes-and-bounds surveys in Township 14 North, Range 12 East, Gila and Salt River Meridian, Arizona.

The history of surveys pertaining to this resurvey is as follows: Theodore F. White surveyed the south bdy., T. 14 N., R. 12 E., and the east bdy. of T. 14 N., R. 11 E. in 1881. J.B. McLaughlin surveyed the east boundary of T. 14 N., R. 12 E. in 1883. Daniel Drummond resurveyed the south and east boundaries, and surveyed the north boundary and the subdivisional lines of T. 14 N., R. 12 E. in 1893. Wallace R. Ott remonumented certain corners in T. 14 N., Rs. 11 and 12 E. 1966.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated July 13, 1992, for Group Number 745, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and a search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The survey was performed at the request of the Federal Land Exchange, Incorporated, in a letter dated May 29, 1992. The purpose of this survey was to facilitate a land exchange.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Lietz Set 4 electronic instrument.

The geographic position of the section corner of sections 5, 6, 7 and 8 was determined by the technique of relative positioning using the Ashtech GPS Geodetic System. Triangulation station "Blue Ridge Lookout" was used as the control station.

Latitude: 34°37'32.85" N. Longitude: 111°06'16.44" W. NAD 27

The mean magnetic declination as taken from quadrangle map QUAYLE HILL, ARIZ., published in 1971 by U.S. Geological Survey, is 14° E.

Dependent Resurvey of a Portion of the East Boundary,
T. 14 N., R. 11 E., Gila and Salt River Meridian, Arizona

CHAINS

Restoring the survey executed
by Theodore F. White in 1881

Beginning at the cor. of secs. 1 and 12 only, on the E. bdy. of T. 14 N., R. 11 E., marked with an aluminum post, 30 ins. long, 2 1/2 ins. diam., firmly set by Wallace R. Ott, R.L.S. 9431, projecting 4 ins. above ground, with aluminum cap mkd. T14N R11E R12E S1 S7 S12 RLS 9431 1982, with a mound of stone, 3 ft. base, 2 ft. high, to the W., from which bearing trees of record

A pine, 24 ins.diam., bears S. 30 1/2° E., 58 lks. dist., with healed blaze. (Record: S. 35° E.)

A pine, 26 ins.diam., bears S. 20 1/2° W., 24 lks. dist., mkd. TXIVNRXIEXIIBT on unhealed blaze. (Record: S. 23° W.)

A pine, 22 ins.diam., bears N. 72 1/2° W., 47 lks. dist., with healed blaze. (Record: N. 65° W.)

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

	T14N	
R11E		R12E
S1		
—		S7
S12		
		1992

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Bury the aluminum post alongside the stainless steel post.

Retain the mound of stone, 3 ft. base, 2 ft. high, W. of cor.

N. 0°30' E., on the E. bdy. of the Tp.

Over gently rolling land, through medium pine timber.

Dependent Resurvey of a Portion of the East Boundary,
T. 14 N., R. 11 E., Gila and Salt River Meridian, Arizona

CHAINS	
13.59	Point for the closing cor. of secs. 6 and 7, T. 14 N., R. 12 E, hereinafter described.
28.28	Point for AP 1, at intersection with the center line of State Highway No. 87, hereinafter described.
	From this cor. point, P.C. Station 651 + 14.63, monumented with a railroad spike, firmly set, 2 ins. below the surface of the pavement of State Highway No. 87, bears S. 86°41' W., 8.972 chs., chord dist.
33.535	Point for the S. 1/16 sec. cor. of sec. 6 only, hereinafter described.
40.39	Point for the 1/4 sec. cor. of sec. 1 only, at proportionate dist; there is no remaining evidence of the original cor. position.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T14N R11E R12E 1/4 S1 1992</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
53.48	Point for the 1/4 sec. cor. of sec. 6 only, T. 14 N., R. 12 E., hereinafter described.
80.78	The cor. of Tps. 14 and 15 N., R. 11 E., marked with an aluminum post, 30 ins. long, 2 1/2 ins. diam., firmly set, by Lynn H. Jensen, R.L.S. 8902, flush with ground, encircled with a collar of stone, with aluminum cap mkd. T15N T14N R11E R12E S1 S6 S36 RLS 8902 1981, from which bearing trees of record

Dependent Resurvey of a Portion of the East Boundary,
T. 14 N., R. 11 E., Gila and Salt River Meridian, Arizona

CHAINS

A rotted pine stump, 24 ins. diam., bears N. 60 1/2° E.,
59 lks. dist. (Record: N. 30° E.)

A pine, 32 ins.diam., bears S. 14 1/4° E., 47 lks. dist.,
with illegible marks on partially healed blaze. (Record:
S. 35° E.)

A pine, 32 ins.diam., bears S. 52° W., 126 lks. dist., mkd.
XIVNRXIE on unhealed blaze. (Record: S. 41° W.)

A juniper, 48 ins.diam., bears N. 21 3/4° W., 39 lks. dist.,
with healed blaze. (Record: N. 44° W.)

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
22 ins. in the ground, encircled with a collar of stone, with
brass cap mkd.

T15N	
R11E	T14N
S36	R12E
S1	S6
T14N	
	1992

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case
beneath the stainless steel post.

Bury the aluminum post alongside the stainless steel post.

A rebar, 18 ins. long, 5/8 ins. diam. was firmly set, 1 in. below
ground alongside the aluminum pipe. Deposit the rebar inside the
stainless steel pipe.

Dependent Resurvey of a Portion of the East Boundary,
T. 15 N., R. 11 E., Gila and Salt River Meridian, Arizona

Restoring the survey executed
by Theodore F. White in 1881

From the cor. of Tps. 14 and 15 N., R. 11 E., hereinbefore
described.

Dependent Resurvey of a Portion of the East Boundary,
T. 15 N., R. 11 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>N. 0°01' E., on the E. bdy. of sec. 36.</p> <p>Along a 4 strand barbed wire fence, through medium growth pine.</p> <p>9.51 Point for the closing cor. of Tps. 14 and 15 N., R. 12 E., hereinafter described.</p> <p>11.78 Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.</p> <p>18.48 Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.</p> <p>20.92 Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.</p> <p>23.37 Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.</p> <p>25.99 Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.</p> <p>40.13 The 1/4 sec. cor. of sec. 36 only, T. 14 N., R. 11 E., marked with an aluminum post, 30 ins. long, 2 1/2 ins. diam., firmly set Lynn H. Jensen, R.L.S. 8902, projecting 6 ins. above ground, encircled with a collar of stone, with aluminum cap mkd. T15N R11E 1/4 S36 RLS 8902 1981, from which bearing trees of record</p> <p style="padding-left: 40px;">A pine, 24 ins.diam., bears N. 62 ° E., 27 lks. dist., with healed blaze.</p> <p style="padding-left: 40px;">A fallen and rotted oak, 12 ins.diam., bears S. 60 ° W., 15 lks. dist.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> <p>T15N</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 10px;">R11E</td> <td style="border-left: 1px solid black; padding: 0 10px;">R12E</td> </tr> <tr> <td style="padding: 0 10px;">1/4 S36</td> <td style="border-left: 1px solid black; padding: 0 10px;"> </td> </tr> <tr> <td style="padding: 0 10px;"></td> <td style="border-left: 1px solid black; padding: 0 10px;">1992</td> </tr> </table> </div>	R11E	R12E	1/4 S36			1992
R11E	R12E						
1/4 S36							
	1992						

Dependent Resurvey of a Portion of the East Boundary,
T. 15 N., R. 11 E., Gila and Salt River Meridian, Arizona

CHAINS

from which

A pine, 24 ins.diam., bears S. 71° W., 214 lks. dist., mkd.
X BT.

A pine, 16 ins.diam., bears N. 36° W., 155 lks. dist., mkd.
1/4 S36 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case
beneath the stainless steel post.

Bury the aluminum post alongside the stainless steel post.

Cor. is located in a barbed wire fence, 4 strands, bears
N. and S.

Dependent Resurvey of a Portion of the North Boundary,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

Restoring the survey executed
by Daniel Drummond in 1893

From the cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the
Tp., monumented with an iron post, 2 1/2 ins. diam., firmly set,
projecting 12 ins. above ground, in a mound of stone, 2 ft. base,
to top, with brass cap mkd. T15N R12E S31 S32 S6 S5 T14N 1966,
from which bearing trees of record.

An oak, 7 ins.diam., bears N. 56 1/4° E., 60 lks. dist.,
with healed blaze. (Record: N. 54° E.)

A rotted pine stump, 24 ins.diam., bears S. 56° E., 85 lks.
dist.

An oak, 7 ins.diam., bears S. 22° W., 60 lks. dist., with
healed blaze. (Record: S. 20 1/2° W.)

An oak, 12 ins.diam., bears S. 56 ° W., 41 lks. dist., with
illegible marks on partially healed blaze.

An oak, 18 ins.diam., bears N. 46° W., 53 lks. dist., with
healed blaze.

Dependent Resurvey of a Portion of the North Boundary,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Add the marks 1992 to brass cap.
	Cor. is located in a barbed wire fence, 4 strands, bears N. and W.
	N. 89°26' W., bet. secs. 31 and 6.
	Along a 4 strand barbed wire fence, through medium pine timber.
1.175	Iron pipe, 1 in. diam., projecting 1 in. above ground, with an affixed washer stamped RLS 18436.
6.25	Iron pipe, 1 in. diam., projecting 1 in. above ground, with an affixed washer stamped RLS 18436.
12.30	Barbed wire fence, 4 strand, bears N., S., and E.
13.83	Center line of State Highway No. 87, pavement, 25 lks. wide, bears N. and S.
15.35	Barbed wire fence, 4 strand, bears N., S., and W.
19.995	Point for the E. 1/16 sec. cor. of secs. 6 and 31. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to bedrock, in a supporting mound of stone, 4 ft. base, to top, with brass cap mkd. <div style="text-align: center;"> T15N R12E S31 E 1/16 — S6 T14N 1992 </div>
	Cor. is located in a barbed wire fence, 4 strands, bears E. and W.
39.99	The 1/4 sec. cor. of secs. 6 and 31, marked with an aluminum post, 30 ins. long, 2 1/2 ins. diam., firmly set by Lynn H. Jensen, R.L.S. 8902 projecting 6 ins. above ground, encircled with a collar of stone, with aluminum cap mkd. T15N R12E 1/4 S31 S6 T14N RLS 8902 1981, from which bearing trees of record

Dependent Resurvey of a Portion of the North Boundary,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A rotted pine stump, 26 ins. diam., bears S. 61° E., 40 lks. dist., mkd. 1/X S BT.</p> <p>An oak, 18 ins.diam., bears N. 7° W., 40 lks. dist., with healed blaze.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T15N R12E S31 1/4 — S6 T14N 1992</p> <p>from which</p> <p>A forked alligator juniper, 8 ins. diam., bears S. 45 1/2° W., 65 lks. dist., mkd. 1/4 S6 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the aluminum post alongside the stainless steel post.</p> <p>A rebar, 18 ins.long, 5/8 in. diam., was firmly set, 1 in. below ground alongside the aluminum pipe. Deposit the rebar inside the stainless steel pipe.</p> <p>Cor. is located in a barbed wire fence, 4 strands, bears E. and W.</p> <hr style="width: 30%; margin-left: auto; margin-right: auto;"/> <p>N. 89°27' W., beginning new measurement.</p> <p>Along a 4 strand barbed wire fence, through medium pine timber.</p>
9.165	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.
14.09	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.

Dependent Resurvey of a Portion of the North Boundary,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS	
17.80	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.
21.01	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.
24.725	Iron pipe, 3/4 in. diam., projecting 6 ins. above ground, with an affixed washer stamped RLS 18436.
30.635	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.
32.24	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.
33.10	Wash, 15 lks. wide, 2 ft. deep, drains NNE.
38.33	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.
41.37	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.
44.135	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.
52.35	Iron pipe, 3/4 in. diam., projecting 2 ins. above ground, with an affixed washer stamped RLS 18436.
62.53	<p>The original closing cor. of Tps. 14 and 15 N., R. 12 E., monumented with a sandstone, 18 x 11 x 5 ins., lying loosely on the ground, in a scattered mound of stone, 1 ft. base, to top, mkd. CC on the E., 6 grooves on the N., and 6 grooves on the E. face. Add the marks AM on E. face and bury the stone in place, 6 ins. below surface, from which bearing trees of record</p> <p style="padding-left: 40px;">A pine, 26 ins.diam., bears N. 64° E., 82 lks. dist., with illegible marks on partially healed blaze.</p> <p style="padding-left: 40px;">An oak, 18 ins.diam., bears S. 63° E., 61 lks. dist., with illegible marks on partially healed blaze.</p> <p style="padding-left: 40px;">A stump hole, bears S. 42° W., 44 lks. dist.</p>

Dependent Resurvey of a Portion of the North Boundary,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS

62.59

The closing cor. of Tps 14 and 15 N., R.12 E., at intersection with the E. bdy. of sec. 36, marked with an aluminum post, 30 ins. long, 2 1/2 ins. diam., firmly set by Lynn H. Jensen, R.L.S. 8902, flush with ground, encircled with a collar of stone, with aluminum cap mkd. T15N T15N R12E R11E S31 S36 S6 T14N RLS 8902 1981.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T15N	T15N
R11E	R12E
S36	S31
	—CC
	S6
	T14N
	1992

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Bury the aluminum post alongside the stainless steel post.

Cor. is located in a barbed wire fence, 4 strands, bears N. and E.

From this cor. point, the cor. of Tps. 14 and 15 N., R. 11 E., bears S. 0°01' W., 9.51 chs. dist., hereinbefore described.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

Restoring the survey executed
by Daniel Drummond in 1893

From the cor. of secs. 5, 6, 7, and 8, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. below ground, mkd. T14N R12E S6 S5 S7 S8 1966, from which bearing trees of record

A pine stump, 14 ins.diam., bears N. 15° E., 7 lks. dist., mkd. T14N R12E S5 BT on open blaze.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A pine, 18 ins.diam., bears S. 75° E., 43 lks. dist., mkd. T14N R12E S8 BT on open blaze.</p>
	<p>A pine, 17 ins.diam., bears S. 61° E., 57 lks. dist., with illegible marks on partially healed blaze.</p>
	<p>A juniper, 16 ins.diam., bears S. 41° W., 22 lks. dist., with healed blaze.</p>
	<p>A pine, 18 ins.diam., bears N. 89 1/2° W., 45 lks. dist., with healed blaze.</p>
	<p>A pine, 24 ins.diam., bears N. 23° W., 87 lks. dist., mkd. T14N R12E S6 BT on partially healed blaze.</p>
	<p>Add marks 1992 to brass cap.</p>
	<p>Cor. is located on W. edge of a trail road, bears N. and S.</p>
	<p>N. 89°40' W., bet. secs. 6 and 7.</p>
	<p>Along rolling land, through heavy pine timber, descend.</p>
10.40	<p>Wash, 15 lks. wide, 5 ft. deep, drains SE, ascend.</p>
39.93	<p>The 1/4 sec. cor. of secs. 6 and 7, monumented with a sandstone, 20 x 9 x 5 ins., firmly set, projecting 5 ins. above ground, mkd. 1/4 on N. face, from which bearing trees of record</p>
	<p>A dead pine, 24 ins. diam., bears N. 29° E., 34 lks. dist., with illegible marks on open blaze.</p>
	<p>A pine, 15 ins. diam., bears S. 86° E., 8 lks. dist., with healed blaze.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T14N R12E S6 1/4 — S7 1992</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 18 ins. diam., bears N. 34 1/4° W., 83 1/2 lks. dist., mkd. 1/4 S6 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the mkd. sandstone alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°29' W., beginning new measurement.</p>
20.17	<p>Point for the W. 1/16 sec. cor. of secs. 6 and 7.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T14N R12E S6 W 1/16 — S7 1992</p> <p>from which</p> <p style="padding-left: 40px;">An oak, 8 ins. diam., bears N. 55 3/4° E., 91 lks. dist., mkd. W 1/16 S6 BT.</p> <p style="padding-left: 40px;">An oak, 13 ins. diam., bears S. 31 1/4° W., 220.5 lks. dist., mkd. W 1/16 S7 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.34	<p>Point for the 80th 1/16 sec. cor. of secs. 6 and 7.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to bedrock, in a supporting mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T14N R12E S6 1/16 — 80 S7 1992</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 19 ins. diam., bears N. 20 1/4° E., 80.5 lks. dist., mkd. 1/16 80 S6 BT.</p> <p style="padding-left: 40px;">An oak, 15 ins. diam., bears S. 39 3/4° E., 132 lks. dist., mkd. 1/16 80 S7 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
63.04	<p>Point for the closing cor. for secs. 6 and 7 at intersection with the E. bdy. of sec. 1, T. 14 N., R. 11 E.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R11E R12E S6 S1 — CC S7 1992</p> <p>from which</p> <p style="padding-left: 40px;">An oak, 5 ins.diam., bears S. 44 1/2° W., 38 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS

From this cor. point the original closing cor. of secs. 6 and 7, bears N. 89°29' W., 0.02 chs. dist., monumented with a sandstone, 20 x 11 x 5 ins., loosely set, projecting 19 ins. above ground, supported in a scattered mound of stone, 1 ft. base, to top, mkd. CC on the E., 1 groove on the N., and 5 grooves on the S. face. Add the marks AM on E. face and bury the stone in place, 6 ins. below surface, from which bearing trees of record

An oak, 9 ins.diam., bears N. 62° E., 66 lks. dist., with healed blaze.

An oak, 12 ins.diam., bears S. 75° E., 28 lks. dist., with healed blaze.

A pine stump, 30 ins.diam., bears S. 85° W., 33 lks. dist., mkd. T14N R12E CC S6&7 BT on unhealed blaze.

From this same cor. point the cor. of secs. 1 and 12 only, T. 14 N., R. 11 E., bears S. 0°30' W., 13.59 chs. dist., hereinbefore described.

Point for the 1/4 sec. cor. of sec. 6 only, T. 14 N., R. 12 E., is at proportionate dist. on the W. bdy. of sec. 6.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.

T14N
R11E | R12E
 1/4 S6
1992

from which

An oak, 18 ins.diam., bears S. 72 1/4° E., 59 lks. dist., mkd. 1/4 S6 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

The point for the S. 1/16 sec. cor. of sec. 6 only, T. 14 N., R. 12 E., is at midpoint bet. the 1/4 sec. cor. of sec. 6 only, and the closing cor. of secs. 6 and 7, on the W. bdy. of sec. 6.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14N R11E R12E S 1/16 S6 1992</p> </div> <p>from which</p> <p style="padding-left: 40px;">A pine, 24 ins.diam., bears N. 82 1/2° E., 48 1/2 lks. dist., mkd. S 1/16 S6 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 0°05' E., bet. secs. 5 and 6.</p> <p>Over rolling land through medium pine timber.</p> <p>33.85 Trail road, 15 lks. wide, bears E.and W.</p> <p>37.025 Iron pin, 7/16 in. diam., firmly set, projecting 2 ins. above ground, with affixed washer stamped PE 2399.</p> <p>39.915 Iron pin, 7/16 in. diam., firmly set, projecting 2 ins. above ground, with affixed washer stamped PE 2399.</p> <p>40.01 The 1/4 sec. cor. of secs. 5 and 6, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 14 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. T14N R12E 1/4 S6 S5 1966, from which bearing trees of record</p> <p style="padding-left: 40px;">A pine, 18 ins. diam., bears N. 39° E., 25 lks. dist., with healed blaze. (Record: 23 lks.)</p> <p style="padding-left: 40px;">A juniper stump, 12 ins. diam., bears S. 59° W., 18 lks. dist.</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears N. 51 1/4° W., 102 lks. dist., mkd. T14N R12E 1/4 S6 BT on open blaze. (Record: N. 55° W.)</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Add the marks 1992 to brass cap.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°14' E., beginning new measurement.</p> <p>2.875 Iron pin, 7/16 in. diam., firmly set, projecting 2 ins. above ground, with affixed washer stamped PE 2399.</p> <p>5.815 Iron pin, 7/16 in. diam., firmly set, projecting 2 ins. above ground, with affixed washer stamped PE 2399.</p> <p>8.77 Iron pin, 7/16 in. diam., firmly set, projecting 2 ins. above ground, with affixed washer stamped PE 2399.</p> <p>12.13 Point for AP 12, at intersection with the S. Right-of-Way of Enchanted Lane.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td colspan="2">T14N R12E</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">AP12</td> <td style="padding: 0 5px;"> </td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">—</td> <td style="padding: 0 5px;"> S5</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S6</td> <td style="padding: 0 5px;"> </td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">1992</td> <td style="padding: 0 5px;"> </td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point is occupied with an iron pin, 18 ins. long, 1/2 ins. diam., firmly set, flush with ground. Deposit the iron pin inside the stainless steel post.</p> <p>From this cor. point, AP 11 bears N. 89°47'W., 6.06 chs. dist., hereinafter described.</p> <p>12.59 Center of Enchanted Lane, improved gravel, 40 lks. wide, bears E. and W.</p> <p>13.04 Iron pin, 7/16 in. diam., firmly set, projecting 2 ins. above ground, with affixed washer stamped PE 2399, at intersection with the N. Right-of-Way of Enchanted Lane.</p> <p>18.29 Point for the N 1/16 sec. cor. of secs. 5 and 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>	T14N R12E		AP12		—	S5	S6		1992	
T14N R12E											
AP12											
—	S5										
S6											
1992											

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona

CHAINS	<p style="text-align: center;">T14N R12E N 1/16 S6 S5 1992</p> <p>from which</p> <p style="text-align: center;">An oak, 8 ins. diam., bears N. 75 3/4° W., 121 lks. dist., mkd. N1/16 S6 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>36.50 The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p style="text-align: center;">Subdivision of Section 6, T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 6 and 7.</p> <p>N. 0°06' E., on the N. and S. center line of sec. 6.</p> <p>Over rolling land, through medium pine timber.</p> <p>17.90 Top of ravine, bears ENE and WSW, descend.</p> <p>20.02 Point for the center S. 1/16 sec. cor. of sec. 6.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T14N R12E C S1/16 S6 C 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
--------	--

Subdivision of Section 6, T. 14 N., R. 12 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
21.35	Wash, 15 lks. wide, 3 ft. deep, drains ENE, ascend.
24.10	Top of ravine, bears ENE and WSW.
32.445	Point for a witness point at intersection with the center line of State Highway No. 87, hereinafter described.
	From this cor. point, AP 5 bears N. 67°33' 30" E., 3.975 chs. dist., hereinafter described.
40.04	Point for the center 1/4 sec. cor. of sec. 6, at intersection with the E. and W. center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.
	T14N R12E
	C 1/4 S6
	1992
	from which
	An oak, 8 ins. diam., bears S. 47 3/4° E., 39 lks. dist., mkd. C1/4 S6 BT.
	An oak, 10 ins. diam., bears N. 65° W., 127 lks. dist., mkd. C1/4 S6 BT.
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
58.95	Point for the center N. 1/16 sec. cor. of sec. 6.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.

Subdivision of Section 6, T. 14 N., R. 12 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T14N R12E C N1/16 S6 C 1992</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
66.60	<p>Overhead power lines, 3 strand, bears E. and W.</p>
74.90	<p>Trail road, 10 lks. wide, bears NE and SW.</p>
76.67	<p>The 1/4 sec. cor. of secs. 6 and 31, on the N. bdy. of the Tp., hereinbefore described.</p>
	<hr/> <p>From the 1/4 sec. cor. of secs. 5 and 6.</p>
	<p>N. 89°37' W., on the E. and W. center line of sec. 6.</p>
	<p>Over gently rolling land, through medium pine timber.</p>
5.50	<p>Abandoned road, 30 lks. wide, bears SSE and NNW.</p>
19.96	<p>Point for the center E. 1/16 sec. cor. of sec. 6.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T14N R12E E 1/16 C ——— C S6 1992</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
25.435	<p>Point for a witness point at intersection with the center line of State Highway No. 87, hereinafter described.</p>

Subdivision of Section 6, T. 14 N., R. 12 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	From this cor. point, AP 6 bears N. 53°42'E., 1.732 chs. dist., hereinafter described.
39.92	The center 1/4 sec. cor. of sec. 6, at intersection with the N. and S. center line.
60.00	Point for the center W. 1/16 sec. cor. of sec. 6. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd. <div style="text-align: center;"> <p>T14N R12E W 1/16 C———C S6 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.08	Point for the center 80th 1/16 sec. cor. of sec. 6. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd. <div style="text-align: center;"> <p>T14N R12E 1/16 C———80 S6 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
102.67	The W. 1/4 sec. cor. of sec. 6 only, on the W. bdy. of the Tp., hereinbefore described.

Subdivision of Section 6, T. 14 N., R. 12 E.,
Gila and Salt River Meridian, Arizona

<p>CHAINS</p>	<p style="text-align: center;">N.E. 1/4 of Section 6</p> <hr/> <p>From the center E. 1/16 sec. cor. of sec. 6.</p> <p>N. 0°10' E., on the N. and S. center line of the NE 1/4 of sec. 6.</p> <p>4.185 Point for a witness point at intersection with the center line of State Highway No. 87, hereinafter described.</p> <p>From this cor. point, AP 8 bears N. 51°02'E., 2.551 chs. dist., hereinafter described.</p> <p>18.60 Point for the NE 1/16 sec. cor. of sec. 6 at intersection with the N and S center line of the NE 1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T14N R12E</p> <p style="text-align: center;">NE 1/16 S6</p> <p style="text-align: center;">1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>36.565 Point for the E. 1/16 sec. cor. of secs. 6 and 31, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the N. 1/16 sec. cor. of secs. 5 and 6.</p> <p>N. 88°44' W., on the E. and W. center line of the N.E. 1/4 of sec. 6.</p> <p>12.34 Center line of State Highway No. 87, pavement, 25 lks. wide, bears N. and S.</p> <p>19.98 The N.E. 1/16 sec. cor. of sec. 6.</p> <p>39.96 The center N. 1/16 sec. cor. of sec. 6.</p> <hr/>
---------------	---

Subdivision of Section 6, T. 14 N., R. 12 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>S.W. 1/4 of Section 6</p> <hr/>
	<p>From the W. 1/16 sec. cor. of secs. 6 and 7.</p> <p>N. 0°13' E., on the N. and S. center line of the S.W. 1/4 of sec. 6.</p>
19.995	<p>Point for the SW 1/16 sec. cor. of sec. 6 at intersection with the E and W center line of the SW 1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T14N R12E</p> <p style="text-align: center;">SW 1/16 S6</p> <p style="text-align: center;">1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
23.95	<p>Point for a witness point at intersection with the center line of State Highway No. 87, hereinafter described.</p> <p>From this cor. point, AP 4 bears S. 67°33' 30" W., 4.285 chs. dist., hereinafter described.</p>
39.99	<p>The center W. 1/16 sec. cor. of sec. 6.</p> <hr/>
	<p>From the 80th 1/16 sec. cor. of secs. 6 and 7.</p> <p>N. 0°20' E., on the NS 80th 1/16 line of the S.W. 1/4 of sec. 6.</p>
18.23	<p>Point for a witness point at intersection with the center line of State Highway No. 87, hereinafter described.</p> <p>From this cor. point, AP 3 bears S. 81°37' W., 4.405 chs. dist., hereinafter described.</p>

Subdivision of Section 6, T. 14 N., R. 12 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
19.975	<p>Point for the S. 80th 1/16 sec. cor. of sec. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to bedrock, in a supporting mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T14N R12E</p> <p style="text-align: center;">S 1/16 80 S6 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
39.95	<p>The center 80th 1/16 sec. cor. of sec. 6.</p> <hr/> <p>From the center S. 1/16 sec. cor. of sec. 6.</p> <p>N. 89°33' W., on the E. and W. center line of the S.W. 1/4 of sec. 6.</p>
20.125	<p>The S.W. 1/16 sec. cor. of sec. 6.</p>
30.785	<p>Point for a witness point at intersection with the center line of State Highway No. 87, hereinafter described.</p> <p>From this cor. point, AP 3 bears S. 78°38'W., 5.218 chs. dist., hereinafter described.</p>
40.25	<p>The S. 80th 1/16 sec. cor. of sec. 6.</p>
62.90	<p>The S 1/16 sec. cor. of sec. 6 only, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/>

Metes-and-Bounds Surveys,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona


CHAINS

State Highway Number 87

Stationing of State Highway 87 was derived from as constructed plans for Project F.H. 10-2(1), 3(1), Route Number 10, Pine-Winslow, United States Department of Commerce, Bureau of Public Roads, approved May 24, 1961, with as constructed revisions dated July, 1963. Some significant differences were noted between station number measurements as denoted on Bureau of Public Roads plans and Bureau of Land Management field data, which reflects measurements between found monuments.

From the point for AP 1, at intersection with the center line of State Highway No. 87, pavement, 25 lks. wide, and the line bet. secs. 1 and 6, T. 14 N., Rs. 11 and 12 E.

Set an aluminum tablet, 3 1/4 ins. diam., 1 1/2 ins. stem, cemented in place, 1 in. below pavement, with top mkd.



from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 13°35' E., 100.3 ft. dist., with cap mkd. RM T14N R12E S6 100.3 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the aluminum tablet.

Thence along a 1°23'54" circular curve to the left, having a radius of 4097.14 ft., on line bet. AP 1 and AP 2, along the center line of State Highway No. 87, the chord of said arc bears N. 82°04 1/2' E., 0.992 chs. dist.

0.992 AP 2, identical with Station 657 + 61.57 PT, monumented with a railroad spike, firmly set, 3 ins. below the surface of the pavement of State Highway No. 87, from which a bearing object set by U.S. Bureau of Public Roads in 1962


Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona

CHAINS

An iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, bears S. 1°10' E., 152.9 lks. dist., with brass cap mkd. US Bureau of Public Roads 1962 657 + 61.57 BM ELEV 6848.60.

At the cor. point

Set an aluminum tablet, 3 1/4 ins. diam., 1 1/2 ins. stem, cemented in place, 1 in. below pavement, over the railroad spike, with top mkd.

T14N R12E
AP 2

S6
1992

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the aluminum tablet.

N. 81°37' E., on the line bet. AP 2 and AP 3, along the center line of State Highway No. 87.

21.935 Point for a witness point at intersection with the N. and S 80th 1/16 line of the S.W. 1/4 of sec. 6.

Set a railroad spike, 3 ins. below the surface of the pavement of State Highway No. 87, mkd. BLM 1992

from which

A **stainless steel post**, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 5°11' E., 96.7 ft. dist., with cap mkd. RM T14N R12E S6 96.7 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the railroad spike.

From this cor. point, the S. 80th 1/16 sec. cor. of sec. 6 bears N. 0°20' E., 1.745 chs. dist., hereinbefore described.

Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona

CHAINS	
26.34	<p>AP 3, identical with Station 675 + 12.96 PC, monumented with a railroad spike, firmly set, 3 ins. below the surface of the pavement of State Highway No. 87, from which bearing objects set by U.S. Bureau of Public Roads in 1962</p> <p>A rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, encircled with a collar of stone, bears S. 8°23' E., 121.4 lks. dist.</p> <p>A rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, encircled with a collar of stone, bears N. 8°23' W., 95.5 lks. dist.</p> <p>At the cor. point</p> <p>Set an aluminum tablet, 3 1/4 ins. diam., 1 1/2 ins. stem, cemented in place, 1 in. below pavement, over the railroad spike, with top mkd.</p> <div style="text-align: center;"> <p>T14N R12E</p> <p>AP 3</p> <hr style="width: 10%; margin: 0 auto;"/> <p>S6</p> <p>1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the aluminum tablet.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>Thence along a 1°44'02" circular curve to the left, having a radius of 3304.49 ft., on line bet. AP 3 and AP 4, along the center line of State Highway No. 87, the chord of said arc bears N. 78°38' E., 5.218 chs. dist.</p>
5.220	<p>Point for a witness point at intersection with the E. and W. center line of the S.W. 1/4 of sec. 6.</p> <p>Set a railroad spike, 3 ins. below the surface of the pavement of State Highway No. 87, mkd. BLM 1992</p>

Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona

CHAINS

from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 13°32' E., 47.8 ft. dist., with cap mkd. RM T14N R12E S6 47.8 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the railroad spike.

From this cor. point, the S.W. 1/16 sec. cor. of sec. 6 bears S. 89°33' E., 10.66 chs. dist., hereinbefore described.

Thence continue along the 1°44'02" circular curve to the left, the chord of said arc bears N. 71°35' 30" E., 7.074 chs. dist.

12.30


AP 4, identical with Station 683 + 23.14 PT, monumented with a railroad spike, firmly set, 3 ins. below the surface of the pavement of State Highway No. 87, from which bearing objects set by U.S. Bureau of Public Roads in 1962

An iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, bears N. 23°03' W., 151.6 lks. dist., with brass cap mkd. US Bureau of Public Roads 1962 683 + 23.14 BM ELEV 6846.90.

At the cor. point

Set an aluminum tablet, 3 1/4 ins. diam., 1 1/2 ins. stem, cemented in place, 1 in. below pavement, over the railroad spike, with top mkd.

T14N R12E
AP 4
S6
1992



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the aluminum tablet.

Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona

CHAINS	
4.285	<p>N. 67°33'30" E., on the line bet. AP 4 and AP 5, along the center line of State Highway No. 87.</p> <p>Point for a witness point at intersection with the N. and S. center line of the S.W. 1/4 of sec. 6.</p> <p>Set a railroad spike, 3 ins. below the surface of the pavement of State Highway No. 87, mkd. BLM 1992</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 16°45' E., 61.2 ft. dist., with cap mkd. RM T14N R12E S6 61.2 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the railroad spike.</p> <p>From this cor. point, the S.W. 1/16 sec. cor. of sec. 6 bears N. 0°13' E., 3.95 chs. dist., hereinbefore described.</p>
26.07	<p>Point for a witness point at intersection with the N. and S. center line of sec. 6.</p> <p>Set a railroad spike, 3 ins. below the surface of the pavement of State Highway No. 87, mkd. BLM 1992</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 19°49' E., 92.5 ft. dist., with cap mkd. RM T14N R12E S6 92.5 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the railroad spike.</p>

Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona

CHAINS	
	<p>From this cor. point, the center 1/4 sec. cor. of sec. 6 bears N. 0°06' E., 7.595 chs. dist., hereinbefore described.</p>
30.045	<p>AP 5, identical with Station 703 + 08.71 PC, monumented with a railroad spike, firmly set, 3 ins. below the surface of the pavement of State Highway No. 87, from which bearing objects set by U.S. Bureau of Public Roads in 1962</p> <p style="padding-left: 40px;">A rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, encircled with a collar of stone, bears S. 22°26' E., 109.8 lks. dist.</p> <p style="padding-left: 40px;">A rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, encircled with a collar of stone, bears N. 22°26' W., 126.6 lks. dist.</p> <p>At the cor. point</p> <p>Set an aluminum tablet, 3 1/4 ins. diam., 1 1/2 ins. stem, cemented in place, 1 in. below pavement, over the railroad spike, with top mkd.</p> <div style="text-align: center; margin: 20px 0;"> <p>T14N R12E AP 5</p> <hr style="width: 10%; margin: 0 auto;"/> <p>S6 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the aluminum tablet.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>Thence along a 1°35'04" circular curve to the left, having a radius of 3616.09 ft., on line bet. AP 5 and AP 6, along the center line of State Highway No. 87, the chord of said arc bears N. 61°05' E., 12.364 chs. dist.</p>
12.390	<p>Point for a witness point at intersection with the E. and W. center line of sec. 6.</p> <p>Set a railroad spike, 3 ins. below the surface of the pavement of State Highway No. 87, mkd. BLM 1992</p>

Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona

CHAINS

from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 22°36' E., 98.9 ft. dist., with cap mkd. RM T14N R12E S6 98.9 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the railroad spike.

From this cor. point, the C-E 1/16 sec. cor. of sec. 6 bears S. 89°37' E., 5.475 chs. dist., hereinbefore described.

Thence continue along the 1°35'04" circular curve to the left, the chord of said arc bears N. 53°42' E., 1.732 chs. dist.

14.122 AP 6, identical with Station 712 +38.62 PT, monumented with a railroad spike, firmly set, 3 ins. below the surface of the pavement of State Highway No. 87, from which bearing objects set by U.S. Bureau of Public Roads in 1962

A rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, encircled with a collar of stone, bears S. 37°06' E., 151.5 lks. dist.

A rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, encircled with a collar of stone, bears N. 37°22' W., 151.4 lks. dist.

At the cor. point

Set an aluminum tablet, 3 1/4 ins. diam., 1 1/2 ins. stem, cemented in place, 1 in. below pavement, over the railroad spike, with top mkd.

T14N R12E

AP 6

S6


1992

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the aluminum tablet.

Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona


CHAINS	
	<p>N. 52°45'30" E., on the line bet. AP 6 and AP 7, along the center line of State Highway No. 87.</p>
4.81	<p>AP 7, identical with Station 715 +56.40 TS, monumented with a railroad spike, firmly set, 3 ins. below the surface of the pavement of State Highway No. 87, from which bearing objects set by U.S. Bureau of Public Roads in 1962</p>
	<p>A rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, encircled with a collar of stone, bears N. 37°14' W., 96.5 lks. dist.</p>
	<p>At the cor. point.</p>
	<p>Set an aluminum tablet, 3 1/4 ins. diam., 1 1/2 ins. stem, cemented in place, 1 in. below pavement, over the railroad spike, with top mkd.</p>
	<p style="text-align: center;">T14N R12E AP 7 ----- S6 1992</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the aluminum tablet.</p>
	<p>Thence along the arc of a spiral curve to the left, having a spiral angle of 5°10'03", on line bet. AP 7 and AP 8, along the center line of State Highway No. 87, the subchord bears N. 51°03'45" E., 0.335 chs. dist.</p>
0.335	<p>Point for a witness point at intersection with the N. and S. center line of the N.E. 1/4 of sec. 6.</p>
	<p>Set a railroad spike, 3 ins. below the surface of the pavement of State Highway No. 87, mkd. BLM 1992</p>
	<p>from which</p>
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 40°09' E., 97.4 ft. dist., with cap mkd. RM T14N R12E S6 97.4 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the railroad spike.</p> <p>From this cor. point, the C-E 1/16 sec. cor. of sec. 6 bears S. 0°10' W., 4.185 chs. dist., hereinbefore described.</p> <p>Thence along the arc of a spiral curve to the left, having a spiral angle of 5°10'03", on line bet. AP 7 and AP 8, along the center line of State Highway No. 87, the subchord bears N. 51°02' E., 2.551 chs. dist.</p> <p>2.887 AP 8, identical with Station 717 +33.03 PSC, monumented with a railroad spike, firmly set, 3 ins. below the surface of the pavement of State Highway No. 87, from which bearing objects set by U.S. Bureau of Public Roads in 1962</p> <p style="padding-left: 40px;">A rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, encircled with a collar of stone, bears N. 42°19' W., 121.2 lks. dist.</p> <p>At the cor. point</p> <p>Set an aluminum tablet, 3 1/4 ins. diam., 1 1/2 ins. stem, cemented in place, 1 in. below pavement, over the railroad spike, with top mkd.</p> <div style="text-align: center; margin: 20px 0;"> <p>T14N R12E AP 8</p>  <p>S6 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the aluminum tablet.</p> <hr style="width: 30%; margin: 20px auto;"/> <p>Thence along a 4°58'04" circular curve to the left, having a radius of 1153.36 ft., on line bet. AP 8 and AP 9, along the center line of State Highway No. 87, the chord of said arc bears N. 32°52' E., 8.886 chs. dist.</p>
8.985	<p>Point for AP 9, at intersection with the S. Right-of-Way of Enchanted Lane.</p> <p>Set an aluminum tablet, 3 1/4 ins. diam., 1 1/2 ins. stem, cemented in place, 1 in. below pavement, with top mkd.</p>

Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona

CHAINS



from which

A brass tablet, 3 1/4 ins. diam., firmly set in concrete, flush with ground, bears N. 80°47' W., 144.3 lks. dist. with top mkd. US DEPT OF INTERIOR ELEV 6826 FT ABOVE SEA LEVEL 7 FMK 1970 GEOLOGICAL SURVEY.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the aluminum tablet.

From this cor. point, a railroad spike, identical with Station 727 + 11.84 PCS, firmly set, 3 ins. below pavement, bears N. 9°15'E., 5.399 chs. chord dist.

South R.O.W. of Enchanted Lane,



From AP 9, at intersection with the center line of State Highway No. 87, and the S. Right-of-Way of Enchanted Lane, hereinbefore described.

S. 77°32'30" E., on the line bet. AP 9 and AP 10, along the S. Right-of-Way of Enchanted Lane.

4.133 Point for AP 10.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.

Metes-and-Bounds Survey,
T. 14 N., R. 12 E., Gila and Salt River Mer., Arizona

CHAINS	
	<p style="text-align: center;">T14N R12E AP 10</p>  <p style="text-align: center;">S6 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point is occupied by a rebar, 1/2 in. diam., firmly set, 1 in. below the surface of the ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence along a 5°58'00" circular curve to the left, having a radius of 960.28 ft., on line bet. AP 10 and AP 11, along the south right-of-way of Enchanted Lane, the chord of said arc bears S. 83°40'30" E., 3.109 chs. dist.</p>
3.115	<p>Point for AP 11.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T14N R12E AP 11</p>  <p style="text-align: center;">S6 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point is occupied by an iron pin, 1/2 in. diam., firmly set, 1 in. below the surface of ground</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°47' E., on the line bet. AP 11 and AP 12, along the S. Right-of-Way of Enchanted Lane.</p>
6.06	<p>AP 12, on the line between secs. 5 and 6, hereinbefore described.</p> <p>From this cor. point, the N. 1/16 sec. cor of secs. 5 and 6, bears N. 0°14'E., 6.16 chs. dist., hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/>

GENERAL DESCRIPTION

CHAINS

The land encompassed in this survey is located about 13 miles northeasterly of Clints Well, Arizona. Elevation ranges from about 6600 to 6800 feet above sea level.

Access is provided by State Highway No. 87, and numerous subdivision, track and logging roads in the vicinity.

There are thick stands of timber, the predominant species being pine, interspersed with oak and juniper.

No mining activity was noted.

The principal use of the area is livestock grazing and outdoor recreation. There are numerous year round residences and summer cabins in the vicinity.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS


NAMES	CAPACITY
Gordon R. Bubel	Surveying Technician
Steven R. Walton	Survey Aid

CERTIFICATE OF SURVEY

I, Stephen K. Hansen, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 13th day of July, 1992, I have dependently resurveyed a portion of the east boundary, Townships 14 and 15 North, Range 11 East and a portion of the north boundary, a portion of the subdivisional lines, the subdivision of section 6, and metes-and-bounds surveys in Township 14 North, Range 12 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

02/04/1993

(Date)



(Cadastral Surveyor)


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the east boundary, Townships 14 and 15 North, Range 11 East and a portion of the north boundary, a portion of the subdivisional lines, the subdivision of section 6, and metes-and-bounds surveys in Township 14 North, Range 12 East, Gila and Salt River Meridian, Arizona, executed by Stephen K. Hansen, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

FEB 5 1993

(Date)

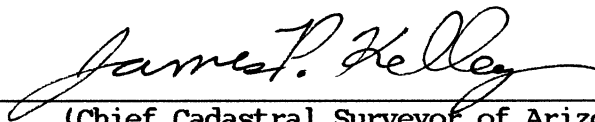

(Chief Cadastral Surveyor of Arizona)

 CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 14 N., R. 12 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.

 (Date)

 (Chief Cadastral Surveyor of Arizona)
