

ORIGINAL

1

BOOK 5448

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD NOTES  
OF THE

---

DEPENDENT RESURVEY OF

---

THE FIFTH STANDARD PARALLEL NORTH (SOUTH BOUNDARY),

---

THE WEST AND NORTH BOUNDARIES AND THE SUBDIVISIONAL LINES,

---

AND THE SUBDIVISION OF SECTIONS 13, 14, 24, 30, AND 36,

---

THE SURVEY OF CERTAIN LOTS, THE SURVEY OF TRACTS 37 AND 38,

---

AND A METES-AND-BOUNDS SURVEY IN SECTION 30,

---

TOWNSHIP 21 NORTH, RANGE 28 EAST

---

Of the Gila and Salt River Meridian,  
In the State of Arizona

---

EXECUTED BY

---

William P. Carpender and Stephen J. Malloy, Cadastral Surveyors

---


Under special instructions dated January 12, 1987, approved February 23, 1987, supplemental special instructions dated and approved October 13, 1987, supplemental special instructions dated and approved February 29, 1988, and amended special instructions dated and approved January 11, 1989, which provided for the surveys included under Group Number 685 and assignment instructions dated April 21, 1987 and July 11, 1988.

Survey commenced April 27, 1987

Survey completed April 13, 1994

BOOK 5448  
INDEX DIAGRAM

TOWNSHIP 21 NORTH, RANGE 28 EAST,

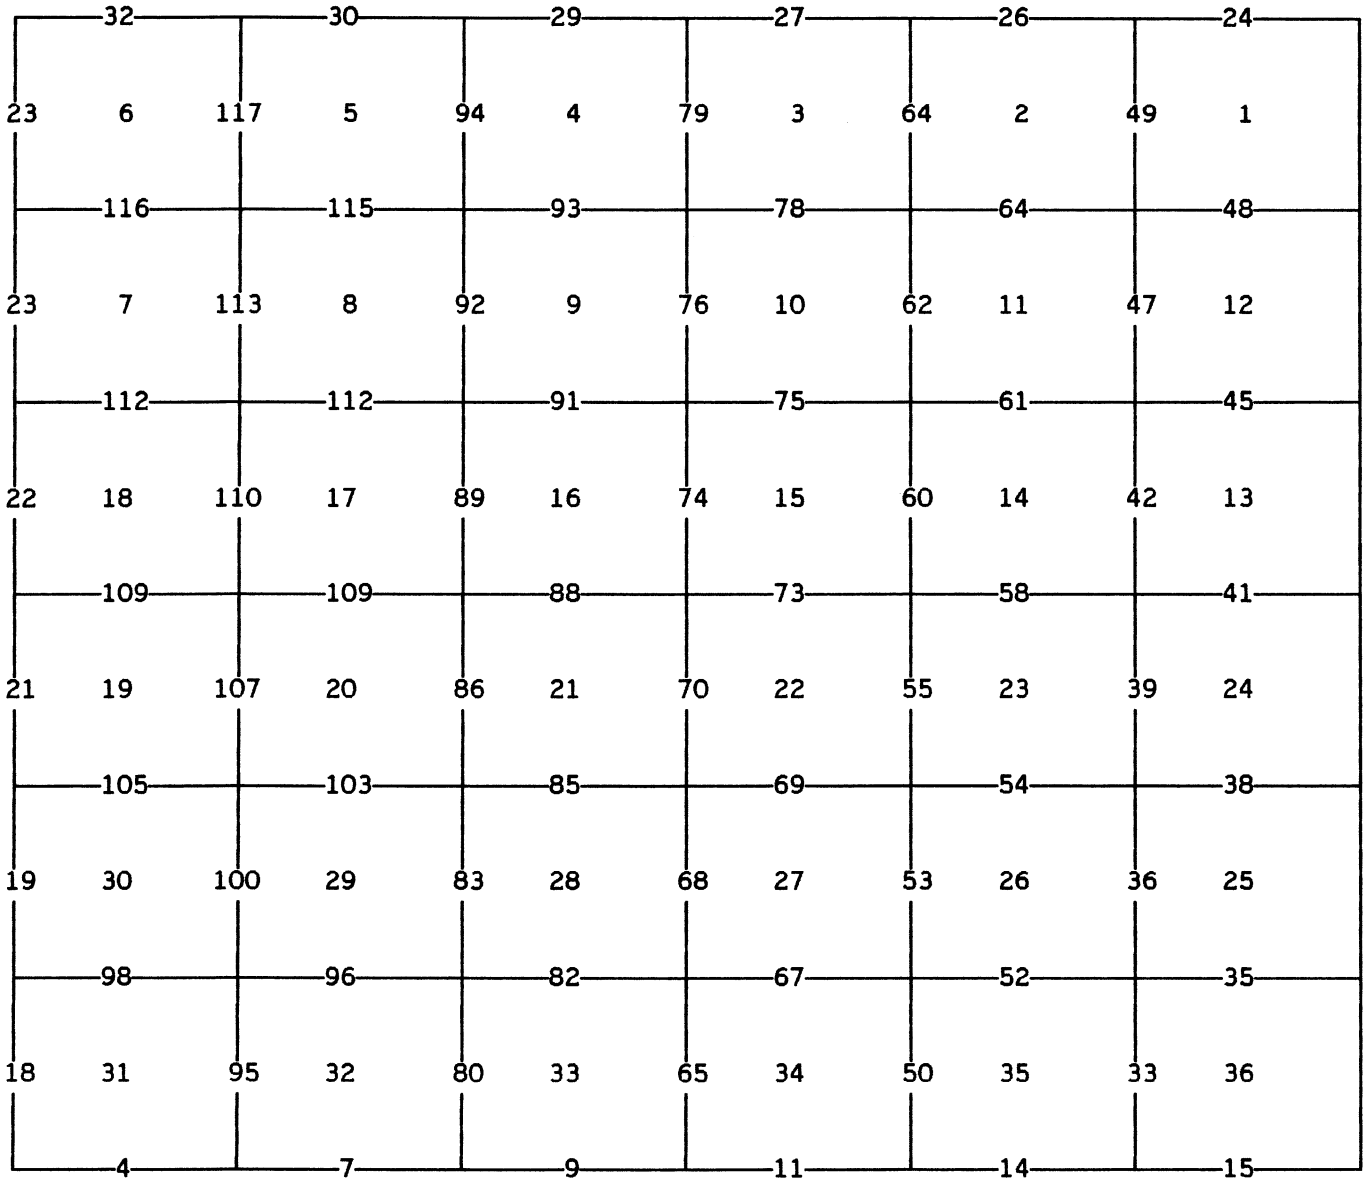

|                             |          |
|-----------------------------|----------|
| Subdivision of sec. 13      | Page 118 |
| "    "    "    14           | "    119 |
| "    "    "    24           | "    124 |
| "    "    "    30           | "    125 |
| "    "    "    36           | "    127 |
| Survey of Lot 1 sec. 13     | "    134 |
| "    "    "    1    "    14 | "    141 |
| "    "    "    2    "    "  | "    142 |
| "    "    "    3    "    "  | "    145 |
| "    "    "    4    "    "  | "    146 |
| "    "    "    5    "    "  | "    149 |
| "    "    "    6    "    "  | "    153 |

|                             |          |
|-----------------------------|----------|
| Survey of Lot 5 sec. 19     | Page 156 |
| "    "    "    1    "    21 | "    157 |
| "    "    "    1    "    29 | "    161 |
| "    "    "    2    "    "  | "    163 |
| "    "    Tract 37          | "    165 |
| "    "    "    38           | "    169 |
| Metes-and-Bounds Survey     |          |
| in sec. 30                  | "    174 |

## BOOK 5448

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

The following field notes are those of the dependent resurvey of the Fifth Standard Parallel North (South Boundary), the west and north boundaries and the subdivisional lines, and the subdivision of sections 13, 14, 24, 30 and 36, the survey of certain lots, the survey of Tracts 37 and 38, and a metes-and-bounds survey in section 30, Township 21 North, Range 28 East, Gila and Salt River Meridian, Arizona.

The township boundaries and the subdivisional lines were surveyed by W. R. Fitzgerald in 1882. The Fifth Standard Parallel North (south boundary) was resurveyed, and a portion of the Seventh Auxiliary Guide Meridian East (east boundary) and a portion of the west boundary was retraced by William Strover in 1910. A portion of the west boundary was dependently resurveyed by Ty White in 1947. The Seventh Auxiliary Guide Meridian East (east boundary) was dependently resurveyed by William P. Carpender, Stephen J. Malloy, and Kenneth W. Bays, in 1987-93.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated January 12, 1987, Supplemental Special Instructions dated October 13, 1987, Supplemental Special Instructions dated February 29, 1988, and Amended Supplemental Special Instructions dated January 11, 1989, for Group No. 685, Arizona.

Preliminary to the resurvey, the lines of the original survey and resurveys were retraced and search was made for all corners and other calls of the record. Lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by observations on a U.S.C. & G. S. triangulation network, confirmed by hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with Geodimeter, Zeiss, Hewlett-Packard, and Topcon total stations.

The geographic position of the southwest corner of section 31, as determined from a tie made to U.S.C. & G.S. triangulation station "PAUL 1959", located in the SW 1/4 of section 31, T. 21 N., R. 28 E., is as follows:

Latitude: 35°10'13.46" N. Longitude: 109°25'16.64" W. NAD 1927

The mean magnetic declination is 13 1/2° E, as determined from U.S.G.S. Quadrangle "SANDERS, ARIZ.", 1971 edition.

## BOOK 5448

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

## PRELIMINARY STATEMENT

During the course of this survey, wood post or stone corner monuments were found that were marked with the letters "IA" only or "IA" in addition to other corner markings such as grooves, notches, or 1/4.

Investigation of records of the St. Michaels Catholic Mission stored in archives at the Special Collections Library at the University of Arizona in Tucson revealed that these corners marked IA were set during the survey of Indian Allotments by the U. S. Indian Service in 1909 and 1910. Letters were found indicating that the surveyors for the Indian Service were corresponding with the GLO office in Santa Fe and that a GLO surveyor, William Strover, was inspecting Indian Allotment surveys in the township and working directly with the Indian Service surveyors while he was performing resurveys in the township in 1910. Apparently the Indian Service sought to properly restore or perpetuate original survey corners.

The Indian Allotment monuments have been accepted locally for many years; moreover, improvements such as fences and roads have been built relying on the Indian Allotment corners as the true corner positions.

Accordingly, the Indian Allotment monuments were accepted during the resurvey of this township as the best available evidence of the original corner positions.

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

Restoring the resurvey executed by  
William Strover, in 1910

Beginning at the stan. cor. of Tps. 21 N., Rs. 27 and 28 E., determined at record distance from the remaining 1910 bearing trees:

A juniper, 7 ins. diam., bears N. 9 1/2° E., 201.5 lks.  
dist., mkd. SC T21N R28E S31 BT (Record: N. 10°43' E.)

A juniper, 10 ins. diam., bears N. 34 3/4° W., 196 lks.  
dist., mkd. SC T21N R27E S36 BT (Record: N. 33° 35' W.)

At the cor. point

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>SC<br/>T21N<br/>R27E R28E<br/>S36   S31</p> <hr style="width: 50%; margin: 0 auto;"/> <p>1988</p> </div> <p>Bury the original post alongside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor., the original juniper post, 30 ins. long, 4 ins. square, with faint scribe marks visible, laying loose on the ground, bears N. 81 3/4° W., 64 lks. dist.</p> <p>From this same cor., U.S. Coast and Geodetic Survey triangulation station "PAUL 1959", bears N. 87°22'45" E., (forward bearing), 14.20 chs. dist., monumented with a standard bronze disk, set flush in a concrete base, 12 ins. square, projecting 4 ins. above ground, with top mkd. PAUL 1959, and a triangle in the center. Both reference monuments and the azimuth mark were found to be in good condition.</p> <p>S. 89°43' E., on the S. bdy. of sec. 31.</p> <p>Over rolling land, through scattered juniper, along a fence.</p> <p>13.90 Ridge, bears N. and S.</p> <p>39.94 The standard 1/4 sec. cor. of sec. 31, determined at record distance from the 1910 bearing trees:</p> <div style="margin-left: 40px;"> <p>A juniper, 10 ins. diam., bears N. 3° E., 152 lks. dist., with the marks SC 1/4 S31 BT visible on partially healed blaze. (Record: N. 3°55' E.)</p> <p>A juniper, 8 ins. diam., bears N. 55 1/4° W., 125 lks. dist., with the marks SC 1/4 S31 BT visible on partially healed blaze. (Record: N. 55° W.)</p> </div> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> |

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

SC  
T21N R28E  
1/4 S31

---

1988

Bury the 1910 sandstone alongside the stainless steel post.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

From this cor., the 1910 monument, a sandstone, 12 x 10 x 10 ins., mkd. SC 1/4 on top, laying loose on the ground, bears N. 89°42' W., 1.25 chs. dist.

The cor. is located 2 lks. N. of a fence, bears E. and W., and 22 lks. N. of a dirt road, 14 lks. wide, bears E. and W.

---

S. 89°13' E., beginning new measurement.

39.94

The standard cor. of secs. 31 and 32, monumented with a sandstone, 19 x 12 x 9 ins., firmly set, 13 ins. in the ground, mkd. with SC on N. face, 5 grooves on the E. face, 1 groove on the W. face, from which the 1910 bearing tree:

A juniper stump, 18 ins. diam., bears N. 1 3/4° E.,  
76 lks. dist. (Record: N. 0°04' E., 78 lks. dist.)

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
25 ins. in the ground, with brass cap mkd.

SC  
T21N R28E  
S31 | S32

---

1988

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Bury the 1910 stone alongside the stainless steel post.

Set a steel fence post near the cor.

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>The cor. is located in a fence, bears E. and W., and 19 lks. N. of a dirt road, bears E. and W.</p> <hr/> <p>S. 89°16' E., on the S. bdy. of sec. 32.</p> <p>Over rolling land, through scattered juniper, along a fence.</p>   |
| 18.45  | <p>The closing cor. of secs. 5 and 6, T. 20 N., R. 28 E., monumented with a juniper post, 4 x 4 ins. square, 36 ins. long, projecting 12 ins. above the ground, mkd. with 5 grooves on the E. and 1 groove on the W. faces, and is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E<br/>S32</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S 6   S 5<br/>T20N R28E<br/>CC<br/>1989</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located under a fence, bears E. and W.</p> |
| 36.00  | Ridge, bears NE. and SW.   |
| 39.89  | <p>The standard 1/4 sec. cor. of sec. 32, determined at record distance from the 1910 bearing trees:</p> <ul style="list-style-type: none"> <li>• A juniper, 8 ins. diam., bears N. 17 3/4° E., 115 lks. dist., faintly mkd. 4 BT on partly healed blaze (Record N. 16°30' E.).</li> <li>The remains of a juniper stump, bears N. 60° W., 123 lks. dist. (Record N. 61°50' W.).</li> </ul> <p>At the cor. point</p>  |

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>24 ins. in the ground, with brass cap mkd.</p>   |
|        | <p style="text-align: center;">SC<br/>T21N R28E<br/>1/4 S32<br/>-----<br/>1989</p>  |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p>  |
|        | <p>Set a steel fence post near the cor.</p>   |
|        | <p>The cor. is located 19 lks. N. of a dirt road, bears E. and W.,<br/>and 6 lks. S. of a fence, bears E. and W.</p>  |
|        | <p style="text-align: center;">-----</p> <p>S. 88°59' E., beginning new measurement.</p>  |
| 11.40  | <p>Ridge, bears N. and S.</p>   |
| 36.66  | <p>Point for the closing cor. of secs. 4 and 5, T. 20 N., R. 28 E.,<br/>at proportionate dist.; there is no remaining evidence of the<br/>original cor.</p> |
|        | <p>At the cor. point</p>  |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>24 ins. in the ground, with brass cap mkd.</p>   |
|        | <p style="text-align: center;">T21N R28E<br/>S32<br/>-----<br/>S 5   S 4<br/>T20N R28E<br/>CC<br/>1988</p>  |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic<br/>case beneath the stainless steel post.</p>   |
|        | <p>Set a steel fence post alongside the cor.</p>  |
|        | <p>The cor. is located 3 lks. S. of a fence, bears E. and W.</p>  |
| 39.94  | <p>The standard cor. of secs. 32 and 33, determined at record<br/>bearing and dist. from the 1910 bearing tree:</p>   |
|        | <p style="text-align: center;">A juniper, 12 ins. diam., bears N. 65°20' E., 388 lks.<br/>dist., mkd. SC T21N R28E S33 BT on partly healed blaze.</p>       |



## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>27 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>SC</p> <p>T21N R28E</p> <p>S32   S33</p> <hr style="width: 50%; margin: auto;"/> <p>1988</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 11 lks. N. of a track road, bears E. and W.,<br/>and 1 lk. S. of a fence, bears E. and W.</p> <p>The cor. is also located 4 lks. W. of the cor. of fences<br/>extending N., E., and W., and 98 lks. W. of the cor. of fences<br/>extending E., S., and W.</p> |
| 14.97  | <p>S. 88°47' E., on the S. bdy. of sec. 33.</p> <p>Over rolling land, through scattered juniper, along a fence.</p> <p>Point for a witness point on line bet. secs. 4 and 33.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 28 ins. in the<br/>ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>WP</p> <p>T21N R28E</p> <p>S 33</p> <hr style="width: 50%; margin: auto;"/> <p>S 4</p> <p>T20N R28E</p> <p>1988</p> </div>   |
| 37.80  | <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 50 lks. N. of a track road, bears E. and W.,<br/>and 1 lk. S. of a fence, bears E. and W.</p> <p>Ridge, bears NE. and SW.</p>   |
| 40.56  | <p>The standard 1/4 sec. cor. of sec. 33, monumented with a<br/>sandstone, 12 x 8 x 4 ins., firmly set, 6 ins. in the ground,<br/>mkd. SC 1/4 on N. face, from which the 1910 bearing tree:</p>   |

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>A juniper, 14 ins. diam., bears N. 1° E., 177 lks. dist.,<br/>mkd. SC 1/4 S33 BT on partly healed blaze.<br/>(Record: N. 4°10' W., 186 1/2 lks.)</p>        |
|        | <p>At the cor. point</p>   |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>22 ins. in the ground, with brass cap mkd.</p>  |
|        | <p style="text-align: center;">SC<br/>T21N R28E<br/>1/4 S33<br/>-----<br/>1988</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p>   |
|        | <p>Bury the 1910 stone alongside the stainless steel post.</p>   |
|        | <p>Set a steel fence post near the cor.</p>  |
|        | <p>The cor. is located 4 lks. S. of a fence, bears E. and W.</p>   |
|        | <p style="text-align: center;">-----</p> <p>S. 89°03' E., beginning new measurement.</p>   |
| 6.73   | <p>Point for a witness point on line bet. secs. 4 and 33.</p>  |
|        | <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 27 ins. in the<br/>ground, with aluminum cap mkd.</p>  |
|        | <p style="text-align: center;">WP<br/>T21N R28E<br/>S 33<br/>-----<br/>S 4<br/>T20N R28E<br/>1988</p>  |
|        | <p>Set a steel fence post alongside the cor.</p>   |
|        | <p>The cor. is located 18 lks. N. of a track road, bears E. and W.,<br/>and 1 lk. S. of a fence, bears E. and W.</p>   |
| 24.75  | <p>Abandoned track road, bears NE. and SW.</p>   |
| 36.11  | <p>Point for the closing cor. of secs. 3 and 4, T. 20 N., R. 28 E.,<br/>at proportionate distance; there is no remaining evidence of the<br/>original cor.</p> |

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>23 ins. in the ground, with brass cap mkd.</p>   |
|        | <p style="text-align: center;">T21N R28E<br/>S33</p> <hr style="width: 50%; margin: auto;"/> <p style="text-align: center;">S 4   S 3<br/>T20N R28E<br/>CC<br/>1988</p>                         |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>   |
|        | <p>Set a steel fence post alongside the cor.</p>  |
|        | <p>The cor. is located under a fence, bears E. and W.</p>   |
| 39.78  | <p>The standard cor. of secs. 33 and 34, monumented with a sandstone, 17 x 11 x 5 ins., laying loose on the ground, mkd. SC on top, 3 grooves on the E. face, and 3 grooves on the W. face.</p> |
|        | <p>At the cor. point</p>  |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>25 ins. in the ground, with brass cap mkd.</p>   |
|        | <p style="text-align: center;">SC<br/>T21N R28E<br/>S33   S34</p> <hr style="width: 50%; margin: auto;"/> <p style="text-align: center;">1988</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>  |
|        | <p>Bury the 1910 stone alongside the stainless steel post.</p>  |
|        | <p>Set a steel fence post near the cor.</p>   |
|        | <p>The cor. is located under a fence, bears E. and W.</p>   |
|        | <hr style="width: 80%; margin-left: 0;"/> <p>N. 89°27' E., on the S. bdy. of sec. 34.</p>   |
|        | <p>Over rolling land, through scattered juniper, along a fence.</p>   |
| 31.60  | <p>Ridge, bears NE. and SW.</p>   |

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 40.36  | <p>The stan. 1/4 sec. cor. of sec. 34, monumented with a sandstone, 14 x 11 x 4 ins., lying loose on the ground, mkd. 1/4 SC on a face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SC<br/>T21N R28E<br/>1/4 S34<br/>-----<br/>1987</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 50 1/4° E.,<br/>204 lks. dist., mkd. 1/4 S34 SC BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 41° W.,<br/>203.5 lks. dist., mkd. X at breast height and BT at base.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Raise a mound of stone, 4 ft. base, 4 ft. high, N. of the cor.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 47 lks. N. of a dirt road, 15 lks. wide, bears E. and W., and 53 lks. S. of a fence, bears E. and W.</p> <p style="text-align: center;">-----</p> <p>N. 86°10' E., beginning new measurement.</p> |
| 37.815 | <p>Point for the closing cor. of secs. 2 and 3, T. 20 N., R. 28 E., at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 36 ins. in the ground, with brass cap mkd.</p>  |

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R28E  
S34

|           |     |
|-----------|-----|
| S 3       | S 2 |
| T20N R28E |     |
| CC        |     |
| 1989      |     |

from which

An aluminum post, 36 ins. long, 3/4 ins. diam.,  
set 30 ins. in the ground, for a reference monument, bears  
S. 44 1/2° E., 68.0 ft. dist., with cap mkd. RM T20N R28E  
S2 68.0 FT 1989 and an arrow pointing to the cor., and  
with a steel fence post alongside the aluminum post.

An aluminum post, 36 ins. long, 3/4 ins. diam.,  
set 28 ins. in the ground, for a reference monument, bears  
S. 38 1/4° E., 77.2 ft. dist., with cap mkd. RM T20N R28E  
S3 77.2 FT 1989 and an arrow pointing to the cor., and  
with a steel fence post alongside the aluminum post.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic  
case beneath the stainless steel post.

The cor. is located 8 ins. below the surface of the N. edge of a  
dirt road, 33 lks. wide, bears E. and W.

41.73

The standard cor. of secs. 34 and 35, determined at record dist.  
from the remains of the 1910 bearing trees:

A stump hole, bears N. 66°37' E., 149.5 lks. dist.

A juniper, 20 ins. diam., bears N. 31° W., 233 lks.  
dist., with axe marks. (Record: N. 30°17' W.)

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.

|           |     |
|-----------|-----|
| SC        |     |
| T21N R28E |     |
| S34       | S35 |
| 1989      |     |

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case  
beneath the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Set a steel fence post near the cor.</p> <p>The cor. is located 44 lks. S. of a dirt road, 20 lks. wide, bears E. and W. and 9 lks SW of a fence cor. bears N., E., and W.</p> <hr/> <p>S. 87°57' E., on the S. bdy. of sec. 35.</p> <p>Over rolling grass land, through scattered junipers.</p>   |
| 40.40  | <p>The stan. 1/4 sec. cor. of sec. 35, monumented with a sandstone, 12 x 8 x 5 ins., loosely set, 1 in. in the ground, with illegible marks on a face.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SC<br/>T21N R28E<br/>1/4 S35</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1989</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the 1910 stone alongside the cor.</p> <p>Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 50 lks. N. of a dirt road, 20 lks. wide, bears E. and W.; also 26 lks. S. of a fence, bears E. and W.</p> <hr/> <p>S. 88°34' E., beginning new measurement.</p> |
| 16.50  | <p>U. S. Highway 666, 40 lks. wide, bears N. 8° E. and S. 2° W.</p>   |
| 34.90  | <p>Wash, 15 lks. wide, drains NE.; asc. over steep W. slope.</p>  |
| 37.70  | <p>Top of steep ascent., continue over rolling grass land.</p>  |
| 38.01  | <p>The closing cor. of secs. 1 and 2, T. 20 N., R. 28 E., monumented with a rebar, 5/8 in. diam., set in 1977, by Keith Shreeve PE 6123, as per survey map, book 1, page 53, filed at the Apache County Courthouse in St. Johns, AZ; this rebar had been removed by persons unknown at the time of the monumentation.</p>   |

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
12 ins. in the ground to bedrock, mkd. X on the bedrock, and in a  
mound of stone, 4 ft. base, to top, with brass cap mkd.

T21N R28E  
S35

|           |     |
|-----------|-----|
| S 2       | S 1 |
| T20N R28E |     |
| CC        |     |
| 1989      |     |

42.19

The stan. cor. of secs. 35 and 36, monumented with a sandstone,  
14 X 10 X 4 ins., firmly set, projecting 3 ins. above the ground,  
mkd. with 5 grooves on the E. and 1 groove on the W. faces, and  
in a mound of stone 3 ft. base, 2 ft. high, from which the 1910  
bearing tree:

A juniper, 18 ins. diam., bears N. 41 1/2° W., 76 lks. dist.,  
with faint scribe marks 21N R28E S35 BT. (Record: N. 42°50' W.,  
77 1/2 lks.)

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22  
ins. in the ground, and in a mound of stone, 3 ft. base, to top,  
with brass cap mkd.

SC  
T21N R28E  
S35 | S36

1988

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case  
beneath the stainless steel post.

Bury the 1910 stone alongside the cor.

Set a steel fence post near the cor.

---

S. 88°18' E., on the S. bdy. of sec. 36.

Over rolling grass land, through scattered junipers.

## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 41.27  | <p>The stan. 1/4 sec. cor. of sec. 36, monumented with a limestone 10 x 8 x 2 ins., loosely set, 1 in. in the ground, with no visible marks.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SC<br/>T21N R28E<br/>1/4 S36<br/>-----<br/>1988</p> <p>from which</p> <p style="text-align: center;">A juniper, 7 ins. diam., bears N. 20 1/2° W.,<br/>239 lks. dist., mkd. 1/4 S36 SC BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone 3 ft. base, 2 ft. high, N. of cor.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 5 lks. S. of a fence, bears E. and W., and 37 lks. S. of a dirt road, 15 lks. wide, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> |
| 4.10   | Dirt road, 15 lks. wide, bears ENE. and WSW.   |
| 15.473 | <p>Point for the E-W-E 1/256 sec. cor. of sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">SC<br/>T21N R28E<br/>S 36<br/>E-W-E 1/256<br/>-----<br/>1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>  |



## BOOK 5448

Dependent Resurvey of the Fifth Stan. Par. N. (S. Bdy.),  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 20.63  | <p>Set a steel fence post near the cor.</p> <p>The cor. is located 74 lks. N. of a fence bears E. and W.</p> <p>Point for the E. 1/16 sec. cor. of sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SC<br/>T21N R28E<br/>E 1/16 S36<br/>-----<br/>1988</p> <p>from which</p> <p style="text-align: center;">A juniper, 6 ins. diam., bears N. 8 1/4° W.,<br/>139 lks. dist., mkd. E1/16 S36 SC BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |
| 25.787 | <p>Point for the W-E-E 1/256 sec. cor. of sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SC<br/>T21N R28E<br/>S36<br/>W-E-E 1/256<br/>-----<br/>1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>   |
| 41.26  | <p>True point for the stan. cor. of Tps. 21 N., Rs. 28 and 29 E., determined at record bearing and dist. from the 1910 witness cor., bears South, 1 ch. dist., monumented with a stainless steel post, 2 1/2 ins. diam., projecting 2 ins. above the ground, with brass cap mkd. WC SC T21N R28E R29E S36 S31 1988, with a steel fence post near the cor., located in a cor. of fences bearing S. and WNW.</p> <hr/>  |

## BOOK 5448

Dependent Resurvey of the West Boundary

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>Restoring the survey executed by<br/>W. R. Fitzgerald, in 1882</p> <hr/> <p>From the stan. cor. of Tps. 21 N., Rs. 27 and 28 E., hereinbefore described.</p> <p>N. 0°06' E., bet. secs. 31 and 36.</p> <p>Ascend gradually over rolling land, through scattered juniper.</p> <p>0.10 Fence, bears E. and W.</p> <p>4.60 Ridge, bears E. and W.; descend gradually.</p> <p>39.99 Point for the 1/4 sec. cor. of secs. 31 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N<br/>1/4<br/>R27E   R28E<br/>S36   S31<br/>1990</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>53.20 Enter broken, rocky land.</p> <p>71.30 Descend rocky, NW slope.</p> <p>79.98 The cor. of secs. 25, 30, 31, and 36, monumented with a sandstone, 28 x 15 x 4 ins., firmly set, projecting 18 ins. above a mound of stone, 4 ft. base, 1 ft. high, mkd. with 5 grooves on the N., and 1 groove on the S. faces.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> |

## BOOK 5448

Dependent Resurvey of the West Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

|       |      |
|-------|------|
| T21N  |      |
| R27E  | R28E |
| S25   | S30  |
| ----- |      |
| S36   | S31  |
| 1987  |      |

from which

A rock outcropping, 10 x 3 x 3 ft. high, bears N. 21° E.,  
29 1/2 lks. dist., with X B0 chiseled on the S. face.

A rock outcropping, 6 x 4 x 2 ft. high, bears N. 51° W.,  
59 lks. dist., with X B0 chiseled on the top.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case  
beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Set a steel fence post near the cor.

N. 0°44' E., bet. secs. 25 and 30.

Descend over rolling grass land.

24.40 Puerco River, 10 chs. wide, course SW.

39.00 Railroad track, bears ENE, and WSW.

39.30 Railroad track, bears ENE. and WSW.

39.61 Point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate  
dist.; there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
48 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T21N |      |
| 1/4  |      |
| R27E | R28E |
| S25  | S30  |
| 1987 |      |

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case  
beneath the stainless steel post.

The cor. is located in a railroad access road, 20 lks. wide,  
bears ENE. and WSW.

BOOK 5448

Dependent Resurvey of the West Boundary  
 T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |      |  |      |      |     |     |     |     |      |  |
|--------|---|------|--|------|------|-----|-----|-----|-----|------|--|
| 42.69  | <p>Intersect eastbound right-of-way of U.S. Interstate Highway 40, monumented with a rail road rail, firmly set, projecting 20 ins. above ground, mkd. HWY. R. OF W. POT 1427+75.6 on NNW face. This cor. was established by Santa Fe Railroad, of an unknown date, a copy of the plat can be found at the Santa Fe Railroad office in Winslow, Arizona. The cor. is located at the cor. of right-of-way fences bearing S., WSW and ENE.</p> <p>Thence along eastbound highway right-of-way, identical with a portion of the line bet. secs. 25 and 30.</p>   |      |  |      |      |     |     |     |     |      |  |
| 43.78  | <p>Intersect eastbound right-of-way of U.S. Interstate Highway 40, monumented with a rail road rail, firmly set, projecting 26 ins. above ground, mkd. HWY. R. OF W. POT 1427+75.6 on NNW face. This cor. was established by Santa Fe Railroad, of an unknown date, a copy of the plat can be found at the Santa Fe Railroad office in Winslow, Arizona. The cor. is located 20 lks. SSW. of a right-of-way fence cor. bearing N. and WSW.</p> <p>Leave eastbound highway right-of-way.</p>   |      |  |      |      |     |     |     |     |      |  |
| 49.37  | <p>Intersect westbound right-of-way of U.S. Interstate Highway 40, monumented with a brass disk, 2 1/2 ins. diam., set flush in a concrete cylinder, 6 ins. diam., flush with ground, mkd. ARIZONA HIGHWAY DEPT. RP 96.00 W.B. CONST. STA 1428 X 29.90 1964. The cor. is located in a right-of-way fence, bearing ENE. and WSW.</p>   |      |  |      |      |     |     |     |     |      |  |
| 79.22  | <p>The cor. of secs. 19, 24, 25, and 30, perpetuated by Ralph B. Nunnolley, R.C.E. No. 4901, in 1969, utilized by Ralph B. Nunnolley in 1968, and Lacy C. Greer, R.L.S. 5704, in 1964, monumented with a rebar, 30 ins. long, 3/8 in. diam., firmly set, projecting 12 ins. above the ground. This is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <table data-bbox="844 1533 1006 1732" style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T21N</td> </tr> <tr> <td style="text-align: center;">R27E</td> <td style="text-align: center;">R28E</td> </tr> <tr> <td style="text-align: center;">S24</td> <td style="text-align: center;">S19</td> </tr> <tr> <td style="text-align: center;">S25</td> <td style="text-align: center;">S30</td> </tr> <tr> <td colspan="2" style="text-align: center;">1987</td> </tr> </table> <p>from which</p> | T21N |  | R27E | R28E | S24 | S19 | S25 | S30 | 1987 |  |
| T21N   |   |      |  |      |      |     |     |     |     |      |  |
| R27E   | R28E  |      |  |      |      |     |     |     |     |      |  |
| S24    | S19   |      |  |      |      |     |     |     |     |      |  |
| S25    | S30   |      |  |      |      |     |     |     |     |      |  |
| 1987   |   |      |  |      |      |     |     |     |     |      |  |

## BOOK 5448

Dependent Resurvey of the West Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

An iron disk, 2 ins. diam., firmly set, flush in a concrete cylinder, 5 ins. diam., 2 ins. below the ground, bears S. 0°28' W., 87.5 lks. dist., mkd. ARIZONA HIGHWAY DEPT. ELEV. 5764.57 + sta. (This monument is for old U.S. Highway 66).

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

Set a steel fence post near the cor.

The cor. is located 11 lks. W. of a cor. of fences bearing N., S., and W.

---

N. 0°27' E., bet. secs. 19 and 24.

Ascend over S. slope, through grass land.

38.80 Top of mesa; descend over rolling grass land.

39.67 Point for the 1/4 sec. cor. of secs. 19 and 24, at proportionate dist.; there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T21N |      |
| 1/4  |      |
| R27E | R28E |
| S24  | S19  |
| 1987 |      |

from which

A rim rock outcropping, 25 x 4 x 4 ft. high, bears N. 65° E., 85 lks. dist., with X BO chiseled on the SW. face.

A rock outcropping, 4 x 3 x 1 ft. high, bears S. 62 3/4° W., 40 lks. dist., with X BO chiseled on the top.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

## BOOK 5448

Dependent Resurvey of the West Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |      |  |      |      |      |      |       |     |      |     |      |  |
|--------|---|------|--|------|------|------|------|-------|-----|------|-----|------|--|
| 79.34  | <p>Point for the cor. of secs., 13, 18, 19, and 24, at proportionate dist.; a sandstone, 27 x 12 x 6 ins. diam., is lying loose on the ground nearby, mkd. with 3 grooves on one face, and 3 grooves on the opposite face. Earth work in the area makes it impossible to determine the original cor. position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T21N</td></tr> <tr><td style="text-align: center;">R27E</td><td style="text-align: center;">R28E</td></tr> <tr><td style="text-align: center;">S13</td><td style="text-align: center;">S18</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td style="text-align: center;">S24</td><td style="text-align: center;">S19</td></tr> <tr><td colspan="2" style="text-align: center;">1987</td></tr> </table> <p>Bury the mkd. stone alongside the stainless steel post.</p> <hr/> | T21N |  | R27E | R28E | S13  | S18  | ----- |     | S24  | S19 | 1987 |  |
| T21N   |   |      |  |      |      |      |      |       |     |      |     |      |  |
| R27E   | R28E  |      |  |      |      |      |      |       |     |      |     |      |  |
| S13    | S18   |      |  |      |      |      |      |       |     |      |     |      |  |
| -----  |   |      |  |      |      |      |      |       |     |      |     |      |  |
| S24    | S19   |      |  |      |      |      |      |       |     |      |     |      |  |
| 1987   |   |      |  |      |      |      |      |       |     |      |     |      |  |
| 0.70   | <p>N. 0°27' E., bet. secs. 13 and 18.</p> <p>Ascend over S. slope, through grass land.</p> <p>Power pole line, bears E. and W.</p>  |      |  |      |      |      |      |       |     |      |     |      |  |
| 39.67  | <p>Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T21N</td></tr> <tr><td colspan="2" style="text-align: center;">1/4</td></tr> <tr><td style="text-align: center;">R27E</td><td style="text-align: center;">R28E</td></tr> <tr><td style="text-align: center;">S13</td><td style="text-align: center;">S18</td></tr> <tr><td colspan="2" style="text-align: center;">1987</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>  | T21N |  | 1/4  |      | R27E | R28E | S13   | S18 | 1987 |     |      |  |
| T21N   |   |      |  |      |      |      |      |       |     |      |     |      |  |
| 1/4    |   |      |  |      |      |      |      |       |     |      |     |      |  |
| R27E   | R28E  |      |  |      |      |      |      |       |     |      |     |      |  |
| S13    | S18   |      |  |      |      |      |      |       |     |      |     |      |  |
| 1987   |   |      |  |      |      |      |      |       |     |      |     |      |  |
| 79.34  | <p>The cor. of secs. 7, 12, 13, and 18, monumented with an iron post, 2 ins. diam., projecting 4 ins. above ground, with brass cap mkd. T21N R27E R28E S12 S7 S13 S18 1947.</p> <p>from which bearing trees mkd. in 1947</p> <p style="padding-left: 40px;">A juniper, 20 ins. diam., bears S. 13° E., 22 lks. dist., mkd. T21N R28E S18 BT.</p>  |      |  |      |      |      |      |       |     |      |     |      |  |

## BOOK 5448

Dependent Resurvey of the West Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>A juniper, 25 ins. diam., bears N. <math>17\ 1/2^\circ</math> W., 74 lks. dist., mkd. T21N R27E S12 BT. (Record: N. <math>18\ 1/4^\circ</math> W.)</p> <p>Add the marks 1994 on the brass cap.</p> <hr/> <p style="text-align: center;">Restoring the resurvey executed by<br/>Ty White, in 1947</p> <hr/> <p>N. <math>0^\circ 28'</math> E., bet. secs. 7 and 12.</p> <p>Ascend along a fence, bears N. and S.</p>  |
| 16.15  | Top of bluff, bears E. and W.; thence over rolling land, through scattered juniper.   |
| 39.63  | <p>The <math>1/4</math> sec. cor. of secs. 7 and 12, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. <math>1/4</math> S12 S7 1947.</p> <p>from which bearing trees mkd. in 1947</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. <math>60\ 3/4^\circ</math> E., 48 lks. dist., mkd. <math>1/4</math> S7 BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. <math>57\ 1/4^\circ</math> W., 90 lks. dist., mkd. <math>1/4</math> S12 BT.</p> <p>Add the marks T21N R27E R28E 1994 on the brass cap.</p> <p>The cor. is located 3 lks. E. of a fence, bears N. and S.</p> <hr/> <p>N. <math>0^\circ 26'</math> E., beginning new measurement.</p> |
| 11.00  | Ridge, bears E. and W.  |
| 30.45  | Ridge, bears E. and W.  |
| 39.73  | <p>The cor. of secs. 1, 6, 7 and 12, monumented with an iron post, 2 ins. diam., firmly set, projecting 27 ins. above ground, and in a mound of stone, 4 ft. base, <math>1\ 1/2</math> ft. high, with brass cap mkd. T21N R27E R28E S1 S6 S12 S7 1947.</p> <p>Add the marks 1994 on the brass cap.</p> <p>The cor. is located 3 lks. E. of a fence, bears N. and S.</p> <hr/> <p>N. <math>0^\circ 29'</math> E., bet. secs. 1 and 6.</p>  |

## BOOK 5448

Dependent Resurvey of the West Boundary

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | Over rolling land, along a fence.   |
| 11.00  | Ridge, bears E. and W.  |
| 23.60  | Ridge, bears E. and W.  |
| 28.70  | Top of bluff, bears NE. and SW.; descend steep NW. slope.   |
| 31.65  | Bottom of NW. slope; thence over level, grassy valley.  |
| 39.59  | The 1/4 sec. cor. of secs. 1 and 6, monumented with an iron post, 1 in. diam., firmly set, 12 ins. below ground, with brass cap mkd. 1/4 S1 S6 1947.  |
|        | Add the marks T21N R27E R28E 1994 on the brass cap.   |
|        | N. 0°31' E., beginning new measurement.   |
| 39.68  | The cor. of Tps. 21 and 22 N., Rs. 27 and 28 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above ground, with a scattered mound of stone to the S., with brass cap mkd. T22N R27E R28E S36 S31 S1 S6 T21N 1947. |
|        | Add the marks 1994 on the brass cap.  |
|        | The cor. is located 4 lks. N. of a cor. of fences bearing E., S., and W.  |
|        | Dependent Resurvey of the North Boundary,<br>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona  |
|        | Restoring the survey executed by<br>W. R. Fitzgerald, in 1882   |
|        | From the cor. of Tps. 21 and 22 N., Rs. 28 and 29 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T22N R28E R29E S36 S31 S1 S6 T21N 1991.                         |
|        | N. 89°07' W., bet. secs. 1 and 36.  |
|        | Over rolling land, through scattered juniper.   |
| 40.19  | Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate dist.; there is no remaining evidence of the original cor.  |



## BOOK 5448

Dependent Resurvey of the North Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.

T22N R28E  
S36  
1/4 —  
S 1  
T21N  
1992

from which

A piñon, 5 ins. diam., bears N. 82 3/4° E.,  
133 lks. dist., mkd. 1/4 S36 BT.

A juniper, 7 ins. diam., bears S. 3 3/4° E.,  
13 lks. dist., mkd. 1/4 S1 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Set a steel fence post near the cor.

80.38

Point for the cor. of secs. 1, 2, 35, and 36, at proportionate  
dist.; there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.

T22N R28E  
S35 | S36  
— | —  
S 2 | S 1  
T21N  
1992

from which

A juniper, 6 ins. diam., bears N. 58 1/2° E.,  
84 lks. dist., mkd. T22N R28E S36 BT.

A juniper, 10 ins. diam., bears S. 80 1/2° E.,  
124 lks. dist., mkd. T21N R28E S1 BT.

A juniper, 11 ins. diam., bears S. 8 1/4° W.,  
41 lks. dist., mkd. T21N R28E S2 BT.

A juniper, 3 ins. diam., bears N. 31 1/2° W.,  
49 lks. dist., mkd. X BT.

## BOOK 5448

Dependent Resurvey of the North Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 40.19  | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N. 89°07' W., bet. secs. 2 and 35.</p> <p>Over rolling land, through dense juniper.</p> <p>The 1/4 sec. cor. of secs. 2, and 35, monumented with a juniper post, 34 ins. long, 6 x 5 ins. sq., firmly set, projecting 14 ins. above ground, mkd. IA on the S., 4 on the W., 1/4 on the N., and with faint marks on the E. faces.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R28E<br/>S35<br/>1/4 —<br/>S 2<br/>T21N<br/>1992</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 47 3/4° E.,<br/>54 lks. dist., mkd. 1/4 S2 BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 54 1/4° W.,<br/>52 lks. dist., mkd. 1/4 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the IA post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N. 88°08' W., beginning new measurement.</p> <p>40.13 The cor. of secs. 2, 3, 34, and 35, monumented with a juniper post, 25 ins. long, 3 ins. sq., firmly set, projecting 3 ins. above ground, with axe marks.</p> <p>At the cor. point</p> |

## BOOK 5448

Dependent Resurvey of the North Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
26 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T22N | R28E |
| S34  | S35  |
| S 3  | S 2  |
| T21N |      |
| 1991 |      |

from which

A juniper, 15 ins. diam., bears N. 33 1/2° E.,  
14 lks. dist., mkd. T22N R28E S35 BT.

A juniper, 4 ins. diam., bears S. 41° E.,  
123 1/2 lks. dist., mkd. X BT.

A juniper, 15 ins. diam., bears S. 56° W.,  
51 lks. dist., mkd. T21N R28E S3 BT.

A juniper, 4 ins. diam., bears N. 22 3/4° W.,  
190 lks. dist., mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the juniper post alongside the stainless steel post.

Set a steel fence post near the cor.

---

N. 86°30' W., bet. secs. 3 and 34.

Over rolling land, through dense juniper.

39.45

The 1/4 sec. cor. of secs. 3 and 34, monumented with the remains  
of a juniper post, 36 ins. long, 2 ins. sq., laying loose on the  
ground.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
25 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T22N | R28E |
| S34  |      |
| 1/4  | —    |
| S 3  |      |
| T21N |      |
| 1991 |      |

## BOOK 5448

Dependent Resurvey of the North Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

from which

A juniper, 11 ins. diam., bears N.  $6\frac{1}{2}^{\circ}$  E.,  
35 lks. dist., mkd. 1/4 S34 BT.

A juniper, 9 ins. diam., bears S.  $81\frac{1}{4}^{\circ}$  W.,  
44 lks. dist., mkd. 1/4 S3 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the juniper post alongside the stainless steel post.

Set a steel fence post near the cor.

N.  $89^{\circ}24'$  W., beginning new measurement.

40.78

The cor. of secs. 3, 4, 33, and 34, monumented with a juniper  
post, 38 ins. long, 4 ins. sq., firmly set, projecting 18 ins.  
above ground, mkd. with 3 grooves on the NE., and 3 grooves on  
the SW. faces.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
25 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T22N | R28E |
| S33  | S34  |
| S 4  | S 3  |
| T21N |      |
| 1991 |      |

from which

A juniper, 11 ins. diam., bears N.  $38\frac{1}{4}^{\circ}$  E.,  
270 lks. dist., mkd. T22N R28E S34 BT.

A juniper, 10 ins. diam., bears S.  $34\frac{1}{2}^{\circ}$  E.,  
249 lks. dist., mkd. T21N R28E S3 BT.

A juniper, 4 ins. diam., bears S.  $5\frac{3}{4}^{\circ}$  W.,  
121 1/2 lks. dist., mkd. T21N R28E S4 BT.

A juniper, 12 ins. diam., bears N.  $44\frac{1}{4}^{\circ}$  W.,  
133 1/2 lks. dist., mkd. T22N R28E S33 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

## BOOK 5448

Dependent Resurvey of the North Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Bury the juniper post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/>  |
| 40.18  | <p>N. 87°59' W., bet. secs. 4 and 33.</p> <p>Over rolling land, through moderate juniper.</p> <p>The 1/4 sec. cor. of secs. 4 and 33, monumented with a juniper post, 22 ins. long, 2 x 4 ins., sq., loosely set, projecting 15 ins. above the ground, mkd. 1/4 on the E. face.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R28E<br/>S33<br/>1/4 —<br/>S 4<br/>T21N<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 28 1/2° E.,<br/>319 lks. dist., mkd. 1/4 S4 BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears N. 51 1/4° W.,<br/>337 lks. dist., mkd. 1/4 S33 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located in a cor. of abandoned fences, bearing E. and S.</p> <hr/> <p>N. 88°00' W., beginning new measurement.</p> |
| 40.29  | <p>The cor. of secs. 4, 5, 32, and 33, monumented with a juniper post, 32 ins. long, 3 x 4 ins. sq., firmly set, projecting 9 ins. above ground, mkd. with IA on the S., 4 grooves on the E., and 2 grooves on the W. faces. A juniper guard post, 6 ins. diam., projecting 5 ft. above ground, is alongside the cor.</p>   |

## BOOK 5448

Dependent Resurvey of the North Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
26 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T22N | R28E |
| S32  | S33  |
| S 5  | S 4  |
| T21N |      |
| 1991 |      |

from which

A juniper, 11 ins. diam., bears N. 87° E.,  
79 lks. dist., mkd. T22N R28E S33 BT.

A juniper, 12 ins. diam., bears S. 58 1/2° E.,  
107 lks. dist., mkd. T21N R28E S4 BT.

A juniper, 9 ins. diam., bears S. 33° W.,  
49 1/2 lks. dist., mkd. T21N R28E S5 BT.

A juniper, 7 ins. diam., bears N. 42 1/4° W.,  
151 1/2 lks. dist., mkd. T22N R28E S32 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the IA post alongside the stainless steel post.

Set a steel fence post near the cor.

The cor. is located 14 lks. E. of a track road, bears N. and S.

N. 87°36' W., bet. secs. 5 and 32.

Over rolling land, through moderate juniper.

37.60 Track road on low ridge, bears N. and S.

40.42 Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate  
dist.; there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
21 ins. in the ground, with brass cap mkd.

## BOOK 5448

Dependent Resurvey of the North Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p style="text-align: center;">T22N R28E<br/>S32<br/>1/4 —<br/>S 5<br/>T21N<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 16 3/4° E.,<br/>54 1/2 lks. dist., mkd. 1/4 S32 BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 56 1/2° E.,<br/>105 lks. dist., mkd. 1/4 S5 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>   |
| 80.84  | <p>Point for the cor. of secs. 5, 6, 31, and 32, at proportionate<br/>dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R28E<br/>S31   S32<br/>—+—<br/>S 6   S 5<br/>T21N<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears N. 58° E.,<br/>279 1/2 lks. dist., mkd. T22N R28E S32 BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 59 1/4° E.,<br/>209 lks. dist., mkd. T21N R28E S5 BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears S. 76 3/4° W.,<br/>680 lks. dist., mkd. T21N R28E S6 BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears N. 21° W.,<br/>488 lks. dist., mkd. T22N R28E S31 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |

## BOOK 5448

Dependent Resurvey of the North Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>From this cor., an iron pipe, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with a brass tablet attached to the top, mkd. LS 5704 T22N R28E S31 S32 S6 S5 T21N R28E 1969, located 2 lks. E. of a cor. of fences bearing S. and W., established by Lacy C. Greer, R.L.S. NO. 5704, in 1969, bears N. 27°30' W., 156 lks. dist. This monument is shown on an unrecorded plat found at Matkin-Murphy Consulting Engineers Inc., in Show Low, Arizona. The plat gives no indication of what procedure was used to establish this position, which is not harmoniously related to accepted cors., and is not utilized in the course of this resurvey.</p>   |
|        | <p>N. 87°36' W., bet. secs. 6 and 31.</p>  |
|        | <p>Ascend over rolling land, through scattered juniper.</p>  |
| 25.00  | <p>Ridge, bears N. and S.; descend.</p>  |
| 40.42  | <p>The 1/4 sec. cor. of secs. 6 and 31, monumented with a broken, decayed juniper post, 36 ins. long, 4 ins. sq., a portion firmly set, projecting 2 ins. above ground, another portion of the same post, laying alongside, mkd. with axe marks, with a mound of stone, 1 1/2 ft. base, 1 ft. high, N. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a steel fence post driven into the ground, encircled with a collar of stone, 2 ft. diam., with brass cap mkd.</p> <div style="text-align: center;"> <p>T22N R28E<br/>S31<br/>1/4 —<br/>S 6<br/>T21N<br/>1991</p> </div> <p>from which</p> <p>A juniper, 5 ins. diam., bears S. 43 1/2° E., 83 lks. dist., mkd. 1/4 S6 BT.</p> <p>A juniper, 6 ins. diam., bears N. 11 3/4° W., 36 1/2 lks. dist., mkd. 1/4 S31 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> |



## BOOK 5448

Dependent Resurvey of the North Boundary  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>Bury both portions of the juniper post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N. 89°33' W., beginning new measurement.</p>  |
| 38.76  | <p>The cor. of Tps. 21 and 22 N., Rs. 27 and 28 E, hereinbefore described.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of the Subdivisional Lines,<br/>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">Restoring the survey executed by<br/>W. R. Fitzgerald, in 1882</p> <hr/> <p>From the stan. cor. of secs. 35 and 36, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°34' E., bet. secs. 35 and 36.</p> <p>Descend over grassland, through scattered juniper.</p> |
| 13.41  | <p>Point for a witness point on line bet. secs. 35 and 36.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, with cap mkd.</p> <p style="text-align: center;">W P<br/>T21N R28E<br/>S35   S36<br/>1989</p>  |
| 33.42  | <p>Set a steel fence post near the cor.</p> <p>The cor. is located 17 lks. E. of a fence, bears N. and S., curving SE.</p> <p>Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S35   S36<br/>1989</p> <p>from which</p> <p style="text-align: center;">A juniper, 10 ins. diam., bears S. 76° E.,<br/>58 lks. dist., mkd. 1/4 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 2 lks. E. of a fence, bears N. and S.</p>   |
| 50.24  | <p>Point for a witness point on line bet. secs. 35 and 36.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 29 ins. in the<br/>ground, with cap mkd.</p> <p style="text-align: center;">W P<br/>T21N R28E<br/>S35   S36<br/>1989</p>  |
| 66.84  | <p>Set a steel fence post near the cor.</p> <p>The cor. is located 2 lks. W. of a fence, bears N. and S.</p> <p>The cor. of secs. 25, 26, 35, and 36, monumented with a wood<br/>post, 42 ins. long, 4 ins. sq., firmly set, projecting 20 ins.<br/>above ground, mkd. IA on the N. face and with 2 grooves on the E.<br/>face.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S26   S25<br/>-----<br/>S35   S36<br/>1987</p> <p>from which</p> |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

A juniper, 8 ins. diam., bears S.  $17\ 1/2^\circ$  E.,  
95 lks. dist., mkd. T21N R28E S36 BT.

A juniper, 10 ins. diam., bears S.  $46\ 3/4^\circ$  W.,  
99 lks. dist., mkd. T21N R28E S35 BT.

Deposit a magnet in a  $1 \times 1 \times 2\ 5/8$  in. white plastic case  
beneath the stainless steel post.

Bury the wood post alongside the stainless steel post.

Raise a mound of stone 3 ft. base, 2 ft. high, W. of the cor.

Set a steel fence post near the cor.

The cor. is located in a cor. of fences, bears N., S., and E.

From the cor. of secs. 25, 30, 31, and 36, on the E. bdy. of the  
Tp., monumented with a stainless steel post,  $2\ 1/2$  ins. diam.,  
firmly set, projecting 4 ins. above ground, with brass cap mkd.  
T21N R28E R29E S25 S30 S36 S31 1987.

S.  $89^\circ 44'$  W., bet. secs. 25 and 36.

Descend over broken NW. slope, through scattered juniper.

40.06 The  $1/4$  sec. cor. of secs. 25 and 36, monumented with a mound of  
stone, 3 ft. base,  $1/2$  ft. high.

At the corner point

Set a stainless steel post, 28 ins. long,  $2\ 1/2$  ins. diam.,  
22 ins. in the ground, and in a mound of stone, 3 ft. base, to  
top, with brass cap mkd.

T21N R28E  
S25  
 $1/4$  —  
S36  
1987

from which

A juniper, 15 ins. diam., bears N.  $74^\circ$  E.,  
13.5 lks. dist., mkd.  $1/4$  S25 BT.

A juniper, 16 ins. diam., bears S.  $71^\circ$  W.,  
68 lks. dist., mkd.  $1/4$  S36 BT.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>   |
|        | <p>Set a steel fence post near the cor.</p>   |
|        | <p>From this cor., a spring, bears S. 25 1/4° W., 8.00 chs. dist. (Record: Lower Emigrant Spring).</p> <hr/>  |
|        | <p>N. 85°10' W., beginning new measurement.</p>   |
| 1.95   | <p>Descend over mesa, edge bears N. and S.; thence continue along rolling N. slope.</p>   |
| 41.25  | <p>The cor. of secs. 25, 26, 35, and 36.</p> <hr/>  |
|        | <p>N. 0°06' E., bet. secs. 25 and 26.</p>   |
|        | <p>Over a broken N. slope, through scattered juniper.</p>   |
| 39.94  | <p>The 1/4 sec. cor. of secs. 25 and 26, monumented with a wood post, 24 ins. long, 4 ins. sq., firmly set, projecting 18 ins. above ground, mkd. 1/4 IA on the W. face, with an open ended iron pipe, 18 ins. long, 1 in. diam., firmly set, flush with the ground, alongside the wood post.</p> |
|        | <p>At the cor. point</p>  |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>   |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S26   S25<br/>1987</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>   |
|        | <p>Bury the wood post and the iron pipe alongside the stainless steel post.</p>   |
|        | <p>Set a steel fence post near the cor.</p>   |
|        | <p>The cor. is located 1 1/2 k. W. of a fence, bears N. and S.</p> <hr/>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 19.97  | <p>N. 0°20' W., beginning new measurement.</p> <p>The N. 1/16 sec. cor. of secs. 25 and 26, monumented with a wood post, 40 ins. long, 4 ins. sq., projecting 21 ins. above the ground, mkd. IA on the N. face. This is accepted as a careful and faithful determination of the cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>N 1/16<br/>S26   S25<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 25 E.,<br/>207 lks. dist., mkd. 1/4 S25 BT.</p> <p style="padding-left: 40px;">A juniper, 4 ins. diam., bears S. 45 1/2° W.,<br/>119 lks. dist., mkd. 1/4 S26 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the IA post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located in a fence, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> |
| 19.95  | <p>N. 0°04' E., beginning new measurement.</p> <p>The cor. of secs. 23, 24, 25, and 26, monumented with a sandstone, 18 x 10 x 3 ins, firmly set, 3 ins. below the ground, with illegible marks on the N. face. This cor. was perpetuated by an Indian Allotment Surveyor in 1910, and utilized by B. E. Coffman, R.L.S. No. 4307, in 1961, Earle L. Slyder, R.L.S. No. 4128, in 1963, and Leonard L. Rotter and Lacy C. Greer, R.C.E. No. 4932 and R.L.S. No. 5704, respectively, in 1969. Plats by Coffman, Slyder, and Rotter and Greer are recorded at the Apache County Courthouse in St. Johns, Arizona.</p> <p>At the cor. point</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T21N | R28E |
| S23  | S24  |
| S26  | S25  |
| 1987 |      |

from which

A rail road rail, bears N. 10 1/2° W.,  
32 lks. dist., projecting 24 ins. above ground.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case  
beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of the  
cor.

Set a steel fence post near the cor.

The cor. is located 5 lks. W. of a fence, bears N. and S.

From the cor. of secs. 19, 24, 25, and 30, on the E. bdy.,  
monumented with a stainless steel post, 2 1/2 ins. diam., firmly  
set, projecting 3 ins. above ground, with brass cap mkd. T21N  
R28E R29E S24 S19 S25 S30 1987.

N. 87°42' W., bet. secs. 24 and 25.

Descend over a broken NW. slope, through scattered juniper.

40.43

The 1/4 sec. cor. of secs. 24 and 25, monumented with a  
sandstone, 18 x 13 x 6 ins., firmly set, projecting 12 ins. above  
ground, mkd. 4 on the N., also a wood post, 24 ins. long, 3 ins.  
diam., lying loose alongside, mkd. IA on a face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
23 ins. in the ground, with brass cap mkd.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p style="text-align: center;">T21N R28E<br/>S24<br/>1/4 —<br/>S25<br/>1987</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the sandstone and the wood post alongside the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.</p> <p>Set a steel fence post near the cor.</p> <p style="text-align: center;">_____</p> <p>N. 87°33' W., beginning new measurement.</p>  |
| 40.52  | <p>The cor. of secs. 23, 24, 25, and 26.</p> <hr/>  |
|        | <p>N. 0°10' W., bet. secs. 23 and 24.</p>   |
| 40.24  | <p>Over gently rolling land, through scattered juniper.</p> <p>The 1/4 sec. cor. of secs. 23 and 24, monumented with a rebar, 1/4 in. diam., 18 ins. long, flush with a driveway, restored by B. E. Coffman, R.L.S No. 4307, in 1961, utilized by Earle L. Slyder, R.L.S. No. 4128, in 1963, and Leonard L. Rotter and Lacy C. Greer, R.C.E. No. 4932 and R.L.S. No. 5704 respectively, in 1969. Plats by Coffman, Slyder, and Rotter and Greer are on file at the Apache County Courthouse in St. Johns, Arizona. This is accepted as a careful and faithful determination of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 33 ins. in the ground, with brass cap mkd.</p> |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S23   S24<br/>1992</p> <p>from which</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>The NW. cor. of the Sanders NHIRC Office, 67 x 42 ft., bears N. 85 1/4° E., 248 lks. dist., the long side bears E.</p>  |
|        | <p>A flag pole, 5 ins. diam., bears S. 86° E., 203 lks. dist., set in a 3 x 3 x 3 ft. cement pad.</p>  |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>  |
|        | <p>The cor. is located in the driveway of the Sanders Navajo-Hopi Indian Relocation Commission (NHIRC) Office, and 60 lks. E. of the center of U.S. Highway 666, in a curve bearing northeasterly and southerly.</p>   |
|        | <p>The rebar was destroyed when the driveway was paved, before the stainless steel post was set.</p>   |
|        | <hr/> <p>N. 0°10' W., beginning new measurement.</p>   |
|        | <p>Over nearly level land, through the town of Sanders, Arizona.</p>   |
|        | <p>5.50 Center of U.S. Highway 666, in a curve bearing northeasterly and southwesterly.</p>  |
|        | <p>9.905 From this point, a fence cor. at the SW. cor. of the Sanders Valley Baptist Church yard, bears S. 89° E., 2.41 chs. dist., fences bear E., and S.</p>   |
|        | <p>From this same point, an iron pin, 1 in. diam., projecting 9 ins. above ground, bears S. 89° E., 5.56 chs. dist., located in a fence cor. at the SE. cor. of the Sanders Valley Baptist Church yard, fences bear N., and W.</p>   |
|        | <p>32.337 The SW. cor. of lot 365, Sandersun Subdivision Unit One Amended, monumented with an open end pipe, 1 in. diam., firmly set, flush with the ground, was established by Earle L. Snyder, L.S. 4128, in 1962. A copy of this plat is on file at the Apache County Courthouse, in St. Johns.</p> |
|        | <p>32.40 Enter bed of Puerco River, 880 lks. wide, course SW.</p>  |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 40.22  | <p>The cor. of secs. 13, 14, 23, and 24, monumented with an open end pipe, 1 in. diam., 48 ins. long, 36 ins. below the river bed, laying bent over. This point was restored by B. E. Coffman, R.L.S. No. 4307, in 1961, utilized by Earle L. Slyder, R.L.S. No. 4128, in 1963, and Leonard L. Rotter and Lacy C. Greer, R.C.E No. 4932 and R.L.S. No. 5704 respectively, in 1969. Plats by Coffman, Slyder, and Rotter and Greer are recorded at the Apache County Courthouse in St. Johns, Arizona. This is accepted as a careful and faithful restoration of the original cor. position. The cor. falls in the Puerco River, where it is impractical to establish a permanent monument.</p> <p>From this cor. point, an iron pipe, 2 7/8 ins. diam., firmly set, projecting 6 ins. above ground, with a brass tablet attached to the top, mkd. LACY GREER ENG. CO. T21N R28E S14 S13 S23 S24 WC 1964, established by Lacy C. Greer, R.L.S. NO. 5704, in 1964, bears N. 0°44' W., 2.282 chs. dist.</p> <hr/> <p>From the cor. of secs. 13, 18, 19, and 24, on the E. bdy., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T21N R28E R29E S13 S18 S24 S19 1987.</p> <p>N. 87°13' W., bet. secs. 13 and 24.</p> <p>Over nearly level ground, on Navajo Drive, a dirt road, 25 lks. wide.</p> |
| 40.48  | <p>The 1/4 sec. cor. of secs. 13 and 24, determined using the Arizona Park Estates Unit One plat, recorded at the Apache County Courthouse, by Earle L. Slyder, R.L.S. No. 4128, dated January 28, 1963. This position has long been locally recognized as the cor. and is accepted as a careful and faithful determination of the position of the cor.</p> <p>The NW. cor. of lot 16, Arizona Park Estates Unit One, monumented with an open end iron pipe, 1 in. diam., firmly set, flush with ground, bears S. 42°17' E., 53.6 lks. dist.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 44 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S13<br/>1/4 —<br/>S24<br/>1992</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|--------|--|-----|----|--|--|-----------|--|--|-----|-----|--|--|--|--|-----|-----|--|------|--|
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | The cor. is located in the intersection of Navajo Drive, 20 lks. wide, bears E. and W., and Gardner Drive, 20 lks. wide, bears N. and S.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | N. 87°13' W., beginning new measurement.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
| 32.50  | U.S. Highway 666, 200 ft. wide, bears SW and NW.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
| 34.034 | The NE. cor. of lot 363, Sandersun Subdivision Unit One Amended, monumented with a rebar, 1/2 in. diam., firmly set flush with the ground, established by Earle L. Snyder, R.L.S. No. 4128, in 1962. A copy of the plat is on file at the Apache County Court House, in St. Johns, Arizona.                                |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
| 40.50  | The cor. of secs. 13, 14, 23 and 24.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | N. 0°12' E., bet. secs. 13 and 14.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | Over the Puerco River bed.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
| 1.00   | Leave the bed of the Puerco River, 880 lks. wide, course SW.; thence ascend gradually, through the town of Sanders, Arizona.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
| 3.00   | Point selected for the witness cor. to the cor. of secs. 13, 14, 23, and 24.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | <table style="margin-left: auto; margin-right: auto;"> <tr><td></td><td>WC</td><td></td></tr> <tr><td></td><td>T21N R28E</td><td></td></tr> <tr><td></td><td>S14</td><td>S13</td></tr> <tr><td></td><td> </td><td> </td></tr> <tr><td></td><td>S23</td><td>S24</td></tr> <tr><td></td><td>1992</td><td></td></tr> </table> |     | WC |  |  | T21N R28E |  |  | S14 | S13 |  |  |  |  | S23 | S24 |  | 1992 |  |
|        | WC   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | T21N R28E  |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | S14  | S13 |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        |  |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | S23  | S24 |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | 1992   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | from which   |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |
|        | <p>An aluminum post, 36 ins. long, 3/4 in. diam., set 31 ins. in the ground, for a reference monument, bears S. 32°30' E., 76.0 ft. dist., with cap mkd. RM T21N R28E S13 76.0 FT TO WC 1992, and an arrow pointing to the witness cor. Set a steel fence post near the RM.</p>  |     |    |  |  |           |  |  |     |     |  |  |  |  |     |     |  |      |  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>An aluminum post, 36 ins. long, 3/4 in. diam., set 30 ins. in the ground, for a reference monument, bears S. 30°28' W., 177.5 ft. dist., with cap mkd. RM T21N R28E S14 177.5 FT TO WC 1992, and an arrow pointing to the witness cor. Set a steel fence post near the RM.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The witness cor. is located in a fence, bears NE. and SW.</p>  |
| 19.45  | South track of Santa Fe Railroad bears ENE. and WSW.   |
| 19.61  | <p>Point for the S. 1/16 sec. cor. of secs. 13 and 14, falls between the north and south track of the Santa Fe Railroad, where it is impractical to establish a permanent monument.</p> <p>From this point, the point selected for the witness cor. to the S. 1/16 sec. cor. of secs. 13 and 14 bears N. 15°50' E., 1.37 chs. dist.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WC<br/>T21N R28E<br/>S 1/16<br/>S14   S13<br/>1994</p> <p>Set a steel fence post alongside the cor.</p> |
| 19.70  | Center track of Santa Fe Railroad bears ENE. and WSW.  |
| 19.95  | North track of Santa Fe Railroad bears ENE. and WSW.   |
| 20.85  | <p>Intersect the eastbound right-of-way of U.S. Interstate Highway 40.</p> <p>From this point, an Arizona Highway Department right-of-way marker, bears N. 23°43' E., 2.03 chs. dist., monumented with a brass tablet, 3 ins. diam., encased in a concrete cylinder, 6 ins. diam., flush with the ground, mkd. ARIZONA HIGHWAY DEPT. 1707 X 12.93 RP 256.39 1963, This cor. was established by the Arizona Highway Department, in 1965.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>From this same point, an Arizona Highway Dept. right-of-way marker, bears S. 62°48' W., 1.46 chs. dist., monumented with a brass tablet, 3 ins. diam., encased in a concrete cylinder, 6 ins. diam., flush with the ground, mkd. ARIZONA HIGHWAY DEPT. 1705 X 07.67 RP 319.65 EB 1963, This cor. was established by the Arizona Highway Department, in 1963.</p>   |
| 33.58  | <p>Intersect the westbound right-of-way of U.S. Interstate Highway 40, monumented with a brass tablet, 3 ins., diam., encased in a concrete cylinder, 6 ins. diam., flush with the ground, mkd. ARIZONA HIGHWAY DEPT. 1708 X 54.30 RP 316.27 WB 1963. This cor. was established by the Arizona Highway Department, in 1965.</p>   |
| 39.22  | <p>The 1/4 sec. cor. of secs. 13 and 14, determined using an Arizona Highway Department right-of-way plat, dated 1966.</p>  |
|        | <p>At the cor. point</p>  |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 43 ins. in the ground, with brass cap mkd.</p>   |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S14   S13<br/>1992</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>   |
|        | <p>The cor. is located in a school yard, 61 lks. N. of a stone school building, and 41 lks. E. of a brick school building.</p>  |
|        | <hr style="width: 20%; margin: auto;"/> <p>N. 0°04' W., beginning new measurement.</p>  |
|        | <p>Ascend over broken west slope, through the Sanders school yards.</p>   |
| 38.75  | <p>Wash, 60 lks. wide, drains SW.</p>   |
| 40.80  | <p>The cor. of secs. 11, 12, 13, and 14, monumented with an igneous stone, 16 x 16 x 11 ins., loosely set in a mound of stone, 3 ft. base, 1/2 ft. high, with no marks visible. This cor. was restored by Lacy C. Greer, R.L.S. No. 5704, in 1963, as per a plat filed at Matkin and Murphy Consulting Engineers Inc., Show low, Arizona. This is accepted as a careful and faithful restoration of the original cor. position.</p> |
|        | <p>At the cor. point</p>  |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, in concrete, with brass cap mkd.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

|           |     |
|-----------|-----|
| T21N R28E |     |
| S11       | S12 |
|           |     |
| S14       | S13 |
| 1992      |     |

from which

A brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, set in a drill hole, cemented in place, for a reference monument, bears S. 57°50' E., 30 lks. dist., with top mkd. RM T21N R28E S13 19.9 FT TO COR, and an arrow pointing to the cor.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Raise a mound of stone, 3 ft. base 2 ft. high, W. of the cor.

The cor. is located 110 lks. W. of a wash, 20 lks. wide, course SW.

---

From the true point for the cor. of secs. 7, 12, 13, and 18, on the E. bdy. of the Tp., from which the witness cor. bears N. 0°11' W., 4.30 chs. dist., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. WC T21N R28E R29E S12 S7 S13 S18 1987.

N. 88°32' W., bet. secs. 12 and 13.

Over the Puerco River bed.

- 4.45 Right bank of the Puerco River, bears ENE. and WSW.; thence ascend gradually.
- 5.05 Fence, bears NE. and SW.
- 6.10 Southerly railroad track, bears NE. and SW.
- 6.40 Northerly railroad track, bears NE. and SW.
- 7.55 Track road, bears NE. and SW.
- 8.05 Power pole line, bears NE. and SW.
- 9.10 From this point, a fence cor. bears S., 63 lks. dist., fences bear NE. and W.
- 11.40 From this point, a fence cor. bears S., 59 lks. dist., fences bear E. and SW.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 15.61  | From this point, an Arizona Highway Department right-of-way marker bears N., 8.52 chs. dist., monumented with an aluminum disk, 3 ins. diam., set in a concrete column, 6 ins. diam., projecting 4 ins. above ground, mkd. ARIZONA HIGHWAY DEPT. 1766 X 30 R.P. 120.0 W.B. 1963.   |
| 16.50  | From this point, a fence cor. bears S., 34 lks. dist., fences bear NE., SSE., and WSW.   |
| 19.15  | Center of U.S. Interstate Highway 40, eastbound, pavement, 90 lks. wide, bears NE. and SW.   |
| 22.30  | Center of U.S. Interstate Highway 40, westbound, pavement, 150 lks. wide, bears NE. and SW.  |
| 24.30  | Center of frontage road, pavement, 50 lks. wide, bears ENE. and WSW.   |
| 26.33  | From this point, an Arizona Highway Department right-of-way marker bears S., 34 lks. dist., monumented with an aluminum disk, 3 ins. diam., set in a concrete column, 6 ins. diam., projecting 3 ins. above ground, mkd. ARIZONA HIGHWAY DEPT. 1757 X 26.71 R.P. 200.0 W.B. 1963.  |
| 39.77  | <p>The 1/4 sec. cor. of secs. 12 and 13, monumented with a sandstone, 24 x 17 x 4 ins., lying loose in a scattered mound of stone, and leaning against a fence cor., mkd. IA on one side and 1/4 on the opposite side.</p> <p>At the cor. point</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in a drill hole, cemented in place, in the concrete supporting the fence cor., with top mkd.</p> <p style="text-align: center;">T21N R28E<br/>S12<br/>1/4 —<br/>S13<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears S. 26° W.,<br/>164 lks. dist., mkd. 1/4 S13 BT.</p> <p style="padding-left: 40px;">A juniper, 4 ins. diam., bears N. 80 1/4° W.,<br/>192 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the brass tablet.</p> |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Bury the sandstone alongside the brass tablet.</p> <p>The cor. is located at a fence cor., set in concrete, bears E. and S.</p> <hr/>  |
| 20.35  | <p>N. 86°57' W., beginning new measurement.</p> <p>Cor. 2, lot 1, sec. 13, hereinafter described.</p>   |
| 40.81  | <p>The cor. of secs. 11, 12, 13, and 14.</p> <hr/>  |
| 39.25  | <p>N. 0°12' W., bet. secs. 11 and 12.</p> <p>Ascend over rolling, S. slope, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E<br/>1/4<br/>S11   S12<br/>1992</p> </div> <p>from which</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 33 1/2° E.,<br/>109 lks. dist., mkd. 1/4 S12 BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 23 1/2° W.,<br/>67 lks. dist., mkd. 1/4 S11 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |
| 78.50  | <p>The cor. of secs. 1, 2, 11, and 12, monumented with a juniper post, 38 ins. long, 4 ins. sq., firmly set, projecting 14 ins. above ground, mkd. with 1 groove on the E., 5 grooves on the S., and A on the N. faces.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS    | <div data-bbox="829 300 980 453" style="text-align: center;"> <table border="1"> <tr> <td>T21N R28E</td> <td></td> </tr> <tr> <td>S 2</td> <td>S 1</td> </tr> <tr> <td>S11</td> <td>S12</td> </tr> <tr> <td colspan="2">1991</td> </tr> </table> </div> <p>from which</p> <p>A juniper, 26 ins. diam., bears N. 12 1/4° E.,<br/>159 lks. dist., mkd. T21N R28E S1 BT.</p> <p>A juniper, 20 ins. diam., bears S. 28° E.,<br/>256 lks. dist., mkd. T21N R28E S12 BT.</p> <p>A juniper, 7 ins. diam., bears S. 41 1/2° W.,<br/>123 lks. dist., mkd. T21N R28E S11 BT.</p> <p>A juniper, 6 ins. diam., bears N. 57 1/4° W.,<br/>49 lks. dist., mkd. T21N R28E S2 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Bury the IA post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>From the cor. of secs. 1, 6, 7, and 12, on the E. bdy. of the<br/>Tp., monumented with a stainless steel post, 2 1/2 ins. diam.,<br/>firmly set, flush with the surface of the ground, with brass cap<br/>mkd. T21N R28E R29E S1 S6 S12 S7 1987.</p> <p>N. 89°58' W., bet. secs. 1 and 12.</p> <p>Ascend, over a garbage dump.</p> <p>3.00 Ridge, bears N. and S.; descend over rolling land through<br/>moderate juniper.</p> <p>40.24 Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate<br/>dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>23 ins. in the ground, with brass cap mkd.</p> | T21N R28E |  | S 2 | S 1 | S11 | S12 | 1991 |  |
|-----------|---|-----------|--|-----|-----|-----|-----|------|--|
| T21N R28E |   |           |  |     |     |     |     |      |  |
| S 2       | S 1   |           |  |     |     |     |     |      |  |
| S11       | S12   |           |  |     |     |     |     |      |  |
| 1991      |   |           |  |     |     |     |     |      |  |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | T21N R28E<br>S 1<br>1/4 —<br>S12<br>1991   |
|        | from which<br><br>A juniper, 6 ins. diam., bears S. 20° W.,<br>49 lks. dist., mkd. 1/4 S12 BT.<br><br>A juniper, 12 ins. diam., bears N. 46 1/2° W.,<br>82 lks. dist., mkd. 1/4 S1 BT.<br><br>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br>beneath the stainless steel post.<br><br>Set a steel fence post near the cor. |
| 46.00  | Wash, 100 lks. wide, 10 ft. deep, drains S.  |
| 49.40  | Fence, bears SE. and NW.   |
| 63.70  | Fence, bears SE. and NW.   |
| 64.80  | Power pole line, 4 wire, bears NE. and SW.   |
| 65.30  | Power pole line, 2 wire, bears NE. and SW.   |
| 65.50  | Access road for pole line, 25 lks. wide, in a curve with tangents<br>bearing NE. and SSW.  |
| 72.00  | Dirt road, 25 lks. wide, bears N. and S.   |
| 80.47  | The cor. of secs. 1, 2, 11, and 12.  |
|        | <hr/> N. 0°02' E., bet. secs. 1 and 2.<br><br>Ascend, over rolling land, through moderate juniper.   |
| 39.30  | Graded road, 40 lks. wide, bears ESE. and WSW.   |
| 40.09  | The 1/4 sec. cor. of secs. 1 and 2, monumented with a juniper<br>post, 36 ins. long, 4 ins. sq., firmly set, projecting 3 ins.<br>above ground, faintly mkd. IA on the W. side.<br><br>At the cor. point<br><br>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br>24 ins. in the ground, with brass cap mkd.                  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S 2   S 1<br/>1992</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 4 ins. diam., bears N. 26° E.,<br/>129 lks. dist., mkd. 1/4 S1 BT.</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears N. 46° W.,<br/>253 lks. dist., mkd. 1/4 S2 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Bury the IA post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°04' E., beginning new measurement.</p> |
| 7.00   | Ridge, bears E. and W.; descend.   |
| 40.56  | The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp.,<br>hereinbefore described.  |
|        | <hr/> <p>From the stan. cor. of secs. 34 and 35, on the S. bdy. of the Tp.,<br/>hereinbefore described.</p> <p>N. 1°54' E., bet. secs. 34 and 35.</p> <p>Over rolling land, through scattered juniper, along a fence.</p>  |
| 26.96  | An open ended iron pipe, 1 1/4 ins. diam., loosely set,<br>projecting 10 ins. above ground, of unknown origin, bears E.,<br>39.5 lks. dist.  |
| 33.78  | The 1/4 sec. cor. of secs. 34, and 35, monumented with a<br>sandstone, 26 x 9 x 5 ins., firmly set, projecting 11 ins. above<br>ground, mkd. 1/4 IA on the W. face.  |
|        | <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>25 ins. in the ground, with brass cap mkd.</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R28E  
1/4  
S34 | S35  
1991

from which

A juniper, 7 ins. diam., bears N.  $38\ 1/4^\circ$  E.,  
312 lks. dist., mkd. 1/4 S35 BT.

A juniper, 10 ins. diam., bears S.  $84\ 1/2^\circ$  W.,  
121 lks. dist., mkd. 1/4 S34 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

Set a steel fence post near the cor.

The cor. is located 10 lks. W. of a fence, bears N. and S.

\_\_\_\_\_

N.  $1^\circ 51'$  E., beginning new measurement.

33.82

The cor. of secs. 26, 27, 34, and 35, monumented with a  
sandstone, 14 x 13 x 6 ins., laying loose on the ground, mkd.  
with 2 grooves and IA on one side, and 1 groove on the adjacent  
side.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
26 ins. in the ground, with brass cap mkd.

T21N R28E  
S27 | S26  
-----  
S34 | S35  
1991

from which

A juniper, 6 ins. diam., bears N.  $76\ 3/4^\circ$  E.,  
359 lks. dist., mkd. T21N R28E S26 BT.

A juniper, 7 ins. diam., bears S.  $34\ 1/2^\circ$  E.,  
99 lks. dist., mkd. T21N R28E S35 BT.

A juniper, 5 ins. diam., bears S.  $16\ 1/4^\circ$  W.,  
99 lks. dist., mkd. T21N R28E S34 BT.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>A juniper, 5 ins. diam., bears N. 26 1/4° W.,<br/>364 lks. dist., mkd. T21N R28E S27 BT.</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p>  |
|        | <p>Bury the sandstone alongside the stainless steel post.</p>   |
|        | <p>Set a steel fence post near the cor.</p>   |
|        | <p>The cor. is located in a fence, bears N. and S., and 20 lks.<br/>W. of a track road, bears N. and S.</p>   |
|        | <p>From the cor. of secs. 25, 26, 35, and 36.</p>   |
|        | <p>N. 87°43' W., bet. secs. 26 and 35.</p>  |
|        | <p>Over level land.</p>   |
| 22.25  | <p>Center of U.S. Highway 666, pavement, 75 lks. wide, bears NNE.<br/>and S.</p>  |
| 40.51  | <p>The 1/4 sec. cor. of secs. 26 and 35, monumented with a rotted<br/>juniper post, 19 ins. long, 3 ins. diam., firmly set, 2 ins.<br/>below ground, with axe marks on the bottom. This cor. was<br/>utilized by B. E. Coffman, R.L.S. No. 4307, in 1960, as per a<br/>plat recorded at the Apache County Courthouse, St. Johns,<br/>Arizona.</p> |
|        | <p>At the cor. point</p>  |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>27 ins. in the ground, with brass cap mkd.</p>   |
|        | <p style="text-align: center;">T21N R28E<br/>S26<br/>1/4 —<br/>S35<br/>1991</p>   |
|        | <p>from which</p>   |
|        | <p>A juniper, 6 ins. diam., bears N. 52 1/4° E.,<br/>14.5 lks. dist., mkd. 1/4 S26 BT.</p>  |
|        | <p>A juniper, 3 ins. diam., bears S. 16 3/4° E.,<br/>125 lks. dist., mkd. X BT.</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | Bury the juniper post alongside the stainless steel post.   |
|        | Set a steel fence post near the cor.  |
|        | From this cor. point, an open ended iron pipe, 1 in. diam., firmly set, flush with the ground, established by B. E. Coffman, R.L.S. NO. 4307, in 1960, bears N. 79°24' E., 171 lks. dist.   |
|        | From this same cor. point, an open ended iron pipe, 1 in. diam., firmly set, flush with the ground, established by B. E. Coffman, R.L.S. NO. 4307, in 1960, bears N. 81°54' W., 358 lks. dist.  |
|        | N. 87°44' W., beginning new measurement.  |
| 40.54  | The cor. of secs. 26, 27, 34, and 35.   |
|        | N. 0°05' E., bet. secs. 26 and 27.  |
|        | Descend gradually over rolling land, through scattered juniper, along a fence.  |
| 20.20  | Enter broken land, with moderate juniper.   |
| 39.93  | The 1/4 sec. cor. of secs. 26 and 27, monumented with a mound of stone, 3 ft. base, 1 ft. high. A sandstone, 28 x 13 x 4 ins., mkd. 1/4, was wired into a fence as a deadman nearby. The mound of stone is accepted as the best available evidence of the original cor. position. |
|        | At the cor. point   |
|        | Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in a drill hole, cemented in place, 6 ins. below ground, in bedrock, with top mkd.   |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S27   S26<br/>1991</p>   |
|        | from which  |
|        | A juniper, 5 ins. diam., bears N. 13 1/4° E., 40 lks. dist., mkd. 1/4 S26 BT.   |
|        | A juniper, 3 ins. diam., bears S. 36 1/4° W., 82 lks. dist., mkd. X BT.   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the brass tablet.   |
|        | Remove the mkd. sandstone from the fence, and bury it alongside the brass tablet.   |
|        | Rebuild the mound of stone, 3 ft. base, 2 ft. high, W. of the cor.  |
|        | The cor. is located 25 lks. W. of a fence, bears N. and S.  |
|        | N. 0°07' E., beginning new measurement.   |
| 7.40   | Leave broken land, enter nearly level, open land.   |
| 34.90  | Left bank of the Puerco River, bears ENE. and WSW.  |
| 39.94  | Point for the cor. of secs. 22, 23, 26, and 27, at proportionate dist., falls in the bed of the Puerco River, where it is impractical to establish a permanent monument; there is no remaining evidence of the original cor.  |
|        | From the cor. of secs. 23, 24, 25, and 26.  |
|        | N. 87°52' W., bet. secs. 23 and 26.   |
| 40.49  | The 1/4 sec. cor. of secs. 23 and 26, monumented with a juniper post, 52 ins. long, 7 ins. sq., firmly set, projecting 28 ins. above ground, with a sandstone, 18 x 6 x 6 ins., laying on the ground alongside. This cor. was reestablished by persons unknown and utilized by B. E. Coffman, R.L.S. No. 4307, in 1960, as per a plat recorded at the Apache County Courthouse, St. Johns, Arizona, and is accepted as the best available evidence of the original cor. position. |
|        | At the cor. point   |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.  |
|        | <p style="text-align: center;">T21N R28E<br/>S23<br/>1/4 —<br/>S26<br/>1991</p>   |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS    |   |    |  |           |  |     |     |  |  |     |     |      |  |
|-----------|---|----|--|-----------|--|-----|-----|--|--|-----|-----|------|--|
|           | Bury the juniper post and sandstone alongside the stainless steel post.   |    |  |           |  |     |     |  |  |     |     |      |  |
|           | Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of the cor.  |    |  |           |  |     |     |  |  |     |     |      |  |
|           | Set a steel fence post near the cor.  |    |  |           |  |     |     |  |  |     |     |      |  |
|           | The cor. is located 18 lks. N. of a graded road, 30 lks. wide, bears E. and W.  |    |  |           |  |     |     |  |  |     |     |      |  |
|           | <hr/> N. 87°33' W., beginning new measurement.  |    |  |           |  |     |     |  |  |     |     |      |  |
| 35.00     | Left bank of the Puerco River, bears ENE. and WSW.  |    |  |           |  |     |     |  |  |     |     |      |  |
| 40.39     | The true point for the cor. of secs. 22, 23, 26, and 27.  |    |  |           |  |     |     |  |  |     |     |      |  |
|           | <hr/> N. 0°10' E., bet. secs. 22 and 23.  |    |  |           |  |     |     |  |  |     |     |      |  |
|           | Over the Puerco River bed.  |    |  |           |  |     |     |  |  |     |     |      |  |
| 2.80      | Right bank of the Puerco River, bears NE. and SW.; thence ascend gradually over nearly level land, through scattered juniper.   |    |  |           |  |     |     |  |  |     |     |      |  |
| 5.00      | Point selected for the witness cor. to the cor. of secs. 22, 23, 26, and 27.  |    |  |           |  |     |     |  |  |     |     |      |  |
|           | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.  |    |  |           |  |     |     |  |  |     |     |      |  |
|           | <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">WC</td></tr> <tr><td colspan="2" style="text-align: center;">T21N R28E</td></tr> <tr><td style="text-align: center;">S22</td><td style="text-align: center;">S23</td></tr> <tr><td colspan="2" style="text-align: center;"> </td></tr> <tr><td style="text-align: center;">S27</td><td style="text-align: center;">S26</td></tr> <tr><td colspan="2" style="text-align: center;">1991</td></tr> </table> | WC |  | T21N R28E |  | S22 | S23 |  |  | S27 | S26 | 1991 |  |
| WC        |   |    |  |           |  |     |     |  |  |     |     |      |  |
| T21N R28E |   |    |  |           |  |     |     |  |  |     |     |      |  |
| S22       | S23   |    |  |           |  |     |     |  |  |     |     |      |  |
|           |   |    |  |           |  |     |     |  |  |     |     |      |  |
| S27       | S26   |    |  |           |  |     |     |  |  |     |     |      |  |
| 1991      |   |    |  |           |  |     |     |  |  |     |     |      |  |
|           | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.   |    |  |           |  |     |     |  |  |     |     |      |  |
|           | Set a steel fence post near the cor.  |    |  |           |  |     |     |  |  |     |     |      |  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 19.97  | <p>The S. 1/16 sec. cor. of secs. 22 and 23, monumented with a sandstone, 25 x 9 x 6 ins., firmly set, projecting 13 ins. above ground, mkd. 1/16 on the W. face. This cor. was established by persons unknown, utilized by B. E. Coffman, R.L.S. No. 4307, in 1960, as per a plat recorded at the Apache County Courthouse in St. Johns, Arizona, and is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S 1/16<br/>S22   S23<br/>1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 23 lks. W. of a fence, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°38' E., beginning new measurement.</p> |
| 4.15   | <p>Begin ascent of small ridge, bears N. and S.</p>   |
| 20.09  | <p>The 1/4 sec. cor. of secs. 22 and 23, monumented with a sandstone, 27 x 7 x 6 ins., laying on the ground, faintly mkd. IA.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to bedrock, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S22   S23<br/>1991</p> <p>from which</p> <p style="text-align: center;">A rock outcrop, flush with the ground, bears S. 89 3/4° E.,<br/>83.5 lks. dist., with X B0 chiseled on the top.</p>  |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>A juniper, 19 ins. diam., bears S. <math>67\frac{3}{4}^{\circ}</math> W.,<br/>187 lks. dist., mkd. <math>1/4</math> S22 BT.</p> <p>Deposit a magnet in a <math>1 \times 1 \times 2\frac{5}{8}</math> ins. white plastic case<br/>beneath the stainless steel post.</p> <p>The cor. is located in a cor. of fences bearing N., E., and S.</p> <hr/> <p>N. <math>0^{\circ}16'</math> W., beginning new measurement.</p> |
| 12.80  | Begin descent.   |
| 17.50  | End descent at a railroad right-of-way fence, bears NE. and SW.  |
| 19.20  | Southerly railroad track, bears NE. and SW.  |
| 19.40  | Northerly railroad track, bears NE. and SW.  |
| 20.45  | Power pole line, bears NE. and SW.   |
| 20.75  | Railroad right-of-way fence, bears NE. and SW.   |
| 21.90  | Frontage road, 40 lks. wide, pavement, bears NE. and SW.   |
| 22.20  | U.S. Interstate 40 right-of-way fence, bears NE. and SW.   |
| 23.45  | Center of eastbound U.S. Interstate 40, 65 lks. wide, pavement,<br>bears NE. and SW.   |
| 25.35  | Center of westbound U.S. Interstate 40, 65 lks. wide, pavement,<br>bears NE. and SW.   |
| 25.85  | U.S. Interstate 40 right-of-way fence, bears NE. and SW.   |
| 26.35  | Frontage road, 40 lks. wide, pavement, bears NE. and SW.   |
| 27.50  | Right-of-way fence, bears NE. and SW.; ascend.   |
| 39.60  | <p>The cor. of sec. 14, 15, 22 and 23, monumented with a sandstone,<br/><math>24 \times 14 \times 6</math> ins., firmly set, 9 ins. in the ground, mkd. with<br/>2 grooves on the E., and 2 grooves and IA on the S. faces.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, <math>2\frac{1}{2}</math> ins. diam.,<br/>26 ins. in the ground, with brass cap mkd.</p>                           |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

|           |     |
|-----------|-----|
| T21N R28E |     |
| S15       | S14 |
| — —       |     |
| S22       | S23 |
| 1988      |     |

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

The corner is located 5 lks. E. of a cor. of fences bearing N., S., and W.

From the cor. of secs. 13, 14, 23, and 24.

N. 88°18' W., bet. secs. 14 and 23.

Over nearly level river bottom.

20.16

The E. 1/16 sec. cor. of secs. 14 and 23, monumented with an iron pipe, 30 ins. long, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap, mkd. LACY GREER ENG. CO. E 1/16 S14 S23 1964. Alongside the iron post a sandstone, 12 x 7 x 4 ins., laying on the ground, mkd. 1/16. This cor. was established by B. E. Coffman, R.L.S. No. 4307, in 1960, and perpetuated by Leonard L. Rotter, R.C.E No. 4932 and Lacy C. Greer, R.L.S. No. 5704, in 1964. Plats by Coffman, and Rotter and Greer are recorded at the Apache County Courthouse. This is accepted as a careful and faithful determination of the position of the cor.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

|           |   |
|-----------|---|
| T21N R28E |   |
| S14       |   |
| E 1/16    | — |
| S23       |   |
| 1992      |   |

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Bury the sandstone and iron pipe alongside the stainless steel post.

Set a steel fence post near the cor.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>The cor. is located in a fence, bears N. and S.</p> <hr/> <p>N. 88°24' W., beginning new measurement.</p> <p>Over nearly level land.</p> <p>20.14 Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate measurement using the Arizona Highway Department plat, dated 1966.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S14<br/>1/4 —<br/>S23<br/>1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> |
| 0.25   | <p>N. 88°11' W., beginning new measurement.</p> <p>Intersect the eastbound right-of-way of U.S. Interstate Highway 40 at the right of way fence.</p> <p>From this point, an Arizona Highway Dept. right-of-way marker, bears N. 61°21' E., 27.00 chs. dist., monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., flush with ground, mkd. ARIZONA HIGHWAY DEPT. 1694 X 30 RP 118.83 EB 1963. This cor. was established by the Arizona Highway Department, in 1963.</p>  |
| 12.10  | <p>Intersect the westbound right-of-way of U.S. Interstate Highway 40.</p> <p>From this point, an Arizona Highway Dept. right-of-way marker, bears N. 65°20' E., 0.16 chs. dist., monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., flush with ground, mkd. ARIZONA HIGHWAY DEPT. 1669 X 55.32 RP 120.0 WB 1963. This cor. was established by the Arizona Highway Department, in 1963.</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>From this same point, an Arizona Highway Dept. right-of-way marker, bears S. 67°42' W., 12.70 chs. dist., monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., projecting 3 ins. above the ground, mkd. ARIZONA HIGHWAY DEPT. 1661 X 00 RP 140 WB 1963. This cor. was established by the Arizona Highway Department, in 1963.</p>   |
| 40.19  | <p>The cor. of sec. 14, 15, 22 and 23</p> <hr/>   |
|        | <p>N. 0°05' E., bet. secs. 14 and 15.<br/>Over rolling land, through scattered juniper.</p>   |
| 39.32  | <p>The 1/4 sec. cor. of secs. 14 and 15, monumented with a sandstone, 19 x 14 x 4 ins., firmly set, 15 ins. in the ground, mkd. 1/4 on the W., and IA on the E. faces.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S15   S14<br/>1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The corner is located in a fence, bears N. and S.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°01' E., beginning new measurement.</p> |
| 8.70   | <p>Top of ridge, bears NE. and SW.</p>  |
| 40.21  | <p>The cor. of secs. 10, 11, 14, and 15, monumented with a sandstone, 24 x 14 x 3 ins., firmly set, 10 ins. in the ground, mkd. with 2 grooves on the E. and 4 grooves and IA on the S. faces.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

|           |     |
|-----------|-----|
| T21N R28E |     |
| S10       | S11 |
| -----     |     |
| S15       | S14 |
| 1988      |     |

from which

A juniper, 8 ins. diam., bears S. 43 1/2° E., 39 lks. dist.,  
mkd. T21N R28E S14 BT.

A juniper, 8 ins. diam., bears N. 42° W., 14 lks. dist.,  
mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case  
beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

Set a steel fence post near the cor.

The corner is located at a cor. of fences bearing S. and W.

From the cor. of sec. 11, 12, 13, and 14.

N. 88°37' W., bet. secs. 11 and 14.

Over rolling land, through scattered juniper.

39.40 Wash, 30 lks. wide, drains SE.

40.24 Point for the 1/4 sec. cor. of secs. 11 and 14, at proportionate  
dist., there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
23 ins. in the ground, with brass cap mkd.

|           |       |
|-----------|-------|
| T21N R28E |       |
| S11       |       |
| 1/4       | ----- |
| S14       |       |
| 1992      |       |

from which

A juniper 8 ins. diam., bears N. 47 3/4° E., 126 lks. dist.,  
mkd. 1/4 S11 BT.

A juniper, 6 ins. diam., bears S. 2° E., 82 lks. dist.,  
mkd. 1/4 S14 BT.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>A well head, bears N. 16 1/4° W., 205 lks. dist., projecting from a concrete well cover, 6 ft. sq., 1 1/2 ft. high.</p>  |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>  |
|        | <p>Set a steel fence post near the cor.</p>   |
| 48.73  | <p>From this point an Arizona Highway Dept. right-of-way monument bears S., 47 lks. dist., monumented with a brass tablet, encased in a concrete cylinder, 6 ins. diam., flush with ground, mkd. ARIZONA HIGHWAY DEPT. POT STA 47 X 62.64 RR 100 1965. This cor. was established by the Arizona Highway Department, in 1965</p> |
| 80.48  | <p>The cor. of secs. 10, 11, 14, and 15.</p> <hr/>  |
|        | <p>N. 0°11' E., bet. secs. 10 and 11.</p>   |
|        | <p>Over broken land, through moderate juniper.</p>  |
| 4.00   | <p>Wash, 8 lks. wide, 8 ft. deep, drains W.</p>   |
| 38.00  | <p>Wash, 8 lks. wide, 5 ft. deep, drains WSW.</p>   |
| 39.69  | <p>The 1/4 sec. cor. of secs. 10 and 11, monumented with a weathered sandstone, 18 x 15 x 5 ins., laying on the ground, with faint, illegible marks. This cor. was set by persons unknown, and is accepted as the best available evidence of the original cor. position.</p>  |
|        | <p>At the cor. point</p>  |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>   |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S10   S11<br/>1991</p>   |
|        | <p>from which</p>   |
|        | <p>A juniper, 5 ins. diam., bears N. 51 3/4° E., 80 lks. dist., mkd. 1/4 S11 BT.</p>  |
|        | <p>A juniper, 4 ins. diam., bears S. 85 3/4° W., 164 lks. dist., mkd. X BT.</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

Set a steel fence post near the cor.

---

N. 0°03' W., beginning new measurement.

20.50 Graded road, 25 lks. wide, bears E. and W.

21.30 Power pole line, bears E. and W.

39.93 The cor. of secs. 2, 3, 10, and 11, monumented with a sandstone,  
21 x 12 x 4 ins., laying on the ground, mkd. IA on one side and  
with 2 grooves on the opposite side.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
21 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T21N | R28E |
| S 3  | S 2  |
| S10  | S11  |
| 1991 |      |

from which

A juniper, 6 ins. diam., bears N. 84 3/4° E.,  
277 lks. dist., mkd. T21N R28E S2 BT.

A juniper, 5 ins. diam., bears S. 39° E.,  
131 lks. dist., mkd. T21N R28E S11 BT.

A juniper, 8 ins. diam., bears S. 53 1/2° W.,  
50 lks. dist., mkd. T21N R28E S10 BT.

A juniper, 10 ins. diam., bears N. 70 1/4° W.,  
127 lks. dist., mkd. T21N R28E S3 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

Set a steel fence post near the cor.

---

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | From the cor. of secs. 1, 2, 11, and 12.   |
|        | N. 87°49' W., bet. secs. 2 and 11.   |
|        | Over rolling land, through moderate juniper.   |
| 32.65  | Graded road, 17 lks. wide, bears N. and S., on a ridge.  |
| 40.09  | Point for the 1/4 cor. of secs. 2 and 11, at proportionate dist.; there is no remaining evidence of the original cor. position.                                      |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.   |
|        | <p style="text-align: center;">T21N R28E<br/>S 2<br/>1/4 —<br/>S11<br/>1991</p>  |
|        | from which   |
|        | <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears N. 9 3/4° E.,<br/>318 lks. dist., mkd. 1/4 S2 BT.</p>  |
|        | <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears S. 39 1/4° W.,<br/>57 lks. dist., mkd. 1/4 S11 BT.</p>  |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.  |
|        | A juniper post, 36 ins. long, 3 x 4 ins. sq., mkd. IA 1/4, once set in the ground, was found 5 ft. above the ground, resting in the limbs of a large juniper nearby. |
|        | Remove the juniper post from the tree and bury it alongside the stainless steel post.  |
|        | Set a steel fence post near the cor.   |
| 60.00  | Graded road, 33 lks. wide, bears N. and S.   |
| 61.50  | Graded road, 25 lks. wide, bears N. and S.   |
| 80.18  | The cor. of secs. 2, 3, 10, and 11.  |
|        | <hr/> <p>N. 0°04' W., bet. secs. 2 and 3.</p>  |
|        | Ascend over rolling land, through moderate juniper.  |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 15.70  | Graded road, 23 lks. wide, bears SE. and NW.   |
| 39.89  | <p>Point for the 1/4 cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of the original cor. position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S 3   S 2<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 30 ins. diam., bears S. 35 1/4° E.,<br/>92 lks. dist., mkd. 1/4 S2 BT.</p> <p style="padding-left: 40px;">A juniper, 24 ins. diam., bears N. 86 1/2° W.,<br/>102.5 lks. dist., mkd. 1/4 S3 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>A juniper post, 33 ins. long, 3 ins. sq., with illegible scribe marks, once set in the ground, was found resting in the limbs of a small juniper nearby.</p> <p>Remove the juniper post from the tree and bury it alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |
| 79.51  | <p>The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the stan. cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 2°35' E., bet. secs. 33 and 34.</p> <p>Over rolling land, through moderate juniper.</p>  |
| 7.80   | Track road, 15 lks. wide, bears ENE. and WSW.  |

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 37.06  | <p>The 1/4 sec. cor. of secs. 33 and 34, monumented with a rebar, 31 ins. long, 1/2 in. diam., firmly set, projecting 12 ins. above ground, with a decayed juniper post, 36 ins. long, 5 ins. diam., with axe marks, laying on the ground alongside, of unknown origin. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S33   S34<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 82° E.,<br/>72 lks. dist., mkd. 1/4 S34 BT.</p> <p style="padding-left: 40px;">A juniper, 26 ins. diam., bears N. 21 3/4° W.,<br/>70 lks. dist., mkd. 1/4 S33 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside, and deposit the rebar inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p style="text-align: center;">_____</p> <p>N. 2°18' E., beginning new measurement.</p> |
| 26.70  | Descend steep N. slope, into the Puerco River valley.  |
| 36.75  | <p>The cor. of secs. 27, 28, 33, and 34, monumented with a sandstone, 16 x 10 x 5 ins., loosely set, flush with the ground, mkd. with 3 grooves on a face, and 1 groove on the adjacent face.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven into the ground, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

|           |     |
|-----------|-----|
| T21N R28E |     |
| S28       | S27 |
|           |     |
| S33       | S34 |
| 1991      |     |

from which

A juniper, 5 ins. diam., bears N. 55 1/4° E.,  
219 lks. dist., mkd. T21N R28E S27 BT.

A juniper, 7 ins. diam., bears S. 58 1/4° E.,  
139 lks. dist., mkd. X BT.

A juniper, 20 ins. diam., bears S. 6 1/2° W.,  
121 lks. dist., mkd. T21N R28E S33 BT.

A juniper, 6 ins. diam., bears N. 30 3/4° W.,  
17 lks. dist., mkd. T21N R28E S28 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

Set a steel fence post near the cor.

From this cor., a sandstone, 19 x 8 x 6 ins., projecting 12 ins.  
above the ground, mkd. with SC on the N., 3 grooves on the E.,  
1 groove on the S., 3 grooves on the W. faces, and X on the top,  
bears N. 21°07' W., 8.97 chs. dist. This stone, of unknown  
origin, is not harmoniously related to other accepted cors., and  
is not utilized in the course of this resurvey.

From the cor. of secs. 26, 27, 34, and 35.

N. 87°43' W., bet. secs. 27 and 34.

Over rolling land, through moderate juniper.

40.54

The 1/4 sec. cor. of secs. 27 and 34, monumented with a  
sandstone, 22 x 17 x 4 ins., firmly set, projecting 3 ins. above  
ground, mkd. 1/4 on the N., and IA on the S. faces.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
25 ins. in the ground, with brass cap mkd.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p style="text-align: center;">T21N R28E<br/>S27<br/>1/4 —<br/>S34<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 26 1/4° E.,<br/>41 lks. dist., mkd. 1/4 S27 BT.</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 44 1/2° E.,<br/>171 lks. dist., mkd. 1/4 S34 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 88°03' W., beginning new measurement.</p> |
| 40.57  | <p>The cor. of secs. 27, 28, 33, and 34.</p> <hr/>   |
|        | <p>N. 0°08' E., bet. secs. 27 and 28.</p> <p>Over rolling, broken land, through scattered juniper, descending<br/>into the Puerco River valley.</p>  |
| 34.40  | <p>Old fence, bears E. and W.</p>  |
| 35.01  | <p>Point selected for the witness cor. to the 1/4 sec. cor. of secs.<br/>27 and 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>19 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WC<br/>T21N R28E<br/>1/4<br/>S28   S27<br/>1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS    |  |           |  |     |     |     |     |      |  |
|-----------|--|-----------|--|-----|-----|-----|-----|------|--|
| 39.15     | Left bank of the Puerco River, bears NNE. and WSW.   |           |  |     |     |     |     |      |  |
| 39.82     | Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate dist., falls in the bed of the Puerco River, where it is impractical to establish a permanent monument; there is no remaining evidence of the original cor.   |           |  |     |     |     |     |      |  |
| 62.40     | Right bank of the Puerco River, bears ENE. and WSW.  |           |  |     |     |     |     |      |  |
| 79.64     | <p>Point for the cor. of secs. 21, 22, 27, and 28, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1" data-bbox="852 777 998 934"> <tr> <td colspan="2" data-bbox="852 777 998 808">T21N R28E</td> </tr> <tr> <td data-bbox="852 808 925 840">S21</td> <td data-bbox="925 808 998 840">S22</td> </tr> <tr> <td data-bbox="852 871 925 903">S28</td> <td data-bbox="925 871 998 903">S27</td> </tr> <tr> <td colspan="2" data-bbox="852 903 998 934">1992</td> </tr> </table> </div> <p>from which</p> <p>An iron post, 30 ins. long, 2 1/2 ins. diam., set 25 ins. in the ground, for a reference monument, bears S. 26°29' W., 125.0 ft. dist., with cap mkd. RM T21N R28E S28 125.0 FT TO COR 1992, and an arrow pointing to the cor. Set a steel fence post near the RM. The RM is located 4 lks. N. of a fence, bears E. and W.</p> <p>An iron post, 30 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears N. 58°15' W., 259.9 ft. dist., with cap mkd. RM T21N R28E S21 259.9 FT TO COR 1992, and an arrow pointing to the cor. Set a steel fence post near the RM. The RM is located 9 lks. W. of a fence, bears N. and S.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, an iron pipe, 1 3/4 ins. diam., firmly set, projecting 14 ins. above ground, of unknown origin, bears N. 19°31' W., 9.77 chs. dist. This position was determined using improper procedures and control, is not harmoniously related to accepted cors., and is not utilized in the course of this resurvey.</p> <hr/> <p>From the true point for the cor. of secs. 22, 23, 26, and 27.</p> | T21N R28E |  | S21 | S22 | S28 | S27 | 1992 |  |
| T21N R28E |  |           |  |     |     |     |     |      |  |
| S21       | S22  |           |  |     |     |     |     |      |  |
| S28       | S27  |           |  |     |     |     |     |      |  |
| 1992      |  |           |  |     |     |     |     |      |  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 40.46  | <p>N. 87°33' W., bet. secs. 22 and 27.</p> <p>Over level land.</p> <p>The 1/4 sec. cor. of secs. 22 and 27, monumented with a sandstone, 10 x 9 x 5 ins., firmly set, projecting 4 ins. above ground, mkd. /4 on the W. face.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S22<br/>1/4 —<br/>S27<br/>1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> |
| 20.285 | <p>N. 88°30' W., beginning new measurement.</p> <p>Point for the W. 1/16 sec. cor. of secs. 22 and 27.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S22<br/>W 1/16 —<br/>S27<br/>1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>   |
| 40.57  | <p>The cor. of secs. 21, 22, 27, and 28.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 4°30' W., bet. secs. 21 and 22.</p> <p>Over nearly level grassland.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 19.97  | <p>Point for the S. 1/16 sec. cor. of secs. 21 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S 1/16<br/>S21   S22<br/>1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 1.50 chs. E. of a fence, bears N. and S.</p>                                      |
| 32.35  | Power pole line, bears ENE. and WSW.  |
| 32.60  | Railroad access road, 15 lks. wide, bears ENE. and WSW.   |
| 33.90  | Southerly railroad track, bears ENE. and WSW.   |
| 34.10  | Northerly railroad track, bears ENE. and WSW.   |
| 34.40  | Railroad access road, 15 lks. wide, bears ENE. and WSW.   |
| 35.40  | Railroad right-of-way fence, bears ENE. and WSW.  |
| 36.15  | Center of old U.S. Highway 66, pavement, 40 lks. wide, bears ENE. and WSW.  |
| 36.45  | U.S. Interstate Highway 40 right-of-way fence, bears ENE. and WSW.  |
| 37.70  | Center of eastbound U.S. Interstate Highway 40, pavement, 65 lks. wide, bears ENE. and WSW.   |
| 39.40  | Center of westbound U.S. Interstate Highway 40, pavement, 65 lks. wide, bears ENE. and WSW.   |
| 39.94  | <p>The 1/4 sec. cor. of secs. 21 and 22, monumented with a rebar, 36 ins. long, 3/4 in. diam., firmly set, 8 ins. below ground, perpetuated by an Indian Allotment surveyor, around 1910, and utilized by Lacy C. Greer, R.L.S. No. 5704, in 1964, as per a plat filed at Matkin-Murphy Consulting Engineers Inc., Show Low, Arizona, and further perpetuated by the Arizona Highway Department, in 1966. This is accepted as a careful and faithful perpetuation of the original cor. position.</p> <p>At the cor. point</p> |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 33 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S21   S22<br/>1992</p> <p>from which</p> <p>An iron post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 54°26' E., 175.9 ft. dist., with cap mkd. RM T21N R28E S22 1/4 175.9 FT TO COR 1992, and an arrow pointing to the cor., located 5 lks. N. of a fence, bears ENE. and WSW.</p> <p>An iron post, 30 ins. long, 2 1/2 ins. diam., set 25 ins. in the ground, for a reference monument, bears N. 43°12' W., 71.9 ft. dist., with cap mkd. RM T21N R28E S21 1/4 71.9 FT TO COR 1992, and an arrow pointing to the cor., located 2 lks. N. of a fence, bears ENE. and WSW.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>From this cor. point, an aluminum disk, 3 ins. diam., set in a concrete column, 6 ins. diam., mkd. ARIZONA HIGHWAY DEPT. 1591 X 34.6 R.P. 100.0 WB 1963, bears N 4°00' W, 96.5 lks. dist., located in a cor. of fences, bearing N., ENE., and WSW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 4°55' E., beginning new measurement.</p> |
| 0.15   | Fence, bears ENE. and WSW.   |
| 0.30   | Center of frontage road, pavement, 40 lks. wide, bears ENE. and WSW.   |
| 1.00   | Fence, bears ENE. and WSW.   |
| 17.10  | Telephone pole line, bears ENE. and WSW.   |
| 40.74  | The cor. of secs. 15, 16, 21, and 22, monumented with a remnant of a sandstone, 13 x 11 x 2 1/2 ins., laying on the ground, mkd. IA on a side, and with 3 grooves on an adjacent side.   |
|        | At the cor. point  |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.

|           |     |
|-----------|-----|
| T21N R28E |     |
| S16       | S15 |
|           |     |
| S21       | S22 |
| 1991      |     |

from which

A juniper, 5 ins. diam., bears N. 26° E.,  
150 lks. dist., mkd. T21N R28E S15 BT.

A juniper, 3 ins. diam., bears S. 72° E.,  
96 lks. dist., mkd. X BT.

A juniper, 4 ins. diam., bears S. 76° W.,  
40 lks. dist., mkd. T21N R28E S21 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

The cor. is located 4 lks. S. of a fence, bears E. and W.

From this cor., a juniper post, 4 ins. sq., located in a cor. of  
fences bearing N. and W., of unknown origin, bears N. 15°02' W.,  
9.23 chs. dist., utilized by Ralph B. Nunnolley, R.C.E. No. 4901,  
in 1969, as per a plat recorded at the Apache County courthouse,  
St. Johns, Arizona. This position was reestablished using  
improper control and is not utilized in the course of this  
resurvey.

From this same cor., a rebar, 5/8 in. diam., firmly set,  
projecting 4 ins. above ground, with a tag mkd. PE 6123, bears  
N. 21°23' W, 9.535 chs. dist., determined by Keith Shreeve,  
R.C.E. NO. 6123, in 1969, as per a plat recorded at the Apache  
County courthouse, St. Johns, Arizona. This position was  
reestablished using improper control and is not utilized in the  
course of this resurvey.

---

From the cor. of secs. 14, 15, 22, and 23.

N. 87°30' W., bet. secs. 15 and 22.

Over rolling land, along a fence.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 40.41  | <p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S15<br/>1/4 —<br/>S22<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 4 ins. diam., bears N. 17 1/4° E.,<br/>388 lks. dist., mkd. 1/4 S15 BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears S. 63° W.,<br/>185 lks. dist., mkd. 1/4 S22 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located in a fence, bears E. and W.</p> |
| 80.81  | <p>The cor. of secs. 15, 16, 21, and 22.</p> <hr/> <p>N. 0°05' E., bet. secs. 15 and 16.</p> <p>Ascend, over rolling land.</p> <p>22.55 Power pole line, bears ENE. and WSW.</p> <p>23.55 Low ridge, bears E. and W.</p> <p>39.45 Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S16   S15<br/>1991</p> <p>from which</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

A juniper, 6 ins. diam., bears N. 33 1/2° E.,  
293 lks. dist., mkd. 1/4 S15 BT.

A juniper, 7 ins. diam., bears N. 74 1/2° W.,  
275 lks. dist., mkd. 1/4 S16 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Set a steel fence post near the cor.

78.90

The cor. of secs. 9, 10, 15, and 16, monumented with a crumbling  
sandstone, 21 x 9 x 3 ins., laying on the ground, with no marks  
remaining. This is harmoniously related to accepted cors. in the  
area, and is accepted as the best available evidence of the  
original cor. position.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T21N | R28E |
| S 9  | S10  |
| S16  | S15  |
| 1991 |      |

from which

A juniper, 7 ins. diam., bears N. 25 1/4° E.,  
209.5 lks. dist., mkd. T21N R28E S10 BT.

A juniper, 3 ins. diam., bears S. 59 1/4° E.,  
251.5 lks. dist., mkd. T21N R28E S15 BT.

A juniper, 5 ins. diam., bears S. 40 1/2° W.,  
69 lks. dist., mkd. T21N R28E S16 BT.

A juniper, 8 ins. diam., bears N. 59 1/2° W.,  
99 lks. dist., mkd. T21N R28E S9 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

Set a steel fence post near the cor.

---

From the cor. of secs. 10, 11, 14, and 15.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 40.37  | <p>N. 87°56' W., bet. secs. 10 and 15.</p> <p>Over rolling land.</p> <p>Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S10<br/>1/4 —<br/>S15<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 3° W.,<br/>171.5 lks. dist., mkd. 1/4 S15 BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 71° W.,<br/>48.5 lks. dist., mkd. 1/4 S10 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |
| 80.73  | <p>The cor. of secs. 9, 10, 15, and 16.</p> <hr/>  |
|        | <p>N. 0°09' E., bet. secs. 9 and 10.</p> <p>Ascend into broken, eroded terrain.</p>  |
| 2.50   | <p>Fence, bears E. and W.; a cor. of fences bearing N., S., E., and W., bears West, 2.08 chs. dist.</p>  |
| 8.85   | <p>From this point, a cor. of fences bearing S. and W., bears West, 2.10 chs. dist.</p>  |
| 39.26  | <p>A local witness cor. to the 1/4 sec. cor. of secs. 9 and 10, monumented with a sandstone, 25 x 15 x 8 ins., laying on the ground, mkd. 1/4 WC 50 LK. This cor. was established by persons unknown, is accepted as a careful and faithful determination of the position of the corner, is used to control the alinement and proportionate distance of the position of the 1/4 sec. cor., and now becomes an angle point.</p> <p>At the angle point</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p>                                       |
|        | <p style="text-align: center;">AP<br/>T21N R28E<br/>S 9   S10<br/>1991</p>  |
|        | <p>Deposit 3 16D nails beneath the stainless steel post.</p>  |
|        | <p>Bury the sandstone alongside the stainless steel post.</p>   |
|        | <p>Set a steel fence post near the cor.</p>   |
|        | <p style="text-align: center;">_____</p> <p>N. 0°13' E., beginning new measurement.</p>   |
| 0.50   | <p>Point for 1/4 sec. cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p>   |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p>                                       |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S 9   S10<br/>1991</p>   |
|        | <p>from which</p>   |
|        | <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 4° E.,<br/>69.5 lks. dist., mkd. 1/4 S10 BT.</p>   |
|        | <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears S. 43 1/4° W.,<br/>87 lks. dist., mkd. 1/4 S9 BT.</p>   |
|        | <p>Deposit 4 16D nails beneath the stainless steel post.</p>  |
|        | <p>Set a steel fence post near the cor.</p>   |
| 4.50   | <p>Leave broken land, enter rolling land, through moderate juniper.</p>   |
| 40.29  | <p>The cor. of secs. 3, 4, 9, and 10, monumented with a sandstone, 14 x 8 x 4 ins., firmly set, projecting 7 ins. above ground, mkd. IA and 3 grooves on the E., and 5 grooves on the S. faces.</p> |
|        | <p>At the cor. point</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
25 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T21N | R28E |
| S 4  | S 3  |
| S 9  | S10  |
| 1991 |      |

from which

A juniper, 8 ins. diam., bears N. 30 1/2° E.,  
136 lks. dist., mkd. X BT.

A juniper, 22 ins. diam., bears S. 49 1/2° E.,  
36 lks. dist., mkd. T21N R28E S10 BT.

A juniper, 8 ins. diam., bears S. 21° W.,  
117 lks. dist., mkd. T21N R28E S9 BT.

A juniper, 10 ins. diam., bears N. 26 1/2° W.,  
152.5 lks. dist., mkd. T21N R28E S4 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

Set a steel fence post near the cor.

From the cor. of secs. 2, 3, 10, and 11.

N. 87°59' W., bet. secs. 3 and 10.

Over rolling land.

40.27

Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate  
dist.; there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T21N | R28E |
| S 3  | —    |
| 1/4  | —    |
| S10  | —    |
| 1991 |      |

from which

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 80.53  | <p>A juniper, 9 ins. diam., bears N. 36° E.,<br/>31 lks. dist., mkd. 1/4 S3 BT.</p> <p>A juniper, 13 ins. diam., bears S. 53 1/2° E.,<br/>68 lks. dist., mkd. 1/4 S10 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. of secs. 3, 4, 9, and 10.</p>  |
| 16.00  | <p>N. 0°08' E., bet. secs. 3 and 4.</p> <p>Over rolling land, through moderate juniper, along an abandoned<br/>fence line.</p> <p>Graded road, 30 lks. wide, on ridge top, bears ENE. and WSW.</p>  |
| 39.75  | <p>The 1/4 sec. cor. of secs. 3 and 4, monumented with the remnant<br/>of a juniper post, 18 ins. long, 4 ins. diam., firmly set, 6 ins.<br/>below ground, with axe marks on the bottom. This is harmoniously<br/>related to accepted cors. in the area, and is accepted as the<br/>best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S 4   S 3<br/>1991</p> <p>from which</p> <p>A juniper, 18 ins. diam., bears S. 48 3/4° E.,<br/>183 lks. dist., mkd. 1/4 S3 BT.</p> <p>A juniper, 11 ins. diam., bears S. 79 3/4° W.,<br/>130 lks. dist., mkd. 1/4 S4 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | Set a steel fence post near the cor.  |
|        | N. 0°13' E., beginning new measurement.   |
| 24.20  | Wash, 90 lks. wide, drains W., from ENE.  |
| 39.78  | The cor. of 3, 4, 33, and 34, on the N. bdy. of the Tp., hereinbefore described.  |
|        | From the stan. cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described.  |
|        | N. 1°41' E., bet. secs. 32 and 33.  |
| 24.31  | Point for a witness point on line bet. secs. 32 and 33.   |
|        | Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post 25 ins. long, bonded to a magnetic poly breakaway base, 24 ins. in the ground, with brass cap mkd. |
|        | <p style="text-align: center;">WP<br/>T21N R28E<br/>S32   S33<br/>1991</p>  |
|        | Set a steel fence post near the WP.   |
|        | The WP is located on a ridge, bears ENE. and WSW; descend.  |
| 32.70  | Power pole line, bears SSE. and NNW.  |
| 38.80  | Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate dist.; there is no remaining evidence of the original cor.   |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.  |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S32   S33<br/>1991</p>   |
|        | from which  |
|        | A juniper, 6 ins. diam., bears S. 82 1/2° W., 249 lks. dist., mkd. 1/4 S32 BT.  |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>A juniper, 8 ins. diam., bears N. 33° W.,<br/>168 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 20 lks. E. of a fence, bears N. and S.</p>  |
| 53.93  | <p>Point for a witness point on line bet. secs. 32 and 33.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an<br/>iron post 25 ins. long, bonded to a magnetic poly breakaway base,<br/>24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP<br/>T21N R28E<br/>S32   S33<br/>1991</p> <p>Set a steel fence post near the WP.</p> <p>The WP is located on a ridge, bears ESE. and WNW.</p>  |
| 67.47  | <p>Point for a witness point on line bet. secs. 32 and 33.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an<br/>iron post 25 ins. long, bonded to a magnetic poly breakaway base,<br/>25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP<br/>T21N R28E<br/>S32   S33<br/>1991</p> <p>Set a steel fence post near the WP.</p> <p>The WP is located on the top of a steep, rocky, N. slope; thence<br/>descend into the Puerco River Valley.</p> |
| 77.60  | <p>Point for cor. of secs. 28, 29, 32, and 33, at proportionate<br/>dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>24 ins. in the ground, with brass cap mkd.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

|           |     |
|-----------|-----|
| T21N R28E |     |
| S29       | S28 |
| — —       |     |
| S32       | S33 |
| 1991      |     |

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

The cor. is located 427 lks. SSE from a cor. of fences bearing N., E., and S.

From this cor. point, an open-ended iron pipe, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, in a scattered collar of stones, bears N. 25°05' W., 4.63 chs. dist. This position was determined by persons unknown, is not harmoniously related to accepted cors., and is not utilized in the course of this resurvey.

---

From the cor. of secs. 27, 28, 33, and 34.

N. 87°24' W., bet. secs. 28 and 33.

Over rolling land, through scattered juniper.

40.43

The 1/4 sec. cor. of secs. 28 and 33, monumented with a broken sandstone, 20 x 14 x 5 ins., laying on the ground, in a scattered mound of stone, mkd. I 1/4 A on a side.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to bedrock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

|           |   |
|-----------|---|
| T21N R28E |   |
| S28       |   |
| 1/4       | — |
| S33       |   |
| 1991      |   |

from which

A juniper, 14 ins. diam., bears S. 77 3/4° E.,  
15 lks. dist., mkd. X BT.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>A juniper, 13 ins. diam., bears N. 22 3/4° W.,<br/>75 lks. dist., mkd. 1/4 S28 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Bury the broken sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, an open-ended iron pipe, 1 3/4 ins. diam.,<br/>firmly set, projecting 18 ins. above ground, bears N. 26°54' W.,<br/>8.085 chs. dist., located in a cor. of fences bearing N. and W.<br/>This position was determined by persons unknown, is not<br/>harmoniously related to accepted cors., and is not utilized in<br/>the course of this resurvey.</p> <hr/> <p>N. 85°05' W., beginning new measurement.</p> |
| 40.95  | <p>The cor. of secs. 28, 29, 32, and 33.</p> <hr/>   |
|        | <p>N. 2°40' W., bet. secs. 28 and 29.</p>  |
|        | <p>Descend gradually, over nearly level, open grassland.</p>   |
| 4.20   | <p>Fence, bears E. and W.</p>  |
| 14.20  | <p>Track road, bears E. and W.</p>   |
| 38.82  | <p>The 1/4 sec. cor. of secs. 28 and 29, monumented with a juniper<br/>post, 48 ins. long, 4 x 6 ins. sq., laying on the ground, with<br/>axe marks at both ends. This is accepted as the best available<br/>evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>22 ins. in the ground, over a steel fence post driven into the<br/>ground, with brass cap mkd.</p>  |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S29   S28<br/>1991</p>  |
|        | <p>from which</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 23 ins. in the ground, for a reference monument, bears S. 52°37' E., 146.5 ft. dist., with cap mkd. RM T21N R28E 1/4 S28 146.5 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument.

A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 24 ins. in the ground, for a reference monument, bears S. 25°40' W., 147.0 ft. dist., with cap mkd. RM T21N R28E 1/4 S29 147.0 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

N. 3°08' E., beginning new measurement.

- 20.00 Fence, bears ENE. and WSW.  
21.00 Left bank of the Puerco River, bears E. and W.  
27.70 Right bank of the Puerco River, bears E. and W.  
30.10 Track road, bears E. and W.  
39.78 Point for the cor. of secs. 20, 21, 28, and 29, at proportionate dist.; there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| T21N | R28E |
| S20  | S21  |
| S29  | S28  |
| 1991 |      |

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>From this cor. point, an aluminum pipe, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with an aluminum cap mkd. T20N R28E S20 S21 S29 S28 1989 LS 22264, bears N. 17°25' W., 4.43 chs. dist. This position was determined by Michael F. Jenkins, R.L.S. No. 22264, in 1989, as per a plat recorded at the Apache County courthouse, St. Johns, Arizona, using improper procedures and is not utilized in the course of this resurvey.</p> <p>From this same cor. point, an open-ended iron pipe, 1 3/4 ins. diam., firmly set, projecting 14 ins. above ground, bears N. 27°34' W., 5.015 chs. dist. This position was determined by persons unknown, is not harmoniously related to accepted cors., and is not utilized in the course of this resurvey.</p>  |
| 40.55  | <p>From the cor. of secs. 21, 22, 27, and 28.</p> <p>N. 87°01' W., bet. secs. 21 and 28.</p> <p>Over nearly level land.</p> <p>Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 43 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S21<br/>1/4 —<br/>S28<br/>1992</p> <p>from which</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 24 ins. in the ground, for a reference monument, bears N. 41°53' E., 69.1 ft. dist., with cap mkd. RM T21N R28E 1/4 S21 69.1 FT TO COR 1992, and an arrow pointing to the cor. The reference monument is located 1.5 lk. E. of a corral fence, bears SSE. and NNW.</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 26 ins. in the ground, for a reference monument, bears S. 72°47' E., 67.6 ft. dist., with cap mkd. RM T21N R28E 1/4 S28 67.6 FT TO COR 1992, and an arrow pointing to the cor. The reference monument is located 1.5 lk. E. of a corral fence, bears SSE. and NNW.</p> |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.   |
|        | The cor. is located in Wayne Lynch's corral.  |
|        | From this cor. point, an open-ended iron pipe, 1 3/4 ins. diam., firmly set, projecting 24 ins. above ground, bears N. 22°02' W., 7.37 chs. dist. This position was determined by persons unknown, is not harmoniously related to accepted cors., and is not utilized in the course of this resurvey. |
| 81.10  | The cor. of secs. 20, 21, 28, and 29.   |
|        | N. 0°27' E., bet. secs. 20 and 21.  |
|        | Over nearly level land.   |
| 7.70   | Power pole line, bears ENE. and WSW.  |
| 7.85   | Fence, bears ENE. and WSW.  |
| 9.40   | Southerly railroad track, bears ENE. and WSW.   |
| 9.65   | Northerly railroad track, bears ENE. and WSW.   |
| 10.10  | Access road, 20 lks. wide, bears ENE. and WSW.  |
| 10.75  | Power pole line, bears ENE. and WSW.  |
| 11.00  | Fence, bears ENE. and WSW.  |
| 11.75  | Abandoned U.S. Highway 66, dirt surfaced, 45 lks. wide, bears ENE. and WSW.   |
| 13.35  | Eastbound U.S. Interstate Highway 40, paved surface, 64 lks. wide, bears ENE. and WSW.  |
| 15.10  | Westbound U.S. Interstate Highway 40, paved surface, 63 lks. wide, bears ENE. and WSW.  |
| 15.80  | Fence, bears ENE. and WSW.  |
| 16.10  | Frontage road, paved surface, 40 lks. wide, bears ENE. and WSW.   |
| 16.355 | From this point, an aluminum disk, 3 ins. diam., cemented into a concrete column, 6 ins. diam., projecting 1 in. above ground, mkd. ARIZONA HIGHWAY DEPT. R.P. 100.00 W.B. CONST. CL STA. 1537X51.51 1964, bears West, 1.34 chs. dist., located in a cor. of fences bearing N., ENE., and WSW.        |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 16.60  | Fence, bears ENE. and WSW.  |
| 39.73  | <p>The 1/4 sec. cor. of secs. 20 and 21, monumented with a broken sandstone, 22 x 7 x 3 ins., the bottom portion firmly set, projecting 3 ins. above the ground, the top portion laying on the ground alongside, mkd. 4, perpetuated by an Indian Allotment surveyor, around 1910, and utilized by Lacy C. Greer, R.L.S. No. 5704, in 1964, as per a plat filed at Matkin-Murphy Consulting Engineers Inc., Show Low, Arizona.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S20   S21<br/>1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the portions of sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, a rebar, 1/2 in. diam., firmly set, projecting 5 ins. above ground, bears N. 57°02' W., 1.735 chs. dist. This position was determined by Ralph B. Nunnolley, R.C.E. No. 4901, in 1968, is the SW. cor. of the Bell Brand Ranches Unit 10 subdivision, as per a plat recorded in the Apache County courthouse, St Johns, Arizona.</p> <p>From this same cor. point, an aluminum pipe, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with an aluminum cap mkd. 1/4 S20 S21 1989 LS 22264, bears N. 25°50' W., 6.19 chs. dist. This position was determined by Michael F. Jenkins, R.L.S. No. 22264, in 1989, as per a plat recorded in the Apache County courthouse, St Johns, Arizona, using improper procedures and is not utilized in the course of this resurvey.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°15' E., beginning new measurement.</p> |
| 8.90   | Dirt road, 45 lks. wide, bears E. and W.  |
| 18.55  | Ascend steep, rocky, S. slope.  |
| 27.90  | End ascent; thence over nearly level mesa.  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS    |  |           |  |     |     |     |  |     |     |      |  |
|-----------|--|-----------|--|-----|-----|-----|--|-----|-----|------|--|
| 34.30     | Descend steep, rocky, N. slope.  |           |  |     |     |     |  |     |     |      |  |
| 37.30     | End descent; thence over nearly level land.  |           |  |     |     |     |  |     |     |      |  |
| 39.89     | Point for cor. of secs. 16, 17, 20, and 21, at proportionate dist.; there is no remaining evidence of the original cor.  |           |  |     |     |     |  |     |     |      |  |
|           | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.   |           |  |     |     |     |  |     |     |      |  |
|           | <table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T21N R28E</td> </tr> <tr> <td style="text-align: center;">S17</td> <td style="text-align: center;">S16</td> </tr> <tr> <td colspan="2" style="text-align: center;">— —</td> </tr> <tr> <td style="text-align: center;">S20</td> <td style="text-align: center;">S21</td> </tr> <tr> <td colspan="2" style="text-align: center;">1991</td> </tr> </table> | T21N R28E |  | S17 | S16 | — — |  | S20 | S21 | 1991 |  |
| T21N R28E |  |           |  |     |     |     |  |     |     |      |  |
| S17       | S16  |           |  |     |     |     |  |     |     |      |  |
| — —       |  |           |  |     |     |     |  |     |     |      |  |
| S20       | S21  |           |  |     |     |     |  |     |     |      |  |
| 1991      |  |           |  |     |     |     |  |     |     |      |  |
|           | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.  |           |  |     |     |     |  |     |     |      |  |
|           | Raise a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, W. of the cor.   |           |  |     |     |     |  |     |     |      |  |
|           | Set a steel fence post near the cor.   |           |  |     |     |     |  |     |     |      |  |
|           | From this cor. point, a rebar, 1 in. diam., firmly set, flush with the ground, and in a mound of stone, 3 ft. diam., bears N. 15°03' W., 4.05 chs. dist., This position was determined by persons unknown, using improper procedures, and is not utilized in the course of this resurvey.  |           |  |     |     |     |  |     |     |      |  |
|           | <hr/>  |           |  |     |     |     |  |     |     |      |  |
|           | From the cor. of secs. 15, 16, 21, and 22.   |           |  |     |     |     |  |     |     |      |  |
|           | N. 87°35' W., bet. secs. 16 and 21.  |           |  |     |     |     |  |     |     |      |  |
|           | Over rolling land.   |           |  |     |     |     |  |     |     |      |  |
| 3.50      | Fence, bears N. and S.   |           |  |     |     |     |  |     |     |      |  |
| 32.85     | Fence, bears N. and S.   |           |  |     |     |     |  |     |     |      |  |
| 40.45     | Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the original cor.  |           |  |     |     |     |  |     |     |      |  |
|           | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.   |           |  |     |     |     |  |     |     |      |  |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p style="text-align: center;">T21N R28E<br/>S16<br/>1/4 —<br/>S21<br/>1991</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, N. of the cor.</p> <p>Set a steel fence post near the cor.</p>  |
|        | <p>From this cor. point, an iron pin, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with a brass tag mkd. P.E. 2399, bears N. 46°14' E., 10.505 chs. dist. This position was determined by Ralph B. Nunnolley, R.C.E. No. 4901, in 1968, is the NE. cor. of the Bell Brand Ranches Unit 10 subdivision, as per a plat recorded in the Apache County courthouse, St Johns, Arizona.</p> |
| 80.90  | <p>The cor. of secs. 16, 17, 20, and 21.</p> <hr/>  |
|        | <p>N. 0°05' E., bet. secs. 16 and 17.</p>   |
|        | <p>Over rolling land.</p>   |
| 3.60   | <p>Buried water pipe line, with access road, 60 lks. wide, bears E. and W.</p>  |
| 5.90   | <p>Power pole line, bears E. and W.</p>   |
| 16.85  | <p>Earth dam of stock tank, bears WNW. and ESE.</p>   |
| 28.30  | <p>Ditch, 10 lks. wide, course SW.</p>  |
| 39.89  | <p>Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p>  |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>   |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S17   S16<br/>1991</p>   |
|        | <p>from which</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

A juniper, 7 ins. diam., bears N. 14 3/4° E.,  
275 lks. dist., mkd. 1/4 S16 BT.

A juniper, 5 ins. diam., bears S. 33 1/4° E.,  
329 lks. dist., mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Set a steel fence post near the cor.

From this cor. point, an iron pin, 1/2 in. diam., firmly set,  
projecting 2 ins. above ground, with a brass tag mkd. P.E. 2399,  
bears N. 29°59' W., 81 lks. dist. This position was determined  
by Ralph B. Nunnelley, R.C.E. No. 4901, in 1968, is the NE. cor.  
of lot 115, Bell Brand Ranches Unit 11 subdivision, as per a plat  
recorded in the Apache County courthouse, St. Johns, Arizona.

53.55 Left bank of large wash, bears NNE. and W.

58.20 Right bank of same wash, bears NNE. and SSW.

72.00 Begin ascent of steep, broken S. slope.

74.78 Point selected for the witness cor. to the cor. of secs. 8, 9,  
16, and 17.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.

|      |      |
|------|------|
| WC   |      |
| T21N | R28E |
| S 8  | S 9  |
| S17  | S16  |
| 1991 |      |

from which

A juniper, 6 ins. diam., bears N. 61 1/2° E.,  
203 lks. dist., mkd. X BT.

A juniper, 8 ins. diam., bears N. 52 3/4° W.,  
52 lks. dist., mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Set a steel fence post near the witness cor.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>The witness cor. is located below the main bluff, on a low ridge, bears NNE. and SSW.</p>   |
| 79.78  | <p>Point for the cor. of secs. 8, 9, 16, and 17, at proportionate dist., falls on a steep, loose, S. slope, where it is impractical to establish a permanent monument; there is no remaining evidence of the original cor. position.</p> <hr/>   |
|        | <p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>N. 86°58' W., bet. secs. 9 and 16.</p> <p>Over rolling, broken, eroded land.</p>   |
| 40.46  | <p>Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate dist., falls in a deep wash, course SW., where it is impractical to establish a permanent monument; there is no remaining evidence of the original cor. position.</p>   |
| 48.46  | <p>Point selected for the witness cor. to the 1/4 sec. cor. of secs. 9 and 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WC<br/>T21N R28E<br/>S 9<br/>1/4 —<br/>S16<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 74 1/2° W.,<br/>93.5 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A juniper, 18 ins. diam., bears N. 7° W.,<br/>140 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the witness cor.</p> <p>The witness cor. is located on a ridge, bears N. and S.</p> |
| 80.92  | <p>The true point for the cor. of secs. 8, 9, 16, and 17.</p> <hr/>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | N. 1°02' E., bet. secs. 8 and 9.   |
|        | Ascend steep, loose, S. slope.   |
| 0.30   | Top of bluff; thence ascend over rolling, broken land, through moderate juniper.   |
| 4.90   | Navajo Reservation boundary fence, bears E. and W.   |
| 19.945 | Point for the S. 1/16 sec. cor. of secs. 8 and 9.  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.   |
|        | <p style="text-align: center;">T21N R28E<br/>S 1/16<br/>S 8   S 9<br/>1994</p>   |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.   |
|        | Set a steel fence post alongside the cor.  |
|        | The cor. is located on a ridge, bears NE. and SW.; thence over nearly level land, through scattered juniper.   |
| 39.89  | The 1/4 sec. cor. of secs. 8 and 9, monumented with a sandstone, 12 x 6 x 5 ins., firmly set, projecting 4 ins. above ground, with no marks remaining on weathered surfaces. This is harmoniously related to accepted cors. in the area, and is accepted as the best available evidence of the original cor. position. |
|        | At the cor. point  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.   |
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S 8   S 9<br/>1991</p>  |
|        | from which   |
|        | A juniper, 6 ins. diam., bears S. 78 1/4° E., 269.5 lks. dist., mkd. 1/4 S9 BT.  |
|        | A juniper, 9 ins. diam., bears N. 87 3/4° W., 117.5 lks. dist., mkd. 1/4 S8 BT.  |

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS    |   |           |  |     |     |     |     |      |  |
|-----------|---|-----------|--|-----|-----|-----|-----|------|--|
|           | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0°18' W., beginning new measurement.</p>  |           |  |     |     |     |     |      |  |
| 9.10      | Track road, 12 lks. wide, bears ENE. and WSW.   |           |  |     |     |     |     |      |  |
| 10.00     | Descend into broken, eroded land.   |           |  |     |     |     |     |      |  |
| 38.99     | <p>Point for the cor. of secs. 4, 5, 8, and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: 0 auto; border-collapse: collapse;"> <tr> <td colspan="2" style="padding: 2px 10px;">T21N R28E</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S 5</td> <td style="padding: 2px 5px;">S 4</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S 8</td> <td style="padding: 2px 5px;">S 9</td> </tr> <tr> <td colspan="2" style="padding: 2px 10px;">1991</td> </tr> </table> </div> <p>from which</p> <p style="margin-left: 40px;">A juniper, 7 ins. diam., bears N. 83 3/4° E.,<br/>79 lks. dist., mkd. T21N R28E S4 BT.</p> <p style="margin-left: 40px;">A juniper, 4 ins. diam., bears S. 13 3/4° W.,<br/>38.5 lks. dist., mkd. T21N R28E S8 BT.</p> <p style="margin-left: 40px;">A juniper, 3 ins. diam., bears S. 81 1/4° W.,<br/>313.5 lks. dist., mkd. X BT.</p> <p style="margin-left: 40px;">A juniper, 12 ins. diam., bears N. 62° W.,<br/>472 lks. dist., mkd. T21N R28E S5 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>From the cor. of secs. 3, 4, 9, and 10.</p> <p>N. 87°55' W., bet. secs. 4 and 9.</p> <p>Over rolling land, through scattered juniper.</p> | T21N R28E |  | S 5 | S 4 | S 8 | S 9 | 1991 |  |
| T21N R28E |   |           |  |     |     |     |     |      |  |
| S 5       | S 4   |           |  |     |     |     |     |      |  |
| S 8       | S 9   |           |  |     |     |     |     |      |  |
| 1991      |   |           |  |     |     |     |     |      |  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 40.20  | <p>The 1/4 sec. cor. of secs. 4 and 9, monumented with a juniper post, 36 ins. long, 4 ins. sq., firmly set, projecting 18 ins. above ground, mkd. IA on the N., and 1/4 on the W. faces.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S 4<br/>1/4 —<br/>S 9<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears S. 40 1/4° E.,<br/>20 lks. dist., mkd. 1/4 S9 BT.</p> <p style="padding-left: 40px;">A juniper, 15 ins. diam., bears N. 1 1/4° W.,<br/>44 lks. dist., mkd. 1/4 S4 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p style="text-align: center;">_____</p> <p>N. 86°58' W., beginning new measurement.</p> |
| 40.40  | <p>The cor. of secs. 4, 5, 8, and 9.</p> <hr/> <p>N. 0°18' E., bet. secs. 4 and 5.</p> <p>Over rolling land, through scattered juniper.</p>  |
| 38.99  | <p>The 1/4 sec. cor. of secs. 4 and 5, monumented with a juniper post, 37 ins. long, 4 ins. sq., firmly set, projecting 12 ins. above ground, mkd. 1/4 on the W. face.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S 5   S 4<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 26 ins. diam., bears S. 56 1/2° E.,<br/>87 lks. dist., mkd. 1/4 S4 BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 69 1/2° W.,<br/>117.5 lks. dist., mkd. 1/4 S5 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0°11' E., beginning new measurement.</p> |
| 11.40  | Low ridge, bears E. and W.  |
| 39.75  | The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp.,<br>hereinbefore described.   |
|        | <hr style="width: 60%; margin: 10px auto;"/> <p>From the stan. cor. of secs. 31 and 32, on the S. bdy. of the<br/>Tp., hereinbefore described.</p> <p>N. 0°46' E., bet. secs. 31 and 32.</p> <p>Over rolling land, through moderate juniper.</p>  |
| 13.10  | Descend into broken, eroded land, along the E. side of a ravine,<br>course N.   |
| 39.79  | Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate<br>dist.; there is no remaining evidence of the original cor.  |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S31   S32<br/>1991</p> <p>from which</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |      |      |     |     |  |  |     |     |      |  |
|--------|---|------|------|-----|-----|--|--|-----|-----|------|--|
|        | <p>A juniper, 11 ins. diam., bears N. 53 1/4° E.,<br/>91 lks. dist., mkd. 1/4 S32 BT.</p> <p>A juniper, 12 ins. diam., bears N. 63 1/4° W.,<br/>135 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>   |      |      |     |     |  |  |     |     |      |  |
| 45.00  | Wash, 1 ch. wide, 10 ft. deep, course W.; ascend.   |      |      |     |     |  |  |     |     |      |  |
| 50.50  | Ridge, bears ENE. and WSW.  |      |      |     |     |  |  |     |     |      |  |
| 55.00  | Ridge, bears E. and W.; descend.  |      |      |     |     |  |  |     |     |      |  |
| 60.00  | Enter nearly level Puerco River valley.   |      |      |     |     |  |  |     |     |      |  |
| 79.58  | <p>The cor. of secs. 29, 30, 31, and 32, monumented with a<br/>sandstone, 24 x 10 x 10 ins., laying on the ground, mkd. with<br/>5 grooves on a side, and 1 groove on the opposite side. This is<br/>harmoniously related to accepted cors. in the area, and is<br/>accepted as the best available evidence of the original cor.<br/>position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>25 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T21N</td> <td>R28E</td> </tr> <tr> <td>S30</td> <td>S29</td> </tr> <tr> <td colspan="2" style="text-align: center;"> </td> </tr> <tr> <td>S31</td> <td>S32</td> </tr> <tr> <td colspan="2" style="text-align: center;">1991</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>From the cor. of secs. 28, 29, 32, and 33.</p> <p>N. 87°43' W., bet. secs. 29 and 32.</p> <p>Over nearly level Puerco River valley.</p> | T21N | R28E | S30 | S29 |  |  | S31 | S32 | 1991 |  |
| T21N   | R28E  |      |      |     |     |  |  |     |     |      |  |
| S30    | S29   |      |      |     |     |  |  |     |     |      |  |
|        |   |      |      |     |     |  |  |     |     |      |  |
| S31    | S32   |      |      |     |     |  |  |     |     |      |  |
| 1991   |   |      |      |     |     |  |  |     |     |      |  |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 10.00  | Ascend NE. slope of bluff above river valley.  |
| 14.12  | Point for a witness point on line bet. secs. 29 and 32.  |
|        | Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, 18 ins. in the ground, to bedrock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.     |
|        | <p style="text-align: center;">WP<br/>T21N R28E<br/>S29<br/>-----<br/>S32<br/>1991</p>   |
|        | Set a steel fence post near the WP.<br><br>The WP is located on top of a bluff overlooking the Puerco River valley; thence over the rolling bluff, through moderate juniper.   |
| 28.44  | Point for a witness point on line bet. secs. 29 and 32.  |
|        | Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, 16 ins. in the ground, to bedrock, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd. |
|        | <p style="text-align: center;">WP<br/>T21N R28E<br/>S29<br/>-----<br/>S32<br/>1991</p>   |
|        | Set a steel fence post near the WP.<br><br>The WP is located on top of a bluff overlooking the Puerco River valley; thence descend across the steep, rocky, N. slope of the bluff.   |
| 40.55  | Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate dist.; there is no remaining evidence of the original cor.  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p style="text-align: center;">T21N R28E<br/>S29<br/>1/4 —<br/>S32<br/>1991</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>  |
|        | <p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, N. of the cor.</p>   |
|        | <p>Set a steel fence post near the cor.</p>   |
| 49.935 | <p>Point for a witness point on line bet. secs. 29 and 32.</p>  |
|        | <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, 18 ins. in the ground, to bedrock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> |
|        | <p style="text-align: center;">WP<br/>T21N R28E<br/>S29<br/>—<br/>S32<br/>1991</p>  |
|        | <p>Set a steel fence post near the WP.</p>  |
| 60.00  | <p>Enter nearly level Puerco River valley.</p>  |
| 81.09  | <p>The cor. of secs. 29, 30, 31, and 32.</p>  |
|        | <p>N. 89°11' W., bet. secs. 30 and 31.</p>  |
|        | <p>Over nearly level Puerco River valley.</p>   |
| 4.00   | <p>Wash, 60 lks. wide, 6 ft. deep, course NNW.</p>  |
| 15.00  | <p>Ascend steep, rocky, NE. slope of bluff above valley.</p>  |
| 28.55  | <p>Point for a witness point on line bet. secs. 30 and 31.</p>  |
|        | <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, 20 ins. in the ground, with brass cap mkd.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p style="text-align: center;">WP<br/>T21N R28E<br/>S30<br/>-----<br/>S31<br/>1991</p>  |
| 40.46  | <p>Set a steel fence post near the WP.</p> <p>Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, to bedrock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S30<br/>1/4 ———<br/>S31<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 29 3/4° E.,<br/>287 lks. dist., mkd. 1/4 S31 BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears S. 6° W.,<br/>111 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 30 lks. S. of the edge of the bluff, bears E. and W.</p> |
| 61.76  | <p>Point for a witness point on line bet. secs. 30 and 31.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP<br/>T21N R28E<br/>S30<br/>-----<br/>S31<br/>1991</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | Set a steel fence post near the WP.   |
| 71.72  | Point for a witness point on line bet. secs. 30 and 31.   |
|        | Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, 22 ins. in the ground, to bedrock, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.  |
|        | WP  |
|        | T21N R28E   |
|        | S30   |
|        | -----   |
|        | S31   |
|        | 1991  |
|        | Set a steel fence post near the WP.   |
|        | The cor. is located 25 lks. S. of the edge of the bluff, bears E. and W.; thence descend steep, rocky, NW. slope.   |
| 80.78  | The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp., hereinbefore described.  |
|        | From the cor. of secs. 29, 30, 31, and 32.  |
|        | N. 0°02' E., bet. secs. 29 and 30.  |
|        | Descend into Puerco River valley.   |
| 40.22  | Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate dist.; there is no remaining evidence of the original cor.   |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.  |
|        | T21N R28E   |
|        | 1/4   |
|        | S30   S29   |
|        | 1991  |
|        | from which  |
|        | A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 23 ins. in the ground, for a reference monument, bears N. 43°23' E., 69.9 ft. dist., with cap mkd. RM T21N R28E 1/4 S29 69.9 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument. |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 24 ins. in the ground, for a reference monument, bears N. 41°45' W., 65.6 ft. dist., with cap mkd. RM T21N R28E 1/4 S30 65.6 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |
| 57.19  | <p>Point for a witness point on line bet. secs. 29 and 30.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 35 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>WP</p> <p>T21N R28E</p> <p> </p> <p>S30   S29</p> <p> </p> <p>1991</p> </div> <p>Set a steel fence post near the WP.</p>  |
| 57.60  | Left bank of Puerco River, bears S. and NW.   |
| 62.335 | Point for AP 1, of the metes-and-bounds survey in sec. 30, hereinafter described.   |
| 63.30  | Right bank of Puerco River, bears SE. and W.  |
| 63.91  | Center of southerly railroad track, bears ENE. and WSW.   |
| 64.13  | Center of northerly railroad track, bears ENE. and WSW.   |
| 64.35  | Access road, 17 lks. wide, bears ENE. and WSW.  |
| 65.20  | Power pole line, bears ENE. and WSW.  |
| 65.40  | Fence, bears ENE. and WSW.  |
| 65.41  | <p>From this point, a bronze disk, 4 ins. diam., cemented into a concrete column, 12 ins. sq., projecting 1 in. above ground, mkd. U.S. COAST &amp; GEODETIC SURVEY TRAVERSE STATION AA 4 1959 and a triangle, bears West, 64.5 lks. dist.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS    |  |           |  |     |     |     |     |      |  |
|-----------|--|-----------|--|-----|-----|-----|-----|------|--|
| 65.73     | From this point, a narrow gauge railroad rail, 4 ins. sq., firmly set, projecting 44 ins. above ground, mkd. HWY. R.O.W. P.O.T. 483+11.3, bears East, 103.5 lks. dist.   |           |  |     |     |     |     |      |  |
| 67.70     | Center of eastbound U.S. Interstate Highway 40, pavement, 58 lks. wide, bears ENE. and WSW.  |           |  |     |     |     |     |      |  |
| 69.45     | Center of westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE. and WSW.  |           |  |     |     |     |     |      |  |
| 71.029    | Point for Cor. 3, Lot 2, sec. 29, hereinafter described, located in a fence, bears ENE. and WSW.   |           |  |     |     |     |     |      |  |
| 76.330    | Point for Cor. 2, Lot 2, sec. 29, hereinafter described, located in a fence, bears E. and W.   |           |  |     |     |     |     |      |  |
| 77.09     | Old U.S. Highway 66, locally known as School Bus Route, pavement, 40 lks. wide, bears E. and W.  |           |  |     |     |     |     |      |  |
| 77.84     | From this point, a rebar, 5/8 in. diam., firmly set, 5 ins. below ground, with a brass tag, mkd. LS 7334, established by Troy L. Baldwin, R.L.S. No. 7334, bears West, 0.5 lks. dist., located in a cor. of fences bearing N. and E.   |           |  |     |     |     |     |      |  |
| 80.44     | <p>The cor. of secs. 19, 20, 29, and 30, monumented with an open-ended iron pipe, 1 1/2 ins. diam., firmly set, 7 ins. below ground, with a sandstone, 16 x 13 x 9 ins., 15 ins. below ground, alongside. This was perpetuated by James M. Sheperd, R.C.E. No. 44, previous to 1953, and utilized by Lacy C. Greer, R.L.S. No. 5704, in 1953, as per plats and field tablets filed at Matkin-Murphy Consulting Engineers Inc., Show Low, Arizona. This has long been used by local landowners, Land Surveyors, and Highway Engineers, and is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1" data-bbox="852 1570 998 1724"> <tr> <td colspan="2" data-bbox="852 1570 998 1602">T21N R28E</td> </tr> <tr> <td data-bbox="852 1602 925 1644">S19</td> <td data-bbox="925 1602 998 1644">S20</td> </tr> <tr> <td data-bbox="852 1644 925 1686">S30</td> <td data-bbox="925 1644 998 1686">S29</td> </tr> <tr> <td colspan="2" data-bbox="852 1686 998 1724">1991</td> </tr> </table> </div> <p>from which</p> | T21N R28E |  | S19 | S20 | S30 | S29 | 1991 |  |
| T21N R28E |  |           |  |     |     |     |     |      |  |
| S19       | S20  |           |  |     |     |     |     |      |  |
| S30       | S29  |           |  |     |     |     |     |      |  |
| 1991      |  |           |  |     |     |     |     |      |  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 24 ins. in the ground, for a reference monument, bears N. 35°09' E., 195.4 ft. dist., with cap mkd. RM T21N R28E S20 195.4 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument.</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 24 ins. in the ground, for a reference monument, bears S. 22°47' E., 160.3 ft. dist., with cap mkd. RM T21N R28E S29 160.3 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument.</p> <p>A Cottonwood, 19 ins. diam., bears S. 50° W., 191 lks. dist., mkd. T21N R28E S30 BT.</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 23 ins. in the ground, for a reference monument, bears N. 46°17' W., 245.2 ft. dist., with cap mkd. RM T21N R28E S19 245.2 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument.</p> <p>A steel well head, 9 ins. diam., projecting 40 ins. above ground, bears N. 19°31' W., 361 lks. dist.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the iron pipe inside, and bury the sandstone alongside the stainless steel post.</p> <p>The cor. is located in a gate of a fence, bears N. and S.</p> <hr/> <p>From the cor. of secs. 20, 21, 28, and 29.</p> <p>N. 86°22' W., bet. secs. 20 and 29.</p> <p>Over nearly level land.</p> |
| 24.70  | Fence, bears ENE. and WSW.   |
| 29.70  | Southerly railroad track, bears ENE. and WSW.  |
| 30.35  | Northerly railroad track, bears ENE. and WSW.  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 31.85  | Access road, dirt surfaced, 15 lks. wide, bears ENE. and WSW.  |
| 33.85  | Power pole line, bears ENE. and WSW.   |
| 34.65  | Fence, bears ENE. and WSW.   |
| 40.76  | Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate dist.; there is no remaining evidence of the original cor.  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 44 ins. in the ground, with brass cap mkd.   |
|        | T21N R28E<br>S20<br>1/4 —<br>S29<br>1991   |
|        | from which   |
|        | <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 26 ins. in the ground, for a reference monument, bears S. 15°28' E., 121.9 ft. dist., with cap mkd. RM T21N R28E 1/4 S29 121.9 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument, located 4 lks. N. of the southerly U.S. Interstate Highway 40 right-of-way fence, bears ENE. and WSW.</p> |
|        | <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 23 ins. in the ground, for a reference monument, bears N. 15°28' W., 237.4 ft. dist., with cap mkd. RM T21N R28E 1/4 S20 237.4 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument, located at a cor. of fences bearing N., ENE., and WSW.</p>  |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.  |
|        | The cor. is located under the asphalt fill on the S. edge of the pavement of eastbound U.S. Interstate Highway 40.   |
| 41.90  | Center of eastbound U.S. Interstate Highway 40, paved, 50 lks. wide, bears ENE. and WSW.   |
| 47.50  | Center of westbound U.S. Interstate Highway 40, paved, 50 lks. wide, bears ENE. and WSW.   |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 49.65  | Fence, bears ENE. and WSW.   |
| 50.60  | Frontage road, paved, 35 lks. wide, bears ENE. and WSW.  |
| 52.20  | Fence, bears ENE. and WSW.   |
| 81.51  | The cor. of secs. 19, 20, 29, and 30.  |
| <hr/>  |  |
|        | S. 89°53' W., bet. secs. 19 and 30.  |
|        | Over nearly level land.  |
| 0.182  | Point for AP 1, Tract 37, hereinafter described, located in a fence, bears N. and S.   |
| 3.70   | East wall of a stable, 11.5 x 12.5 ft., the long side bears E. and W., at a point 3 lks. S. of the NE. cor. of the stable.                             |
| 3.90   | The NW. cor. of the same stable.   |
| 4.546  | Point for AP 2, Tract 37, hereinafter described, located in a cyclone fence, 8 ft. high, bears N. and S.   |
| 9.471  | Point for AP 6, Tract 37, hereinafter described, located at a cor. of cyclone fences, 8 ft. high, bearing S. and W.                                    |
| 10.229 | Point for AP 5, Tract 37, hereinafter described, located at a cor. of cyclone fences, 8 ft. high, bearing N. and E., and an old wire fence, bearing W. |
| 21.324 | Point for a witness point on the line bet. secs. 19 and 30, at intersection with line 8-1, Tract 38.   |
|        | Set an aluminum post, 36 ins. long, 3/4 in. diam., 32 ins. in the ground, with an aluminum cap mkd.  |
|        | WP<br>T21N R28E<br>S19<br><hr style="width: 10%; margin: 0 auto;"/> S30<br>1991  |
|        | Set a steel fence post near the witness point.   |
| 21.47  | Fence, bears N. and S.   |
| 24.02  | East wall of a house, 40 x 38 ft., the long side bears N. and S., at a point 25 lks. S. of the NE. cor. of the house.                                  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 24.60  | West wall of the same house, at a point 29 lks. S. of the NW. cor. of the house.   |
| 29.217 | Point for a witness point on the line bet. secs. 19 and 30, at intersection with line 6-7, Tract 38.   |
|        | Set an aluminum post, 36 ins. long, 3/4 in. diam., 32 ins. in the ground, with an aluminum cap mkd.  |
|        | <p style="text-align: center;">WP<br/>T21N R28E<br/>S19<br/>-----<br/>S30<br/>1991</p>   |
|        | Set a steel fence post near the witness point.   |
| 30.83  | East wall of the front porch of Hooch's house, 60 x 53 ft., the long side bears N. and S., at a point 4 lks. N. of the SE. cor. of the porch.  |
| 31.45  | West wall of the front porch of Hooch's house.   |
| 32.30  | Fence, bears N. and S.   |
| 40.14  | The 1/4 sec. cor. of secs. 19 and 30, monumented with a rebar, 26 ins. long, 5/8 in. diam., firmly set, projecting 7 ins. above ground, with an aluminum cap mkd. GREER ENGR CO LS 5704 1/4, restored by Lacy C. Greer, R.L.S. No. 5704, in 1978, as per a plat filed at Matkin-Murphy Consulting Engineers Inc., Show Low, Arizona. This is accepted as a careful and faithful restoration of the original cor. position. |
|        | At the cor. point  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.   |
|        | <p style="text-align: center;">T21N R28E<br/>S19<br/>1/4 —<br/>S30<br/>1991</p>  |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.  |
|        | Bury the rebar inside the stainless steel post.  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>Set a steel fence post near the cor.</p> <hr/> <p>S. 89°58' W., beginning new measurement.</p>  |
| 33.749 | Point for Cor. 3, lot 5, sec. 19, hereinafter described.   |
| 38.817 | Point for Cor. 2, lot 5, sec. 19, hereinafter described.   |
| 39.62  | The cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., hereinbefore described.   |
|        | <hr/> <p>From the cor. of secs. 19, 20, 29, and 30.</p> <p>N. 0°06' E., bet. secs. 19 and 20.</p> <p>Over nearly level land, along a fence.</p>  |
| 1.80   | A cor. of fences bearing N., E., and S.  |
| 2.65   | Power pole line, bears E. and W.   |
| 22.70  | Power pole line, bears E. and W.   |
| 23.15  | Earth berm, for drainage control, bears E. and SW.   |
| 40.00  | <p>The 1/4 sec. cor. of secs. 19 and 20, monumented with an open-ended iron pipe, 18 ins. long, 7/8 in. diam., firmly set, projecting 2 ins. above the ground, with a sandstone, 16 x 11 x 3 ins., laying on the ground alongside, mkd. 1/4, of unknown origin. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S19   S20<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A rock outcrop, bears S. 77 3/4° E., 193 lks. dist., with X BO chiseled on the NW. face.</p> <p style="padding-left: 40px;">A rock ledge, bears S. 69 3/4° W., 98 lks. dist., with X BO chiseled on the NE. face.</p> |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |      |      |     |     |     |     |      |  |
|--------|--|------|------|-----|-----|-----|-----|------|--|
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the iron pipe inside, and bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 1°20' E., beginning new measurement.</p>   |      |      |     |     |     |     |      |  |
| 39.34  | <p>Point for the cor. of secs. 17, 18, 19, and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 32 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <table style="border-collapse: collapse; margin: 0 auto;"> <tr> <td style="padding: 2px 5px;">T21N</td> <td style="padding: 2px 5px;">R28E</td> </tr> <tr> <td style="padding: 2px 5px;">S18</td> <td style="padding: 2px 5px;">S17</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 2px 5px;">S19</td> <td style="border-top: 1px solid black; padding: 2px 5px;">S20</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px 5px;">1991</td> </tr> </table> </div> <p>from which</p> <p style="margin-left: 40px;">A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 25 ins. in the ground, for a reference monument, bears S. 5°03' E., 178.6 ft. dist., with cap mkd. RM T21N R28E S20 178.6 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument.</p> <p style="margin-left: 40px;">A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 24 ins. long, with a magnetic poly breakaway base, set 22 ins. in the ground, for a reference monument, bears S. 51°18' W., 143.1 ft. dist., with cap mkd. RM T21N R28E S19 143.1 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post near the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. is located under the surface of a graded road, bears E. and W.</p> | T21N | R28E | S18 | S17 | S19 | S20 | 1991 |  |
| T21N   | R28E   |      |      |     |     |     |     |      |  |
| S18    | S17  |      |      |     |     |     |     |      |  |
| S19    | S20  |      |      |     |     |     |     |      |  |
| 1991   |  |      |      |     |     |     |     |      |  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>From this cor. point, a rebar, 1 in. diam., firmly set, 1 in. below ground, in a collar of stones, bears S. 49°40' W., 36 lks. dist. This position was determined by persons unknown, using improper procedures and is not utilized in the course of this resurvey.</p> <hr/>  |
| 40.62  | <p>From the cor. of secs. 16, 17, 20, and 21.</p> <p>N. 87°49' W., bet. secs. 17 and 20.</p> <p>Over nearly level land.</p> <p>The 1/4 sec. cor. of secs. 17 and 20, monumented with a sandstone, 18 x 14 x 3 ins., firmly set, projecting 3 ins. above ground, mkd. 1/4 on the N. face. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S17<br/>1/4 —<br/>S20<br/>1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> |
| 30.60  | <p>N. 85°16' W., beginning new measurement.</p> <p>Dirt road, 40 lks. wide, bears N. and S.</p>   |
| 38.70  | <p>Dirt road, 55 lks. wide, bears N. and S.</p>   |
| 40.37  | <p>The cor. of secs. 17, 18, 19, and 20.</p> <hr/>  |
|        | <p>S. 89°56' W., bet. secs. 18 and 19.</p> <p>Over nearly level land, along a dirt road.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS                                     |  |
|--|--|
| 40.22                                      | <p>Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S18<br/>1/4 —<br/>S19<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears N. 65 1/4° E.,<br/>587.5 lks. dist., mkd. 1/4 S18 BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 46 1/4° W.,<br/>184 lks. dist., mkd. 1/4 S19 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 40 lks. S. of a dirt road, 15 lks. wide, bears E. and W.; begin ascent.</p> |
| 70.50                                      | Top of broad ridge, bears N. and S.; descend.  |
| 80.11                                      | The cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp, hereinbefore described.  |
| <hr/>                                      |  |
| From the cor. of secs. 17, 18, 19, and 20. |  |
| N. 0°22' E., bet. secs. 17 and 18.         |  |
| Over nearly level land.                    |  |
| 0.80                                       | Power pole line, bears E. and W.   |
| 39.33                                      | <p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p style="text-align: center;">T21N R28E<br/>1/4<br/>S18   S17<br/>1991</p>  |
|        | <p>from which</p>  |
|        | <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 53° E.,<br/>75 lks. dist., mkd. 1/4 S17 BT.</p>                     |
|        | <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 81 1/4° W.,<br/>351 lks. dist., mkd. 1/4 S18 BT.</p>                |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p>                             |
|        | <p>Set a steel fence post near the cor.</p>  |
| 65.00  | <p>Begin ascent of bluff.</p>  |
| 71.00  | <p>Top of bluff, bears E. and W.; thence over rolling land, through<br/>moderate juniper.</p>  |
| 78.66  | <p>Point for the cor. of secs. 7, 8, 17, and 18, at proportionate<br/>dist.; there is no remaining evidence of the original cor.</p> |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>24 ins. in the ground, with brass cap mkd.</p>                    |
|        | <p style="text-align: center;">T21N R28E<br/>S 7   S 8<br/>-----<br/>S18   S17<br/>1991</p>  |
|        | <p>from which</p>  |
|        | <p style="padding-left: 40px;">A juniper, 4 ins. diam., bears N. 27 1/2° E.,<br/>344 lks. dist., mkd. T21N R28E S8 BT.</p>           |
|        | <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 11 1/2° W.,<br/>258 lks. dist., mkd. T21N R28E S18 BT.</p>          |
|        | <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears N. 62 1/2° W.,<br/>182 lks. dist., mkd. T21N R28E S7 BT.</p>           |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p>                             |
|        | <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 40.275 | <p>Set a steel fence post near the cor.</p> <hr/> <p>From the cor. of secs. 8, 9, 16, and 17.<br/>N. 87°20' W., bet. secs. 8 and 17.<br/>Over rolling, broken land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S 8<br/>1/4 —<br/>S17<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 4 ins. diam., bears N. 47° E.,<br/>189 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears S. 1 1/4° W.,<br/>208.5 lks. dist., mkd. 1/4 S17 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, U.S. Coast &amp; Geodetic Survey triangulation station, "FILTRO 1936 1959", monumented with a standard brass tablet, 3 ins. diam., firmly set in a concrete pillar, 1 ft. sq., projecting 12 ins. above ground, with top mkd. FILTRO 1936 1959 and a triangle, bears S. 5°42.5' E., 6.52 chs. dist.</p> |
| 80.55  | <p>The cor. of secs. 7, 8, 17, and 18.</p> <hr/> <p>N. 89°34' W., bet. secs. 7 and 18.<br/>Over rolling, broken land, through moderate juniper.</p>  |
| 40.34  | <p>Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p>  |



## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>S 7<br/>1/4 —<br/>S18<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 16° W.,<br/>348 lks. dist., mkd. 1/4 S18 BT.</p> <p style="padding-left: 40px;">A juniper, 20 ins. diam., bears N. 87° W.,<br/>590.5 lks. dist., mkd. 1/4 S7 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located on the N. edge of an old graded road, 30 lks. wide, bears E. and W., and 110 lks. S. of the Navajo Reservation bdy. fence, bears E. and W.</p> |
| 79.93  | <p>The cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/>   |
| 39.33  | <p>From the cor. of secs. 7, 8, 17, and 18.</p> <p>N. 0°06' E., bet. secs. 7 and 8.</p> <p>Over rolling, broken land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S 7   S 8<br/>1991</p> <p>from which</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>A juniper, 4 ins. diam., bears S. 27 1/4° E.,<br/>159.5 lks. dist., mkd. 1/4 S8 BT.</p>   |
|        | <p>A juniper, 8 ins. diam., bears S. 61° W.,<br/>145 lks. dist., mkd. 1/4 S7 BT.</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p>                           |
|        | <p>Set a steel fence post near the cor.</p>  |
| 58.995 | <p>Point for the N. 1/16 sec. cor. of secs. 7 and 8.</p>   |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>25 ins. in the ground, with brass cap mkd.</p>                  |
|        | <p style="text-align: center;">T21N R28E<br/>N 1/16<br/>S 7   S 8<br/>1994</p>   |
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic<br/>case beneath the stainless steel post.</p>                    |
|        | <p>Set a steel fence post alongside the cor.</p>   |
| 78.66  | <p>Point for the cor. of secs. 5, 6, 7, and 8, at proportionate<br/>dist.; there is no remaining evidence of the original cor.</p> |
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>23 ins. in the ground, with brass cap mkd.</p>                  |
|        | <p style="text-align: center;">T21N R28E<br/>S 6   S 5<br/>-----<br/>S 7   S 8<br/>1991</p>  |
|        | <p>from which</p>  |
|        | <p>A juniper, 4 ins. diam., bears N. 9 1/2° E.,<br/>266 lks. dist., mkd. X BT.</p>   |
|        | <p>A juniper, 10 ins. diam., bears S. 13° E.,<br/>15.5 lks. dist., mkd. T21N R28E S8 BT.</p>                                       |
|        | <p>A juniper, 9 ins. diam., bears S. 10 3/4° W.,<br/>23 lks. dist., mkd. T21N R28E S7 BT.</p>                                      |
|        | <p>A juniper, 7 ins. diam., bears N. 38 1/2° W.,<br/>279 lks. dist., mkd. T21N R28E S6 BT.</p>                                     |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

The cor. is located in a small juniper grove, and 50 lks. S. of a wash, 50 lks. wide, 12 ft. deep, course WSW.

From this cor. point, a mound of stone, 3 ft. diam., with an iron pipe, 30 ins. long, 2 1/2 ins. diam., laying on the ground alongside, bears N. 37°15' W., 1.19 chs. dist. This position was determined by Lacy C. Greer, R.L.S. NO. 5704, in 1969, as per a plat filed at Matkin-Murphy Consulting Engineers Inc., Show Low, Arizona. The plat gives no indication of what procedure was used to determine this position, which is not harmoniously related to accepted cors., and is not utilized in the course of this resurvey.

From the cor. of secs. 4, 5, 8, and 9.

N. 87°30' W., bet. secs. 5 and 8.

Over rolling, broken land, through scattered juniper.

20.225

Point for the E. 1/16 sec. cor. of secs. 5 and 8.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.

T21N R28E  
S 5  
E 1/16 —  
S 8  
1994

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

The cor. is located on the NW. side of a wash, 6 lks. wide, 1 ft. deep, drains SSW.

40.45

Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p style="text-align: center;">T21N R28E<br/>S 5<br/>1/4 —<br/>S 8<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 4 ins. diam., bears S. 49° W.,<br/>124 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 9 1/4° W.,<br/>299 lks. dist., mkd. 1/4 S5 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |
| 60.675 | <p>Point for the W. 1/16 sec. cor. of secs. 5 and 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>25 ins. in the ground, with brass cap mkd.</p>  |
|        | <p style="text-align: center;">T21N R28E<br/>S 5<br/>W 1/16 —<br/>S 8<br/>1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic<br/>case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>   |
| 80.90  | <p>The cor. of secs. 5, 6, 7, and 8.</p>  |
|        | <hr/> <p>N. 89°03' W., bet. secs. 6 and 7.</p> <p>Over rolling, broken land, through moderate juniper.</p>  |
| 40.38  | <p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate<br/>dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>21 ins. in the ground, over a steel fence post driven into the<br/>ground, and in a mound of stone, 3 ft. base, to top, with brass<br/>cap mkd.</p>   |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p style="text-align: center;">T21N R28E<br/>S 6<br/>1/4 —<br/>S 7<br/>1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 13 ins. diam., bears N. 10 1/4° E.,<br/>111 lks. dist., mkd. 1/4 S6 BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 29° E.,<br/>27 lks. dist., mkd. 1/4 S7 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, an iron pipe, 30 ins. long, 2 1/2 ins.<br/>diam., firmly set, projecting 8 ins. above ground, and in a mound<br/>of stone, 3 ft. diam., with a brass tablet, 2 1/2 ins. diam.,<br/>cemented to the top, mkd. LS5704 T21N R28 1/4 S6 S7 1969, bears<br/>N. 40°10' W., 60 lks. dist., determined by Lacy C. Greer, R.L.S.<br/>NO. 5704, in 1969, as per a plat filed at Matkin-Murphy<br/>Consulting Engineers Inc., Show Low, Arizona. The plat gives no<br/>indication of what procedure was used to establish this position,<br/>which is not harmoniously related to accepted cors. nearby, and<br/>is not utilized in the course of this resurvey.</p> |
| 79.48  | <p>The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp.,<br/>hereinbefore described.</p> <hr/>  |
| 39.33  | <p>From the cor. of secs. 5, 6, 7, and 8.</p> <p>N. 0°17' E., bet. secs. 5 and 6.</p> <p>Over rolling, broken land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate<br/>dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>21 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>1/4<br/>S 6   S 5<br/>1991</p>  |

## BOOK 5448

Dependent Resurvey of the Subdivisional Lines  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS   |  |
|--|--|
|  | <p>from which</p> <p>A juniper, 8 ins. diam., bears S. 54 3/4° E.,<br/>357 lks. dist., mkd. 1/4 S5 BT.</p> <p>A juniper, 11 ins. diam., bears N. 57 3/4° W.,<br/>150 lks. dist., mkd. 1/4 S6 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>  |
| 78.58  | <p>The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp.,<br/>hereinbefore described.</p>  |
| <hr/> <p>Subdivision of Section 13<br/>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> <hr/> |  |
| 32.88  | <p>From the 1/4 sec. cor. of secs. 13 and 24.</p> <p>N. 0°17' E., on the N. and S. center line of sec. 13.</p> <p>Point for a witness point on the N. and S. center line of<br/>sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP<br/>T21N R28E<br/>C<br/>  S13<br/>C<br/>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic<br/>case beneath the stainless steel post.</p> |
| 34.80  | <p>Left bank of the Puerco River, bears ENE. AND WSW.</p>  |
| 43.10  | <p>Right bank of the Puerco River, bears NE. AND SW.; thence enter<br/>land fill.</p>  |
| 47.70  | <p>Fence, bears NE. and SW.; leave land fill.</p>  |
| 51.70  | <p>Southerly railroad track, bears NE. and SW.</p>   |
| 52.00  | <p>Northerly railroad track, bears NE. and SW.</p>   |

Subdivision of Section 13  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS   |   |
|--|---|
| 52.20  | Railroad side track, bears NE. and SW.  |
| 53.10  | Track road, access to railroad track, bears NE. and SW.   |
| 53.40  | Power pole line, bears NE. and SW.  |
| 55.55  | Fence, bears NE. and SW.  |
| 56.75  | From this point, a railroad right-of-way marker, monumented with a narrow gauge railroad rail, firmly set, projecting 17 ins. above ground, bears West, 27 lks. dist. |
| 59.00  | Center of the exit ramp to a truck scales, from eastbound U.S. Interstate Highway 40, pavement, 25 lks. wide, bears NE. and SW.                                       |
| 60.05  | Center of eastbound U.S. Interstate Highway 40, pavement, 55 lks. wide, bears NE. and SW.   |
| 61.95  | Southerly edge of the pavement of westbound U.S. Interstate Highway 40, at the Agricultural Inspection Station, bears NE. and SW.                                     |
| 64.25  | Northerly edge of the pavement of westbound U.S. Interstate Highway 40, at the Agricultural Inspection Station, bears NE. and SW.                                     |
| 65.80  | Point for Cor. 9, Lot 1, sec. 13, hereinafter described.  |
| 79.815   | The 1/4 sec. cor. of secs. 12 and 13.   |
| <hr/> Subdivision of Section 14<br>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona <hr/>   |   |
| <hr/> From the 1/4 sec. cor. of secs. 14 and 23.   |   |
| N. 0°06' E., on the N. and S. center line of sec. 14.  |   |
| Over nearly level land.  |   |
| 0.49   | Intersect the southerly right-of-way fence of U.S. Interstate Highway 40.   |
| From this point, an Arizona Highway Dept. right-of-way marker, bears N. 62°00' E., 26.55 chs. dist., monumented with a brass disk, firmly set in a concrete cylinder, 6 ins. diam., flush with the ground, mkd. ARIZONA HIGHWAY DEPT. 1694X30 RP 118.83 EB 1963. |   |

## BOOK 5448

Subdivision of Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 6.41   | <p>Intersect the northerly right-of-way of U.S. Interstate Highway 40.</p> <p>From this point, an Arizona Highway Dept. right-of-way marker, bears N. 63°28' E., 11.09 chs. dist., monumented with a brass disk, firmly set in a concrete cylinder, 6 ins. diam., flush with the ground, mkd. ARIZONA HIGHWAY DEPT 1685X74.01 RP 120.0 WB ELEV. 5845.79 1963.</p> <p>From this same point, Arizona Highway Dept. right-of-way marker 1669X55.32, hereinbefore described, bears S. 63°28' W., 13.33 chs. dist.</p>   |
| 19.665 | <p>Point for the center S. 1/16 sec. cor. of sec. 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>C<br/>S 1/16   S14<br/>C<br/>1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The corner is located 10 lks. E. of a fence, bears N. and S.</p> <p>From this cor. point, an open end pipe, 1 1/4 ins. diam., projecting 3 ins. above ground, of unknown origin, bears S. 36°18' E., 15 lks. dist. This monument was not utilized in the course of this survey.</p> |
| 39.33  | <p>Point for the center 1/4 sec. cor. of sec. 14, at intersection with the E. and W. center line of sec. 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>C 1/4 S14<br/>1988</p> <p>from which</p>  |



## BOOK 5448

Subdivision of Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>An aluminum post, 36 ins. long, 3/4 in. diam., set flush with the ground, for a reference monument, bears N. 54°02' E., 70 ft. dist., with cap mkd. T21N R28E RM C1/4 S14 70 FT TO COR 1988, and an arrow pointing to the cor.</p> <p>An aluminum post, 36 ins. long, 3/4 in. diam., set flush with the ground, for a reference monument, bears S. 53°41' E., 70 ft. dist., with cap mkd. T21N R28E RM C1/4 S14 70 FT TO COR 1988, and an arrow pointing to the cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The corner is located on the W. edge of a wash, 1 ch. wide, drains SE. from NE.</p> <p>From this cor. point, an open end pipe, 1 1/4 ins. diam., projecting 3 ins. above ground, of unknown origin, bears S. 12°21' E., 144 lks. dist. This monument was not utilized in the course of this survey.</p> |
| 79.83  | The 1/4 sec. cor. of secs. 11 and 14.  |
|        | <hr/> <p>From the 1/4 sec. cor. of secs. 13 and 14.</p>  |
|        | N. 88°12' W., on the E. and W. center line of sec. 14.   |
|        | Over nearly level land, through a school yard.   |
| 12.357 | Point for Cor. 2, Lot 1, sec.14, identical with Cor. 1, Lot 2, sec. 14, hereinafter described.   |
| 15.707 | Point for Cor. 2, Lot 2, sec. 14, hereinafter described.   |
| 18.65  | Center of paved road, 40 lks. wide, bears SE. and NW.  |
| 20.185 | <p>The center E. 1/16 sec. cor. of sec. 14, monumented with a rebar, 30 ins. long, 3/4 in. diam., firmly set flush with ground. This cor. was established by Lacy C. Greer, R.C.E. No. 5643, in 1963, and is accepted as a careful and faithful determination of the cor. position.</p>  |
|        | <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>   |

## BOOK 5448

Subdivision of Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | T21N R28E<br>E 1/16<br>C—C<br>S14<br>1988   |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.<br><br>Deposit the rebar alongside the stainless steel post.<br><br>Set a steel fence post near the cor.<br><br><hr style="width: 20%; margin: auto;"/> N. 88°12' W., beginning new measurement. |
| 1.152  | Point for Cor. 2, Lot 6, sec. 14, hereinafter described.  |
| 20.185 | The center 1/4 sec. cor. of sec. 14.  |
| 60.375 | The 1/4 sec. cor. of secs. 14 and 15.   |
|        | <hr/> SE. 1/4 of Section 14<br><hr/>  |
|        | From the E. 1/16 sec. cor. of secs. 14 and 23.  |
|        | N. 0°10' E., on the N. and S. center line of the SE. 1/4 of sec. 14.  |
| 11.58  | Intersect the southerly right-of-way fence of U.S. Interstate Highway 40.   |
|        | From this point, Arizona Highway Dept. right-of-way marker 1694X30, hereinbefore described, bears N. 59°20' E., 3.82 chs. dist.   |
| 18.616 | Intersect the northerly right-of-way of U.S. Interstate Highway 40.   |
|        | From this point, a rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, bears N. 52°31' E., 19 lks. dist.  |
|        | From this same point, a brass disk, firmly set in a concrete cylinder, 6 ins. diam., flush with the ground, mkd. ARIZONA HIGHWAY DEPT. 1692X50 RP 155 WB 1963, bears S. 52°31' W., 2.031 chs. dist.   |
| 19.616 | Point for the SE. 1/16 sec. cor. of sec. 14, at intersection with the E. and W. center line of the SE. 1/4 of sec. 14.  |

## BOOK 5448

Subdivision of Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.                                    |
|        | T21N R28E<br>SE 1/16 S14<br>1988  |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.  |
|        | Set a steel fence post near the cor.  |
| 24.781 | Intersect line 7-8, Lot 6, sec. 14.   |
|        | From this point, Cor. 8, Lot 6, sec. 14, bears N. 24°51.6' W., 1.391 chs. dist., hereinafter described.                                   |
| 26.334 | Point for Cor. 8, Lot 5, sec.14, identical with Cor. 9, Lot 6, sec. 14, hereinafter described.  |
| 38.473 | Point for Cor. 7, Lot 5, sec. 14, identical with Cor. 1, Lot 6, sec. 14, hereinafter described.   |
| 39.248 | The center E. 1/16 sec. cor. of sec. 14.  |
|        | From the true point for the S. 1/16 sec. cor. of secs. 13 and 14. N. 88°16.5' W., on the E. and W. center line of the SE. 1/4 of sec. 14. |
| 2.57   | Intersect the southerly right-of-way of U.S. Interstate Highway 40.   |
|        | From this point, Arizona Highway Dept. right-of-way marker 1705X07, hereinbefore described, bears N. 68°47' E., 1.37 chs. dist.           |
|        | From this same point, Arizona Highway Dept. right-of-way marker 1694X30, hereinbefore described, bears S. 68°47' W., 15.38 chs. dist.     |
| 18.915 | Point for Cor. 6, Lot 6, sec. 14, at intersection with the northerly right-of-way of U.S. Interstate Highway 40, hereinafter described.   |
|        | From this point, a rebar, on U.S. Interstate Highway 40 right-of-way, bears S. 52°33.2' W., 15.38 chs. dist., hereinbefore described.     |
| 20.174 | The SE. 1/16 sec. cor. of sec. 14.  |

## BOOK 5448

Subdivision of Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 40.334 | The center S. 1/16 sec. cor. of sec. 14.   |
|        | <hr/> <p style="text-align: center;">Subdivision of Section 24<br/>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> <hr/>   |
|        | <p>From the 1/4 sec. cor. of secs. 24 and 25.</p> <p>N. 0°13' W., on the N. and S. center line of sec. 24.</p> <p>Over rolling grassland, through scattered juniper.</p>   |
| 14.90  | Fence, bears E. and W.; thence continue along Gardner Drive, a dirt road, 15 lks. wide, bears N.   |
| 40.19  | <p>The center 1/4 sec. cor. of sec. 24, determined at midpoint bet. the SE. cor. of lot 194, and the NW. cor. of lot 226, Arizona Park Estates Unit One, as per a plat recorded at the Apache County Courthouse, by Earle L. Snyder, R.L.S. No. 4128, dated January 28, 1963. This position has long been locally recognized as the cor. and is accepted as a careful and faithful determination of the position of the cor.</p> <p style="padding-left: 40px;">The NW. cor. of lot 226, Arizona Park Estates Unit One, monumented with an open-ended iron pipe, 1 in. diam., firmly set, projecting 6 ins. above ground, bears S. 43°50' E., 54.8 lks. dist.</p> <p style="padding-left: 40px;">The SE. cor. of lot 194, Arizona Park Estates Unit One, monumented with an open-ended iron pipe, 1 in. diam., firmly set, projecting 6 ins. above ground, bears N. 43°50' W., 54.8 lks. dist.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 46 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>C 1/4 S24<br/>1987</p> <p>from which</p> <p style="padding-left: 40px;">The SW. cor. of lot 195, Arizona Park Estates Unit One, monumented with an open-ended iron pipe, 1 in. diam., firmly set, projecting 6 ins. above ground, bears N. 42°17' E., 53.6 lks. dist.</p> |

## BOOK 5448

Subdivision of Section 24

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located in the intersection of Murray Lane and Gardner Drive, dirt roads, 20 lks. wide, bearing N., E., and S.</p> <hr/> <p>N. 0°11' W., beginning new measurement.</p> <p>Continue along Gardner Drive.</p>  |
| 40.04  | <p>The 1/4 sec. cor. of secs. 13 and 24.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 19 and 24, on the E. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. T21N 1/4 R28E R29E S24 S19 1987.</p> <p>N. 87°24' W., on the E. and W. center line of sec. 24.</p> <p>Along Murray Lane, a dirt road, 15 lks. wide, bears E. and W.</p>                          |
| 40.50  | <p>The center 1/4 sec. cor. of sec. 24.</p> <hr/> <p>N. 87°28' W., beginning new measurement.</p> <p>Over rolling grass land.</p>  |
| 36.99  | <p>Intersect NHIRC New Lands Office, 67 x 42 ft., the long side bears E. and W.</p>  |
| 38.01  | <p>Leave New Lands Office.</p>   |
| 40.50  | <p>The 1/4 sec. cor. of secs. 23 and 24.</p> <hr/> <p style="text-align: center;">Subdivision of Section 30<br/>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 30 and 31.</p> <p>N. 0°16' E., on the N. and S. center line of sec. 30.</p> <p>0.30 Begin descent of steep, rocky N. slope.</p> <p>3.00 End descent; thence over nearly level land.</p> <p>11.75 Fence, bears ENE. and WSW.</p> |

## BOOK 5448

Subdivision of Section 30

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 39.92  | <p>Point for the center 1/4 sec. cor. of sec. 30, at intersection with the E. and W. center line of sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>C 1/4 S30<br/>1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |
| 46.578 | <p>Point for a witness point on the N. and S. center line of sec. 30.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 34 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">W P<br/>T21N R28E<br/>C<br/>  S30<br/>C<br/>1991</p> <p>Set a steel fence post near the witness point.</p>   |
| 46.70  | Left bank of the Puerco River, bears ENE. and WSW.  |
| 51.461 | Point for AP 2, of the metes-and-bounds survey in sec. 30, hereinafter described.   |
| 52.00  | Right bank of the Puerco River, bears ENE. and WSW.   |
| 52.30  | Fence, bears ENE. and WSW.  |
| 53.025 | Southerly railroad track, bears ENE. and WSW.   |
| 53.25  | Northerly railroad track, bears ENE. and WSW.   |
| 53.50  | Access road, dirt surfaced, 23 lks. wide, bears ENE. and WSW.   |
| 54.35  | Power pole line, bears ENE. and WSW.  |
| 54.60  | Fence, bears ENE. and WSW.  |
| 56.95  | Eastbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE. and WSW.   |

## BOOK 5448

Subdivision of Section 30

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS   |  |
|--|--|
| 58.70  | Westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE. and WSW.  |
| 60.15  | Fence, bears ENE. and WSW.   |
| 76.65  | Fence, bears E. and W.   |
| 77.40  | Paved road, locally known as School Bus Route, bears E. and W.   |
| 78.16  | From this point, a rebar, 5/8 in. diam., projecting 9 ins. above ground, with an aluminum cap mkd. GREER ENGR CO. LS 5704, bears West, 1 lk. dist., located in a fence, bears E. and W., and in a power pole line, bears N. and S., was established by Lacy C. Greer, R.L.S. No. 5704, in 1981, as per a map filed at Matkin-Murphy Consulting Engineers, Inc., Show Low, Arizona. |
| 79.80  | The 1/4 sec. cor. of secs. 19 and 30.  |
| <hr/>  |  |
| From the 1/4 sec. cor. of secs. 29 and 30.                         |  |
| N. 89°37' W., on the E. and W. center line of sec. 30.             |  |
| Over nearly level land.  |  |
| 40.30  | The center 1/4 sec. cor. of sec. 30.   |
| 51.40  | Left bank of the Puerco River, bears NE. and WSW.  |
| 63.90  | Right bank of the Puerco River, bears NE. and SW.  |
| 74.80  | Fence, bears ENE. and WSW.   |
| 78.95  | Southerly railroad track, bears ENE. and WSW.  |
| 79.50  | Northerly railroad track, bears ENE. and WSW.  |
| 80.27  | The 1/4 sec. cor. of secs. 25 and 30, on the W. bdy.   |
| <hr/>  |  |
| Subdivision of Section 36  |  |
| T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona          |  |
| <hr/>  |  |
| From the stan. 1/4 sec. cor. of sec. 36, on the S. bdy. of the Tp. |  |
| N. 0°28' E., on the N. and S. center line of sec. 36.              |  |
| Over rolling grass land, through scattered juniper.                |  |
| 16.62  | Point for the center S. 1/16 sec. cor. of sec. 36.   |

## BOOK 5448

Subdivision of Section 36

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>C<br/>S 1/16   S36<br/>C<br/>1988</p> <p>from which</p> <p style="text-align: center;">A juniper, 12 ins. diam., bears N. 39° W., 97 lks. dist., mkd. CS 1/16 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>  |
| 33.24  | <p>Point for the center 1/4 sec. cor. of sec. 36, at intersection with the E. and W. center line of sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>C 1/4 S36<br/>1988</p> <p>from which</p> <p style="text-align: center;">A juniper, 6 ins. diam., bears S. 53 1/4° E., 32 lks. dist., mkd. T21N R28E C 1/4 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |
| 64.60  | <p>The 1/4 sec. cor. of secs. 25 and 36.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 31 and 36, on the E. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. T21N R28E R29E S36 S31 1989.</p> <p>N. 88°02' W., on the E. and W. center line of sec. 36.</p> <p>Descend over broken SW. slope, through scattered juniper.</p>   |



## BOOK 5448

Subdivision of Section 36

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS                            |  |
|-----------------------------------|--|
| 20.335                            | <p>Point for the center E. 1/16 sec. cor. of sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E<br/>E 1/16<br/>C—C<br/>S36<br/>1988</p> <p>from which</p> <p style="text-align: center;">A juniper, 10 ins. diam., bears N. 27 1/2° E.,<br/>64.5 lks. dist., mkd. CE 1/16 S36 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>         |
| 40.67                             | The center 1/4 sec. cor. of sec. 36.   |
| 81.88                             | The 1/4 sec. cor. of secs. 35 and 36.  |
| <hr/> SE. 1/4 of Sec. 36<br><hr/> |  |
| 12.411                            | <p>From the stan. E. 1/16 sec. cor. of sec. 36, on the S. bdy. of the Tp.</p> <p>N. 0°03' W., on the N. and S. center line of the SE. 1/4 of sec. 36.</p> <p>Point for the center N-S-SE. 1/256 sec. cor. of sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36<br/>C-N-S-SE<br/>1/256<br/>1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> |

## BOOK 5448

Subdivision of Section 36

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | The cor. is located 100 lks. W. of a cor. of fences bearing N., ESE., and NW.  |
| 14.90  | Fence, bears ESE. and WNW.   |
| 16.25  | Fence, bears ESE. and WNW.   |
| 16.548 | Point for the SE. 1/16 sec. cor. of sec. 36.   |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.   |
|        | <p style="text-align: center;">T21N R28E<br/>SE 1/16 S36<br/>1988</p>  |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.   |
|        | Set a steel fence post near the cor.   |
| 19.70  | Fence, bears NNE. and SSW.   |
| 20.685 | Point for the center S-N-SE. 1/256 sec. cor. of sec. 36.   |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.   |
|        | <p style="text-align: center;">S36<br/>C-S-N-SE<br/>1/256<br/>1988</p>   |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.   |
|        | Set a steel fence post near the cor.   |
| 33.096 | The center E. 1/16 sec. cor. of sec. 36.   |
|        | <hr style="width: 20%; margin: 0 auto;"/> <p>From the S. 1/16 sec. cor. of secs. 31 and 36, on the E. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. T21N S 1/16 R28E R29E S36 S31 1989.</p> |
|        | N. 88°15.5' W. on the E. and W. center line of the SE. 1/4 of sec. 36.   |
| 20.480 | The SE. 1/16 sec. cor. of sec. 36.   |

## BOOK 5448

Subdivision of Section 36

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 30.722 | <p>Point for the center W-SE. 1/64 sec. cor. of sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36<br/>C-W-SE<br/>1/64<br/>1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>   |
| 40.964 | <p>The center S. 1/16 sec. cor. of sec. 36.</p> <hr/>  |
| 2.45   | <p>Graded dirt road, 20 lks. wide, bears NE. and SW.</p>   |
| 2.90   | <p>Fence, bears NE. and SW.</p>  |
| 4.132  | <p>Point for the SW-SE-SE. 1/256 sec. cor. of sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S36<br/>SW-SE-SE<br/>1/256<br/>1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 66.7 lks. E. of a fence, bears N. and S.</p> <hr/> <p>S. 88°25.5' E., on a portion of the E. and W. center line of the S. 1/2 of the SE. 1/4 of the SE. 1/4 of sec. 36.</p> |
| 1.88   | <p>Fence, bears NE. and SW.</p>  |

## BOOK 5448

Subdivision of Section 36

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 2.27   | Graded dirt road, 20 lks. wide, bears SW. and N., in a curve.  |
| 2.65   | Graded dirt road, 12 lks. wide, bears NE. and SW., in a curve.   |
| 4.97   | Fence, bears ESE. and WNW.   |
| 6.24   | Fence, bears NNE. and SSW.   |
| 8.19   | Dirt road intersection, 15 lks. wide, bears SE. and NW.  |
| 10.296 | Point for the SE-SE-SE. 1/256 sec. cor. of sec. 36.  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.                           |
|        | S36<br>SE-SE-SE<br>1/256<br>1988   |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.                                     |
|        | Set a steel fence post near the cor.   |
|        | _____  |
|        | N. 0°26' W., on a portion of the N. and S. center line of the E. 1/2 of the SE. 1/4 of the SE. 1/4 of sec. 36.                   |
| 1.90   | Track road, 12 lks. wide, bears ENE. and WSW.  |
| 5.52   | Fence, bears NE. and SW.   |
| 8.245  | Point for the NE-SE-SE. 1/256 sec. cor. of sec. 36.  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.                           |
|        | S36<br>NE-SE-SE<br>1/256<br>1988   |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.                                     |
|        | Set a steel fence post near the cor.   |
|        | _____  |
|        | N. 88°19' W., on a portion of the E. and W. center line of the N. 1/2 of the SE. 1/4 of the SE. 1/4 of sec. 36, on mean bearing. |

## BOOK 5448

Subdivision of Section 36

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 9.76   | Fence, bears SE. and NW.   |
| 14.39  | Fence, bears NNE. and SSW.   |
| 15.388 | The center N-S-SE. 1/256 sec. cor. sec. 36.  |
|        | <hr/>  |
|        | From the stan. E-W-E. 1/256 sec. cor. of sec. 36, on the S. bdy. of the Tp.  |
|        | N. 0°05' E. on a portion of the N. and S. center line of the SE. 1/4 of the SW. 1/4 of the SE. 1/4 of sec. 36.     |
| 4.142  | Point for the SE-SW-SE. 1/256 sec. cor. of sec. 36.  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.             |
|        | <p style="text-align: center;">S36<br/>SE-SW-SE<br/>1/256<br/>1988</p>   |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.                       |
|        | Set a steel fence post near the cor.   |
|        | <hr/>  |
|        | N. 88°25.5' W., on a portion of the E. and W. center line of the SE. 1/4 of the SW. 1/4 of the SE. 1/4 of sec. 36. |
| 5.148  | Point for the center S-SW-SE. 1/256 sec. cor. of sec. 36.  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.             |
|        | <p style="text-align: center;">S36<br/>C-S-SW-SE<br/>1/256<br/>1988</p>  |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.                       |
|        | Set a steel fence post near the cor.   |
|        | <hr/>  |
|        | N. 0°12.5' E., on a portion of the N. and S. center line of the SW. 1/4 of the SE. 1/4 of sec. 36.                 |

## BOOK 5448

Subdivision of Section 36

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 12.438 | The center W-SE. 1/64 sec. cor. of sec. 36.  |
| 4.146  | <p data-bbox="394 396 1451 459">N. 0°12.5' E., on a portion of the N. and S. center line of the NW. 1/4 of the SE. 1/4 of sec. 36.</p> <p data-bbox="394 491 1451 522">Point for the center S-NW-SE. 1/256 sec. cor. of sec. 36.</p> <p data-bbox="394 554 1451 617">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div data-bbox="834 653 980 774" style="text-align: center;"> <p>S36<br/>C-S-NW-SE<br/>1/256<br/>1988</p> </div> <p data-bbox="394 816 1451 879">Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p data-bbox="394 911 1451 942">Set a steel fence post near the cor.</p> <hr data-bbox="662 963 1172 974"/> <p data-bbox="394 1005 1451 1068">S. 88°12' E., on the E. and W. center line of the SE. 1/4 of the NW. 1/4 of the SE. 1/4 of sec. 36.</p>  |
| 10.223 | The center S-N-SE. 1/256 sec. cor. of sec. 36.   |
| 20.350 | <div data-bbox="467 1194 1386 1257" style="text-align: center;"> <p>Survey of Lot 1, Section 13<br/>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> </div> <hr data-bbox="394 1289 1451 1299"/> <p data-bbox="394 1331 1451 1362">From Cor. 1, identical with the 1/4 sec. cor. of secs. 12 and 13.</p> <p data-bbox="394 1394 1451 1457">N. 86°57' W., on line 1-2, identical with a portion of the line bet. secs. 12 and 13.</p> <p data-bbox="394 1478 1451 1509">Point for Cor. 2.</p> <p data-bbox="394 1541 1451 1604">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="834 1640 1013 1824" style="text-align: center;"> <p>T21N R28E<br/>S12</p> <hr data-bbox="850 1719 997 1730"/> <p>S13   COR 2<br/>       LOT 1<br/>1992</p> </div> <p data-bbox="394 1866 1451 1929">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> |

## BOOK 5448

Survey of Lot 1, Section 13

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | Set a steel fence post near the cor.<br><hr/>   |
|        | Thence S. 8°29' E., on line 2-3.  |
| 0.924  | A rebar, 5/8 in. diam., firmly set, projecting 2 ins. above a mound of concrete, 2 ft. diam., 1 ft. high, with an aluminum cap, 1 1/2 ins. diam., mkd. PE 6123, established by Keith Shreeve, R.C.E. NO. 6123, in 1971, as per an unrecorded map filed in the office of Shreeve & Associates, Inc., at St. Johns, Arizona. This is used to control the alinement of line 2-3. The local monument is located 2 lks. N. of a cor. of fences bearing E., S., and W.; thence along a fence, bears N. and S. |
| 16.548 | Cor. 3, monumented with a rebar, 18 ins. long, 5/8 in. diam., firmly set, projecting 1 in. above a mound of concrete, 2 ft. diam., 9 ins. high, with an aluminum cap, 1 1/2 ins. diam., mkd. PE 6123, established by Keith Shreeve, R.C.E. NO. 6123, in 1971, as per an unrecorded map filed in the office of Shreeve & Associates, Inc., at St. Johns, Arizona.  |
|        | At the cor. point   |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.  |
|        | <div style="text-align: center;"> <p>T21N R28E</p> <p>S13 } COR 3</p> <p>      } LOT 1</p> <p>      1992</p> </div>   |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.   |
|        | Deposit the rebar inside the stainless steel post.  |
|        | The cor. is located 3 lks. S. of a cor. of fences bearing N. and S.<br><hr/>  |
|        | Thence S. 5°08' W., on line 3-4.  |
| 4.864  | Cor. 4, monumented with a rebar, 18 ins. long, 5/8 in. diam., firmly set, projecting 2 ins. above a mound of concrete, 2.5 ft. diam., 1 ft. high, with an aluminum cap, 1 1/2 ins. diam., mkd. PE 6123, established by Keith Shreeve, R.C.E. NO. 6123, in 1971, as per an unrecorded map filed in the office of Shreeve & Associates, Inc., at St. Johns, Arizona.  |
|        | At the cor. point   |

## BOOK 5448

Survey of Lot 1, Section 13  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
22 ins. in the ground, with brass cap mkd.

T21N R28E  
S13  
COR 4  
LOT 1  
1992

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

The cor. is located 3 lks. S. of the end of a fence, bears N.

---

Thence S. 45°15' W., on line 4-5.

8.668

Cor. 5, monumented with a rebar, 18 ins. long, 5/8 in. diam.,  
firmly set, projecting 2 ins. above a mound of concrete, 2.5 ft.  
diam., 1 ft. high, with an aluminum cap, 1 1/2 ins. diam., mkd.  
PE 6123, established by Keith Shreeve, R.C.E. NO. 6123, in 1971,  
as per an unrecorded map filed in the office of Shreeve &  
Associates, Inc., at St. Johns, Arizona.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
23 ins. in the ground, with brass cap mkd.

T21N R28E  
S13  
COR 5  
LOT 1  
1992

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

Set a steel fence post near the cor.

From this cor. point, U.S. Coast & Geodetic Survey triangulation  
station, "AHD S11 1959", bears S. 72°58' W., 34.5 lks. dist.,  
monumented with a standard brass tablet, 3 3/4 ins. diam., set in  
a concrete column, 12 ins. sq., firmly set, projecting 6 ins.  
above ground, with top mkd. AHD S11 1959 and a triangle.



---



## BOOK 5448

Survey of Lot 1, Section 13

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 3.252  | <p>Thence S. 71°25' W., on line 5-6.</p> <p>Point for Cor. 6, determined by grant boundary adjustment.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, the most southeasterly cor. of the "New High School Site" per an unrecorded map filed in the office of Shreeve &amp; Associates, Inc., at St. Johns, Arizona., monumented with a rebar, 18 ins. long, 5/8 in. diam., firmly set, 16 ins. below ground, established by Keith Shreeve, R.C.E. NO. 6123, in 1971, bears S. 46°15' W., 12.95 chs. dist.</p> <hr/> |
| 10.750 | <p>Thence S. 0°19' W., on line 6-7.</p> <p>Point for Cor. 7, at intersection with the northerly right-of-way of U.S. Interstate Highway 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, a rebar, 1/2 in. diam., firmly set, projecting 5 ins. above ground, bears S. 0°19' W., 1.6 lks. dist., established by Keith Shreeve, R.C.E. NO. 6123, in 1971, as per an unrecorded map filed in the office of Shreeve &amp; Associates, Inc., at St. Johns, Arizona. This is used to control the alinement of line 6-7.</p> <hr/>                                 |

## BOOK 5448

Survey of Lot 1, Section 13  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Thence along the arc of a 15°31'25" circular curve to the left, having a radius of 24,359.97 ft., on line 7-8, identical with the northerly right-of-way of U.S. Interstate Highway 40, the chord of said arc bears N. 51°19' E., 28.899 chs. dist.</p>  |
| 11.596 | <p>From this point, Cor. 10, Lot 1, sec. 13, hereinafter described, bears N. 38°14.5' W., 80.3 lks. dist.</p> <p>From this same point, old U.S. Highway 66 center line station 1727+98.0, a calculated position, bears S. 38°14.5' E., 3.091 chs. dist.</p>   |
| 28.906 | <p>Cor. 8, monumented with an aluminum disk, 3 ins. diam., firmly set in a concrete column, 7 ins. diam., projecting 5 ins. above ground, mkd. ARIZONA HIGHWAY DEPT. 1739X00 R.P. 96.0 W.B. 1963.</p> <p>from which</p> <p>A brass tablet, 3 1/4 ins. diam., 2 1/2 ins. stem, set in a drill hole, cemented in place, for a reference monument, bears N. 9°52' E., 12.2 ft. dist., with top mkd. RM T21N R28E 12.2 FT TO COR 8 LOT 1 S13 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case in the drill hole beneath the brass tablet. The reference monument is located on top of a sandstone outcrop, 14 x 9 x 3 ft., and 14 lks. N. of the right-of-way fence, bears NE. and SW.</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 26 ins. in the ground, for a reference monument, bears S. 81°01' W., 51.1 ft. dist., with cap mkd. RM T21N R28E RM 51.1 FT TO COR 8 LOT 1 S13 1992, and an arrow pointing to the cor., located 56 lks. N. of the right-of-way fence, bears NE. and SW. Set a steel fence post near the reference monument.</p> |
|        | <p>Thence N. 40°00' E., on line 8-9, identical with the northerly right-of-way line of U.S. Interstate Highway 40.</p>  |
| 7.609  | <p>An aluminum disk, 3 ins. diam., firmly set in concrete, 24 ins. below ground, mkd. ARIZONA HIGHWAY DEPT. 1744X00 R.P. 170.0 W.B. 1963, located 1 lk. E. of a cor. of fences bearing N. and SW. This is used to control the alinement of line 8-9.</p>  |
| 7.751  | <p>Point for Cor. 9, at intersection with the N. and S. center line of sec. 13.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>   |

## BOOK 5448

Survey of Lot 1, Section 13

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R28E  
 LOT 1  
 COR 9 } S13  
 1992

from which

A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 26 ins. in the ground, for a reference monument, bears N. 57°25' W., 11.5 ft. dist., with cap mkd. RM T21N R28E 11.5 FT TO COR 9 LOT 1 S13 1992, and an arrow pointing to the cor., located 9 lks. W. of a fence, bears N. and S. Set a steel fence post near the reference monument.

The cor. is located 8 lks. E. of a fence, bears N. and S., and 15 lks. W. of a very steep E. slope above the exit area of the agricultural inspection station in westbound U.S. Interstate Highway 40.

---

Thence N. 0°17' E., on line 9-1, identical with a portion of the N. and S. center line of sec. 13, along a fence, bears N. and S.

14.015

Cor. 1.

---

From the point for Cor. 10.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

T21N R28E  
 S13 } LOT 1  
 COR 10  
 1992

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

From this cor., the 1/4 sec. cor. of secs. 12 and 13, bears N. 31°54' E., 35.752 chs. dist.

## BOOK 5448

Survey of Lot 1, Section 13

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona


## CHAINS

From this same cor., old U.S. Highway 66 center line station 1727+98.0, a calculated position since construction of U.S. Interstate Highway 40 has destroyed all evidence of the old highway, bears S. 38°14.5' E., 3.894 chs. dist.

N. 38°14.5' W., on line 10-11.

0.758 Point for Cor. 11.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.


Set a steel fence post near the cor.

---

Thence S. 51°45.5' W., on line 11-12.

0.758 Point for Cor. 12.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

---

Thence S. 38°14.5' E., on line 12-13.

0.758 Point for Cor. 13.


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.

## BOOK 5448

Survey of Lot 1, Section 13

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

---

Thence N. 51°45.5' E., on line 13-10.

0.758

Cor. 10.

---

Survey of Lot 1, Section 14  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

---

(This lot was created due to local conditions. These conditions were brought about due to a literal interpretation of the description West from the 1/4 sec. cor. of secs. 13 and 14.)

From Cor. 1, identical with the 1/4 sec. cor. of secs. 13 and 14.


N. 88°12' W., on line 1-2, identical with a portion of the E. and W. center line of sec. 14.

Over nearly level land, through a school yard.

12.357

Point for Cor. 2, identical with Cor. 1, Lot 2, sec. 14.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

BOOK 5448

Survey of Lot 1, Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

The cor. is located in a fence, bears N. and S., on the W. edge of the school yard.




Thence S. 0°23.9' W., on line 2-3.

0.440

Cor. 3, identical with Cor. 7, Lot 2, sec. 14, monumented with a cor. of fences bearing N., S., and E. This is locally recognized as the corner, and is accepted as the best available evidence of the position of the corner.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.



Thence N. 89°45.4' E., on line 3-1, along a fence, bears E.

12.354

Cor. 1.



Survey of Lot 2, Section 14  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

From Cor. 1, identical with Cor. 2, Lot 1, sec. 14.

N. 88°12' W., on line 1-2, identical with a portion of the E. and W. center line of sec. 14.

3.350

Point for Cor. 2, at proportionate dist.


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

## BOOK 5448

Survey of Lot 2, Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

From this cor., a rebar, 3/4 in. diam., firmly set, projecting 1 in. above the ground, bears S. 3° E., 2 lks. dist. This monument is not utilized in the course of this survey.

---


Thence S. 59°09.0' E., on line 2-3, identical with a road right-of-way.

2.466

Cor. 3, monumented with a broken concrete cylinder, 6 ins. diam., firmly set, 6 ins. below ground. This cor. was established by Lacy C. Greer, R.L.S. No. 5704, in 1963, and reestablished by the Arizona Highway Department, in 1965. A copy of Greer's plat can be found at Baldwin Surveying Co., in Show Low, Arizona. This is accepted as a careful and faithful determination of the cor. position.

At the cor. point

Set an aluminum post, 12 ins. long, 3/4 ins. diam., 3 ins. into the existing concrete, and 7 ins. in new concrete, with aluminum cap mkd.



Set a steel fence post near the cor.



---

Thence S. 29°48.2' W., on line 3-4, identical with a road right-of-way.

## BOOK 5448

Survey of Lot 2, Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 0.756  | <p>Cor. 4, monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., firmly set projecting 2 ins. above ground, mkd. ARIZONA HIGHWAY DEPT. TS STA 10X74.0 RP 50.0 1965. This cor. was established by Lacy C. Greer, R.L.S. No. 5704, in 1963, and reestablished by the Arizona Highway Department, in 1965. A copy of Greer's plat can be found at Baldwin Surveying Co., in Show Low, Arizona. This is accepted as a careful and faithful determination of the cor. position.</p> <hr/> <p>Thence S. 61°54.2' E., on line 4-5, identical with a road right-of-way.</p>                       |
| 1.522  | <p>Point for Cor. 5, at proportionate dist. on the road right-of-way.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E<br/>LOT2<br/>COR5</p>  <p>S14<br/>1988</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>Thence S. 61°53.6' E., on line 5-6, identical with a road right-of-way.</p> |
| 0.279  | <p>Point for Cor. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E<br/>LOT2<br/>COR6</p>  <p>S14<br/>1988</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>  |



## BOOK 5448

Survey of Lot 2, Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona


|        |  |      |     |      |  |      |  |
|--------|--|------|-----|------|--|------|--|
| CHAINS | <p>The corner is located in a fence, bears N. and S.</p> <hr/> <p>Thence N. 0°23.9' E., on line 6-7, along a fence, bears N. and S.</p> <p>2.224 Cor. 7, identical with Cor. 3, lot 1, sec. 14, hereinbefore described.</p> <hr/> <p>Thence N. 0°23.9' E., on line 7-1, identical with line 2-3, Lot 1, sec. 14, along a fence, bears N. and S.</p> <p>0.440 Cor. 1.</p> <hr/> <p style="text-align: center;">Survey of Lot 3, Section 14<br/>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From Cor. 1, monumented with a cor. of fences bearing N., S., and W. This cor. was established by Lacy C. Greer, R.L.S. No. 5704, in 1963. A copy of Greer's plat can be found at Baldwin Surveying Co., in Show Low, Arizona. This is accepted as a careful and faithful determination of the cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E</p> <table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">COR1</td> <td style="padding: 2px;">S14</td> </tr> <tr> <td style="padding: 2px;">LOT3</td> <td style="padding: 2px;"></td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px;">1988</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor., the 1/4 sec. cor. of secs. 13 and 14, bears N. 71°00.9' E., 9.756 chs. dist.</p> <p>S. 89°36.8' W., on line 1-2, along a fence, bears W.</p> <p>1.622 Point for Cor. 2.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, with brass cap mkd.</p> | COR1 | S14 | LOT3 |  | 1988 |  |
| COR1   | S14  |      |     |      |  |      |  |
| LOT3   |  |      |     |      |  |      |  |
| 1988   |  |      |     |      |  |      |  |

## BOOK 5448

Survey of Lot 3, Section 14  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R28E



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.


The cor. is located in the mission driveway and in a fence gate, bears E. and W.

---

Thence S. 55°40.0' E., on line 2-3, along a road right-of-way.

1.946 Point for Cor. 3.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

The cor. is located 1.5 lks. E. of a fence, bears N. and S.

---

Thence N. 0°48.1' E., on line 3-1, along a fence, bears N. and S.

1.108 Cor. 1.

---

Survey of Lot 4, Section 14  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

---

From Cor. 1, monumented with an open end pipe, 24 ins. long, 2 ins. diam., firmly set 12 ins. below ground, with a rebar, 5/8 in. diam., 12 ins. long, alongside, of unknown origin. This cor. was utilized by the Arizona Highway Department, in 1961, and Lacy C. Greer, R.L.S. No. 5704, in 1963. A copy of Greer's plat can be found at Baldwin Surveying Co., in Show Low, Arizona. This is accepted as a careful and faithful determination of the cor. position.

## BOOK 5448

Survey of Lot 4, Section 14


T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
26 ins. in the ground, with brass cap mkd.

T21N R28E



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case  
beneath the stainless steel post.

Deposit the pipe and the rebar alongside the stainless steel  
post.

Set a steel fence post near the cor.


From this cor., the 1/4 sec. cor. of secs. 13 and 14, bears  
N. 32°42.6' E., 7.938 chs. dist.

N. 89°43.9' W., on line 1-2.

2.451 Point for Cor. 2.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
28 ins. in the ground, with brass cap mkd.

T21N R28E



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case  
beneath the stainless steel post.

The corner is located on the E. edge of the bus yard driveway.

---



Thence S. 37°32.5' E., on line 2-3, along the road right-of-way.

1.986 Cor. 3, monumented with a broken concrete cylinder, 6 ins. diam.,  
firmly set 30 ins. below the ground. This cor. was established  
by the Arizona Highway Department, in 1965, and is accepted as a  
careful and faithful determination of the cor. position.

At the cor. point

## BOOK 5448

Survey of Lot 4, Section 14  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <div data-bbox="820 394 982 583" style="text-align: center;"> <p>T21N R28E<br/>LOT4<br/>COR3<br/>S14<br/>1988</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence S. 32°55.7' E., on line 3-4, on the road right-of-way.</p>  |
| 0.091  | <p>Point for Cor. 4, at proportionate dist, along the U.S. Interstate Highway 40 right-of-way.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div data-bbox="820 1060 982 1228" style="text-align: center;"> <p>T21N R28E<br/>LOT4<br/>COR4<br/>S14<br/>1988</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. a U.S. Interstate Highway 40 right-of-way marker bears S. 63°47.4 W., 0.763 chs. dist., monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., 12 ins. below the surface of the road, mkd. STA 1705X80 RP 320 WB 19. This cor. was established by the Arizona Highway Department, in 1961, and is used to control the proportionate measurement of the cor. position.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence N. 63°47.4' E., on line 4-5, along the U.S. Interstate Highway 40 right-of-way.</p> |
| 1.710  | <p>Point for Cor. 5, at proportionate dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>   |

## BOOK 5448

Survey of Lot 4, Section 14  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R28E  
LOT4  
COR5  
S14  
1988

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

From this cor. a U.S. Interstate Highway 40 right-of-way marker bears N. 63°47.4 E., 4.366 chs. dist., monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., flush with the ground, mkd. 1708X54.30 RP 316.27 WB 1963. This cor. was established by the Arizona Highway Department, in 1963, and is used to control the proportionate measurement of the cor. position.

---

Thence N. 21°12.5' W., on line 5-1.

0.948

Cor. 1.

---

Survey of Lot 5, Section 14  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

From the point for Cor. 1, at proportionate dist. and along the road right-of-way.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T21N R28E  
LOT5  
COR1  
S14  
1988

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

From this cor., U.S. Interstate Highway 40 right-of-way marker, station 1705X80, bears N. 49°34.1 E., 1.527 chs. dist., hereinbefore described.

## BOOK 5448


Survey of Lot 5, Section 14  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>From this same cor., the 1/4 sec. cor. of secs. 13 and 14, bears N. 37°13.5' E., 12.113 chs. dist.</p>   |
|        | <p>N. 33°14.9' W., on line 1-2, along a road right-of-way.</p>  |
| 0.193  | <p>Cor. 2, monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., 12 ins. below ground, mkd. ARIZONA HIGHWAY DEPART. PC STA 3X74.00 RP 100 1965.</p> <p>Set a steel fence post near the cor.</p> <hr/>                             |
|        | <p>Thence N. 42°09.8' W., on line 2-3, along the road right-of-way.</p>   |
| 4.062  | <p>Cor. 3, monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., projecting 1 ins. above ground, mkd. CS STA 6X74.00 RP 100 1965.</p> <hr/>   |
|        | <p>Thence N. 57°15.9' W., on line 3-4, along the road right-of-way.</p>   |
| 4.296  | <p>Cor. 4, monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., projecting 4 ins. above ground, mkd. ST STA 9X74.00 RP 100 1965.</p> <hr/>   |
|        | <p>Thence N. 60°09.8' W., on line 4-5, along the road-right-of-way.</p>   |
| 1.515  | <p>Cor. 5, monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., projecting 4 ins. above ground, mkd. TS STA 10X74.00 RP 100 1965.</p> <hr/>  |
|        | <p>Thence N. 58°09.3' W., on line 5-6, along the road right-of-way.</p>   |
| 4.702  | <p>Cor. 6, monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., projecting 4 ins. above ground, mkd. SC STA 13X74.00 RP 100 1965.</p> <hr/>  |
|        | <p>Thence N. 54°45.8' W., on line 6-7, along the road right-of-way.</p>   |
| 1.340  | <p>Point for Cor. 7, identical with Cor. 1, Lot 6, sec. 14, at intersection with the N. and S. center line of the SE. 1/4 of sec. 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> |

## BOOK 5448

Survey of Lot 5, Section 14  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.


Set a steel fence post near the cor.

From this cor., the center E. 1/16 sec. cor. of sec. 14, bears N. 0°10' E., 0.775 chs. dist.

Thence S. 0°10' W., on line 7-8, identical with line 9-1, lot 6, sec. 14, and a portion of the N. and S. center line of the SE. 1/4 of sec. 14.

12.139 Point for Cor. 8, identical with Cor. 9, Lot 6, sec. 14.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

Thence N. 63°43.5' E., on line 8-9.

5.656 Cor. 9, monumented with a rebar, 18 ins. long, 5/8 in. diam., flush with the ground. This cor. was established by Lacy C. Greer, R.L.S. No. 5704, in 1964, as per a plat recorded at the Apache County Courthouse, and is accepted as a careful and faithful determination of the corner position.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

## BOOK 5448

Survey of Lot 5, Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS



1988

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Deposit the rebar alongside the stainless steel post.

Set a steel fence post near the cor.

---


Thence S. 26°15.4' E., on line 9-10.

5.119

Cor. 10, monumented with a rebar, 18 ins. long, 5/8 in. diam., projecting 2 ins. above ground, and a rebar, 36 ins. long, 3/8 in. diam., 4 ins. below the surface of the ground. This cor. was established by Lacy C. Greer, R.L.S. No. 5704, in 1964, as per a plat recorded at the Apache County Courthouse, and is accepted as a careful and faithful determination of the corner position.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



1988

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

The cor. is located on the northerly right-of-way of U.S. Interstate Highway 40.

---

Thence N. 52°33.2' E., on line 10-11, identical with a portion of the northerly right-of-way of U.S. Interstate Highway 40.

0.044

Cor. 11, monumented with a brass disk, encased in a concrete cylinder, 6 ins. diam., flush with the ground, mkd. 1700X00 RP 240.0 WB S853.97 1965.


---



## BOOK 5448

Survey of Lot 5, Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

|        |  |
|--------|--|
| CHAINS | <p>Thence N. 49°34.1' E., on line 11-1, identical with a portion of the northerly right-of-way of U.S. Interstate Highway 40 .</p>   |
| 7.242  | <p>Cor. 1.</p> <hr/> <p style="text-align: center;">Survey of Lot 6, Section 14<br/>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From Cor. 1, identical with Cor. 7, Lot 5, sec.14, on the N. and S. center line of the SE. 1/4 of sec. 14, hereinbefore described.</p> <p>N. 54°45.8' W., on line 1-2, along the road right-of-way.</p>   |
| 1.407  | <p>Point for Cor. 2, at proportionate dist. on the E. and W. center line of sec. 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E<br/>S14<br/>COR2<br/>LOT6<br/>1988</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> |
| 19.033 | <p>Thence N. 88°12' W., on line 2-3, identical with a portion of the E. and W. center line of sec. 14.</p> <p>Cor. 3, identical with the center 1/4 sec. cor. of sec. 14.</p> <hr/> <p>Thence S. 0°06' W., on line 3-4, identical with a portion of the N. and S. center line of sec. 14.</p>  |
| 19.665 | <p>Cor. 4, identical with center S. 1/16 sec. cor. of sec. 14.</p> <hr/> <p>Thence S. 88°16.5' E., on line 4-5, identical with a portion of the E. and W. center line of the SE. 1/4 of sec. 14.</p>   |
| 20.160 | <p>Cor. 5, identical with the SE. 1/16 sec. cor. of sec. 14.</p> <hr/>   |

## BOOK 5448

Survey of Lot 6, Section 14


T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
| 1.259  | <p>Thence S. 88°16.5' E., on line 5-6, identical with a portion of the E. and W. center line of the SE. 1/4 of sec. 14.</p> <p>Point for Cor. 6, at intersection with the northerly right-of-way of U.S. Interstate Highway 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E<br/>           LOT6<br/>           COR6 / S14<br/>           1988</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>  |
| 1.084  | <p>Thence N. 52°33.2' E., on line 6-7, identical with a portion of the northerly right-of-way of U.S. Interstate Highway 40.</p> <p>Cor. 7, monumented with a rebar, 24 ins. long, 5/8 in. diam., firmly set, projecting 2 ins. above ground. This cor. was established by Lacy C. Greer, R.L.S. No. 5704, in 1964, as per a plat recorded at the Apache County Courthouse, in St. John's, Arizona, and is accepted as a careful and faithful determination of the cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E<br/>           LOT6<br/>           COR7 / S14<br/>           1988</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence N. 24°51.6' W., on line 7-8.</p> |

## BOOK 5448

Survey of Lot 6, Section 14

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 5.007  | <p>Intersect the N. and S. center line of the SE 1/4 of sec. 14.</p> <p>From this point, the SE. 1/16 sec. cor. of sec. 14, bears S. 0°10' W., 5.165 chs. dist., hereinbefore described.</p>   |
| 6.398  | <p>Cor. 8, monumented with a rebar, 36 ins. long, 5/8 ins. diam., firmly set, 2 ins. below ground. This cor. was established by Lacy C. Greer, R.L.S. No. 5704, in 1964, as per a plat recorded at the Apache County Courthouse, in St. John's, and is accepted as a careful and faithful determination of the corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="824 814 987 972" style="text-align: center;"> <p>T21N R28E<br/>COR8<br/>LOT6  S14<br/>1988</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located on the E. side of a wash, 1 ch. wide, course irregularly S.</p> <hr style="width: 20%; margin: 10px auto;"/> |
| 0.656  | <p>Cor. 9, identical with Cor. 8, Lot 5, sec. 14, at intersection with the N. and S. center line of the SE. 1/4 of sec. 14., hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/>  |
| 12.139 | <p>Cor 1.</p> <hr style="width: 80%; margin: 10px auto;"/>   |

## BOOK 5448


Survey of Lot 5, Section 19

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

From the point for cor. 1.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
25 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.


Set a steel fence post near the cor.

The cor. is located in a fence, bears N. and S., and 45 lks.  
S. of a cor. of fences bearing S. and W.

S. 30°15' W., on line 1-2.

10.061 Point for cor. 2, on the line bet. secs. 19 and 30.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Set a steel fence post near the cor.

From this cor., the cor. of secs. 19, 24, 25, and 30, on the W.  
bdy. of the Tp., bears S. 89°58' W., 80.3 lks. dist.,  
hereinbefore described.

Thence N. 89°58' E., on line 2-3, identical with a portion of the  
line bet. secs. 19 and 30.

5.068 Point for cor. 3.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.

## BOOK 5448

Survey of Lot 5, Section 19  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R28E  
LOT 5  
COR 3  
S19  
1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Set a steel fence post near the cor.

The cor. is located in a fence, bears N. and S.

Thence North, on line 3-1, along a fence.

8.688

Cor. 1.

Survey of Lot 1, Section 21  
T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

From the point for cor. 1.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
21 ins. in the ground, with brass cap mkd.

T21N R28E  
COR 1 S21  
LOT 1  
1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

The cor. is located alongside a cor. of fences bearing SE. and W.

From this cor., the 1/4 sec. cor. of secs. 21 and 22, bears  
S. 75°14' E., 15.82 chs.

N. 89°54' W., on line 1-2, along a fence, bears W.

4.197

Point for cor. 2.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
30 ins. in the ground, with brass cap mkd.

## BOOK 5448

Survey of Lot 1, Section 21

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R28E

|     |       |
|-----|-------|
| S21 | COR 2 |
|     | LOT 1 |

1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

The cor. is located 1 1/2 k. W. of a gate post in a fence, bears E. and W.

---

Thence S. 0°06' W., on line 2-3.

2.294 Point for cor. 3.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

|           |     |
|-----------|-----|
| T21N R28E |     |
| LOT 1     | S21 |
| COR 3     |     |

1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

---

Thence N. 89°54' W., on line 3-4.

3.642 Cor. 4, monumented with a rebar, 24 ins. long, 5/8 in. diam., firmly set, 2 ins. below ground, established by Lacy C. Greer, R.L.S. No. 5704, in 1964, as per a plat filed at Matkin-Murphy Consulting Engineers, Inc., Show Low, Arizona, and is accepted as a careful and faithful determination of the cor. position.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

|           |       |
|-----------|-------|
| T21N R28E |       |
| S21       | COR 4 |
|           | LOT 1 |

1991

## BOOK 5448

Survey of Lot 1, Section 21

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

The cor. is located at a cor. of fences bearing E., S., and W., and adjacent to the NW. cor. of the small announcer's booth of a rodeo arena.

From this cor., the 1/4 sec. cor. of secs. 16 and 21, bears N. 18°46' W., 42.84 chs. dist.

From this same cor., the SE. cor. of Bell Brand Ranches Unit 10, bears N. 28°55' W., 12.764 chs. dist., monumented with an iron pin, 1/2 in. diam., firmly set, projecting 6 ins. above ground, with a tag attached, mkd. PE 2399, established by Ralph B. Nunnolley, R.C.E. No. 4901, in 1968, as per a plat recorded at the Apache County Courthouse in St. Johns, Arizona.

---

Thence S. 0°02' E., on line 4-5, along a fence, bears N. and S.

6.367

Point for cor. 5, at intersection with the northerly right-of-way of U.S. Interstate Highway 40.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T21N R28E

|     |       |
|-----|-------|
| S21 | LOT 1 |
|     | COR 5 |

1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

The cor. is located 5 lks. SW. of the end of a cyclone fence, bears N.



From this cor., a U.S. Interstate Highway 40 right-of-way marker bears S. 75°39' W., 7.056 chs. dist., monumented with a brass disk, 3 ins. diam., firmly set in a concrete column, 6 ins. diam., projecting 3 ins. above ground, mkd. ARIZONA HIGHWAY DEPT. 1571X00 R.P. 120.0 W.B. 1963, located at a cor. of fences bearing ENE. and SSE.

---

## BOOK 5448

Survey of Lot 1, Section 21

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
| 8.472  | <p>Thence N. 75°39' E., on line 5-6, identical with a portion of the northerly right-of-way of U.S. Interstate Highway 40.</p> <p>Point for cor. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 1 lk. NW. of a cor. of fences bearing N., ENE., and WSW.</p> <p>From this cor., a U.S. Interstate Highway 40 right-of-way marker bears N. 75°39' E., 13.256 chs. dist., monumented with a brass disk, 3 ins. diam., firmly set in a concrete column, 6 ins. diam., 6 ins. below ground, mkd. ARIZONA HIGHWAY DEPT. 1590X00 STA. R.P. 120.0 W.B. 1963, located 4 lks. ENE. of a cor. of fences bearing SSE. and WSW.</p> |
| 6.168  | <p>Thence N. 0°06' E., on line 6-7, along a fence, bears N. and S.</p> <p>Point for cor. 7.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. is located alongside a cor. of fences bearing S. and NW.</p> <p>Thence along the arc of a 229°10'59" circular curve to the left, having a radius of 25 ft., on line 7-1, the chord of said arc bears N. 44°54' W., 0.536 chs. dist.</p>  |



## BOOK 5448

Survey of Lot 1, Section 21

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

|        |   |
|--------|---|
| CHAINS |   |
| 0.595  | Cor. 1.   |
|        | <hr/> <p style="text-align: center;">Survey of Lot 1, Section 29<br/>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> <hr/>  |
|        | <p>From cor. 1, monumented with a brass disk, 3 ins. diam., firmly set in a concrete column, 6 ins. diam., projecting 3 ins. above ground, mkd. ARIZONA HIGHWAY DEPT. ELEV 5767.02 STA 1966.</p> <p>from which</p> <p style="padding-left: 40px;">A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 24 ins. in the ground, for a reference monument, bears S. 75°39' W., 50.0 ft. dist., with cap mkd. RM T21N R28E S29 50.0 FT TO COR 1 LOT 1 1991 and an arrow pointing to the cor., located in a fence, bears ENE. and WSW.</p> <p style="padding-left: 40px;">A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 24 ins. in the ground, for a reference monument, bears N. 88°45' W., 40.0 ft. dist., with cap mkd. RM T21N R28E S29 40.0 FT TO COR 1 LOT 1 1991 and an arrow pointing to the cor., located 3 lks. S. of a fence, bears E. and W.</p> <p>The cor. is located 2 lks. SE. of a cor. of fences bearing E., WSW., and W.</p> <p>From this cor., the cor. of secs. 19, 20, 29, and 30, bears N. 76°40' W., 19.62 chs. dist.</p> <p>N. 88°45' W., on line 1-2, identical with a portion of the southerly right-of-way of a road, locally known as School Bus Route, along a fence, bears E. and W.</p> |
| 7.820  | Point for cor. 2.   |
|        | Set a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case, 6 ins. in the ground.   |
|        | from which  |
|        | <p style="padding-left: 40px;">A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 24 ins. in the ground, for a reference monument, bears S. 88°45' E., 20.0 ft. dist., with cap mkd. RM T21N R28E 20.0 FT TO COR 2 LOT 1 S29 1991 and an arrow pointing to the cor., located 1 lk. S. of a fence, bears E. and W.</p>  |

## BOOK 5448

Survey of Lot 1, Section 29

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 27 ins. in the ground, for a reference monument, bears S. 0°58' E., 35.0 ft. dist., with cap mkd. RM T21N R28E 35.0 FT TO COR 2 LOT 1 S29 1991 and an arrow pointing to the cor., located 1.5 lks. E. of a fence, bears NNE. and SSW.

The cor. is located in a cattle guard.

---

Thence S. 0°58' W., on line 2-3, along a fence, bears N. and S.

2.181

Cor. 3, at intersection with the northerly right-of-way of U.S. Interstate Highway 40, monumented with a rebar, 26 ins. long, 5/8 in. diam., firmly set, projecting 3 ins. above ground, with an aluminum cap, 1 1/2 ins. diam., mkd. GREER ENGR CO. LS 5704, established by Lacy C. Greer, R.L.S. No. 5704, in 1981, as per a plat filed at Matkin-Murphy Consulting Engineers, Inc., Show Low, Arizona. This is accepted as a careful and faithful determination of the cor. position.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

T21N R28E  
 S29 | LOT 1  
     | COR 3  
 1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

The cor. is located at a cor. of fences bearing N., ENE., and WSW.

---

Thence N. 75°39' E., on line 3-1, identical with a portion of the northerly right-of-way of U.S. Interstate Highway 40, along a fence, bears ENE., and WSW.

8.108

Cor. 1.

---

BOOK 5448

Survey of Lot 2, Section 29


T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

From cor. 1, monumented with a rebar, 31 ins. long, 5/8 in. diam., firmly set, 2 ins. below ground, with an aluminum cap, 1 1/2 ins. diam., mkd. GREER ENGR CO. LS 5704, established by Lacy C. Greer, R.L.S. No. 5704, in 1981, as per a plat filed at Matkin-Murphy Consulting Engineers, Inc., Show Low, Arizona. This is accepted as a careful and faithful determination of the cor. position.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.


The cor. is located at a cor. of fences bearing E., S., and W.

From this cor., Cor. 2, Lot 1, sec. 29, hereinbefore described, bears S. 88°45' E., 3.502 chs. dist.

Thence N. 88°45' W., on line 1-2, identical with a portion of the southerly right-of-way of a road, locally known as School Bus Route, along a fence, bears E. and W.

7.771 Point for cor. 2, at intersection with the line bet. secs. 29 and 30.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

The cor. is located at a cor. of fences bearing E., S., and W.

## BOOK 5448

Survey of Lot 2, Section 29

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS


From this cor., the cor. of secs. 19, 20, 29, and 30, bears  
N.  $0^{\circ}02'$  E., 4.110 chs. dist.

---

Thence S.  $0^{\circ}02'$  W., on line 2-3, identical with a portion of the  
line bet. secs. 29 and 30, along a fence, bears N. and S.

5.301 Point for cor. 3, at intersection with the northerly right-of-way  
of U.S. Interstate Highway 40.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins.  
in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

The cor. is located at a cor. of fences bearing N., ENE.,  
and WSW.

From this cor., a U.S. Interstate Highway 40 right-of-way marker  
bears S.  $75^{\circ}39'$  W., 1.9 lks. dist., monumented with a brass disk,  
3 ins. diam., firmly set in a concrete column, 6 ins. diam.,  
projecting 5 ins. above ground, mkd. ARIZONA HIGHWAY DEPT. R.P.  
96.00 W.B. CONST. CL STA. 1482X89.43 1964.

---

Thence N.  $75^{\circ}39'$  E., on line 3-4, identical with a portion of the  
northerly right-of-way of U.S. Interstate Highway 40, along a  
fence, bears ENE. and WSW.

7.968 Cor. 4, monumented with a rebar, 25 ins. long, 5/8 in. diam.,  
firmly set, projecting 5 ins. above ground, with an aluminum cap,  
1 1/2 ins. diam., mkd. GREER ENGR CO. LS 5704, established by  
Lacy C. Greer, R.L.S. No. 5704, in 1981, as per a plat filed at  
Matkin-Murphy Consulting Engineers, Inc., Show Low, Arizona.  
This is accepted as a careful and faithful determination of the  
cor. position.

At the cor. point


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.

BOOK 5448

Survey of Lot 2, Section 29

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

The cor. is located at a cor. of fences bearing N., ENE., and WSW.

From this cor., Cor. 3, Lot 1, sec. 29, hereinbefore described, bears N. 75°39' E., 3.631 chs. dist.

Thence N. 0°58' E., on line 4-1, along a fence, bears N. and S.


3.157

Cor. 1.

Survey of Tract 37  
 T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

From the point for AP 1.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the AP.


The cor. is located in a fence, bears N. and S., and 18 lks. S. of a cor. of fences bearing E., S. and W.

From this cor., the cor. of secs. 19, 20, 29, and 30, bears N. 89°53' E., 18.2 lks. dist.

## BOOK 5448

Survey of Tract 37

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | S. 89°53' W., on line 1-2, identical with the line bet. secs. 19 and 30.   |
| 4.364  | Point for AP 2.  |
|        | Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd.   |
|        | <div style="text-align: center;"> <p>T21N R28E</p>  <p>AP 2<br/>TR 37<br/>1991</p> </div>  |
|        | Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.  |
|        | The cor. is located 1 lk. W. of a chain link fence, 8 ft. high, bears N. and S.  |
|        | Thence North, on line 2-3, along a chain link fence, 8 ft. high.   |
| 4.545  | AP 3, monumented with a galvanized iron fence corner post, 4 ins. diam., firmly set in concrete, projecting 8.5 ft. above ground, with chain link fences bearing S. and W.   |
|        | from which   |
|        | <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 26 ins. in the ground, for a reference monument, bears S. 11°26' E., 6.7 ft. dist., with cap mkd. RM T21N R28E AP 3 6.7 FT TO COR S19 1991, and an arrow pointing to the cor., located 2 lks. E. of a chain link fence, bears N. and S.</p>   |
|        | <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 26 ins. in the ground, for a reference monument, bears N. 84°11' W., 22.9 ft. dist., with cap mkd. RM T21N R28E AP 3 22.9 FT TO COR S19 1991, and an arrow pointing to the cor., located 3 lks. N. of a chain link fence, bears E. and W.</p> |
|        | Thence S. 89°53' W., on line 3-4, along a chain link fence, 8 ft. high.  |
| 5.682  | Point for AP 4.  |

## BOOK 5448

Survey of Tract 37

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
27 ins. in the ground, with brass cap mkd.

T21N R28E

|      |       |
|------|-------|
| S19  | AP 4  |
|      | TR 37 |
| 1991 |       |

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

The cor. is located 1 lk. SE. of a cor. of chain link fences, 8  
ft. high, bearing E. and S.

---

Thence South, on line 4-5, along a chain link fence, 8 ft. high.

4.545 Point for AP 5, at intersection with the line bet. secs. 19  
and 30.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
25 ins. in the ground, with brass cap mkd.

T21N R28E

|     |       |
|-----|-------|
| S19 | TR 37 |
|     | AP 5  |

S30  
1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

The cor. is located 1 lk. SW. of a cor. of fences, with chain  
link fences, 8 ft. high, bearing N. and E., and an old wire fence  
bearing W.

---

Thence N. 89°53' E., on line 5-6, identical with the line bet.  
secs. 19 and 30.

0.758 Point for AP 6.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, with brass cap mkd.


## BOOK 5448

Survey of Tract 37

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R28E



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

The cor. is located 2 lk. S. of a cor. of chain link fences, 8 ft. high, bearing S. and W.

From this cor., an iron pin, 7/8 in. diam., firmly set, projecting 3 ins. above ground, of unknown origin, bears N. 35° W., 1 lk. dist.


---

Thence South, on line 6-7, along a chain link fence, 8 ft. high.

2.376

Point for AP 7, at intersection with the northerly right-of-way of a road, locally known as School Bus Route.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the AP.

The cor. is located 6 lk. NW. of a cor. of chain link fences, 8 ft. high, bearing N. and E.

From this cor., a rebar, 5/8 in. diam., firmly set, projecting 4 ins. above ground, of unknown origin, bears South, 2 lks. dist.

From this same cor., a right-of-way marker, bears N. 88°46' W., 15.26 chs. dist., monumented with an aluminum disk, 3 ins. diam., firmly set in a concrete abutment on the E. side of a cattle guard, mkd. ARIZONA HIGHWAY DEPT. 5761.50 1966.

---



## BOOK 5448

## Survey of Tract 37



T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |       |  |     |      |  |  |
|--------|---|-------|--|-----|------|--|--|
|        | <p>Thence S. 88°46' E., on line 7-8, identical with a portion of the northerly School Bus Route right-of-way.</p>   |       |  |     |      |  |  |
| 4.56   | <p>A right-of-way marker, monumented with an aluminum disk, 3 ins. diam., firmly set in a concrete column, 6 ins. diam., projecting 3 ins. above ground, mkd. ARIZONA HIGHWAY DEPT. ELEV 5762.40 + STA. 1966.</p>   |       |  |     |      |  |  |
| 9.289  | <p>Point for AP 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R28E</p> <table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">TR 37</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S30</td> </tr> <tr> <td style="padding: 2px;">AP 8</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;"></td> </tr> </table> </div> <p>1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 0.5 lk. SE. of a cor. of fences bearing N. and W.</p> <p>From this cor., a right-of-way marker, bears S. 88°46' E., 24.54 chs. dist., monumented with an aluminum disk, 3 ins. diam., firmly set in a concrete column, 6 ins. diam., flush with the ground, mkd. ARIZONA HIGHWAY DEPT. R.P. 100.00 W.B. CONST. CL STA. 1499X50.98 1964, located in a fence, bears NNE. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> | TR 37 |  | S30 | AP 8 |  |  |
| TR 37  |   | S30   |  |     |      |  |  |
| AP 8   |   |       |  |     |      |  |  |
| 2.591  | <p>Thence N. 0°02' E., on line 8-1, along a fence.</p> <p>AP 1.</p> <hr style="border: 1px solid black;"/> <div style="text-align: center;"> <p>Survey of Tract 38</p> <p>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> </div> <hr style="border: 1px solid black;"/> <p>From the point for AP 1.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>   |       |  |     |      |  |  |

## BOOK 5448

Survey of Tract 38

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona


| CHAINS |   |
|--------|---|
|        | <p style="text-align: center;">T21N R28E</p> <div style="text-align: center;">  </div>  |
| 11.030 | <p>from which</p> <p style="padding-left: 40px;">A fence cor., bears N. 62° E., 26 lks. dist.,<br/>fences bear E., S., and W.</p> <p style="padding-left: 40px;">A fence cor., bears N. 85° E., 139 lks. dist.,<br/>fences bear N. and W.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor., an iron pin, 1 1/2 ins. diam., firmly set,<br/>projecting 6 ins. above ground, of unknown origin,<br/>bears N. 22°54' W., 13 lks. dist.</p> <p>West, on line 1-2, along a fence.</p> <p>Point for AP 2.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>25 ins. in the ground, with brass cap mkd.</p> |
| 12.879 | <p style="text-align: center;">T21N R28E</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case<br/>beneath the stainless steel post.</p> <p>The cor. is located 2 lks. E. of a cor. of fences bearing E. and<br/>S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence South, on line 2-3, along a fence.</p> <p>Point for AP 3.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,<br/>24 ins. in the ground, with brass cap mkd.</p>   |

BOOK 5448

Survey of Tract 38

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS



1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.


Set a steel fence post near the cor.



Thence East, on line 3-4.

0.171 Point for AP 4.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the AP.


Note: Angle points 3 and 4 were created due to a literal interpretation of the deeds.



Thence South, on line 4-5.

2.597 Point for AP 5.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.




1991

## BOOK 5448

Survey of Tract 38

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |   |
|--------|---|
|        | <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>Thence S. 88°49' E., on line 5-6.</p>   |
| 3.063  | <p>AP 6, monumented with a rebar, 19 ins. long, 5/8 in. diam., firmly set, 6 ins. below ground, with an aluminum cap mkd. GREER ENGR CO. LS 5704.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 32 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R28E</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located on the W. edge of a dirt road, 18 lks. wide, bears N. and S.</p> <hr/> <p>Thence S. 1°15' W., on line 6-7.</p> |
| 4.412  | <p>The witness point at intersection with the line bet. secs. 19 and 30, hereinbefore described.</p> <p>From this point, the 1/4 sec. cor. of secs. 19 and 30 bears S. 89°53' W., 10.923 chs. dist.</p>   |
| 6.322  | <p>AP 7, at intersection with the northerly right-of-way of School Bus Route, monumented with a rebar, 16 ins. long, 5/8 in. diam., firmly set, projecting 1 in. above ground, with an aluminum cap mkd. GREER ENGR CO. LS 5704.</p> <p>At the cor. point</p>   |

## BOOK 5448

Survey of Tract 38

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
32 ins. in the ground, with brass cap mkd.

|           |       |
|-----------|-------|
| T21N R28E |       |
| S30       | TR 38 |
|           | AP 7  |

1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

The cor. is located 6 lks. W. of the E. post of a gate in the  
right-of-way fence, bears E. and W.

From this cor., a right-of-way marker, bears N. 88°46' W.,  
1.77 chs. dist., monumented with an aluminum disk, 3 ins. diam.,  
firmly set in a concrete abutment of a cattle guard, mkd. ARIZONA  
HIGHWAY DEPT. 5761.41 1966.

Thence S. 88°46' E., on line 7-8, identical with a portion of the  
northerly right-of-way of School Bus Route.

- 1.687 A rebar, 5/8 in. diam., firmly set, projecting 1 in. above  
ground, with an aluminum cap mkd. GREER ENGR CO. LS 5704.
- 4.533 Right-of-way marker mkd. 5761.50, hereinbefore described.
- 5.989 A rebar, 5/8 in. diam., firmly set, projecting 4 ins. above  
ground, with an aluminum cap mkd. GREER ENGR CO. LS 5704.
- 7.937 Point for AP 8.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
25 ins. in the ground, with brass cap mkd.

|           |     |
|-----------|-----|
| T21N R28E |     |
| TR 38     |     |
| AP 8      | S30 |

1991

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case  
beneath the stainless steel post.

Set a steel fence post near the cor.

## BOOK 5448

## Survey of Tract 38

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

| CHAINS |  |
|--------|--|
|        | <p>The cor. is located 14 lks. W. of a cor. of fences bearing N., E., and W.</p>   |
|        | <p>From this cor., right-of-way marker mkd. 5762.40, hereinbefore described, bears S. 88°46' E., 16.41 chs. dist.</p>  |
|        | <p>Thence North, on line 8-1, along a fence.</p>   |
| 2.098  | <p>The witness point at intersection with the line bet. secs. 19 and 30, hereinbefore described.</p>   |
|        | <p>From this point, the cor. of secs. 19, 20, 29, and 30, bears N. 89°53' E., 21.324 chs. dist.</p>  |
| 22.031 | <p>AP 1.</p>   |
|        | <p style="text-align: center;">Metes-and-Bounds Survey in Section 30<br/>T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona</p>   |
|        | <p>From the point for AP 1, at the intersection of the line bet. secs. 29 and 30 with the southerly right-of-way of the Santa Fe Railroad Company.</p>   |
|        | <p>Set a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case, 12 ins. in the ground.</p>  |
|        | <p>from which</p>  |
|        | <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 26 ins. in the ground, for a reference monument, bears N. 44°26' E., 106.5 ft. dist., with cap mkd. RM T21N R28E S29 106.5 FT TO COR AP 1 1991, and an arrow pointing to the cor. Set a steel fence post near the RM.</p> |
|        | <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 24 ins. in the ground, for a reference monument, bears N. 23°07' W., 78.7 ft. dist., with cap mkd. RM T21N R28E S30 78.8 FT TO COR AP 1 1991, and an arrow pointing to the cor. Set a steel fence post near the RM.</p>   |
|        | <p>The cor. is located in the bed of the Puerco river.</p>   |
|        | <p>From this cor. point, the cor. of secs. 19, 20, 29, and 30, bears N. 0°02' E., 18.105 chs. dist.</p>  |

## BOOK 5448

Metes-and-Bounds Survey in Section 30

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

|                            |   |
|----------------------------|---|
| <p>CHAINS</p> <p>41.56</p> | <p>S. 75°37' W., on line 1-2, identical with a portion of the railroad right-of-way, in the bed of the Puerco River.</p> <p>Point for AP 2, at intersection with the N. and S. center line of sec. 30.</p> <p>Set a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case, 12 ins. in the ground.</p> <p>from which</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 27 ins. in the ground, for a reference monument, bears N. 33°58' E., 77.0 ft. dist., with cap mkd. RM T21N R28E S30 77.0 FT TO COR AP 2 1991, and an arrow pointing to the cor., located 2 lks. S. of a fence, bears ENE. and WSW.</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, set 26 ins. in the ground, for a reference monument, bears N. 49°41' W., 62.4 ft. dist., with cap mkd. RM T21N R28E S30 62.4 FT TO COR AP 2 1991, and an arrow pointing to the cor., located 2 lks. S. of a fence, bears ENE. and WSW.</p> <p>The cor. is located in the bed of the Puerco river.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>Township 21 North, Range 28 East is located approximately 50 miles northeast of Holbrook, Arizona. The small town of Sanders, Arizona lies in the eastern portion of the township. The southern boundary of the Navajo Indian Reservation runs through the northern portion of the township.</p> <p>The terrain consists of rolling land with juniper forest in the northern and southern portions, and the broad, open, nearly level Puerco River basin in the center. The average elevation is 6000 feet above sea level.</p> <p>The Puerco River flows southwesterly across the township, entering in section 12 and leaving in section 30, providing drainage and ground water for the area.</p> <p>Access is provided by U.S. Interstate Highway 40, U.S. Highways 191 and 666, and numerous dirt roads. The Santa Fe Railroad traverses through the township, along the north side of the Puerco River.</p> |
|----------------------------|---|

## BOOK 5448

T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona

## CHAINS

Portions of sections 15, 17, 18, 19, 20, 21, 23, 24, 26, and 35 have been subdivided, but with little occupancy except in the area immediately surrounding Sanders. Some occupancy in the form of residences, small ranches, and small businesses is found along U.S. Interstate Highway 40. A cluster of homes built for the Navajo-Hopi Indian Relocation Commission is located in sections 25 and 36. The remainder of the township is used largely for grazing.

The mean magnetic declination is  $13\ 1/2^\circ$  E. as shown on U.S.G.S. Quadrangle, "SANDERS, ARIZ.", 1971 edition.

---



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

BOOK 5448

## FIELD ASSISTANTS

| NAMES                 | CAPACITY                |
|-----------------------|-------------------------|
| Timothy J. Moore      | Land Surveyor           |
| Gary D. Knoff         | Land Surveyor           |
| Jonathan O. Begay     | Land Surveyor (Trainee) |
| Stephen M. Koval      | Land Surveyor (Trainee) |
| Donald L. Brewer      | Surveying Technician    |
| Robert J. Lyle        | Surveying Technician    |
| Robert M. Charboneau  | Surveying Technician    |
| Rebecca N. Ramirez    | Surveying Technician    |
| Cheryl A. Baier       | Surveying Technician    |
| Gordon R. Bubl        | Surveying Technician    |
| Geoffrey A. Graham    | Surveying Technician    |
| Jeff A. Hill          | Survey Aid              |
| Mark R. Searles       | Survey Aid              |
| Michael Searles       | Survey Aid              |
| Mark A. Leonard       | Survey Aid              |
| Bruce J. Olson        | Survey Aid              |
| David G. Jaramillo    | Survey Aid              |
| Robert L. Speisman II | Survey Aid              |

CERTIFICATE OF SURVEY

BOOK 5448

We, William P. Carpender, and Stephen J. Malloy, Cadastral Surveyors, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 12th day of January, 1987, Supplemental Special Instructions bearing date of the 13th day of October, 1987, Supplemental Special Instructions bearing date of the 29th day of February, 1988, and Amended Special Instructions bearing date of the 11th day of January, 1989, we have dependently resurveyed the Fifth Standard Parallel North (South Boundary), the west and north boundaries, and the subdivisional lines, subdivided sections 13, 14, 24, 30, and 36, surveyed certain lots, surveyed Tracts 37 and 38, and conducted a metes-and-bounds survey in section 30, Township 21 North, Range 28 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

OCTOBER 31, 1995  
(Date)

William P Carpender  
(Cadastral Surveyor)

October 31, 1995  
(Date)

Stephen J Malloy  
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Arizona State Office  
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of the Fifth Standard Parallel North (South Boundary), the west and north boundaries, and the subdivisional lines, and the subdivision of sections 13, 14, 24, 30, and 36, the survey of certain lots, the survey of Tracts 37 and 38, and a metes-and-bounds survey in section 30, Township 21 North, Range 28 East, Gila and Salt River Meridian, Arizona, executed by William P. Carpender, and Stephen J. Malloy, Cadastral Surveyors, having been critically examined and found correct, are hereby approved.

11/7/95  
(Date)

Joseph H. Tull  
(Acting Chief Cadastral Surveyor of Arizona)

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 21 N., R. 28 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.

\_\_\_\_\_  
(Date)

\_\_\_\_\_  
(Acting Chief Cadastral Surveyor of Arizona)