

ORIGINAL

¹ BOOK 5455

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE

DEPENDENT RESURVEY OF

THE WEST AND NORTH BOUNDARIES,

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 19 NORTH, RANGE 27 EAST

Of the Gila and Salt River Meridian,
In the State of Arizona

EXECUTED BY
William P. Carpender, Cadastral Surveyor


Under Special Instructions dated January 12, 1987, approved February 17, 1987, and Supplemental Special Instructions dated and approved February 29, 1988, which provided for the surveys included under Group Number 686 and assignment instructions dated July 11, 1988.

Survey commenced August 16, 1988

Survey completed September 1, 1994

BOOK 5455
INDEX DIAGRAM

TOWNSHIP 19 NORTH, RANGE 27 EAST,

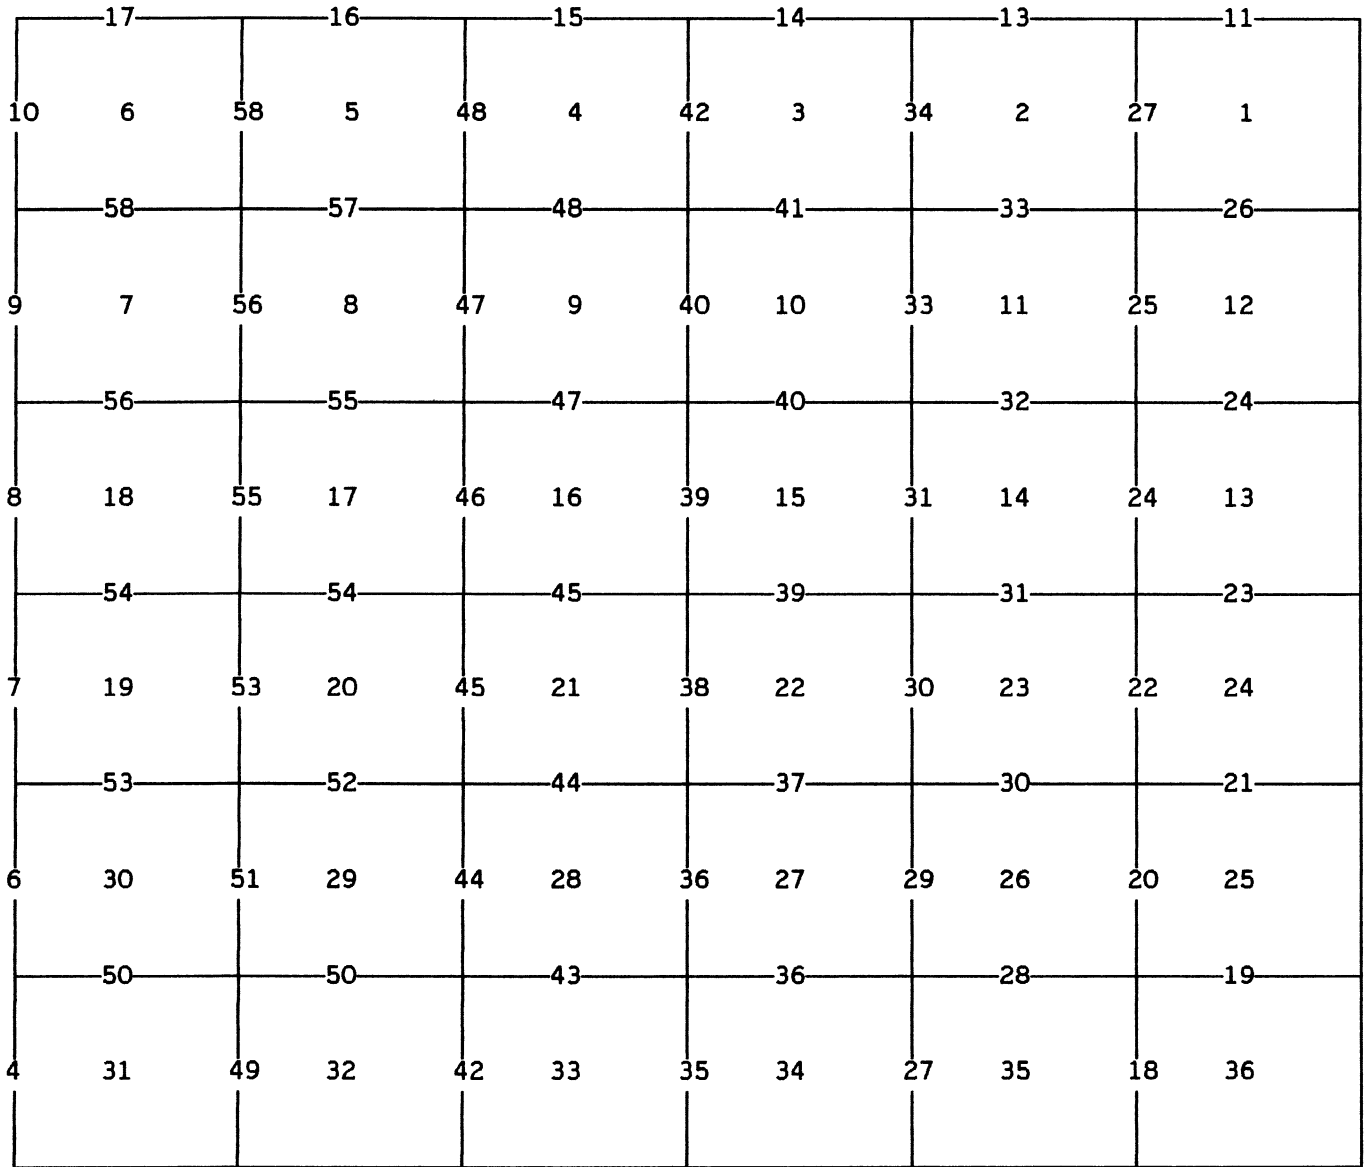

BOOK 5455

T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes describe the dependent resurvey of the west and north boundaries, and the subdivisional lines of Township 19 North, Range 27 East, Gila and Salt River Meridian, Arizona.

The west and north boundaries were surveyed by Frank Follman, in 1882. The south and east boundaries and the subdivisional lines were surveyed by Milton Santee, in 1882. A portion of the north boundary was retraced by William Strover, in 1910. The northwest township corner was remonumented by Kenneth W. Bays, in 1987. The southeast township corner was remonumented by William P. Carpender and Stephen K. Hansen, in 1991-93. The south boundary was dependently resurveyed by Stephen J. Malloy, in 1990-93. The northeast township corner, the 1/4 sec. cor. of secs. 1 and 6 on the E. bdy. of the Tp. and the 1/4 sec. cor. of secs. 1 and 36 on the N. Bdy. of the Tp. were remonumented by William P. Carpender, in 1988-93. The east boundary was dependently resurveyed by Joe R. Salazar and Stephen J. Malloy, in 1988-93.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, the Special Instructions dated January 12, 1987, and the Supplemental Special Instructions dated February 29, 1988, for Group No. 686, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units, confirmed by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with Sokkia, Topcon, and Zeiss total station instruments.

The geographic position of the northeast corner of the township was determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. U.S. Coast and Geodetic Survey triangulation stations "BEACON 54B ECC 1936" and "DEAD 1936" were used as the control stations. The elevation and coordinates refer to the top of the monument.

Elevation	Latitude	Longitude
6429.1 ft.	34°59'38.74" N.	109°25'05.16" W. NAD27

BOOK 5455

T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

The mean magnetic declination, as taken from quadrangle map NAVAJO SPRINGS, ARIZ., published in 1972 by U.S. Geological Survey, is 13 1/2° E.

Dependent Resurvey of the West Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

Restoring the survey executed by
Frank Follman, in 1882

Beginning at the cor. of Tps. 18 and 19 N., Rs. 26 and 27 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, 7 ins. below the surface of the ground, with brass cap mkd. T19N R26E R27E S36 S31 S1 S6 T18N 1992, located on the S. edge of a gravel road, 35 lks. wide, bears W.

from which reference monuments set in 1992

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, bears N. 40°28' E., 144.3 ft. dist., with cap mkd. RM T19N R27E S31 144.3 FT TO COR 1992, and an arrow pointing to the cor., and with a steel fence post alongside the reference monument.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, bears S. 37°57' W., 137.8 ft. dist., with cap mkd. RM T18N R27E S6 137.8 FT TO COR 1992, and an arrow pointing to the cor., and with a steel fence post alongside the reference monument.

N. 0°11' E., bet. secs. 31 and 36, on the W. bdy.

Over rolling grassland, through scattered juniper, along a fence on the W. side of a graded dirt road, 40 lks. wide.

40.27

The 1/4 sec. cor. of secs. 31 and 36, monumented with a rebar, 19 ins. long, 5/8 in. diam., firmly set, projecting 2 ins. above ground, of unknown origin. This is accepted as the best available evidence of the original cor. position.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

BOOK 5455

Dependent Resurvey of the West Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> <p>T19N 1/4 R26E R27E S36 S31 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 1.5 lks. E. of the fence, and 40 lks. W. of the center of the graded road.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°11' E., beginning new measurement.</p>
38.50	Ridge, bears E. and W.
40.29	<p>The cor. of secs. 25, 30, 31, and 36, perpetuated by Lacy C. Greer, R.L.S. 5704, in 1972, restored by B. E. Coffman, R.L.S. 4307, date unknown, monumented with an iron pipe, 32 ins. long, 1 1/4 ins. diam., firmly set, projecting 2 ins. above ground, with a brass cap, 2 ins. diam., mkd. LS 5704 T19N S25 S30 S36 S31 R26E R27E 1972, with a sandstone, 19 x 17 x 9 ins., buried alongside. This is accepted as a careful and faithful perpetuation of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N R26E R27E S25 S30 ----- S36 S31 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe and the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located in the fence, bears N. and S.</p>

BOOK 5455

Dependent Resurvey of the West Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor. point, an aluminum disk, 3 1/2 ins. diam., firmly set in a concrete pillar, 7 ins. sq., flush with the ground, mkd. ELEV. 6071 FT ABOVE SEA 87 DOR 1972, bears S. 3° E., 22 lks. dist.</p> <hr/> <p>N. 0°16' E., bet. secs. 25 and 30.</p> <p>Over rolling grassland, through scattered juniper, along a fence on the W. side of a graded dirt road, 40 lks. wide.</p> <p>40.05 Point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N 1/4 R26E R27E S25 S30 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 5 lks. E. of the fence, bears N. and S., and 40 lks. W. of the graded road, 40 lks. wide., bears N. and S.</p>
80.10	<p>Point for the cor. of secs. 19, 24, 25, and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N R26E R27E S24 S19 ----- S25 S30 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>

BOOK 5455

Dependent Resurvey of the West Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>The cor. is located 3 lks. E. of a cor. of fences bearing N., S., and W., and 40 lks. W. of the graded road.</p> <hr/> <p>N. 0°16' E., bet. secs. 19 and 24.</p> <p>Over rolling grassland, through scattered juniper, along a fence on the W. side of a graded dirt road, 40 lks. wide.</p>
34.50	Ridge, bears E. and W.
40.05	<p>The 1/4 sec. cor. of secs. 19 and 24, monumented with an iron pipe, 17 ins. long, 7/8 in. diam., firmly set, projecting 1 in. above ground, of unknown origin. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N 1/4 R26E R27E S24 S19 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the iron pipe inside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 1 lk. W. of the fence, bears N. and S.</p> <hr/> <p>N. 0°28' E., beginning new measurement.</p>
7.95	Ridge, bears E. and W.
39.81	<p>The cor. of secs. 13, 18, 19, and 24, perpetuated by Lacy C. Greer, R.L.S. 5704, in 1971, restored by B. E. Coffman, R.L.S. 4307, date unknown, monumented with an iron pipe, 30 ins. long, 2 ins. diam., firmly set, projecting 7 ins. above ground, with a brass cap, 2 ins. diam., mkd. LS 5704 R26E R27E S13 S18 S24 S19 T19N 1971. This is accepted as a careful and faithful perpetuation of the position of the original cor.</p> <p>At the cor. point</p>

BOOK 5455

Dependent Resurvey of the West Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.

T19N	
R26E	R27E
S13	S18

S24	S19
1993	

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Bury the iron pipe alongside the stainless steel post.

Set a steel fence post alongside the cor.

The cor. is located 1 lk. E. of the fence, bears N. and S.

N. 0°23' E., bet. secs. 13 and 18.

Over nearly level grassland, along a fence on the W. side of a paved road, 40 lks. wide.

39.47

The 1/4 sec. cor. of secs. 13 and 18, monumented with an iron pipe, 19 ins. long, 7/8 in. diam., firmly set, flush with the ground, with a metal tag attached, with no legible marks, of unknown origin. This is accepted as the best available evidence of the original cor. position.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

T19N	
1/4	
R26E	R27E
S13	S18
1993	

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

The cor. is located in the fence, bears N. and S.

BOOK 5455

Dependent Resurvey of the West Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

N. 0°22' E., beginning new measurement.

39.47

The cor. of secs. 7, 12, 13, and 18, perpetuated by Edward Stringer, R.L.S. 2052, date unknown, restored by B. E. Coffman, R.L.S. 4307, date unknown, monumented with an iron pipe, 17 ins. long, 7/8 in. diam., firmly set, 3 ins. below the ground, with a metal tag attached, mkd. 2052. This is accepted as a careful and faithful perpetuation of the position of the original cor.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T19N	
R26E	R27E
S12	S 7
— —	
S13	S18
1993	

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Deposit the iron pipe inside the stainless steel post.

Set a steel fence post alongside the cor.

The cor. is located 1.5 lks. W. of the fence, bears N. and S.

N. 0°19' E., bet. secs. 7 and 12.

Over nearly level grassland, along a fence on the W. side of a paved road, 40 lks. wide.

39.48

The 1/4 sec. cor. of secs. 7 and 12, perpetuated by Edward Stringer, R.L.S. 2052, date unknown, restored by B. E. Coffman, R.L.S. 4307, date unknown, monumented with an iron pipe, 19 ins. long, 3/4 ins. diam., firmly set, flush with the ground, with a metal tag attached, mkd. LS 2052. This is accepted as a careful and faithful perpetuation of the position of the original cor.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

BOOK 5455

Dependent Resurvey of the West Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

T19N		
1/4		
R26E		R27E
S12		S 7
1993		

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Deposit the iron pipe inside the stainless steel post.

Set a steel fence post alongside the cor.

The cor. is located 5 lks. W. of a cor. of fences bearing N., S., and W.

N. 0°21' E., beginning new measurement.

39.99

The cor. of secs. 1, 6, 7, and 12, perpetuated by Edward Stringer, R.L.S. 2052, date unknown, restored by B. E. Coffman, R.L.S. 4307, date unknown, monumented with an iron pipe, 17 ins. long, 3/4 in. diam., firmly set, projecting 2 ins. above ground, with a metal tag attached, mkd. LS 2052. This is accepted as a careful and faithful perpetuation of the position of the original cor.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.

T19N		
R26E		R27E
S 1		S 6

S12		S 7
1993		

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Deposit the iron pipe inside the stainless steel post.

Set a steel fence post alongside the cor.

The cor. is located 1.5 lks. W. of the fence, bears N. and S.

N. 0°21' E., bet. secs. 1 and 6.

BOOK 5455

Dependent Resurvey of the West Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

<p>CHAINS</p> <p>39.99</p> <p>39.97</p>	<p>Over nearly level grassland, along a fence on the W. side of a paved road, 40 lks. wide.</p> <p>The 1/4 sec. cor. of secs. 1 and 6, perpetuated by Lacy C. Greer, R.L.S. 5704, in 1972, restored by B. E. Coffman, R.L.S. 4307, date unknown, monumented with an iron pipe, 36 ins. long, 1 3/4 ins. diam., firmly set, projecting 16 ins. above ground, with a brass cap, 2 ins. diam., mkd. LS 5704 R26E R27E S1 S6 1/4 T19N 1972, with a rebar, 48 ins. long, 5/8 ins. diam., below ground alongside, of unknown origin. This is accepted as a careful and faithful perpetuation of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N 1/4 R26E R27E S 1 S 6 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe and rebar alongside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°13' E., beginning new measurement.</p> <p>The cor. of Tps. 19 and 20 N., Rs. 26 and 27 E., monumented with a stainless steel post, 2 1/2 ins. diam., projecting 4 ins. above ground, with brass cap mkd. T20N R26E R27E S36 S31 S1 S6 T19N 1987, with a mound of stone, 3 ft. diam., 1 1/2 ft. high, S. of the stainless steel post.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of the North Boundary T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">Restoring the survey executed by Frank Follman, in 1882</p> <hr/> <p>From the cor. of Tps. 19 and 20 N., Rs. 27 and 28 E., monumented with a stainless steel post, 2 1/2 diam., firmly set, projecting 1 in. above ground, with brass cap mkd. T20N R27E R28E S36 S31 S1 S6 T19N 1992.</p>
---	---

BOOK 5455

Dependent Resurvey of the North Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS													
	N. 89°13' W., bet. secs. 1 and 36.												
	Over rolling land, through scattered juniper and sage.												
41.06	The 1/4 sec. cor. of secs. 1 and 36, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T20N R27E S36 1/4 S1 T19N 1988.												
	from which a bearing tree mkd. in 1988												
	A juniper, 6 ins. diam., bears N. 58 3/4° E., 310 lks. dist., mkd. 1/4 S36 BT.												
	The cor. is located 94 lks. S. of an electric fence, bears ESE. and WNW., and on a gentle NW. slope.												
	From this cor. point, U.S. Coast and Geodetic Survey triangulation station "PAUL 1959", with published latitude of 35°10'13.8862" N. and longitude of 109°25'05.3623" W., NAD27, bears N. 4°11'19" E. (forward bearing), 491.89 chs. dist., monumented with a standard brass tablet, set in a concrete pillar, 12 ins. sq., firmly set, projecting 4 ins. above ground, with top mkd. PAUL 1959, and a triangle.												
	N. 88°33' W., beginning new measurement.												
11.40	Gulch, 10 lks. wide, drains NNE.												
30.00	Ridge, bears NE. and SW.												
39.90	Point for the cor. of secs. 1, 2, 35, and 36, at proportionate dist.; there is no remaining evidence of the original cor.												
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T20N</td><td>R27E</td></tr> <tr><td>S35</td><td>S36</td></tr> <tr><td colspan="2" style="text-align: center;">— —</td></tr> <tr><td>S 2</td><td>S 1</td></tr> <tr><td colspan="2" style="text-align: center;">T19N</td></tr> <tr><td colspan="2" style="text-align: center;">1988</td></tr> </table>	T20N	R27E	S35	S36	— —		S 2	S 1	T19N		1988	
T20N	R27E												
S35	S36												
— —													
S 2	S 1												
T19N													
1988													
	from which												
	A juniper, 9 ins. diam., bears N. 8 3/4° W., 360 chs. dist., mkd. T20N R27E S35 BT.												
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.												

BOOK 5455

Dependent Resurvey of the North Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Set a steel fence post alongside the cor.
	<hr/>
	N. 88°33' W., bet. secs. 2 and 35.
	Over rolling land, through scattered juniper and sage.
21.20	Abandoned fence line, bears N. and S.
28.00	Fence, bears N. and S.
39.90	The 1/4 sec. cor. of secs. 2 and 35, monumented with a juniper post, 32 ins. long, 2 ins. diam., laying on the ground.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20N R27E S35 1/4 — S 2 T19N 1988</p>
	from which
	<p style="text-align: center;">A juniper, 8 ins. diam., bears N. 17° W., 47 lks. dist., mkd. 1/4 S35 BT.</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Bury the original post alongside the stainless steel post.
	Set a steel fence post alongside the cor.
	<hr/>
	N. 89°47' W., beginning new measurement.
4.60	Spur, bears NE. and SW.
18.95	Track road, 15 lks. wide, bears NE. and SW., located in a gulch.
39.98	The cor. of secs. 2, 3, 34, and 35, monumented with a juniper post, 40 ins. long, 3 ins. diam., laying on the ground.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

BOOK 54 55

Dependent Resurvey of the North Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS																							
	<div style="text-align: center;"> <table border="1"> <tr><td>T20N R27E</td><td></td></tr> <tr><td>S34</td><td>S35</td></tr> <tr><td>S 3</td><td>S 2</td></tr> <tr><td colspan="2">T19N</td></tr> <tr><td colspan="2">1988</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the original post alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr/> <p>S. 89°54' W., bet. secs. 3 and 34.</p> <p>Over rolling land, through scattered juniper and sage.</p> <p>9.75 Track road, 15 lks. wide, bears SE. and NW.</p> <p>9.85 Electric fence, bears SE. and NW.</p> <p>40.22 Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T20N R27E</td><td></td></tr> <tr><td>S34</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 3</td><td></td></tr> <tr><td colspan="2">T19N</td></tr> <tr><td colspan="2">1988</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>63.40 Fence, bears SSE. and NNW.</p> <p>80.44 Point for the cor. of secs. 3, 4, 33, and 34, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	T20N R27E		S34	S35	S 3	S 2	T19N		1988		T20N R27E		S34		1/4	—	S 3		T19N		1988	
T20N R27E																							
S34	S35																						
S 3	S 2																						
T19N																							
1988																							
T20N R27E																							
S34																							
1/4	—																						
S 3																							
T19N																							
1988																							

Dependent Resurvey of the North Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	<table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 0 10px;">T20N</td><td style="padding: 0 10px;">R27E</td></tr> <tr><td style="padding: 0 10px;">S33</td><td style="padding: 0 10px;">S34</td></tr> <tr><td colspan="2" style="border-top: 1px solid black; height: 5px;"></td></tr> <tr><td style="padding: 0 10px;">S 4</td><td style="padding: 0 10px;">S 3</td></tr> <tr><td colspan="2" style="text-align: center; padding: 0 10px;">T19N</td></tr> <tr><td colspan="2" style="text-align: center; padding: 0 10px;">1988</td></tr> </table>	T20N	R27E	S33	S34			S 4	S 3	T19N		1988	
T20N	R27E												
S33	S34												
S 4	S 3												
T19N													
1988													
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 80%; margin: 10px auto;"/>												
	<p>S. 89°54' W., bet. secs. 4 and 33,</p> <p>Over nearly level land, through scattered sage.</p>												
30.90	Track road, 15 lks. wide, bears SSE. and NNW.												
32.60	Electric fence, bears SE. and NW.												
40.22	Point for the 1/4 sec. cor. of secs. 4 and 33, at proportionate dist.; there is no remaining evidence of the original cor.												
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>												
	<table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 0 10px;">T20N</td><td style="padding: 0 10px;">R27E</td></tr> <tr><td style="padding: 0 10px;">S33</td><td></td></tr> <tr><td style="padding: 0 10px;">1/4</td><td style="padding: 0 10px;">—</td></tr> <tr><td style="padding: 0 10px;">S 4</td><td></td></tr> <tr><td colspan="2" style="text-align: center; padding: 0 10px;">T19N</td></tr> <tr><td colspan="2" style="text-align: center; padding: 0 10px;">1988</td></tr> </table>	T20N	R27E	S33		1/4	—	S 4		T19N		1988	
T20N	R27E												
S33													
1/4	—												
S 4													
T19N													
1988													
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>												
53.00	Gulch, 40 lks. wide, 10 ft. deep, drains NW.												
59.70	Gulch, 30 lks. wide, 5 ft. deep, drains NNW.												
62.20	Berm on the E. side of a stock tank, 15 lks. wide, 20 ft. high.												
80.44	The cor. of secs. 4, 5, 32 and 33, monumented with a weathered red sandstone, 20 x 10 x 4 ins., laying on the ground, mkd. with 3 grooves on a side.												
	<p>At the cor. point</p>												

BOOK 54 55

Dependent Resurvey of the North Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS													
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T20N</td><td>R27E</td></tr> <tr><td>S32</td><td>S33</td></tr> <tr><td colspan="2" style="text-align: center;">—</td></tr> <tr><td>S 5</td><td>S 4</td></tr> <tr><td colspan="2" style="text-align: center;">T19N</td></tr> <tr><td colspan="2" style="text-align: center;">1988</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr/>	T20N	R27E	S32	S33	—		S 5	S 4	T19N		1988	
T20N	R27E												
S32	S33												
—													
S 5	S 4												
T19N													
1988													
	<p>N. 89°43' W., bet. secs. 5 and 32.</p>												
	<p>Over rolling land, through dense sage.</p>												
0.30	<p>Gulch, 20 lks. wide, 3 ft. deep, drains NNW.</p>												
5.95	<p>Graded water line road, 40 lks. wide, bears SE. and NW.</p>												
11.15	<p>Track road, 15 lks. wide, bears N. and S.</p>												
11.80	<p>Fence, bears N. and S.</p>												
39.98	<p>Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate dist.; there is no remaining evidence of the original cor.</p>												
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T20N</td><td>R27E</td></tr> <tr><td>S32</td><td></td></tr> <tr><td colspan="2" style="text-align: center;">1/4 —</td></tr> <tr><td colspan="2" style="text-align: center;">S 5</td></tr> <tr><td colspan="2" style="text-align: center;">T19N</td></tr> <tr><td colspan="2" style="text-align: center;">1988</td></tr> </table> </div>	T20N	R27E	S32		1/4 —		S 5		T19N		1988	
T20N	R27E												
S32													
1/4 —													
S 5													
T19N													
1988													
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury a Beanee Weanee can alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>												
48.70	<p>Fence, bears N. and S.</p>												

BOOK 5455

Dependent Resurvey of the North Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS													
59.00	Track road, 15 lks. wide, bears ENE. and WSW.												
69.90	Track road, 15 lks. wide, bears SE. and NW.												
72.90	Electric fence, bears NNE. and SSW.												
73.00	Track road, 15 lks. wide, bears NNE. and SSW.												
79.96	<p>The cor. of secs. 5, 6, 31, and 32, restored by Lacy C. Greer, R.L.S. No. 5704, in 1963, monumented with a galvanized iron pipe, 30 ins. long, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with a brass cap, mkd. Lacy C. Greer R27E T20N 5 6 31 32 T19N 1963. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T20N</td> <td>R27E</td> </tr> <tr> <td>S31</td> <td>S32</td> </tr> <tr> <td>S 6</td> <td>S 5</td> </tr> <tr> <td colspan="2">T19N</td> </tr> <tr> <td colspan="2">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 4.70 chs. S. of a track road, 22 lks. wide, bears E. and W.</p> <hr/> <p>N. 89°44' W., bet. secs. 6 and 31.</p> <p>Over gently rolling land, through dense sage.</p>	T20N	R27E	S31	S32	S 6	S 5	T19N		1994			
T20N	R27E												
S31	S32												
S 6	S 5												
T19N													
1994													
40.18	<p>Point for the 1/4 sec. cor. of secs. 6 and 31, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T20N</td> <td>R27E</td> </tr> <tr> <td>S31</td> <td></td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td>S 6</td> <td></td> </tr> <tr> <td colspan="2">T19N</td> </tr> <tr> <td colspan="2">1988</td> </tr> </table> </div>	T20N	R27E	S31		1/4	—	S 6		T19N		1988	
T20N	R27E												
S31													
1/4	—												
S 6													
T19N													
1988													

BOOK 5455

Dependent Resurvey of the North Boundary
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post alongside the cor.
	The cor. is located 1.05 chs. S. of a track road, 12 lks. wide, bears E. and W.
59.10	Electric fence bears NE. and SW.
69.90	Track road, 15 lks. wide, bears N. and S.
78.61	The cor. of Tps. 19 and 20 N., Rs. 26 and 27 E., heretofore described.
<hr/> Dependent Resurvey of the Subdivisional Lines T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona <hr/>	
<hr/> Restoring the survey executed by Milton Santee, in 1882 <hr/>	
	From the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. T19N R27E S35 S36 S2 S1 T18N 1993.
	N. 1°58' W., bet. secs. 35 and 36.
	Ascend gradually, through scattered juniper.
3.00	Puerco rim, bears ENE. and WSW.; thence descend very steep, eroded, NW. slope of the Puerco rim.
25.00	End very steep descent; thence descend gradually, over rolling, cleared land, through scattered juniper.
40.24	Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	T19N R27E 1/4 S35 S36 1994
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<p>From this cor. point, U.S. Coast and Geodetic Survey triangulation station, "REESE 1936", with published latitude of 34°59'35.900" N. and longitude of 109°24'44.594" W., NAD27, bears S. 66°43'17" E. (forward bearing), 113.85 chs. dist., monumented with a standard brass tablet, 3 1/2 ins. diam., set in a concrete pillar, 10 ins. sq., firmly set, projecting 4 ins. above ground, with top mkd. REESE 1936 and a triangle.</p>								
50.60	Ridge, bears E. and W.								
80.48	<p>Point for the cor. of secs. 25, 26, 35, and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p>								
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T19N</td> <td>R27E</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td>S35</td> <td>S36</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table>	T19N	R27E	S26	S25	S35	S36	1994	
T19N	R27E								
S26	S25								
S35	S36								
1994									
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>								
	<p>From the cor. of secs. 25, 30, 31, and 36, on the E. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T19N R27E R28E S25 S30 S36 S31 1992.</p>								
	<p>S. 89°58' W., bet. secs. 25 and 36.</p>								
	<p>Over rolling land, through scattered juniper.</p>								
1.70	Track road, 12 lks. wide, bears NNE. and SSW.								
3.90	Wash, 45 lks. wide, 5 ft. deep, drains NNE.								
16.00	Ridge, bears NNE. and SSW.; thence enter broken, eroded badlands.								
20.70	Wash, 30 lks. wide, 3 ft. deep, drains N.								
30.20	Spur ridge, bears ENE. and WSW.								
40.05	<p>Point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate dist.; there is no remaining evidence of the original cor. The cor. falls on a very steep, eroded slope, where it is impractical to establish a permanent monument.</p>								

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this point, the point selected for a witness cor., bears S. 39°19' E., 1.415 chs. dist.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">WC T19N R27E S25 1/4 — S36 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>The witness cor. is located on a spur, slopes NNE.</p>
48.00	<p>Ridge, bears NE. and SW.; thence over rolling, cleared land, through scattered juniper.</p>
52.50	<p>Fence, bears NNE. and SSW., at a point 20 lks. SSW of a cor. of fences bearing NE. and SSW.</p>
52.70	<p>Track road, 12 lks. wide, bears NNE. and SSE.</p>
80.10	<p>The cor. of secs. 25, 26, 35, and 36.</p> <hr/>
	<p>N. 0°41' E., bet. secs. 25 and 26.</p>
	<p>Over rolling land, through moderate juniper.</p>
38.30	<p>Ridge, bears ENE. and WSW.</p>
40.22	<p>Point for the 1/4 sec. cor. of secs. 25 and 26, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E 1/4 S26 S25 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
62.40	<p>Track road, 12 lks. wide, bears ENE. and WSW.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
67.00	Ridge, bears NE. and SW.; thence enter cleared area.										
80.44	Point for the cor. of secs. 23, 24, 25, and 26, at proportionate dist.; there is no remaining evidence of the original cor.										
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T19N</td> <td>R27E</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> <tr> <td colspan="2" style="text-align: center;">— —</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table>	T19N	R27E	S23	S24	— —		S26	S25	1994	
T19N	R27E										
S23	S24										
— —											
S26	S25										
1994											
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.										
	<hr/> <p>From the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T19N R27E R28E S24 S19 S25 S30 1992.</p>										
	N. 89°52' W., bet. secs. 24 and 25.										
	Over rolling land, through scattered juniper.										
6.50	Wash, 6 lks. wide, 2 ft. deep, drains NW.										
9.15	Track road, 12 lks. wide, bears NNW. and SSE.										
21.00	Ridge, bears N. and S.										
23.65	Fence, bears N. and S.										
24.00	Track road, 12 lks. wide, bears N. and S.										
30.80	Gulch, drains. NE.										
35.50	Ridge, bears NE. and SW.										
39.90	Point for the 1/4 sec. cor. of secs. 24 and 25, at proportionate dist.; there is no remaining evidence of the original cor.										
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.										

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R27E S24 1/4 — S25 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
42.50	<p>Ridge, bears NNE. and SSW.</p>
49.00	<p>Track road, 12 lks. wide, bears ENE. and WSW., at intersection with a wash, drains N., at the S. edge of an old stock tank.</p>
73.00	<p>Ridge, bears NE. and SW.</p>
79.81	<p>The cor. of secs. 23, 24, 25, and 26.</p> <hr/>
	<p>N. 1°46' E., bet. secs. 23 and 24.</p>
	<p>Descend gradually, over rolling, cleared land, through scattered juniper.</p>
40.24	<p>Point for the 1/4 sec. cor. of secs. 23 and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E 1/4 S23 S24 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
77.00	<p>Ridge, bears ENE. and WSW.</p>
80.48	<p>Point for the cor. of secs. 13, 14, 23, and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E S14 S13 — — S23 S24 1994</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 13, 18, 19, and 24, on the E. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T19N R27E R28E S13 S18 S24 S19 1992.</p> <p>N. 85°14' W., bet. secs. 13 and 24.</p> <p>Ascend gradually, over rolling, cleared land, through scattered juniper.</p>
2.70	Track road, bears NNE. and SSW.
3.10	Fence, bears NNE. and SSW.
21.30	E. edge of a broad ridge, bears N. and S.
33.30	W. edge of same ridge, bears NNW. and SSE.; thence descend.
38.08	<p>The 1/4 sec. cor. of secs. 13 and 24, monumented with an iron pipe, 69 ins. long, 2 ins. diam., firmly set, projecting 36 ins. above ground, of unknown origin. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S13 1/4 — S24 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Buried the iron pipe alongside the stainless steel post.</p> <p>The cor. is located 15 lks. N. of a track road, bears E. and W.</p> <hr/> <p>S. 86°05' W., beginning new measurement.</p>
32.50	Ridge, bears ENE. and WSW.
34.55	Dirt road, 23 lks. wide, bears NW. and SE.

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
34.90	Fence, bears SE. and NW.
40.10	The cor. of secs. 13, 14, 23, and 24.
	<hr/> N. 0°38' E., bet. secs. 13 and 14. Descend gradually over rolling, cleared land, through scattered juniper.
1.80	Fence, bears E. and W.
2.00	Track road, 12 lks. wide, bears E. and W.
6.75	Fence, bears SE. and NW.
7.00	Graded dirt road, 15 lks. wide, bears SE. and NW.
40.22	Point for the 1/4 sec. cor. of secs. 13 and 14, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T19N R27E 1/4 S14 S13 1994 </div>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
48.00	Ridge, bears NE. and SW.
80.44	Point for the cor. of secs. 11, 12, 13, and 14, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T19N R27E S11 S12 <hr style="width: 50%; margin: 0 auto;"/> S14 S13 1994 </div>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	<hr/>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the cor. of secs. 7, 12, 13, and 18, on the E. bdy., of the Tp. monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. T19N R27E R28E S12 S7 S13 S18 1992.</p> <p>S. 89°44' W., bet. secs. 12 and 13.</p> <p>Ascend gradually over rolling, cleared land, through moderate juniper.</p>
31.40	Ridge, bears NE. and SW.; thence descend gradually.
37.28	<p>The 1/4 sec. cor. of secs. 12 and 13, monumented with a wood post, 43 ins. long, 2 x 6 ins. sq., firmly set, projecting 26 ins. above ground, with no visible marks, of unknown origin. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S12 1/4 — S13 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Buried the wood post alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/>
34.00	<p>N. 88°51' W., beginning new measurement.</p> <p>Ridge, bears NNE. and SSW.</p>
40.39	The cor. of secs. 11, 12, 13, and 14.
40.23	<p>N. 1°13' W., bet. secs. 11 and 12.</p> <p>Ascend gradually, over rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R27E 1/4 S11 S12 1994</p>
75.00	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Ridge, bears ENE. and WSW.</p>
80.46	<p>Point for the cor. of secs. 1, 2, 11, and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S 2 S 1 ----- S11 S12 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
39.98	<p>From the cor. of secs. 1, 6, 7, and 12, on the E. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T19N R27E R28E S1 S6 S12 S7 1992.</p> <p>N. 89°23' W., bet. secs. 1 and 12.</p> <p>Ascend gradually, over rolling grassland.</p> <p>Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
44.10	<p style="text-align: center;">T19N R27E S 1 1/4 — S12 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Right-of-way fence, bears ESE. and WNW.</p>

27
BOOK 54 55

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
47.05	Navajo Springs Road, pavement, bears ESE. and WNW.
50.20	Right-of-way fence, bears ESE. and WNW.
53.05	Track road, bears ESE. and WNW.
53.50	Fence, bears ESE. and WNW.
74.00	Ridge, bears N. and S.; thence descend gradually.
79.96	The cor. of secs. 1, 2, 11, and 12.
	<hr/>
	N. 0°51' E., bet. secs. 1 and 2.
	Descend gradually, over rolling land, through scattered juniper.
9.05	Fence, bears E. and W.
9.30	Track road, bears E. and W.
10.30	Right-of-way fence, bears ESE. and WNW.
11.50	Navajo Springs Road, pavement, bears ESE. and WNW.
12.75	Right-of-way fence, bears ESE. and WNW.
30.60	Ridge, bears ENE. and WSW.
40.22	Point for the 1/4 sec. cor. of secs. 1 and 2, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	T19N R27E 1/4 S 2 S 1 1994
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
81.07	The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp., heretofore described.
	<hr/>
	From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. T19N R27E S34 S35 S3 S2 T18N 1993.

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 2°20' W., bet. secs. 34 and 35.
	Descend steep N. slope of the Puerco rim, over rolling, broken land, through dense juniper and piñon.
10.00	End steep descent; thence descend gradually, over rolling land, through dense juniper and piñon.
40.31	Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R27E 1/4 S34 S35 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
67.50	Ridge, bears NE. and SW.
80.62	Point for the cor. of secs. 26, 27, 34, and 35, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R27E S27 S26 ----- S34 S35 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of the cor.
	<hr/>
	From the cor. of secs. 25, 26, 35, and 36.
	N. 89°26' W., bet. secs. 26 and 35.
	Over rolling land, through dense juniper.
10.50	Ridge, bears N. and S.

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.97	<p>Point for the 1/4 sec. cor. of secs. 26 and 35, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S26 1/4 — S35 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
52.50	Ridge, bears NE. and SW.
79.94	The cor. of secs. 26, 27, 34, and 35.
<hr/>	
N. 0°37' E., bet. secs. 26 and 27.	
Over rolling land, through dense juniper.	
32.20	Ridge, bears NE. and SW.
40.28	<p>Point for the 1/4 sec. cor. of secs. 26 and 27, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E 1/4 S27 S26 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.56	<p>Point for the cor. of secs. 22, 23, 26, and 27, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S22 S23 — — S27 S26 1994</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.01	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 23, 24, 25, and 26.</p> <p>N. 89°21' W., bet. secs. 23 and 26.</p> <p>Over rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 23 and 26, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S23 1/4 — S26 1994</p>
80.02	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 22, 23, 26, and 27.</p> <hr/> <p>N. 1°36' E., bet. secs. 22 and 23.</p> <p>Over rolling, cleared land, through scattered juniper.</p>
10.45	Fence, bears ESE. and WNW.
40.29	<p>Point for the 1/4 sec. cor. of secs. 22 and 23, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E 1/4 S22 S23 1994</p>
79.90	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Fence, bears E. and W.</p>
80.45	Dirt road, 15 lks. wide, bears E. and W.

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
80.58	<p>Point for the cor. of secs. 14, 15, 22, and 23, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R27E</td></tr> <tr><td>S15</td><td>S14</td></tr> <tr><td>S22</td><td>S23</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/>	T19N	R27E	S15	S14	S22	S23	1994			
T19N	R27E										
S15	S14										
S22	S23										
1994											
40.12	<p>From the cor. of secs. 13, 14, 23, and 24.</p> <p>N. 89°16' W., bet. secs. 14 and 23.</p> <p>Over rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R27E</td></tr> <tr><td colspan="2">S14</td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td colspan="2">S23</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T19N	R27E	S14		1/4	—	S23		1994	
T19N	R27E										
S14											
1/4	—										
S23											
1994											
41.60	Ridge, bears N. and S.										
67.72	From this point, an open end iron pipe, 2 1/2 ins. diam., projecting 30 ins. above ground, of unknown origin, bears N., 2.46 chs. dist.										
67.80	Track road, bears N. and S.										
80.24	<p>The cor. of secs. 14, 15, 22, and 23.</p> <hr/> <p>N. 0°34' E., bet. secs. 14 and 15.</p> <p>Over rolling, cleared land, through scattered juniper.</p>										

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.28	<p>Point for the 1/4 sec. cor. of secs. 14 and 15, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E 1/4 S15 S14 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.56	<p>Point for the cor. of secs. 10, 11, 14, and 15, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S10 S11 ----- S15 S14 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
40.17	<hr/> <p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>N. 89°11' W., bet. secs. 11 and 14.</p> <p>Over rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 11 and 14, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S11 1/4 — S14 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
52.80	Ridge, bears NE. and SW.
61.70	Track road, bears SE. and NW.
61.85	Fence, bears SE. and NW.
80.34	The cor. of secs. 10, 11, 14, and 15.
	N. 0°48' W., bet. secs. 10 and 11.
	Over rolling land, through scattered juniper.
23.25	Dirt road, 15 lks. wide, bears SE. and NW.
40.28	Point for the 1/4 sec. cor. of secs. 10 and 11, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R27E 1/4 S10 S11 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
46.90	Ridge, bears NE. and SW.
75.80	Ridge, bears NE. and SW.
80.56	Point for the cor. of secs. 2, 3, 10, and 11, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R27E S 3 S 2 ----- S10 S11 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	From the cor. of secs. 1, 2, 11, and 12.

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 89°06' W., bet. secs. 2 and 11.
	Over gently rolling land, through scattered juniper.
30.70	Fence, bears NNE. and SSW.
31.80	Dirt road, 15 lks. wide, bears NNE. and SSW.
39.86	Point for the 1/4 sec. cor. of secs. 2 and 11, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R27E S 2 1/4 — S11 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
79.73	The cor. of secs. 2, 3, 10, and 11.
	<hr/> <p>N. 0°44' E., bet. secs. 2 and 3.</p>
	Over rolling grassland, through scattered juniper.
40.28	Point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R27E 1/4 S 3 S 2 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
80.96	The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., heretofore described.
	<hr/>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.47	<p>From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. T19N R27E S33 S34 S4 S3 T18N 1993.</p> <p>N. 1°38' W., bet. secs. 33 and 34.</p> <p>Descend steep NE. slope of the Puerco rim, over severely broken land, through dense juniper and piñon.</p> <p>Point for the 1/4 sec. cor. of secs. 33 and 34, at proportionate dist.; there is no remaining evidence of the original cor. The cor. falls on a very steep, eroded slope, where it is impractical to establish a permanent monument.</p> <p>From this point, the point selected for a witness cor., bears S. 74°18' E., 2.24 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a mound of stone, 10 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T19N R27E 1/4 S33 S34 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The witness cor. is located on a spur, bears N. and S.</p>
80.94	<p>Point for the cor. of secs. 27, 28, 33, and 34, at proportionate dist.; there is no remaining evidence of the original cor. The cor. falls on a very steep, eroded slope, where it is impractical to establish a permanent monument.</p> <p>From this point, the point selected for a witness cor., bears N. 80°20' E., 1.995 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T19N R27E S28 S27 ----- S33 S34 1994</p> </div>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>The witness cor. is located on a ridge, bears N. and S.</p> <hr/>
	<p>From the cor. of secs. 26, 27, 34, and 35.</p>
	<p>N. 88°47' W., bet. secs. 27 and 34.</p>
	<p>Over broken rolling land, through dense juniper and piñon.</p>
33.00	<p>Enter ravine, 100 ft. deep, bears N. and S.</p>
39.77	<p>Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate dist.; there is no remaining evidence of the original cor. The cor. falls on a very steep, eroded slope, where it is impractical to establish a permanent monument</p>
	<p>From this point, the point selected for a witness cor., bears S. 84°01' W., 1.90 chs. dist.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>WC T19N R27E S27 1/4 — S34 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
41.60	<p>Leave ravine, bears N. and S.</p>
56.00	<p>Fence, bears SSE. and NNW.</p>
62.00	<p>Descend into severely broken land.</p>
79.55	<p>The cor. of secs. 27, 28, 33, and 34.</p> <hr/>
	<p>N. 0°37' E., bet. secs. 27 and 28.</p>
	<p>Over broken land, through dense juniper.</p>
34.70	<p>Top of ridge, bears E. and W.; thence leave broken land, descend over rolling land, through dense juniper.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.46	<p>Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N R27E 1/4 S28 S27 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.92	<p>Point for the cor. of secs. 21, 22, 27, and 28, at proportionate dist.; there is no remaining evidence of the original cor. The cor. falls in a wash, where it is impractical to establish a permanent monument</p> <p>From this point, the point selected for a witness cor., bears S. 5°42' E., 1.18 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T19N R27E S21 S22 ----- S28 S27 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.</p> <p>The witness cor. is located on a spur, bears N. and S.</p> <hr/> <p>From the cor. of secs. 22, 23, 26, and 27.</p> <p>N. 88°31' W., bet. secs. 22 and 27.</p> <p>Over broken, rolling land, through moderate juniper.</p>
39.76	<p>Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate dist.; there is no remaining evidence of the original cor.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E S22 1/4 — S27 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, N. of the cor.</p>
79.52	<p>The cor. of secs. 21, 22, 27, and 28.</p> <hr/>
	<p>N. 1°17' E., bet. secs. 21 and 22.</p>
	<p>Over broken, rolling land, through moderate juniper.</p>
40.47	<p>Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E 1/4 S21 S22 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
41.50	<p>Enter gently rolling, cleared land, through scattered juniper.</p>
80.94	<p>The cor. of secs. 15, 16, 21, and 22, perpetuated by Lacy C. Greer, R.L.S. 5704, in 1963, monumented with a galvanized iron pipe, 2 1/2 ins. diam., 30 ins. long, firmly set, projecting 14 ins. above ground, with a brass cap, mkd. T19N R27E 16 15 21 22</p>
	<p>1963 Lacy C Greer ENG, with a juniper post, 42 x 4 x 4 ins., with faint markings on two sides, laying alongside. This is accepted as a careful and faithful perpetuation of the position of the original cor.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<div style="text-align: center;"> <table border="1"> <tr><td>T19N R27E</td><td></td></tr> <tr><td>S16</td><td>S15</td></tr> <tr><td colspan="2" style="text-align: center;">— —</td></tr> <tr><td>S21</td><td>S22</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe and the original post alongside the stainless steel post.</p> <p>Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.</p> <hr/> <p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>N. 88°16' W., bet. secs. 15 and 22.</p> <p>Over gently rolling, cleared land, through scattered juniper.</p>	T19N R27E		S16	S15	— —		S21	S22	1994	
T19N R27E											
S16	S15										
— —											
S21	S22										
1994											
39.98	<p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>										
79.96	<div style="text-align: center;"> <table border="1"> <tr><td>T19N R27E</td><td></td></tr> <tr><td>S15</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S22</td><td></td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 15, 16, 21, and 22.</p> <hr/> <p>N. 0°19' E., bet. secs. 15 and 16.</p> <p>Over gently rolling, cleared land, through scattered juniper.</p>	T19N R27E		S15		1/4	—	S22		1994	
T19N R27E											
S15											
1/4	—										
S22											
1994											
39.90	<p>Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.80	<p style="text-align: center;">T19N R27E 1/4 S16 S15 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 9, 10, 15, and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S 9 S10 ----- S16 S15 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 10, 11, 14, and 15.</p> <p>N. 88°49' W., bet. secs. 10 and 15.</p> <p>Over gently rolling, cleared land, through scattered juniper.</p>
40.14	<p>Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S10 1/4 — S15 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.28	<p>The cor. of secs. 9, 10, 15, and 16.</p> <hr/> <p>N. 0°42' W., bet. secs. 9 and 10.</p> <p>Over gently rolling, cleared land, through scattered juniper.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.90	<p>Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E 1/4 S 9 S10 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
40.00	<p>Top of ridge, bears ENE. and WSW., descend over rolling land.</p>
79.80	<p>Point for the cor. of secs. 3, 4, 9, and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S 4 S 3 ----- S 9 S10 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/>
40.05	<p>From the cor. of secs. 2, 3, 10, and 11.</p> <p>N. 89°21' W., bet. secs. 3 and 10.</p> <p>Over gently rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S 3 1/4 — S10 1994</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.11	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 3, 4, 9, and 10.</p> <hr/>
39.90	<p>N. 0°30' E., bet. secs. 3 and 4.</p> <p>Over rolling grassland, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E 1/4 S 4 S 3 1994</p>
79.93	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located 1 ch. W. of a track road, bears SE. and NW.</p> <p>The cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp., heretofore described.</p> <hr/>
40.11	<p>From the true point for the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., not monumented.</p> <p>From this point, the witness cor. bears N. 42°59' E., 1.50 chs. dist., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. WC T19N R27E S32 S33 S5 S4 T18N 1993.</p> <p>N. 1°28' W., bet. secs. 32 and 33.</p> <p>Over broken rolling land, through dense juniper and piñon.</p> <p>Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

BOOK 54 55

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R27E 1/4 S32 S33 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>The cor. is located on a ridge, bears SE. and NW.</p>
80.22	<p>Point for the cor. of secs. 28, 29, 32, and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E S29 S28 ----- S32 S33 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>The cor. is located on a spur, bears NNE.</p>
	<p>From this cor., Sleepy Hollow Well bears N. 21°42' E., 23.02 chs. dist.</p>
	<hr/> <p>From the true point for the cor. of secs. 27, 28, 33, and 34.</p>
	<p>N. 89°34' W., bet. secs. 28 and 33.</p>
	<p>Over severely broken land, through moderate juniper.</p>
40.13	<p>Point for the 1/4 sec. cor. of secs. 28 and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E S28 1/4 — S33 1994</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
46.90	Ridge, bears NE. and SW.
80.27	The cor. of secs. 28, 29, 32, and 33.
	<hr/>
	N. 0°37' E., bet. secs. 28 and 29.
	Over broken land, through moderate juniper.
40.10	Point for the 1/4 sec. cor. of secs. 28 and 29, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T19N R27E 1/4 S29 S28 1994 </div>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
80.20	Point for the cor. of secs. 20, 21, 28, and 29, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T19N R27E S20 S21 ----- S29 S28 1994 </div>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	<hr/>
	From the true point for the cor. of secs. 21, 22, 27, and 28.
	S. 89°55' W., bet. secs. 21 and 28.
	Over broken rolling land, through moderate juniper.
40.14	Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate dist.; there is no remaining evidence of the original cor.

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S21 1/4 — S28 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.28	<p>The cor. of secs. 20, 21, 28, and 29.</p> <hr/> <p>N. 0°52' E., bet. secs. 20 and 21.</p> <p>Over rolling land, through scattered juniper.</p>
40.10	<p>Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E 1/4 S20 S21 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.20	<p>Point for the cor. of secs. 16, 17, 20, and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S17 S16 — — S20 S21 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 15, 16, 21, and 22.</p>

BOOK 54 55

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.44	<p>S. 89°24' W., bet. secs. 16 and 21.</p> <p>Over rolling land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
80.88	<p style="text-align: center;">T19N R27E S16 1/4 — S21 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 16, 17, 20, and 21.</p> <hr/>
1.00	<p>N. 0°30' E., bet. secs. 16 and 17.</p> <p>Over rolling land, through scattered juniper.</p> <p>Wash, 50 lks. wide, 10 ft. deep, drains W.</p>
40.09	<p>Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
80.18	<p style="text-align: center;">T19N R27E 1/4 S17 S16 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 8, 9, 16, and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS						
	<div style="text-align: center;"> <table border="1"> <tr><td>T19N R27E</td></tr> <tr><td>S 8 S 9</td></tr> <tr><td>— —</td></tr> <tr><td>S17 S16</td></tr> <tr><td>1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/>	T19N R27E	S 8 S 9	— —	S17 S16	1994
T19N R27E						
S 8 S 9						
— —						
S17 S16						
1994						
40.30	<p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>S. 89°40' W., bet. secs. 9 and 16.</p> <p>Over rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>					
	<div style="text-align: center;"> <table border="1"> <tr><td>T19N R27E</td></tr> <tr><td>S 9</td></tr> <tr><td>1/4 —</td></tr> <tr><td>S16</td></tr> <tr><td>1994</td></tr> </table> </div>	T19N R27E	S 9	1/4 —	S16	1994
T19N R27E						
S 9						
1/4 —						
S16						
1994						
80.61	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 8, 9, 16, and 17.</p> <hr/>					
40.09	<p>N. 0°11' W., bet. secs. 8 and 9.</p> <p>Over gently rolling land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>					
	<div style="text-align: center;"> <table border="1"> <tr><td>T19N R27E</td></tr> <tr><td>1/4</td></tr> <tr><td>S 8 S 9</td></tr> <tr><td>1994</td></tr> </table> </div>	T19N R27E	1/4	S 8 S 9	1994	
T19N R27E						
1/4						
S 8 S 9						
1994						
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>					

ROOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
80.18	<p>Point for the cor. of secs. 4, 5, 8, and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T19N</td><td>R27E</td></tr> <tr><td>S 5</td><td> S 4</td></tr> <tr><td colspan="2">—</td></tr> <tr><td>S 8</td><td> S 9</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/>	T19N	R27E	S 5	S 4	—		S 8	S 9	1994	
T19N	R27E										
S 5	S 4										
—											
S 8	S 9										
1994											
	<p>From the cor. of secs. 3, 4, 9, and 10.</p> <p>S. 89°57' W., bet. secs. 4 and 9.</p> <p>Over gently rolling grassland, through scattered juniper.</p>										
39.45	Wash, 30 lks. wide, 6 ft. deep, drains N.										
39.93	<p>Point for the 1/4 sec. cor. of secs. 4 and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T19N</td><td>R27E</td></tr> <tr><td></td><td>S 4</td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td></td><td>S 9</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T19N	R27E		S 4	1/4	—		S 9	1994	
T19N	R27E										
	S 4										
1/4	—										
	S 9										
1994											
79.87	<p>The cor. of secs. 4, 5, 8, and 9.</p> <hr/> <p>N. 0°05' E., bet. secs. 4 and 5.</p> <p>Over gently rolling grassland.</p>										
40.09	<p>Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R27E 1/4 S 5 S 4 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
79.86	<p>The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp., heretofore described.</p> <hr/> <p>From the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. T19N R27E S31 S32 S6 S5 T18N 1993.</p> <p>from which bearing trees mkd. in 1993</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears N. 40 1/4° E., 180 1/2 lks. dist., mkd. T19N R27E S32 BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 80 3/4° E., 40 lks. dist., mkd. T18N R27E S5 BT.</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears S. 10 1/4° W., 360 1/2 lks. dist., mkd. T18N R27E S6 BT.</p> <p>N. 0°37' W., bet. secs. 31 and 32.</p> <p>Over rolling land, through dense juniper and piñon.</p>
40.23	<p>Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E 1/4 S31 S32 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.46	<p>Point for the cor. of secs. 29, 30, 31, and 32, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R27E</td></tr> <tr><td>S30</td><td>S29</td></tr> <tr><td>S31</td><td>S32</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of the cor.</p> <hr/>	T19N	R27E	S30	S29	S31	S32	1994			
T19N	R27E										
S30	S29										
S31	S32										
1994											
39.68	<p>From the cor. of secs. 28, 29, 32, and 33.</p> <p>N. 88°51' W., bet. secs. 29 and 32.</p> <p>Over rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>										
79.37	<div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R27E</td></tr> <tr><td colspan="2">S29</td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td colspan="2">S32</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 29, 30, 31, and 32.</p> <hr/>	T19N	R27E	S29		1/4	—	S32		1994	
T19N	R27E										
S29											
1/4	—										
S32											
1994											
39.92	<p>N. 88°58' W., bet. secs. 30 and 31.</p> <p>Over rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>										

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R27E S30 1/4 — S31 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
40.60	<p>Hogan Well Boulevard, pavement, 32 lks. wide, bears N. and S.</p>
79.02	<p>The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp., heretofore described.</p> <hr/>
	<p>From the cor. of secs. 29, 30, 31, and 32.</p>
	<p>N. 0°13' E., bet. secs. 29 and 30.</p>
	<p>Over rolling land, through moderate juniper.</p>
39.98	<p>Fence, bears E. and W.</p>
40.22	<p>Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 36 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E 1/4 S30 S29 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>from which</p>
	<p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears S. 45°00' E., 50.0 ft. dist., with cap mkd. RM T19N R27E 1/4 S29 50.0 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears S. 6°51' W., 49.1 ft. dist., with cap mkd. RM T19N R27E 1/4 S30 49.1 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>										
	<p>The cor. is located in a corral.</p>										
40.61	<p>Fence, bears E. and W.</p>										
80.44	<p>Point for the cor. of secs. 19, 20, 29, and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p>										
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T19N R27E</td> </tr> <tr> <td style="text-align: center;">S19</td> <td style="text-align: center;">S20</td> </tr> <tr> <td colspan="2" style="text-align: center;">— —</td> </tr> <tr> <td style="text-align: center;">S30</td> <td style="text-align: center;">S29</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table>	T19N R27E		S19	S20	— —		S30	S29	1994	
T19N R27E											
S19	S20										
— —											
S30	S29										
1994											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>										
	<hr/> <p>From the cor. of secs. 20, 21, 28, and 29.</p>										
	<p>N. 88°40' W., bet. secs. 20 and 29.</p>										
	<p>Over rolling land, through moderate juniper.</p>										
39.96	<p>Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate dist.; there is no remaining evidence of the original cor.</p>										
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T19N R27E</td> </tr> <tr> <td colspan="2" style="text-align: center;">S20</td> </tr> <tr> <td colspan="2" style="text-align: center;">1/4 —</td> </tr> <tr> <td colspan="2" style="text-align: center;">S29</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table>	T19N R27E		S20		1/4 —		S29		1994	
T19N R27E											
S20											
1/4 —											
S29											
1994											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>										
79.91	<p>The cor. of secs. 19, 20, 29, and 30.</p>										
	<hr/>										

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.04	<p>N. 89°13' W., bet. secs. 19 and 30.</p> <p>Over rolling land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S19 1/4 — S30 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
78.94	<p>The cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., heretofore described.</p>
40.22	<p>From the cor. of secs. 19, 20, 29, and 30.</p> <p>N. 0°20' E., bet. secs. 19 and 20.</p> <p>Over rolling land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E 1/4 S19 S20 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.44	<p>The cor. of secs. 17, 18, 19, and 20, monumented with an old imbedded mound of stone, 2 ft. base, 1/2 ft. high.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS													
	<div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R27E</td></tr> <tr><td>S18</td><td>S17</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S19</td><td>S20</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/>	T19N	R27E	S18	S17			S19	S20	1994			
T19N	R27E												
S18	S17												
S19	S20												
1994													
40.31	<p>From the cor. of secs. 16, 17, 20, and 21.</p> <p>N. 88°30' W., bet. secs. 17 and 20.</p> <p>Over rolling land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>												
80.63	<div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R27E</td></tr> <tr><td colspan="2" style="border-bottom: 1px solid black;"></td></tr> <tr><td colspan="2" style="border-bottom: 1px solid black;">S17</td></tr> <tr><td colspan="2" style="border-bottom: 1px solid black;">1/4 —</td></tr> <tr><td colspan="2" style="border-bottom: 1px solid black;">S20</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 17, 18, 19, and 20.</p> <hr/>	T19N	R27E			S17		1/4 —		S20		1994	
T19N	R27E												
S17													
1/4 —													
S20													
1994													
39.97	<p>N. 89°38' W., bet. secs. 18 and 19.</p> <p>Over rolling land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R27E</td></tr> <tr><td colspan="2" style="border-bottom: 1px solid black;"></td></tr> <tr><td colspan="2" style="border-bottom: 1px solid black;">S18</td></tr> <tr><td colspan="2" style="border-bottom: 1px solid black;">1/4 —</td></tr> <tr><td colspan="2" style="border-bottom: 1px solid black;">S19</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div>	T19N	R27E			S18		1/4 —		S19		1994	
T19N	R27E												
S18													
1/4 —													
S19													
1994													

BOOK 54 55

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
78.88	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., heretofore described.</p> <hr/>
39.77	<p>From the cor. of secs. 17, 18, 19, and 20.</p> <p>N. 0°35' E., bet. secs. 17 and 18.</p> <p>Over rolling grassland.</p> <p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N R27E 1/4 S18 S17 1994</p> </div>
79.54	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 7, 8, 17, and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N R27E S 7 S 8 ----- S18 S17 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/>
40.24	<p>From the cor. of secs. 8, 9, 16, and 17.</p> <p>N. 88°58' W., bet. secs. 8 and 17.</p> <p>Over rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S 8 1/4 — S17 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
80.48	<p>The cor. of secs. 7, 8, 17, and 18.</p> <hr/> <p>S. 89°56' W., bet. secs. 7 and 18.</p> <p>Over gently rolling grassland.</p>
40.26	<p>Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S 7 1/4 — S18 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
79.17	<p>The cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp., heretofore described.</p> <hr/> <p>From the cor. of secs. 7, 8, 17, and 18.</p> <p>N. 0°03' W., bet. secs. 7 and 8.</p> <p>Over gently rolling grassland.</p>
39.77	<p>Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.54	<p style="text-align: center;">T19N R27E 1/4 S 7 S 8 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 5, 6, 7, and 8, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S 6 S 5 ----- S 7 S 8 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
40.14	<p>From the cor. of secs. 4, 5, 8, and 9.</p> <p>N. 89°26' W., bet. secs. 5 and 8.</p> <p>Over gently rolling grassland.</p> <p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S 5 1/4 — S 8 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.</p>
80.29	<p>The cor. of secs. 5, 6, 7, and 8.</p>

BOOK 5455

Dependent Resurvey of the Subdivisional Lines
T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.02	<p>S. 89°54' W., bet. secs. 6 and 7.</p> <p>Over gently rolling grassland.</p> <p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
78.61	<p style="text-align: center;">T19N R27E S 6 1/4 — S 7 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 1, 6, 7, and 12, on the W. bdy., heretofore described.</p> <hr/>
39.77	<p>From the cor. of secs. 5, 6, 7, and 8.</p> <p>N. 0°18' E., bet. secs. 5 and 6.</p> <p>Over gently rolling grassland.</p> <p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
79.46	<p style="text-align: center;">T19N R27E 1/4 S 6 S 5 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., heretofore described.</p> <hr/>

BOOK 5455

T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	GENERAL DESCRIPTION
	<p data-bbox="412 321 1382 415">Township 19 North, Range 27 East is located approximately 40 miles northeast of Holbrook, Az., and 6 miles southeast of Navajo, Az.</p> <p data-bbox="412 447 1446 604">The terrain consists of rolling land with stands of juniper forests in the southern and central regions. The Puerco Rim roughly follows the southern boundary of the township, with severely broken land in sections 27, 28, 33, and 34. The average elevation is 6000 feet above sea level.</p> <p data-bbox="412 636 1446 699">All drainage within the township is northerly from the Puerco Rim toward the Puerco River.</p> <p data-bbox="412 730 1446 825">Access is provided by Navajo Springs Road in the northern portion of the township, a county road along the west boundary, several housing cluster roads, and numerous track roads.</p> <p data-bbox="412 856 1446 951">There are several housing clusters in the southwest and northwest portions. The remainder of the township is used for grazing and wood cutting.</p> <p data-bbox="412 982 1446 1045">The mean magnetic declination is 13 1/2° E., as shown on U.S.G.S. Quadrangle, "NAVAJO SPRINGS, ARIZ.", 1972 edition.</p> <hr data-bbox="412 1077 1430 1081"/>

BOOK 5455

T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

The following information is provided for informational purposes only and is not to be used in the restoration of lost corners.

The geographic positions of the following points were determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. U.S. Coast and Geodetic Survey triangulation stations "BEACON 54B ECC 1936" and "DEAD 1936" were used as the control stations.

Station	Latitude	Longitude	
NE. Tp. Cor.	35°04'53.37" N.	109°25'01.33" W.	NAD 27
SW. Tp. Cor.	34°59'42.94" N.	109°31'24.56" W.	NAD 27
NW. Tp. Cor.	35°04'55.48" N.	109°31'22.57" W.	NAD 27
Cor. of secs. 13, 18, 19, and 24 on the W. bdy.	35°02'19.90" N.	109°31'23.67" W.	NAD 27
Cor. of secs. 7, 12, 13, and 18 on the W. bdy.	35°03'11.43" N.	109°31'23.25" W.	NAD 27
Cor. of secs. 1, 6, 7, and 12 on the W. bdy.	35°04'03.29" N.	109°31'22.88" W.	NAD 27
Cor. of secs. 3, 4, 33, and 34 on the N. bdy.	35°04'55.06" N.	109°28'12.83" W.	NAD 27
Cor. of secs. 4, 5, 32, and 33 on the N. bdy.	35°04'54.98" N.	109°29'16.68" W.	NAD 27

BOOK 5455

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Geoffrey A. Graham	Surveying Technician
Robert J. Lyle	Surveying Technician
Jack E. Arend	Surveying Aid
Jimmie James, Jr.	Surveying Aid
Michael Searles	Surveying Aid

BOOK 5455

CERTIFICATE OF SURVEY

I, William P. Carpender, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 12th day of January, 1987, and Supplemental Special Instructions bearing date of the 29th day of February, 1988, I have dependently resurveyed the west and north boundaries and the subdivisional lines of Township 19 North, Range 27 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

JANUARY 29, 1996
(Date)

William P. Carpender
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of the west and north boundaries and the subdivisional lines of Township 19 North, Range 27 East, Gila and Salt River Meridian, Arizona, executed by William P. Carpender, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

JAN 31 1996
(Date)

Dennis R. McKay
(Acting Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 19 N., R. 27 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Acting Chief Cadastral Surveyor of Arizona)~~