

## ORIGINAL

1

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD NOTES  
OF THE

---

DEPENDENT RESURVEY OF A PORTION OF

---

THE SOUTH AND EAST BOUNDARIES

---

AND A PORTION OF THE SUBDIVISIONAL LINES,

---

THE SUBDIVISION OF SECTIONS 28 AND 34,

---

AND THE METES-AND-BOUNDS SURVEY

---

OF THE

---

MOUNT TIPTON WILDERNESS AREA BOUNDARY

---

IN TOWNSHIP 26 NORTH, RANGE 18 WEST

---

Of the Gila and Salt River Meridian,  
In the State of Arizona

EXECUTED BY

Robert C. Umbanhowar

Cadastral Surveyor

---

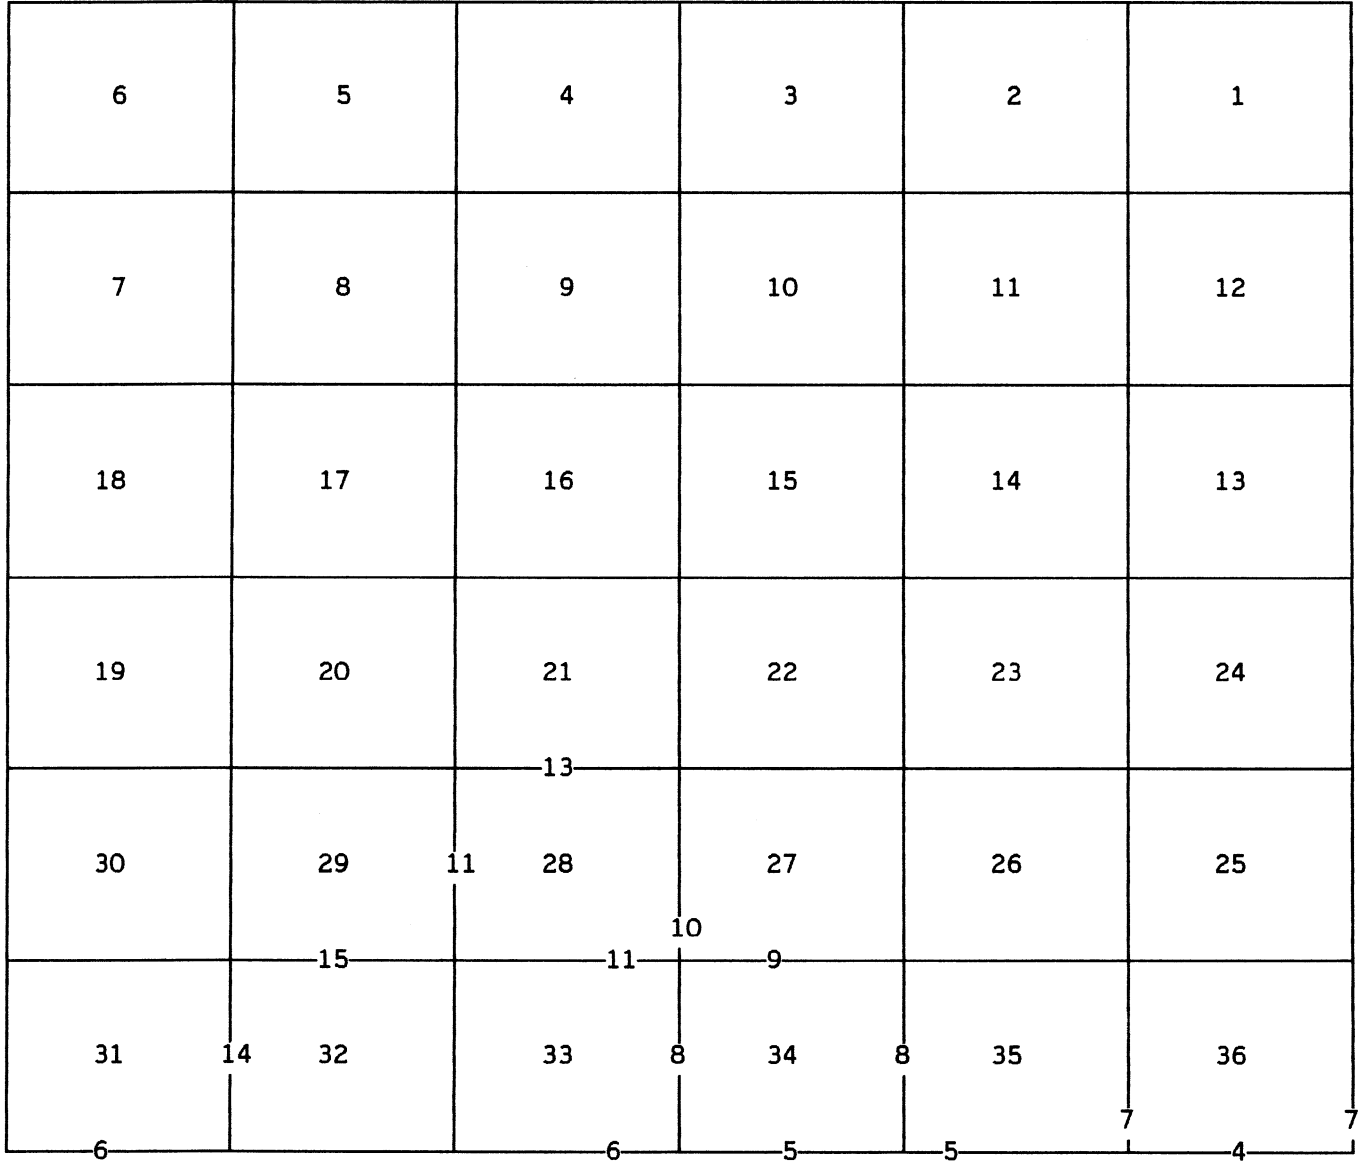
Under Special Instructions dated April 8, 1994, approved April 8, 1994, which provided for the surveys included under Group Number 770, and assignment instructions dated October 3, 1994.

Survey Commenced October 5, 1994

Survey Completed December 13, 1994

INDEX DIAGRAM

TOWNSHIP 26 NORTH, RANGE 18 WEST,



Subdivision of Sec. 28      pp. 15-18  
 Subdivision of Sec. 34      pp. 18-19  
 Metes-and-Bounds Survey MTWA      pp. 19-35

## T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

## CHAINS

The following field notes describe the dependent resurvey of a portion of the south and east boundaries and a portion of the subdivisional lines, the subdivision of sections 28 and 34, and the metes-and-bounds survey of Mount Tipton Wilderness Area Boundary, in Township 26 North, Range 18 West, Gila and Salt River Meridian, Arizona.

The history of surveys pertaining to this survey is as follows: The exterior boundaries were surveyed by C. Burton Foster, in 1874. The east boundary was resurveyed by Jesse B. Wright, in 1912. The north, south and west boundaries were resurveyed by H. G. Bardsley, in 1915. The subdivisional lines were surveyed by H. G. Bardsley and Royston C. Durnford, in 1915.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated April 8, 1994, for Group No. 770, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Pentax PTS-iii05 total station instruments.

The geographic position of the cor. of Townships 25 and 26 North, Ranges 18 and 19 West, was determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. United States Geological Survey triangulation station "MILLER 1958" was used as the control station. The elevation and coordinates refer to the top of the monument.

Elevation	Latitude	Longitude
3778 ft.	35°35'22.890" N.	114°15'19.390" W. NAD27

The mean magnetic declination, as taken from quadrangle map MT. TIPTON, ARIZ., published in 1968 by U.S. Geological Survey, is 15° E.

Dependent Resurvey of a Portion of the S. Bdy.,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the resurvey executed by H. G. Bardsley, in 1915</p> <hr style="width: 20%; margin: auto;"/>
	<p>Beginning at the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W., monumented with an iron post, 3 ins. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 2 1/2 ft. base, 1 ft. high, with brass cap mkd. T26N S36 S31 R18W R17W S1 S6 T25N 1912.</p>
	<p>Add the marks 1994 to the brass cap.</p>
	<p>S. 89°59' W., bet. secs. 1 and 36, on the S. bdy. of the Tp.</p>
10.92	<p>Point for AP 4, sec. 36, identical with AP 1, sec. 1, T. 25 N., R. 18 W., on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
28.49	<p>Point for AP 5, sec. 36, identical with AP 3, sec. 1, T. 25 N., R. 18 W., on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
39.97	<p>Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T26N R18W S36 1/4 ————— S1 T25N 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
63.44	<p>Point for AP 11, sec. 36, identical with AP4, sec. 1, T. 25 N., R. 18 W., on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
67.46	<p>Point for AP 12, sec. 36, identical with AP 6, sec. 1, T. 25 N., R. 18 W., on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>

Dependent Resurvey of a Portion of the S. Bdy.,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
79.94	<p>The cor. of secs. 1, 2, 35 and 36, monumented with an iron post, 3 ins. diam., firmly set, projecting 24 ins. above the ground, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with a mound of stone, 4 ft. base, 2 ft. high, to the W., with brass cap mkd. T26N R18W S35 S36 S2 S1 T25N 1915.</p> <p>Add the marks 1994 to brass cap.</p> <hr/>
39.98	<p>S. 89°59' W., bet. secs. 2 and 35, along the Mount Tipton Wilderness Area Bdy.</p> <p>The 1/4 sec. cor. of secs. 2 and 35, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, with brass cap mkd. 1/4 S35 S2 1915.</p> <p>Add the marks T26N R18W T25N 1994 to the brass cap.</p> <hr/>
40.02	<p>S. 89°59' W., beginning new measurement.</p> <p>The cor. of secs. 2, 3, 34 and 35, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, encircled with a collar of stone, and a mound of stone, 3 ft. base, 2 ft. high, to the W., with brass cap mkd. T26N R18W S34 S35 S3 S2 T25N 1915.</p> <p>Add the marks 1994 to the brass cap.</p> <hr/>
40.11	<p>From the 1/4 sec. cor. of secs. 3 and 34, monumented with an iron post, 1 in. diam., loosely set, projecting 18 ins. above a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S34 S3 1915.</p> <p>Add the marks T26N R18W T25N 1994 to the brass cap.</p> <p>Rebuild mound of stone, 3 ft. base, to top.</p> <p>S. 89°59' W., bet. secs. 3 and 34.</p>
40.11	<p>Point for the cor. of secs. 3, 4, 33 and 34, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the S. Bdy.,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS											
	<div style="text-align: center;"> <table border="1"> <tr><td>T26S</td><td>R18W</td></tr> <tr><td>S33</td><td>S34</td></tr> <tr><td>S4</td><td>S3</td></tr> <tr><td>T25N</td><td></td></tr> <tr><td>1994</td><td></td></tr> </table> </div> <p>Found a basalt stone, 24 x 12 x 8 ins., mkd. with 3 grooves on a face and 3 grooves on opposite face, laying loose in nearby rock slide.</p> <p>Deposit the stone in the mound of stone. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>S. 89°59' W., bet. secs. 4 and 33.</p>	T26S	R18W	S33	S34	S4	S3	T25N		1994	
T26S	R18W										
S33	S34										
S4	S3										
T25N											
1994											
40.11	<p>The 1/4 sec. cor. of secs. 4 and 33, monumented with an iron post, 1 in. diam., loosely set, projecting 36 ins. above the ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. 1/4 S33 S4 1915.</p> <p>Add the marks T26N R18W T25N 1994 to the brass cap.</p> <p>Rebuild supporting mound of stone, 4 ft. base, to top.</p> <hr/> <p>From the cor. of secs. 5, 6, 31 and 32, monumented with an iron post, 3 ins. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 3 ft. base, 1 ft. high, with a mound of stone, 3 ft. base, 1 ft. high, to the W., with brass cap mkd. T26N R18W S31 S32 S6 S5 T25N 1915.</p> <p>Add the marks 1994 to the brass cap.</p> <p>N. 89°32' W., bet. secs. 6 and 31, along the Mount Tipton Wilderness Area Bdy.</p>										
39.58	<p>The 1/4 sec. cor. of secs. 6 and 31, monumented with an iron post, 1 in. diam., loosely set, projecting 36 ins. above the ground, in a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S31 S6 1915.</p> <p>Add the marks T26N R18W T25N 1994 to the brass cap.</p> <p>Rebuild supporting mound of stone, 4 ft. base, to top.</p> <hr/> <p>S. 89°24' W., beginning new measurement.</p>										

Dependent Resurvey of a Portion of the S. Bdy.,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
25.29	Point for AP 1, sec. 6, T. 25 N., R. 18 W., as described in the field notes of the concurrent survey of the metes-and-bounds survey of the Mount Tipton Wilderness Area Bdy., T. 25 N., R. 18 W.
40.30	<p>The cor. of Tps. 25 and 26 N., Rs. 18 and 19 W., monumented with an iron post, 3 ins. diam., firmly set, projecting 9 ins. above ground, with a mound of stone, 2 ft. base, 1 ft. high, to the N., with brass cap mkd. T26N R19W R18W S36 S31 S1 S6 1915.</p> <p>Add the marks 1994 to the brass cap.</p>
<p>Dependent Resurvey of a Portion of the E. Bdy., T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona</p>	
<p>Restoring the resurvey executed by Jesse B. Wright, in 1912</p>	
<p>From the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W., hereinbefore described.</p> <p>N. 0°02' W., bet. secs. 31 and 36, on the E. bdy. of the Tp., along the Mount Tipton Wilderness Area Bdy.</p>	
10.82	<p>Point for AP 1, sec. 36, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
40.17	<p>The 1/4 sec. cor. of secs. 31 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 29 ins. above ground, in a mound of stone, 2 1/2 ft. base, 2 ft. high, with brass cap mkd. 1/4 S36 S31 1912.</p> <p>Add the marks T26N R18W R17W 1994 to the brass cap.</p>
<p>Dependent Resurvey of a Portion of the Subdivisional Lines, T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona</p>	
<p>Restoring the survey executed by H. G. Bardsley and Royston C. Durnford, 1915</p>	
<p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., hereinbefore described.</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 0°04' W., bet. secs. 35 and 36, along the Mount Tipton Wilderness Area Bdy.</p>
2.715	<p>Point for AP 13, sec. 36, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
	<p>Leave the Mount Tipton Wilderness Area Bdy.</p>
39.99	<p>The 1/4 sec. cor. of secs. 35 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 2 ft. base, 1 ft. high, with a mound of stone, 3 ft. base, 2 1/2 ft. high, to the W., with brass cap mkd. 1/4 S35 S36 1915.</p> <p>Add the marks T26N R18W 1994 to the brass cap.</p> <hr/>
	<p>From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., hereinbefore described.</p>
	<p>N. 0°10' W., bet. secs. 34 and 35, along the Mount Tipton Wilderness Area Bdy.</p>
40.00	<p>The 1/4 sec. cor. of secs. 34 and 35, monumented with an iron post, 1 in. diam., loosely set, projecting 36 ins. above ground, in a mound of stone, 1 1/2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S34 S35 1915.</p> <p>Add the marks T26N R18W 1994 to the brass cap.</p> <p>Rebuild supporting mound of stone, 4 ft. base, to top.</p> <hr/>
	<p>North, beginning new measurement.</p>
40.00	<p>The cor. of secs. 26, 27, 34 and 35, monumented with an iron post, 2 ins. diam., firmly set, projecting 26 ins. above ground, in a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, with brass cap mkd. T26N R18W S27 S26 S34 S35 1915.</p> <p>Add the marks 1994 to the brass cap.</p> <hr/>
	<p>From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described.</p>
	<p>N. 0°09' W., bet. secs. 33 and 34.</p>
39.99	<p>Point for the 1/4 sec. cor. of secs. 33 and 34, at record dist. from the cor. of secs. 27, 28, 33 and 34; there is no remaining evidence of the original cor.</p>



Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, in a supporting mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W 1/4 S33   S34 1994</p> </div> <p>from which</p> <p style="padding-left: 40px;">A boulder, 4 1/2 x 4 1/2 x 2 1/2 ft. high, projecting from the W. face of a conglomerate cliff, bears N. 52° E., 76 lks. dist., mkd. X BO on the SW face.</p> <p style="padding-left: 40px;">A boulder, 4 x 3 x 3 ft. high, bears S. 40 3/4° E., 25 lks. dist., mkd. X BO on the NW face.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
66.06	<p>Point for AP 1, sec. 33 on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
79.99	<p>The cor. of secs. 27, 28, 33 and 34, monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above ground, with brass cap mkd. T26N R18W S28 S27 S33 S34 1915.</p> <p>Add the marks 1994 to the brass cap.</p> <hr/>
40.03	<p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>S. 89°50' W., bet. secs. 27 and 34, along the Mount Tipton Wilderness Area Bdy.</p> <p>The 1/4 sec. cor. of secs. 27 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S27 S34 1915.</p> <p>Add the marks T26N R18W 1994 to the brass cap.</p> <p>Rebuild supporting mound of stone, 4 ft. base, to top.</p> <hr/>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
20.04	<p>N. 89°54' W., beginning new measurement.</p> <p>Point for the W. 1/16 sec. cor. of secs. 27 and 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W S27 W 1/16 — S34 1994</p> <p>from which</p> <p style="padding-left: 40px;">A rock cliff, 66 ft. x 18 ft. high, bears N. 12 1/4° E., 35 lks. dist., mkd. X BO on the S. face.</p> <p style="padding-left: 40px;">A boulder, 12 x 6 x 3 ft. high, bears N. 64 3/4° W., 44 lks. dist., mkd. X BO on the SE face.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
40.08	<p>The cor. of secs. 27, 28, 33 and 34.</p> <hr/>
20.12	<p>N. 0°07' W., bet. secs. 27 and 28.</p> <p>Point for the S. 1/16 sec. cor. of secs. 27 and 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W S 1/16 S28   S27 1994</p> <p>from which</p> <p style="padding-left: 40px;">A rock outcrop, 8 ft. x 10 ft. high, bears N. 24 3/4° E., 94 lks. dist., mkd. X BO on the S. face.</p> <p style="padding-left: 40px;">A boulder, 12 x 5 x 5 ft. high, bears S. 75 1/4° E., 166 lks. dist., mkd. X BO on the W face.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
40.24	<p>The 1/4 sec. cor. of secs. 27 and 28, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. 1/4 S27 S28 1915.</p> <p>Add the marks T26N R18W 1994 to the brass cap.</p> <hr/>
	From the cor. of secs. 27, 28, 33 and 34.
	S. 89°58' W., bet. secs. 28 and 33.
16.70	<p>Point for AP 4, sec. 33, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
20.01	<p>Point for the E. 1/16 sec. cor. of secs. 28 and 33.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T26N R18W S28 E 1/16 — S33 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
40.02	<p>The 1/4 sec. cor. of secs. 28 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a scattered mound of stone, with brass cap mkd. 1/4 S28 S33 1915.</p> <p>Rebuild mound of stone, 3 ft. base, to top.</p> <p>Add the marks T26N R18W 1994 to the brass cap.</p> <hr/>
	<p>From the cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above the ground, with brass cap mkd. T26N R18W S29 S28 S32 S33 1915.</p>
	Add the marks 1994 to the brass cap.

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on a moderately steep E. facing slope.</p> <p>N. 0°01' W., bet. secs. 28 and 29, along the Mount Tipton Wilderness Area Bdy.</p>
40.11	<p>The 1/4 sec. cor. of secs. 28 and 29, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above the ground, in a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S29 S28 1915.</p> <p>Add the marks T26N R18W 1994 to the brass cap.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
	<p>Cor. is located 45 lks. E. of center line of graded road, 10 ft. wide, bears W. and 45 lks. S. of graded road, 10 ft. wide, bears N.</p>
	<hr/> <p>N. 0°06' W., beginning new measurement.</p>
40.13	<p>The cor. of secs. 20, 21, 28 and 29, monumented with a well imbedded collar of stone, falls in the intersection of bladed roads. This position is harmoniously related to existing original cors., has been accepted as the position by local survey, and therefore is accepted as the best available evidence of the original cor.</p> <p>At the cor. point</p> <p>Set a Number 5 iron reinforcing bar, 13 ins. long, 5/8 in. diam. 20 ins. in the ground.</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, encircled with a collar of stone, for a reference monument, bears N. 42°35' E., 30.1 ft. dist., with cap mkd. RM T26N R18W S21 30.1 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 18 ins. in the ground, in a mound of stone, 2 1/2 ft. base to top, for a reference monument, bears N. 44°09' W., 41.3 ft. dist., with cap mkd. RM T26N R18W S20 41.3 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Found original monument, an iron post, 36 ins. long, 2 ins. diam., with brass cap mkd. T26N R18W S20 S21 S28 S29 1915, lying NW of cor. approximately 1 ch. dist.</p> <p>Deposit a section of the original iron post, 4 ins. long, with cap inverted alongside the reinforcing bar.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the reinforcing bar.</p> <p>Cor. is located in the intersection of bladed roads, 13 ft. wide, bears N., S., E., and W.</p> <hr/> <p>From the cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2 ins. diam. firmly set, projecting 18 ins. above ground, with brass cap mkd. T26N R18W S21 S22 S28 S27 1915.</p> <p>Add the marks 1994 to brass cap.</p> <p>Build mound of stone, 3 ft. base, to top.</p> <p>S. 89°56' W., bet. secs. 21 and 28.</p>
39.96	<p>The 1/4 sec. cor. of secs. 21 and 28, monumented with a collar of stone. This position is harmoniously related to existing original cors., has been accepted as the position by local survey, and therefore is accepted as the best available evidence of the orig. cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S21 1/4 ——— S28 1994</p> </div> <p>Found original monument, an iron post, 36 ins. long, 1 in. diam., with brass cap mkd. 1/4 S21 S28 1915, lying NNW of cor. approximately 20 lks. dist.</p> <p>Deposit a section of the original iron post, 2 ins. long, with cap inverted alongside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>from which</p>
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, encircled with a collar of stone, for a reference monument, bears S. 45°58' E., 39.5 ft. dist., with cap mkd. RM T26N R18W S28 39.5 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 16 ins. in the ground, in a supporting mound of stone, 3 ft. base, to top, for a reference monument, bears S. 20°24' W., 24.9 ft. dist., with cap mkd. RM T26N R18W S28 24.9 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Cor. is located 15 lks. S. of the intersection of bladed roads, 13 ft. wide, bears N., E., and W.</p>
	<p>S. 89°56' W., beginning new measurement.</p>
39.95	<p>The cor. of secs. 20, 21, 28 and 29.</p>
	<p>From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., hereinbefore described.</p>
	<p>N. 0°03' E., bet. secs. 31 and 32, along the Mount Tipton Wilderness Area Bdy.</p>
39.89	<p>The 1/4 sec. cor. of secs. 31 and 32, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, with a mound of stone, 3 ft. base, 2 ft. high, to the W., with cap erroneously mkd. 1/4 S32 S33 1915.</p>
	<p>Remark the brass cap to read T26N R18W 1/4 S31 S32 1994 1915.</p>
	<p>N. 0°09' W., beginning new measurement.</p>
40.03	<p>The cor. of secs. 29, 30, 31 and 32, monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. T26N R18W S30 S29 S31 S32 1915.</p>
	<p>Add the marks 1994 to the brass cap.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on a steep N. facing slope.</p> <hr/>
	<p>From the cor. of secs. 28, 29, 32 and 33.</p>
	<p>S. 89°43' W., bet. secs. 29 and 32, along the Mount Tipton Wilderness Area Bdy.</p>
39.99	<p>The 1/4 sec. cor. of secs. 29 and 32, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 4 ft. base, 1 ft. high, with brass cap mkd. 1/4 S29 S32 1915.</p>
	<p>Add the marks T26N R18W 1994 to the brass cap.</p>
	<p>Rebuild mound of stone, 4 ft. base, to top.</p>
	<p>Cor. is located on a N. facing slope.</p> <hr/>
	<p>N. 89°39' W., beginning new measurement.</p>
39.88	<p>The cor. of secs. 29, 30, 31 and 32.</p> <hr/>
	<p style="text-align: center;">Subdivision of Section 28, T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 28 and 33.</p>
	<p>N. 0°01' E., on the N. and S. center line of sec. 28, along the Mount Tipton Wilderness Area Bdy.</p>
20.04	<p>Point for the center S. 1/16 sec. cor. of sec. 28.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T26N R18W C S1/16   S28 C 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Leave the Mount Tipton Wilderness Area Bdy.</p>

Subdivision of Section 28,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
30.66	Point for AP 3, sec. 28, on the Mount Tipton Wilderness Area Bdy., hereinafter described.
40.08	Point for the center 1/4 sec. cor. of sec. 28, at intersection with the E. and W. center line of sec. 28
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.
	T26N R18W
	C 1/4 S28
	1994
	Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, 1 lk. W. of cor.
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
80.09	The 1/4 sec. cor. of secs. 21 and 28.
	From the 1/4 sec. cor. of secs. 27 and 28.
	S. 89°45' W., on the E. and W. center line of sec. 28.
19.96	Point for the center E. 1/16 sec. cor. of sec. 28.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, in a supporting mound of stone, 3 ft. base, to top, with brass cap mkd.
	T26N R18W
	E 1/16
	C ————— C
	S28.
	1994
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
39.92	The center 1/4 sec. cor. of sec. 28.
49.83	Point for AP 6, sec. 28, on the Mount Tipton Wilderness Area Bdy., hereinafter described.
79.33	Point for AP 21, sec. 28, on the Mount Tipton Wilderness Area Bdy., hereinafter described.



Subdivision of Section 28,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
79.79	<p>Thence along the Mount Tipton Wilderness Area Bdy. The 1/4 sec. cor. of secs. 28 and 29.</p> <hr/>
20.08	<p style="text-align: center;">SE 1/4</p> <hr style="width: 20%; margin: auto;"/> <p>From the E. 1/16 sec. cor. of secs. 28 and 33. N. 0°03' W., on the N. and S. center line of the SE 1/4 of sec. 28. Point for the SE 1/16 sec. cor. of sec. 28, at intersection with the E. and W. center line of the SE 1/4 of sec. 28. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, in a supporting mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W SE 1/16 S28 1994</p> <p>from which</p> <p style="padding-left: 40px;">A boulder, 5 x 4 x 6 ft. high, bears N. 50 1/4° E., 123 lks. dist., mkd. X B0 on the SE face. A boulder, 4 x 3 x 1 1/2 ft. high, bears N. 24 3/4° W., 94 lks. dist., mkd. X B0 on the S. face ,</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.16	<p>The center E. 1/16 sec. cor. of secs. 28.</p> <hr/> <p>From the S. 1/16 sec. cor. of secs. 27 and 28. S. 89°51' W., on the E. and W. center line of SE 1/4 of sec. 28.</p>
19.98	<p>The SE 1/16 sec. cor. of sec. 28.</p>
33.62	<p>Point for AP 1, sec. 28, on the Mount Tipton Wilderness Area Bdy., hereinafter described. Thence along the Mount Tipton Wilderness Area Bdy.</p>

Subdivision of Section 28,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
39.96	The center S. 1/16 sec. cor. of sec. 28.
<hr/> Subdivision of Section 34, T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona <hr/>	
40.00	<p>From the 1/4 sec. cor. of secs. 3 and 34, on the S. bdy. of the Tp.</p> <p>N. 0°09' W., on the N. and S. center line of sec. 34.</p> <p>Point for the center 1/4 sec. cor. of sec. 34, at intersection with E. and W. center line of sec. 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W C 1/4 S34 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.90	The 1/4 sec. cor. of secs. 27 and 34.
<hr/> From the 1/4 sec. cor. of secs. 34 and 35. <hr/>	
39.92	S. 89°59' W., on the E. and W. center line of sec. 34.
59.97	The center 1/4 sec. cor. of sec. 34.
59.97	<p>Point for the center W. 1/16 sec. cor. of sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 13 ins. in the ground, in a supporting mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W W 1/16 C ——— C S34 1994</p>

Subdivision of Section 34,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>from which</p> <p style="padding-left: 40px;">A boulder, 4 x 3 x 2 ft. high, bears N. 15 1/2° E., 26 lks. dist., mkd. X BO.</p> <p style="padding-left: 40px;">A boulder, 3 x 3 1/2 x 1 1/2 ft. high, bears N. 65 3/4° E., 67 lks. dist., mkd. X BO.</p> <p>Cor. is located 104 lks. SSW of the cor. of barbed wire fence, 5 strand, bears W and NE.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
80.02	<p>The 1/4 sec. cor. of secs. 33 and 34.</p> <hr/> <p style="text-align: center;">NW 1/4</p> <hr style="width: 20%; margin: auto;"/> <p>From the center W. 1/16 sec. cor. of sec. 34</p> <p>N. 0°09' W., on the N. and S. center line of the NW 1/4 of sec. 34, along the Mount Tipton Wilderness Area Bdy.</p>
39.95	<p>The W. 1/16 sec. cor. of sec. 34.</p> <hr/> <p style="text-align: center;">Metes-and-Bounds Survey of the Mount Tipton Wilderness Area Boundary, T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">In Sec. 36</p> <hr style="width: 20%; margin: auto;"/> <p>From the point for AP 1, sec. 36, on the E. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> <p>T26N R18W R17W S36   S31 /   AP1 MTWA 1994</p> </div>




Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <p>From this cor. point, the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W., bears S. 0°02' E., 10.82 chs. dist., hereinbefore described.</p> <p>Cor. is located 61 lks. S. of trail road, bears NE and SSW.</p> <p>S. 37°30' W., on line 1-2.</p>
<p>2.04</p>	<p>Point for AP 2, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div data-bbox="808 808 1023 997" style="text-align: center;"> <p>T26N R18W</p> <p>S36 / AP2 MTWA</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 63°52' W., on line 2-3.</p>
<p>4.14</p>	<p>Point for AP 3, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div data-bbox="836 1375 1023 1564" style="text-align: center;"> <p>T26N R18W</p> <p>S36 / AP3 MTWA</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 38°55' W., on line 3-4.</p>
<p>9.48</p>	<p>Point for AP 4, sec. 36, identical with AP 1, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.</p>




Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 80 lks. S. of S. bank of wash, 3 chs. wide, drains NE.</p> <p>From this cor. point, the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W., bears N. 89°59' E., 10.92 chs. dist., hereinbefore described.</p>
<p>7.67</p>	<p>From the point for AP 5, sec. 36, identical with AP 3, sec. 1, T. 25 N., R. 18 W., on S. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 11 ins. in the ground, in a supporting mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., bears S. 89°59' W., 11.48 chs. dist., hereinbefore described.</p> <p>N. 77°50' W., on line 5-6.</p> <p>Point for AP 6, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T26N R18W S36</p>  <p style="text-align: center;">AP6 MTWA 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>S. 82°22' W., on line 6-7.</p>
4.67	<p>Point for AP 7, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W S36</p>  <p style="text-align: center;">AP7 MTWA 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 72°31' W., on line 7-8.</p>
5.46	<p>Point for AP 8, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W S36</p>  <p style="text-align: center;">AP8 MTWA 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>S. 85°24' W., on line 8-9.</p>
7.62	<p>Point for AP 9, sec. 36.</p>

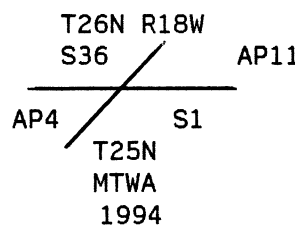Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S36</p>  <p>AP9 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 79°58' W., on line 9-10.</p>
<p>4.46</p>	<p>Point for AP 10, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S36</p>  <p>AP10 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 63°30' W., on line 10-11.</p>
<p>6.30</p>	<p>Point for AP 11, sec. 36, identical with AP 4, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, in a supporting mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S36</p>  <p>AP11 S1 T25N MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>From this cor. point, the 1/4 sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., bears N. 89°59' E., 23.47 chs. dist., hereinbefore described.</p> <hr/> <p>From the point for AP 12, sec. 36, identical with AP 6, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W              AP12                      S36              S1                      AP6              MTWA              T25N              1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp, bears S. 89°59' W., 12.48 chs. dist., hereinbefore described.</p> <p>N. 77°45' W., on line 12-13.</p> <p>12.77      Point for AP 13, on the line bet. secs. 35 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W              S35                      S36              AP13              MTWA              1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 1 ch. S. of right bank of wash, 1 ch. wide, 10 ft. deep, drains NNE, and 3 chs. S. of right bank of wash, 3 chs. wide, 10 ft. deep, drains E.</p>
--------	---



Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona


CHAINS	<p>From this cor. point, the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp, bears S. 0°04' E., 2.715 chs. dist., hereinbefore described.</p> <hr/> <p style="text-align: center;">In Sec. 33</p> <hr style="width: 20%; margin: auto;"/> <p>From the point for AP 1, sec. 33, on the line bet. secs. 33 and 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <p>Cor. is located 64 lks. S. of trail road, bears SE and NW.</p> <p>From this cor. point, the cor. of secs. 27, 28, 33 and 34, bears N. 0°09' W., 13.93 chs. dist., hereinbefore described.</p> <p>N. 48°19' W., on line 1-2.</p> <p>10.07 Point for AP 2, sec. 33.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 61 lks. S. of trail road, bears SE and NNW.</p> <hr/> <p>N. 45°41' W., on line 2-3.</p>
--------	---

Metes-and-Bounds Survey of the  
Mount Tipton Wilderness Area Boundary,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.04	<p>Point for AP 3, sec. 33.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div data-bbox="812 451 1071 651" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <p>Cor. is located 61 lks. S. of trail road, bears SE and NNW.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 55°13' W., on line 3-4.</p>
7.71	<p>Point for AP 4, sec. 33, on the line bet. secs. 28 and 33.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div data-bbox="860 1092 1071 1291" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. W. of trail road, bears SE and NW, and 189 lks. N. of old barbed wire fence, 4 strand, bears ENE and WSW.</p> <p>From this cor. point, the cor. of secs. 27, 28, 33 and 34, bears N. 89°58' E., 16.70 chs. dist., hereinbefore described.</p> <hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">In Sec. 28</p> <hr style="width: 20%; margin: auto;"/> <p>From the point for AP 1, sec. 28, on the E and W center line of the SE 1/4 of sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
Mount Tipton Wilderness Area Boundary,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.


Cor. is located 49 lks. W of trail road, bears NE and SW.

From this cor. point, the center S. 1/16 sec. cor. of sec. 28, bears S. 89°51' W., 6.34 chs. dist., hereinbefore described.

N. 42°44' W., on line 1-2.

4.81 Point for AP 2, sec. 28.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.




Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Cor. is located 45 lks. S. of trail road, bears SE and NNW.

N. 23°29' W., on line 2-3.

7.71 Point for AP 3, sec. 28, on the N. and S. center line of sec. 28.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.



Metes-and-Bounds Survey of the  
Mount Tipton Wilderness Area Boundary,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
2.43	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <p>From this cor. point, the center 1/4 sec. cor. of sec. 28, bears N. 0°01' E., 9.42 chs. dist., hereinbefore described.</p> <hr/> <p>N. 43°34' W., on line 3-4.</p> <p>Point for AP 4, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="860 777 1039 976" style="text-align: center;"> <p>T26N R18W S28 AP4 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. S. of trail road, bears SE and NW.</p> <hr/> <p>N. 74°57' W., on line 4-5.</p>
4.10	<p>Point for AP 5, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="844 1407 1055 1606" style="text-align: center;"> <p>T26N R18W S28 AP5 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 33°09' W., on line 5-6.</p>
7.82	<p>Point for AP 6, sec. 28, on the E. and W. center line of sec. 28.</p>



Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="836 394 1047 619" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 87 lks. S. of trail road, bears SSE and NNW.</p> <p>From this cor. point, the center 1/4 sec. cor. of sec. 28, bears N. 89°45' E., 9.91 chs. dist., hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 26°18' W., on line 6-7.</p>
<p>5.73</p>	<p>Point for AP 7, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <div data-bbox="836 1155 1047 1354" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 64 lks. W of trail road, bears SSE and NNW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 9°37' W., on line 7-8.</p>
	<p>6.44</p> <p>Point for AP 8, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>



Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="836 304 1047 493" data-label="Diagram"> <p>A diagram showing a point for AP8 MTWA in T26N R18W, S28, established in 1994. The diagram consists of a vertical line labeled 'T26N R18W' at the top. A horizontal line extends to the left from the vertical line, labeled 'AP8 MTWA'. A diagonal line extends from the vertical line down and to the right, labeled 'S28'. The year '1994' is written below the diagonal line.</p> </div> <p data-bbox="438 525 1380 588">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="438 619 1347 651">Cor. is located 136 lks. W of trail road, bears N. and S.</p> <hr data-bbox="755 672 1128 682"/> <p data-bbox="438 714 852 745">N. 14°07' E., on line 8-9.</p>
<p data-bbox="292 777 365 808">6.44</p>	<p data-bbox="438 777 820 808">Point for AP 9, sec. 28.</p> <p data-bbox="438 840 1380 903">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div data-bbox="836 934 1047 1123" data-label="Diagram"> <p>A diagram showing a point for AP9 MTWA in T26N R18W, S28, established in 1994. The diagram consists of a vertical line labeled 'T26N R18W' at the top. A horizontal line extends to the left from the vertical line, labeled 'AP9 MTWA'. A diagonal line extends from the vertical line down and to the right, labeled 'S28'. The year '1994' is written below the diagonal line.</p> </div> <p data-bbox="438 1155 1380 1218">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="438 1249 1331 1281">Cor. is located 45 lks. W of trail road, bears N. and S.</p> <hr data-bbox="755 1302 1128 1312"/> <p data-bbox="438 1344 852 1375">N. 6°30' W., on line 9-10.</p>
<p data-bbox="292 1407 365 1438">6.45</p>	<p data-bbox="438 1407 836 1438">Point for AP 10, sec. 28.</p> <p data-bbox="438 1470 1380 1533">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div data-bbox="836 1564 1047 1753" data-label="Diagram"> <p>A diagram showing a point for AP10 MTWA in T26N R18W, S28, established in 1994. The diagram consists of a vertical line labeled 'T26N R18W' at the top. A horizontal line extends to the left from the vertical line, labeled 'AP10 MTWA'. A diagonal line extends from the vertical line down and to the right, labeled 'S28'. The year '1994' is written below the diagonal line.</p> </div> <p data-bbox="438 1785 1380 1848">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
7.72	<p>Cor. is located 68 lks. W of trail road, bears NNW and SSE.</p> <hr style="width: 20%; margin: 0 auto;"/> <p>N. 2°19' W., on line 10-11.</p> <p>Point for AP 11, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;">  <p>T26N R18W</p> <p>AP11 MTWA      S28</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
3.73	<p>Cor. is located 58 lks. W of trail road, bears N. and S.</p> <hr style="width: 20%; margin: 0 auto;"/> <p>N. 22°26' W., on line 11-12.</p> <p>Point for AP 12, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;">  <p>T26N R18W</p> <p>AP12 MTWA      S28</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
4.88	<p>Cor. is located 53 lks. W of trail road, bears NNW and SSE.</p> <hr style="width: 20%; margin: 0 auto;"/> <p>N. 28°56' W., on line 12-13.</p> <p>Point for AP 13, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> <p>T26N R18W</p>  <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 59 lks. S. of graded road, bears E. and W., and 45 lks. W of trail road, bears NNW and SSE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°56' W., on line 13-14.</p>
<p>22.70</p>	<p>Point for AP 14, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W</p>  <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. S. of graded road, 12 ft. wide, bears E. and W., and 45 lks. E of graded road, 12 ft. wide, bears N. and S.</p> <p>From this cor. point, the cor. of secs. 20, 21, 28 and 29, bears N. 45°03' W., 0.64 chs. dist., hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 0°06' E., on line 14-15.</p>
	<p>20.39</p> <p>Point for AP 15, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p>



Metes-and-Bounds Survey of the  
 Mount Tipton Wilderness Area Boundary,  
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona


CHAINS	
	<div data-bbox="860 304 1063 493" data-label="Diagram"> </div> <p data-bbox="438 525 1388 598">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="438 619 1372 661">Cor. is located 36 lks. E of trail road, bears N. and SSE.</p> <hr data-bbox="755 682 1128 688"/> <p data-bbox="438 714 885 756">S. 41°19' E., on line 15-16.</p>
<p data-bbox="300 787 365 819">3.26</p>	<p data-bbox="438 787 836 819">Point for AP 16, sec. 28.</p> <p data-bbox="438 850 1388 913">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <div data-bbox="852 945 1063 1134" data-label="Diagram"> </div> <p data-bbox="438 1165 1388 1228">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="438 1260 1388 1291">Cor. is located 55 lks. E of trail road, bears WNW and SSE.</p> <hr data-bbox="755 1312 1128 1318"/> <p data-bbox="438 1354 868 1396">S. 4°01' W., on line 16-17.</p>
<p data-bbox="300 1417 365 1449">3.65</p>	<p data-bbox="438 1417 836 1449">Point for AP 17, sec. 28.</p> <p data-bbox="438 1480 1388 1543">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <div data-bbox="852 1575 1063 1764" data-label="Diagram"> </div> <p data-bbox="438 1795 1388 1858">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey of the  
Mount Tipton Wilderness Area Boundary,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.79	<p>Cor. is located 50 lks. E of trail road, bears WNW and SSE.</p> <hr/> <p>S. 5°39' E., on line 17-18.</p> <p>Point for AP 18, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="852 657 1063 846" style="text-align: center;"> <p>T26N R18W</p> <p>S28</p> <p>MTWA AP18</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. E of trail road, bears N. and SSW.</p> <hr/> <p>S. 5°27' W., on line 18-19.</p>
3.34	<p>Point for AP 19, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div data-bbox="868 1291 1063 1480" style="text-align: center;"> <p>T26N R18W</p> <p>S28</p> <p>MTWA AP19</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. E of trail road, bears NNE and SW.</p> <hr/> <p>S. 37°38' W., on line 19-20.</p>
3.31	<p>Point for AP 20, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
Mount Tipton Wilderness Area Boundary,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.


Cor. is located 23 lks. E of graded road, 10 ft. wide, bears N. and S.

---

S. 0°06' E., on line 20-21.

2.47 Point for AP 21, sec. 28, on the E. and W. center line of sec. 28.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Cor. is located 23 lks. E of graded road, 10 ft. wide, bears N. and S.

From this cor. point, the 1/4 sec. cor. of secs. 28 and 29, bears S. 89°45' W., 0.46 chs. dist., hereinbefore described.

---

GENERAL DESCRIPTION

---

The land encompassed in this survey is located about 2 miles east of Dolan Springs, Arizona. Elevations range from 3000 to 5500 ft. above sea level.

Terrain is mountainous and rocky, interspersed with rolling grasslands at the lower elevations. Vegetation consists of juniper, cedar and joshua trees.

## T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

## CHAINS

Ranching is the principal commercial use of the area. Other uses of the area include hiking and hunting.

Description of the Mount Tipton Wilderness Area Bdy.,  
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

The following description is for informational purposes only.

Beginning at the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W.

thence N.  $0^{\circ}02'$  W., 10.82 chs. dist., bet. secs. 31 and 36, on the E. bdy. of the Tp., to Angle Point 1, sec. 36;  
thence S.  $37^{\circ}30'$  W., 2.04 chs. dist. to Angle Point 2, sec. 36;  
thence S.  $63^{\circ}52'$  W., 4.14 chs. dist. to Angle Point 3, sec. 36;  
thence S.  $38^{\circ}55'$  W., 9.48 chs. dist. to Angle Point 4, sec. 36, identical with Angle Point 1, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp;

From Angle Point 5, sec. 36, identical with Angle Point 3, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.;

thence N.  $77^{\circ}50'$  W., 7.67 chs. dist. to Angle Point 6, sec. 36;  
thence S.  $82^{\circ}22'$  W., 4.67 chs. dist. to Angle Point 7, sec. 36;  
thence N.  $72^{\circ}31'$  W., 5.46 chs. dist. to Angle Point 8, sec. 36;  
thence S.  $85^{\circ}24'$  W., 7.62 chs. dist. to Angle Point 9, sec. 36;  
thence N.  $79^{\circ}58'$  W., 4.46 chs. dist. to Angle Point 10, sec. 36;  
thence S.  $63^{\circ}30'$  W., 6.30 chs. dist. to Angle Point 11, sec. 36, identical with Angle Point 4, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.;

From Angle Point 12, sec. 36, identical with Angle Point 6, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.;

thence N.  $77^{\circ}45'$  W., 12.77 chs. dist. to Angle Point 13, sec. 36, on the line bet. secs. 35 and 36;  
thence S.  $0^{\circ}04'$  E., 2.715 chs. dist., bet. secs. 35 and 36 to the cor. of secs. 1, 2, 35 and 36;  
thence S.  $89^{\circ}59'$  W., 39.98 chs. dist., bet. secs. 2 and 35, on the S. bdy. of the Tp. to the  $1/4$  sec. cor. of secs. 2 and 35;  
thence S.  $89^{\circ}59'$  W., 40.02 chs. dist., bet. secs. 2 and 35, on the S. bdy. of the Tp. to the cor. of secs. 2, 3, 34 and 35;  
thence N.  $0^{\circ}10'$  W., 40.00 chs. dist., bet. secs. 34 and 35 to the  $1/4$  sec. cor. of secs. 34 and 35;  
thence North, 40.00 chs. dist., bet. secs. 34 and 35 to the cor. of secs. 26, 27, 34 and 35;

## T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	thence S. 89°50' W., 40.03 chs. dist., bet. secs. 27 and 34 to the 1/4 sec. cor. of secs. 27 and 34;
	thence N. 89°54' W., 20.04 chs. dist., bet. secs. 27 and 34 to the W. 1/16 sec. cor. of secs. 27 and 34;
	thence S. 0°09' E., 39.95 chs. dist., on the N. and S. center line of the NW 1/4 of sec. 34 to the center W. 1/16 sec. cor. of secs. 34;
	thence S. 89°59' W., 20.05 chs. dist., on the E. and W. center line of sec. 34 to the 1/4 sec. cor. of secs. 33 and 34;
	thence N. 0°09' W., 26.07 chs. dist., bet. secs. 33 and 34 to the Angle Point 1, sec. 33;
	thence N. 48°19' W., 10.07 chs. dist. to Angle Point 2, sec. 33;
	thence N. 45°41' W., 4.04 chs. dist. to Angle Point 3, sec. 33;
	thence N. 55°13' W., 7.71 chs. dist. to Angle Point 4, sec. 33, on the line bet. secs. 28 and 33;
	thence S. 89°58' W., 23.32 chs. dist., bet. secs. 28 and 33 to the 1/4 sec. cor. of secs. 28 and 33;
	thence N. 0°01' E., 20.04 chs. dist., on the N. and S. center line of sec. 28 to the center S. 1/16 sec. cor. of sec. 28;
	thence N. 89°51' E., 6.34 chs. dist., on the E. and W. center line of the SE 1/4 of sec. 28 to Angle Point 1, sec. 28;
	thence N. 42°44' W., 4.81 chs. dist. to Angle Point 2, sec. 28;
	thence N. 23°29' W., 7.71 chs. dist. to Angle Point 3, sec. 28, on the N. and S. center line of sec. 28;
	thence N. 43°34' W., 2.43 chs. dist. to Angle Point 4, sec. 28;
	thence N. 74°57' W., 4.10 chs. dist. to Angle Point 5, sec. 28;
	thence N. 33°09' W., 7.82 chs. dist. to Angle Point 6, sec. 28, on the E. and W. center line of sec. 28;
	thence N. 26°18' W., 5.73 chs. dist. to Angle Point 7, sec. 28;
	thence N. 9°37' W., 6.44 chs. dist. to Angle Point 8, sec. 28;
	thence N. 14°07' E., 6.44 chs. dist. to Angle Point 9, sec. 28;
	thence N. 6°30' W., 6.45 chs. dist. to Angle Point 10, sec. 28;
	thence N. 2°19' W., 7.72 chs. dist. to Angle Point 11, sec. 28;
	thence N. 22°26' W., 3.73 chs. dist. to Angle Point 12, sec. 28;
	thence N. 28°56' W., 4.88 chs. dist. to Angle Point 13, sec. 28;
	thence S. 89°56' W., 22.70 chs. dist. to Angle Point 14, sec. 28;
	thence S. 0°06' E., 20.39 chs. dist. to Angle Point 15, sec. 28;
	thence S. 41°19' E., 3.26 chs. dist. to Angle Point 16, sec. 28;
	thence S. 4°01' W., 3.65 chs. dist. to Angle Point 17, sec. 28;
	thence S. 5°39' E., 4.79 chs. dist. to Angle Point 18, sec. 28;
	thence S. 5°27' W., 3.34 chs. dist. to Angle Point 19, sec. 28;
	thence S. 37°38' W., 3.31 chs. dist. to Angle Point 20, sec. 28;
	thence S. 0°06' E., 2.47 chs. dist. to Angle Point 21, sec. 28, on the E. and W. center line of sec. 28;
	thence S. 89°45' W., 0.46 chs. dist., on the E. and W. center line of sec. 28 to the 1/4 sec. cor. of secs. 28 and 29;
	thence S. 0°01' E., 40.11 chs. dist., bet. secs. 28 and 29 to the cor. of secs. 28, 29, 32 and 33;
	thence S. 89°43' W., 39.99 chs. dist., bet. secs. 29 and 32 to the 1/4 sec. cor. of secs. 29 and 32;
	thence N. 89°39' W., 39.88 chs. dist., bet. secs. 29 and 32 to

T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

## CHAINS

the cor. of secs. 29, 30, 31 and 32;  
thence S.  $0^{\circ}09'$  E., 40.03 chs. dist., bet. secs. 31 and 32 to  
the  $1/4$  sec. cor. of secs. 31 and 32;  
thence S.  $0^{\circ}03'$  W., 39.89 chs. dist., bet. secs. 31 and 32 to  
the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the  
Tp.;  
thence N.  $89^{\circ}32'$  W., 39.58 chs. dist., bet. secs. 6 and 31, on  
the S. bdy. of the Tp. to the  $1/4$  sec. cor. of secs. 6 and  
31;  
thence S.  $89^{\circ}24'$  W., 25.29 chs. dist., bet. secs. 6 and 31, on  
the S. bdy. of the Tp. to Angle Point 1, sec. 6, T. 25 N.,  
R. 18 W.

---



CERTIFICATE OF SURVEY

I, Robert C. Umbanhowar, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 8th day of April, 1994, I have dependently resurveyed a portion of the south and east boundaries and a portion of the subdivisional lines, subdivided sections 28 and 34, and executed the metes-and-bounds survey of the Mount Tipton Wilderness Area Boundary, in Township 26 North, Range 18 West, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 3, 1998  
(Date)

Robert C. Umbanhowar  
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Arizona State Office  
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the south and east boundaries and a portion of the subdivisional lines, the subdivision of sections 28 and 34, and the metes-and-bounds survey of the Mount Tipton Wilderness Area Boundary in Township 26 North, Range 18 West, Gila and Salt River Meridian, Arizona, executed by Robert C. Umbanhowar, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

7/08/98  
(Date)

Kenny A Laventis  
(Chief Cadastral Surveyor of Arizona)

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.

\_\_\_\_\_  
(Date)

\_\_\_\_\_  
(Chief Cadastral Surveyor of Arizona)