

ORIGINAL

1

BOOK 5526

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE

DEPENDENT RESURVEY OF PORTIONS OF THE SIXTH STANDARD PARALLEL NORTH,

THROUGH RANGE 18 WEST, PORTIONS OF THE FIFTH GUIDE MERIDIAN WEST,

THROUGH TOWNSHIP 25 NORTH, AND A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTIONS 17, 18 AND 31,

AND THE METES-AND-BOUNDS SURVEY OF THE

MOUNT TIPTON WILDERNESS AREA BOUNDARY

IN TOWNSHIP 25 NORTH, RANGE 18 WEST

Of the Gila and Salt River Meridian,
In the State of Arizona

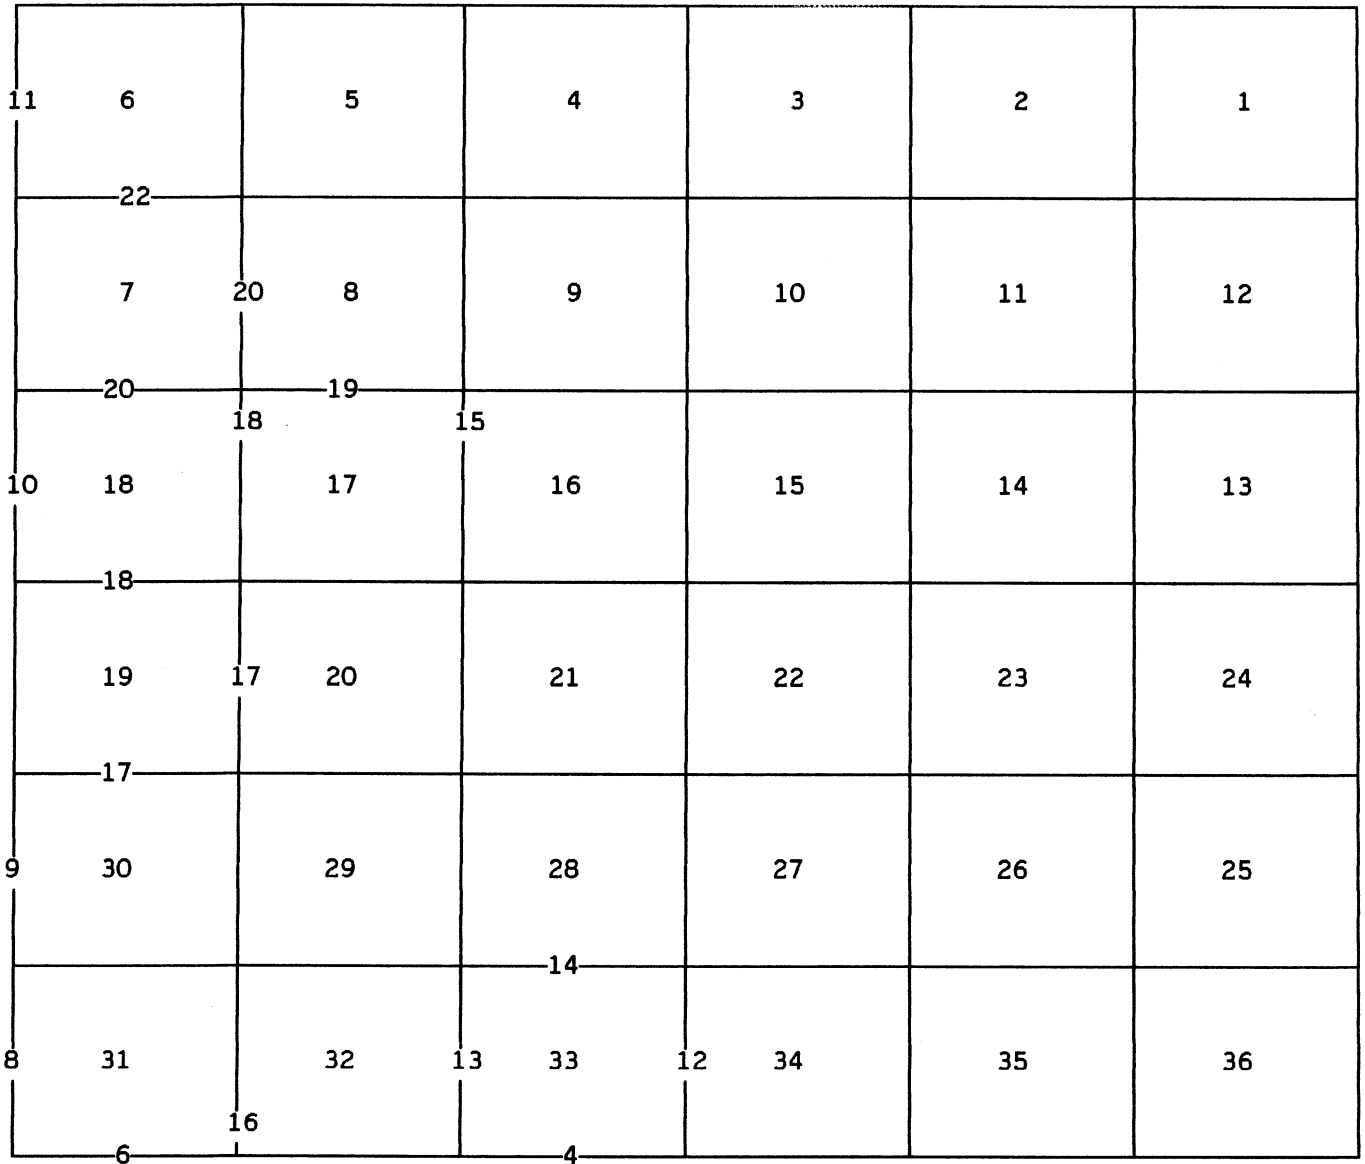
EXECUTED BY
Gordon R. Babel, Cadastral Surveyor

Under Special Instructions dated April 8, 1994, approved April 8, 1994, which provided for the surveys included under Group Number 770 and assignment instructions dated December 22, 1994.

Survey commenced January 10, 1995
Survey completed March 30, 1995

INDEX DIAGRAM

TOWNSHIP 25 NORTH, RANGE 18 WEST,



Subdivision of sec. 17
 Subdivision of sec. 18
 Subdivision of sec. 31
 Metes-and-Bounds Survey of MTWA

pp. 23-25
 pp. 25-26
 pp. 26-28
 pp. 28-59

T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes describe the dependent resurvey of portions of the Sixth Standard Parallel North through Range 18 West, portions of the Fifth Guide Meridian West through Township 25 North, and a portion of the subdivisional lines, the subdivision of sections 17, 18 and 31, and the metes-and-bounds survey of The Mount Tipton Wilderness Area boundary, in Township 25 North, Range 18 West, Gila and Salt River Meridian, Arizona.

The Sixth Standard Parallel North, the Fifth Guide Meridian West, and the North and East boundaries were surveyed by C. Burton Foster in 1874. The Sixth Standard Parallel North was independently resurveyed by H.G. Bardsley and Royston C. Durnford in 1915. The Fifth Guide Meridian West and the north boundary were independently resurveyed by H.G. Bardsley in 1915. The east boundary was independently resurveyed by Sidney E. Blout in 1915. The subdivisional lines were surveyed by Sidney E. Blout, E. J. Lange and S. Frank Walters in 1915-16.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated April 8, 1994, for Group No. 770, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Sokkia SET 2BII total station instrument.

The geographic position of the standard corner of sections 33 and 34, as determined from a tie made to U.S. Geological Survey triangulation station "PUTNAM 1958", hereinafter described, is as follows:

Latitude: 35°30'09.59" N. Longitude: 114°12'07.76" W. NAD27

The mean magnetic declination, as taken from quadrangle map MT. TIPTON, ARIZ., published in 1968 by U.S. Geological Survey, is 15° E.

Dependent Resurvey of a Portion of the 6th Stan. Par. N.,
through R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS

Restoring the resurvey executed by
H. G. Bardsley and Royston C. Durnford in 1915.

Beginning at the stan. cor. of secs. 33 and 34, on the S. bdy. of
the Tp., determined from the original bearing trees

A pinyon pine, 8 ins. diam., bears N. 72 1/4° E., 22 lks.
dist., mkd. T25N R18W S34 BT (Record, N. 67 1/4° E.)

A stump hole, bears N. 46 1/2° W., 31 lks. dist., with fallen
pinyon pine, 8 ins. diam., alongside mkd. T25N R18W S33
BT.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
16 ins. in the ground, to bedrock, in a mound of stone, 2 1/2 ft.
base, to top, with brass cap mkd.

SC
T25N R18W
S33 S34

1995

from which a new bearing tree

A pinyon pine, 4 ins. diam., bears N. 30 3/4° W., 29 lks.
dist., mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 ins. white plastic case
beneath the stainless steel post.

Found original granite stone, 20 x 8 x 6 ins., mkd. SC on face,
with 3 grooves on each side, lying loose nearby.

Bury the granite stone alongside the stainless steel post.

Cor. is located on steep N. facing slope.

From this cor. point, U.S. Geological Survey triangulation
station "PUTNAM 1958", with published latitude of
35°28'50.155" N. and longitude of 114°15'42.626" W., NAD27, bears
S. 65°41'37" W., (forward bearing) 295.50 chs. dist., monumented
with a standard brass disk, 4 ins. diam., cemented flush with the
surface of granite rock outcrop, with top of disk mkd. PUTNAM
1958 and a triangle.

S. 89°59' W., on the S. bdy. of sec. 33, on the S. bdy. of the
Tp., along the Mount Tipton Wilderness Area Bdy.

Dependent Resurvey of a Portion of the 6th Stan. Par. N.,
through R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
40.20	<p>Over mountainous land, through dense undergrowth.</p> <p>The stan. 1/4 sec. cor. of sec. 33, monumented with a granite stone, 22 x 10 x 8 ins., firmly set, projecting 13 ins. above ground, mkd. SC 1/4 on N. face, with a mound of stone, 3 ft. base, 2 ft. high, to the N.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SC T25N R18W 1/4 S33 ----- 1995</p> <p>from which a new bearing object</p> <p style="padding-left: 40px;">An X B0 chiseled on a granite boulder, 10 x 9 x 6 ft., bears N. 4° W., 38 lks. dist.</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the granite stone alongside the stainless steel post.</p> <p style="text-align: center;">-----</p> <p>N. 89°58' W., beginning new measurement.</p> <p>Over mountainous land, through dense undergrowth.</p>
29.36	<p>From this point, the closing cor. of secs. 4 and 5, T. 24 N., R. 18 W., bears South,, 0.07 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 17 ins. above ground, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with brass cap mkd. T25N R18W S33 CC S5 S4 T24N R18W 1916.</p> <p>Add the marks 1995 to the brass cap.</p>
39.81	<p>The stan. cor. of secs. 32 and 33, monumented with a granite stone, 24 x 8 x 5 ins., firmly set, projecting 12 ins. above ground, mkd. SC on the N. face, 4 grooves on the E. face and 2 grooves on the W. face, with a mound of stone, 3 ft. base, 2 ft. high, to the N.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the 6th Stan. Par. N.,
through R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS

SC
T25N R18W
S32 | S33

1995

from which new bearing objects

A pinyon pine, 4 ins. diam., bears N. 54° E., 51.5 lks. dist., mkd. X BT.

An X B0 chiseled on a granite boulder, 3 x 2 x 2 ft., bears N. 45° W., 16 lks. dist.

Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.

Bury the granite stone alongside the stainless steel post.

From the stan. cor. of secs. 31 and 32, monumented with a schist stone, 19 x 9 x 6 ins., firmly set, projecting 9 ins. above ground, mkd. SC on the N. face, with 5 grooves on the E. face, and 1 groove on the W. face.

from which

A juniper, 7 ins. diam., bears N. 68 1/2° E., 46 lks. dist., mkd. T25N R18W S32 BT on a partially healed blaze.

A dead and fallen oak, 5 ins. diam., bears N. 53° W., 169 lks. dist., mkd. 5N R W S31 BT on a substantially healed over blaze.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.

SC
T25N R18W
S31 | S32

1995

Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.

Bury the schist stone alongside the stainless steel post.

Dependent Resurvey of a Portion of the 6th Stan. Par. N.,
through R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>West, on the S. bdy. of sec. 31, along the Mount Tipton Wilderness Area Bdy.</p>
12.21	<p>Point for AP 13, sec. 6, T. 24 N., R. 18 W., as described in the field notes of the concurrent metes-and-bounds survey of the Mount Tipton Wilderness Area Bdy., T. 24 N., R. 18 W.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
15.51	<p>Point for AP 12, sec. 6, T. 24 N., R. 18 W., as described in the field notes of the concurrent metes-and-bounds survey of the Mount Tipton Wilderness Area Bdy., T. 24 N., R. 18 W.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
19.99	<p>Point for the stan. E. 1/16 sec. cor. of sec. 31.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SC T25N R18W E 1/16 S31 ----- 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
39.98	<p>The stan. 1/4 sec. cor. of sec. 31, monumented with a granite stone, 11 x 9 x 3 ins., firmly set, projecting 9 ins. above ground, mkd. SC 1/4 on the N. face, with a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">SC T25N R18W 1/4 S31 ----- 1995</p>

Dependent Resurvey of a Portion of the 6th Stan. Par. N.,
through R. 18 W., Gila and Salt River Meridian, Arizona

<p>CHAINS</p> <p>40.04</p>	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the granite stone alongside the stainless steel post.</p> <hr/> <p>N. 89°46' W., beginning new measurement.</p> <p>The stan. cor. of Tps. 25 N. Rs. 18 and 19 W., monumented with an iron post, 3 ins. diam., firmly set, projecting 16 ins. above ground, with a mound of stone to the N., 4 ft. base, 3 ft. high, with brass cap mkd. T25N R19W R18W S36 S31 SC 1915.</p> <p>Add the marks 1995 to the brass cap.</p>
	<p>Dependent Resurvey of Portions of the 5th Guide Mer. W., through T. 25 N., Gila and Salt River Meridian, Arizona</p>
	<p>Restoring the resurvey executed by H. G. Bardsley 1915.</p> <hr/> <p>From the stan. cor. of Tps. 25 N. Rs. 18 and 19 W., hereinbefore described.</p> <p>N. 0°10' E., bet. secs. 31 and 36, on the W. bdy. of the Tp., along the Mount Tipton Wilderness Area Bdy.</p> <p>Desc., over mountainous land.</p>
<p>11.80</p>	<p>Center of wash, 32 lks. wide, 2 ft. deep, drains NW.</p>
<p>12.50</p>	<p>Center of wash, 38 lks. wide, 2 ft. deep, drains NNW, asc. over mountainous land.</p>
<p>40.00</p>	<p>The 1/4 sec. cor. of secs. 31 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 13 ins. above ground, with a mound of stone to the W., 3 ft. base, 2 ft. high, with brass cap mkd. 1/4 S36 S31 1915.</p> <p>Add the marks T25N R19W R18W 1995 to the brass cap.</p> <hr/>
	<p>N. 0°10' W., beginning new measurement.</p> <p>Asc. over mountainous land.</p>
<p>9.29</p>	<p>Prominent high ridge, bears NNW and SSE, desc. over broken N. slope.</p>

Dependent Resurvey of Portions of the 5th Guide Mer. W.,
through T. 25 N., Gila and Salt River Meridian, Arizona

CHAINS	
39.88	<p>The cor. of secs. 25, 30, 31 and 36, monumented with an iron post, 3 ins. diam., firmly set, projecting 19 ins. above ground, with a mound of stone to the W., 3 ft. base, 1 1/2 ft. high, with brass cap mkd. T25N R19W R18W S25 S30 S36 S31 1915.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located in a barbed wire fence, 4 strands, bears E. and W.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
3.31	<p>N. 0°06' E., bet. secs. 25 and 30.</p> <p>Spur, slopes W.</p>
39.85	<p>The 1/4 sec. cor. of secs. 25 and 30, determined from local lot cors. set by J.T. Jordan, Arizona Professional Engineer, No. 1219, in 1959. These lot cors. are part of the subdivision LAKE MOHAVE RANCHOS ESTATE, on file, and recorded at Mohave County Recorders Office. This is accepted as the best available evidence of the position of the original cor.</p> <p>from which lot cors. set by Jordon</p> <p style="padding-left: 40px;">A rebar, 3/4 in. diam., firmly set, projecting 10 ins. above ground, bears S. 45°28' W., 21.2 ft. dist., with 1 x 2 ins. attached aluminum tag mkd. T25 R19 S25 257.</p> <p style="padding-left: 40px;">A rebar, 3/4 in. diam., firmly set, projecting 8 ins. above ground, bears N. 5°11' W., 165.8 ft. dist.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 38 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T25N R19W R18W 1/4 S25 S30 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>from which</p>

Dependent Resurvey of Portions of the 5th Guide Mer. W.,
through T. 25 N., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears N. 41°50' E., 42.6 ft. dist., with cap mkd. T25N R18W RM 42.6 FT TO COR 1995, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 33°48' E., 48.3 ft. dist., with cap mkd. T25N R18W RM 48.3 FT TO COR 1995, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Found the original iron post, 36 ins. long, 1 in. diam., with brass cap mkd. 1/4 S25 S30 1915 lying loose nearby.</p> <p>Remove brass cap from iron post, and bury beneath the stainless steel post. Remove the iron post, impracticable to bury.</p> <p>Cor. is located 10 ins. below the surface of a graded dirt road, 10 ft. wide, bears N. and S.</p> <hr/> <p>N. 0°05' E., beginning new measurement.</p> <p>Over rolling land, medium undergrowth.</p>
40.05	<p>The cor. of secs. 19, 24, 25 and 30, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. T25N R19W R18W S24 S19 S25 S30 1915.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located at intersection of fences, with 4 strand barbed wire fences bearing N. and SSW.</p> <hr/> <p>From the cor. of secs. 13, 18, 19 and 24, monumented with an iron post, 3 ins. diam, firmly set, projecting 24 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with brass cap mkd. T25N R19W R18W S13 S18 S24 S19 1915.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located 2 lks. E. of a fence cor., with 4 strand barbed wire fences bearing N., S., and W.</p> <p>N. 0°14' W., bet. secs. 13 and 18.</p> <p>Over rolling land, medium undergrowth.</p>

Dependent Resurvey of Portions of the 5th Guide Mer. W.,
through T. 25 N., Gila and Salt River Meridian, Arizona

CHAINS	
6.20	Center of wash, 2 chs. wide, 4 ft. deep, drains SW.
40.05	<p>The 1/4 sec. cor. of secs. 13 and 18, monumented with an iron post, 1 in. diam., firmly set, projecting 16 ins. above ground, with brass cap mkd. 1/4 S13 S18 1915.</p> <p>Add the marks T25N R19W R18W 1995 to the brass cap.</p> <p>Raise a mound of stone, 3 ft. base, to top around the iron post.</p> <p>Cor. is located 3 lks. W. of a 4 strand barbed wire fence, bears E. and W.</p> <hr/>
40.03	<p>N. 0°15' E., beginning new measurement.</p> <p>Over rolling land, medium undergrowth.</p> <p>The cor. of secs. 7, 12, 13 and 18, monumented with an iron post, 3 ins. diam., firmly set, projecting 9 ins. above ground, with brass cap mkd. T25N R19W R18W S12 S7 S13 S18 1915.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located at intersection of fences, with 4 strand barbed wire fences bearing N. and E.</p> <hr/>
12.46	<p>From the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, 3 ins. diam, firmly set, projecting 18 ins. above ground, with brass cap mkd. T25N R19W R18W S1 S6 S12 S7 1915.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located 28 lks. N. of a fence cor., with 4 strand barbed wire fences bearing N. and W.</p> <p>N. 0°11' W., bet. secs. 1 and 6.</p> <p>Over W. facing slope, moderate undergrowth.</p> <p>Point for AP 8, sec. 6, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>

Dependent Resurvey of Portions of the 5th Guide Mer. W.,
through T. 25 N., Gila and Salt River Meridian, Arizona

CHAINS	
39.77	<p>The 1/4 sec. cor. of secs. 1 and 6, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 3 ft. base 2 ft. high, to the W., with brass cap mkd. 1/4 S1 S6 1915.</p>
	<p>Add the marks T25N R19W R18W 1995 to the brass cap.</p>
	<p>Cor. is located on steep W. facing slope.</p>
	<hr/> <p>N. 0°01' E., beginning new measurement.</p>
	<p>Over mountainous land.</p>
6.90	<p>Prominent high ridge, bears ENE and WNW.</p>
26.50	<p>Ridge, bears SE and NW, desc. broken N. slope.</p>
39.39	<p>Point for AP 7, sec. 6, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
	<p>Leave the Mount Tipton Wilderness Area Bdy.</p>
40.15	<p>The cor. of Tps. 25 and 26 N., Rs. 18 and 19 W., monumented with an iron post, 3 ins. diam., firmly set, projecting 11 ins. above ground, with brass cap mkd. T26N R19W R18W S31 S6 S1 S36 1915</p>
	<p>1994 as described in the field notes of the concurrent dependent resurvey of a portion of the S. Bdy., T. 26 N., R. 18 W.</p>
	<hr/> <p>Dependent Resurvey of a Portion of the Subdivisional Lines, T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona</p> <hr/>
	<p>Restoring the survey executed by Sidney E. Blout, E. J. Lange and S. Frank Walters, in 1915-16</p> <hr/>
	<p>From the stan. cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described.</p>
	<p>N. 0°07' E., bet. secs. 33 and 34, along the Mount Tipton Wilderness Area Bdy.</p>
	<p>Over mountainous lands, through dense undergrowth.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
39.88	<p>The 1/4 sec. cor. of secs. 33 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 30 ins above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 2 ft. base, 1 ft. high, to the W., with brass cap mkd. 1/4 S33 S34 1915.</p> <p>from which a new bearing object</p> <p style="padding-left: 40px;">An X B0 chiseled on a granite boulder, 7 x 7 x 5 ft., bears N. 29 3/4° E., 14 lks. dist.</p> <p>Add the marks T25N R18W 1995 to the brass cap.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°07' W., beginning new measurement.</p>
40.22	<p>The cor. of secs. 27, 28, 33 and 34, monumented with an iron post, 2 ins. diam, firmly set, projecting 24 ins. above ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. T25N R18W S28 S27 S33 S34 1915.</p> <p>from which a new bearing object</p> <p style="padding-left: 40px;">An X B0 chiseled on a granite boulder, 4 x 3 x 3 ft., bears N. 52 3/4° W., 20.5 lks. dist.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on steep S. facing slope.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>From the stan. cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°04' W., bet. secs. 32 and 33, along the Mount Tipton Wilderness Area Bdy.</p> <p>Over mountainous land, dense undergrowth.</p>
40.01	<p>The 1/4 sec. cor. of secs. 32 and 33, determined at the center of the original supporting mound of stone, 3 ft. base, 1 ft. high.</p> <p>At the cor. point</p> <p style="padding-left: 40px;">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T25N R18W 1/4 S32 S33 1995</p> <p>from which new bearing trees</p> <p style="padding-left: 40px;">A pinyon pine, 4 ins. diam., bears S. 53 1/2° W., 44.5 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A pinyon pine, 8 ins. diam., bears N. 29° W., 147 lks. dist., mkd. 1/4 S32 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Original mound of stone now functions as a collar of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°03' W., beginning new measurement.</p>
4.90	<p>Center of running wash, 45 lks. wide, 2 ft. deep, drains SW.</p> <p>Begin steep asc. over S. slope of mountain.</p>
40.15	<p>The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2 ins. diam., firmly set, projecting 30 ins. above ground, in a mound of stone, 4 ft. base, 2 ft. high, with brass cap mkd. T25N R18W S29 S28 S32 S33 1915.</p> <p>from which new bearing trees</p> <p style="padding-left: 40px;">A pinyon pine, 8 ins. diam., bears N. 49 1/4° E., 15 lks. dist., mkd. T25N R18W S28 BT.</p> <p style="padding-left: 40px;">A pinyon pine, 4 ins. diam., bears N. 22° E., 17.5 lks. dist., mkd. X BT.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on steep E. facing slope.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>N. 89°54' W., bet. secs. 28 and 33, along the Mount Tipton Wilderness Area Bdy.</p> <p>Over mountainous land.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
40.13	<p>The 1/4 sec. cor. of secs. 28 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 30 ins. above ground, in a mound of stone, 2 ft. base, 1 ft. high, with a mound of stone, 2 ft. base, 1 ft. high, to the N., with brass cap mkd. 1/4 S28 S33 1916.</p> <p>from which a new bearing object</p> <p style="padding-left: 40px;">An X B0 chiseled on a granite boulder, 5 x 4 x 4 ft., bears N. 35° W., 12 lks. dist.</p> <p>Add the marks T25N R18W 1995 to the brass cap.</p> <hr style="width: 20%; margin: 10px auto;"/>
39.97	<p>N. 89°59' W., beginning new measurement.</p> <p>The cor. of secs. 28, 29, 32 and 33.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>From the 1/4 sec. cor. of secs. 16 and 17, monumented with an iron post, 1 in. diam., firmly set, projecting 28 ins above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 3 ft. base, 2 ft. high, to the W., with brass cap mkd., 1/4 S17 S16 1916.</p> <p>Add the marks T25N R18W 1995 to the brass cap.</p> <p>Cor. is located 1 ch. N. of a wash, 12 lks. wide, 1 ft. deep, drains SSE.</p> <p>N. 0°03' E., bet. sec. 16 and 17, along the Mount Tipton Wilderness Area Bdy.</p>
20.01	<p>Point for the N. 1/16 sec. cor. of secs. 16 and 17.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 9 ins. in the ground, to bedrock, in a supporting mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W N 1/16 S17 S16 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
40.02	<p>The cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2 ins. diam., firmly set, projecting 30 ins. above ground, in a mound of stone, 4 ft. base, 2 ft. high, with a mound of stone, 3 ft. base, 2 ft. high, to the W., with brass cap mkd. T25N R18W S8 S9 S17 S16 1916.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located 60 lks. W. of rocky wash, 30 lks. wide, 5 ft. deep, drains NNW.</p> <hr/> <p>From the stan. cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°01' W., bet. secs. 31 and 32, along the Mount Tipton Wilderness Area Bdy.</p> <p>Over mountainous land.</p>
20.035	<p>Point for the S. 1/16 sec. cor. of secs. 31 and 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S 1/16 S31 S32 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
40.07	<p>The 1/4 sec. cor. of secs. 31 and 32, monumented with an iron post, 1 in. diam., firmly set, projecting 30 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 3 ft. base, 2 ft. high, to the W., with brass cap mkd. 1/4 S31 S32 1916.</p> <p>Add the marks T25N R18W 1995 to the brass cap.</p> <p>Cor. is located on steep E. facing slope.</p> <hr/>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the cor. of secs. 19, 20, 29 and 30, monumented with an iron post, 2 ins. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 2 ft. base, 1 1/2 ft. high, to the W., with brass cap mkd. T25N R18W S19 S20 S30 S29 1916.</p> <p>Add the marks 1995 to the brass cap.</p> <p>S. 89°56' W., bet. secs. 19 and 30, along the Mount Tipton Wilderness Area Bdy.</p> <p>Desc. over mountainous land.</p>
40.02	<p>The 1/4 sec. cor. of secs. 19 and 30, monumented with an iron post, 1 in. diam, firmly set, projecting 24 ins. above ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. 1/4 S19 S30 1916.</p> <p>Add the marks T25N R18W 1995 to the brass cap.</p> <hr/> <p>S. 89°52' W., beginning new measurement.</p>
9.53	<p>Point for AP 1, sec. 30, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
39.94	<p>The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/>
	<p>From the cor. of secs. 19, 20, 29 and 30.</p> <p>N. 0°07' E., bet. secs. 19 and 20, along the Mount Tipton Wilderness Area Bdy.</p> <p>Over mountainous land.</p>
25.30	<p>Top of ridge, bears E. and W.</p>
39.99	<p>The 1/4 sec. cor. of secs. 19 and 20, monumented with an iron post, 1 in. diam., firmly set, projecting 28 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 2 ft. base, 1 ft. high, to the W., with brass cap mkd. 1/4 S19 S20 1916.</p> <p>Add the marks T25N R18W 1995 to the brass cap.</p> <hr/> <p>N. 0°03' W., beginning new measurement.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
30.40	Top of high prominent ridge, bears E. and W.
39.92	<p>The cor. of secs. 17, 18, 19 and 20, monumented with an iron post, 2 ins. diam., firmly set, projecting 22 ins. above ground, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with brass cap mkd. T25N R18W S18 S17 S19 S20 1916.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on N. facing slope.</p> <hr/> <p>N. 89°59' W., bet. secs. 18 and 19, along the Mount Tipton Wilderness Area Bdy.</p> <p>Desc. over mountainous land.</p>
40.05	<p>The 1/4 sec. cor. of secs. 18 and 19, monumented with an iron post, 1 in. diam., firmly set, projecting 15 ins. above ground, in a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S18 S19 1916.</p> <p>Add the marks T25N R18W 1995 to the brass cap.</p> <hr/> <p>S. 89°59' W., beginning new measurement.</p>
39.16	<p>Point for AP 50, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
39.92	<p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 17 and 18, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 3 ft. base, 2 ft. high, to the W., with brass cap erroneously mkd. 1/4 S17 S18 1916.</p> <p>Remark the brass cap to read.</p> <div style="text-align: center;"> <p>T25N R18W 1/4 S18 S17 1995 1916</p> </div>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 0°10' E., bet. secs. 17 and 18, along the Mount Tipton Wilderness Area Bdy.</p>
	<p>Over rolling hills.</p>
11.85	<p>Point for AP 30, sec. 18, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
	<p>Leave the Mount Tipton Wilderness Area Bdy.</p>
12.40	<p>Center of unimproved dirt road, 12 lks. wide, bears ENE and WSW.</p>
12.91	<p>Point for AP 29, sec. 30, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
	<p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
29.90	<p>Center of wash, 1 ch. wide, 2 ft. deep, drains NW.</p>
34.30	<p>E. side of hogback ridge, bears E. and W.</p>
39.99	<p>The cor. of secs. 7, 8, 17 and 18, monumented with an iron post, 2 ins. diam., firmly set, projecting 33 ins. above ground, in a mound of stone, 4 ft. base, 2 1/2 ft. high, with brass cap mkd. T25N R18W S7 S8 S18 S17 1916.</p>
	<p>Add the marks 1995 to the brass cap.</p>
	<p>Cor. is located 4 lks. N. of a cor. of fences, with 4 strand barbed wire extending NNE and W.</p>
	<hr/>
	<p>From the cor. of secs. 8, 9, 16 and 17.</p>
19.90	<p>N. 89°40' W., bet. secs. 8 and 17, along the Mount Tipton Wilderness Area Bdy.</p>
	<p>Over rolling hills.</p>
	<p>Point for the E. 1/16 sec. cor. of secs. 8 and 17.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T25N R18W S 8 E 1/16 — S17 1995</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
39.80	The 1/4 sec. cor. of secs. 8 and 17, monumented with an iron post, 1 in. diam, firmly set, projecting 12 ins. above ground, with a mound of stone, 2 ft. base, 1 ft. high, to the N., with brass cap mkd. 1/4 S8 S17 1916. <hr/>
	N. 89°47' W., beginning new measurement.
39.87	The cor. of secs. 7, 8, 17, and 18. <hr/>
	S. 89°59' W., bet. secs. 7 and 18.
	Desc. over rolling land.
39.97	The 1/4 sec. cor. of secs. 7 and 18, monumented with an iron post, 1 in. diam, firmly set, projecting 16 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap erroneously mkd. S8 1/4 S17 1916. Remark the brass cap to read. T25N R18W S 7 1/4 — S18 1995 Cor. is located 4 lks. N., of a 4 strand barbed wire fence, bears E. and W. <hr/>
	N. 89°54' W., beginning new measurement.
40.17	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., hereinbefore described. <hr/>
	From the cor. of secs. 7, 8, 17 and 18. N. 0°02' E., bet. secs. 7 and 8, along the Mount Tipton Wilderness Area Bdy. Over rolling hills.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
5.55	<p>Point for a witness point, determined from local lot cors. set by J.T. Jordan, Arizona Professional Engineer No. 1219, in 1959. These lot cors. are part of the subdivision LAKE MOHAVE RANCHOS UNIT 16, on file, and recorded at Mohave County Records Office.</p> <p>from which lot cors. set by Jordan</p> <p>A rebar, 3/4 in. diam., firmly set, projecting 8 ins. above ground, bears N. 89°55' W., 584.6 ft. dist., with attached, 1 x 2 ins. aluminum tag, mkd. J.T. JORDAN ENGINEERING INC. T25N R18W S7 UNIT 16 BLK V LOT 4</p> <p>A rebar, 3/4 in. diam., firmly set, projecting 8 ins. above ground, bears N. 89°55' W., 1166.4 ft. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T25N R18W S7 MTWA S8 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
31.10	Top of prominent ridge, bears NE and SW.
39.93	<p>The 1/4 sec. cor. of secs. 7 and 8, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with brass cap mkd. 1/4 S7 S8 1916</p> <p>Add the marks T25N R18W 1995 to the brass cap.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°03' E., beginning new measurement.</p> <p>Over rolling hills.</p>
2.11	<p>Point for a witness point, determined from local lot cors. set by J.T. Jordan, Arizona Professional Engineer No. 1219, in 1959. These lot cors. are part of the subdivision LAKE MOHAVE RANCHOS UNIT 16, on file, and recorded at Mohave County Records Office.</p> <p>from which lot cors. set by Jordan</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A rebar, 3/4 in. diam., firmly set, projecting 8 ins. above ground, bears S. 89°55' W., 39.7 ft. dist.</p>
	<p>A rebar, 3/4 in. diam., firmly set, projecting 12 ins. above ground, bears N. 13°59' W., 165.5 ft. dist., with attached, 1 x 2 ins. aluminum tag, mkd. J.T. JORDAN ENGINEERING INC. T25N R18W S7 UNIT 16 BLE V LOT 7</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">WP T25N R18W MTWA S7 S8 1995</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
	<p>Cor. is located in a 4 strand barbed wire fence, bears N. and S.</p>
39.60	<p>Center of rocky wash, 20 ft. wide, 8 ft. deep, drains WSW.</p>
40.04	<p>True point for the cor. of secs. 5, 6, 7, and 8, determined at proportionate dist. from the original witness cor. True point falls on a rock face, where it is impracticable to establish a permanent monument.</p>
	<p>From this point, the original witness cor. to secs. 5, 6, 7 and 8, monumented with an iron post, 2 ins. diam., firmly set, projecting 30 ins. above ground, in a mound of stone, 2 ft. base, 1 1/2 ft. high, with a mound of stone, 2 ft. base, 1 ft. high, to the W., with brass cap mkd. WC T25N R18W S6 S5 S7 S8 1916, bears N. 0°03' E., 0.25 chs. dist. Add the marks 1995 to the brass cap.</p>
	<p>N. 89°53' W., bet. secs. 6 and 7, along the Mount Tipton Wilderness Area Bdy.</p>
	<p>Over rolling hills.</p>
39.96	<p>The 1/4 sec. cor. of secs. 6 and 7, monumented with an iron post, 1 in. diam., firmly set, projecting 30 ins. above ground, in a mound of stone, 4 ft. base, 2 ft. high, with a mound of stone, 3 ft. base, 2 ft. high, to the N., with brass cap mkd. 1/4 S6 S7 1916.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
40.12	<p>Add the marks T25N R18W 1995 to the brass cap.</p> <p>Cor. is located on spur, slopes S.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p> <hr/> <p>S. 89°59' W., beginning new measurement.</p> <p>Over rolling land, medium undergrowth.</p> <p>The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp., hereinbefore described.</p>
39.98	<p style="text-align: center;">Subdivision of Section 17, T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 17 and 20, monumented with an iron post, 1 in. diam, firmly set, projecting 29 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with brass cap mkd. 1/4 S17 S20 1916.</p> <p>Add the marks T25N R18W 1995 to the brass cap.</p> <p>Cor. is located within the Mount Tipton Wilderness Area, on steep, N. facing slope.</p> <p>N. 0°07' E., on the N. and S. center line of sec. 17.</p> <p>Over mountainous land.</p> <p>Point for the center 1/4 sec. cor. of sec. 17, at intersection with the E. and W. center line of sec. 17.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W C1/4 S17 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
60.00	<p>Point for the center N. 1/16 sec. cor. of sec. 17.</p>

Subdivision of Section 17,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
80.02	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W C N1/16 S17 C 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p> <p>The 1/4 sec. cor. of secs. 8 and 17.</p> <hr/>
19.93	<p>From the 1/4 sec. cor. 16 and 17.</p> <p>N. 89°43' W., on the E. and W. center line of sec. 17, along the Mount Tipton Wilderness Area Bdy.</p> <p>Point for the center E. 1/16 sec. cor. of sec. 17.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W E 1/16 C ——— C S17 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
39.86	<p>The center 1/4 sec. cor. of sec. 17.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
79.77	<p>The 1/4 sec. cor. of secs. 17 and 18.</p> <hr/> <p style="text-align: center;">NE 1/4</p> <hr/> <p>From the center E. 1/16 sec. cor. of sec. 17.</p>

Subdivision of Section 17,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
20.01	<p>N. 0°05' E., on the N. and S. center line of the NE 1/4 of sec. 17, along the Mount Tipton Wilderness Area Bdy.</p> <p>Point for the NE 1/16 sec. cor. of sec. 17, at intersection with the E. and W. center line of the NE 1/4 of sec. 17.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W NE 1/16 S17 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
40.02	<p>The E. 1/16 sec. cor. of secs. 8 and 17.</p> <hr/> <p>From the N. 1/16 sec. cor. of secs. 16 and 17.</p> <p>N. 89°42' W., on the E. and W. center line of the NE 1/4 sec 17.</p>
19.91	<p>The NE 1/16 sec. cor. of sec. 17.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
39.82	<p>The center N. 1/16 sec. cor. of sec. 17.</p> <hr/> <p style="text-align: center;">Subdivision of Section 18, T. 25 N., R. 18 W., Gila and Salt River Meridian, Az.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 17 and 18.</p> <p>N. 89°59' W., on the E. and W. center line of sec. 18.</p>
15.04	<p>Point for AP 35, sec. 18, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
17.52	<p>Point for AP 25, sec. 18, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
79.45	<p>Point for AP 10, sec. 18, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>


Subdivision of Section 18
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS 80.20	The 1/4 sec. cor. of secs. 13 and 18, on the W. bdy. of the Tp.
<hr/> Subdivision of Section 31, T. 25 N., R. 18 W., Gila and Salt River Meridian, Az. <hr/>	
	<p>From the stan. 1/4 sec. cor. of sec. 31, on the S. bdy. of the Tp.</p> <p>N. 0°04' E., on the N. and S. center line of sec. 31.</p> <p>Over mountainous land.</p>
20.055	<p>Point for the center S. 1/16 sec. cor. of sec. 31,</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to bedrock, in a mound of stone, 5 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W C S1/16 S31 C 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on high plateau, bears irregularly N. and S.</p>
40.11	<p>Point for the center 1/4 sec. cor. of sec. 31, at intersection with the E. and W. center line of sec. 31.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W C1/4 S31 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
80.07	<p>The 1/4 sec. cor. of secs. 30 and 31, monumented with an iron post, 1 in. diam., firmly set, projecting 30 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 3 ft. base, 1 1/2 ft. high, to the N., with brass cap mkd. 1/4 S30 S31 1916.</p>


Subdivision of Section 31,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
<p>19.955</p>	<p>Add the marks T25N R18W 1995 to the brass cap.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 31 and 32. N. 89°56' W., on the E. and W. center line of sec. 31. Over mountainous land, sparse undergrowth.</p> <p>Point for the center E. 1/16 sec. cor. of sec. 31.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W E1/16 C———C S31 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
39.91	The center 1/4 sec. cor. of sec. 31.
79.88	The 1/4 sec. cor. of secs. 31 and 36, on the W. bdy. of the Tp.
<p>20.05</p>	<p style="text-align: center;">SE 1/4</p> <hr/> <p>From the stan. E. 1/16 sec. cor. of sec 31, on the S. bdy of the Tp.</p> <p>N. 0°02' E., on the N. and S. center line of the SE 1/4 of sec. 31, along the Mount Tipton Wilderness Area Bdy.</p> <p>Point for the SE 1/16 sec. cor. of sec. 31, at intersection with the E. and W. center line of the SE 1/4 sec. 31.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 13 ins. in the ground, to bedrock, in a supporting mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W SE 1/16 S31 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>

Subdivision of Section 31,
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Leave the Mount Tipton Wilderness Area Bdy.</p>
40.10	<p>The center E. 1/16 sec. cor. of sec. 31.</p> <hr/> <p>From the S. 1/16 sec. cor. of secs. 31 and 32.</p> <p>N. 89°58' W., on the E. and W. center line of the SE 1/4 of sec. 31., along the Mt. Tipton Wilderness Area Bdy.</p>
19.97	<p>The SE 1/16 sec. cor. of sec. 31.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
39.94	<p>The center S. 1/16 sec. cor. of sec. 31.</p> <hr/> <p style="text-align: center;">Metes-and-Bounds Survey of the Mount Tipton Wilderness Area Bdy., T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">In Sec. 1</p> <hr/> <p>From AP 1, sec. 1, on the N. bdy. of the Tp., identical with AP 4, sec. 36, T. 26 N., R. 18 W., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd. T26N R18W S36 AP4 AP1 S1 T25N MTWA 1994 as described in the field notes of the metes-and-bounds survey of the Mount Tipton Wilderness Area Bdy., T. 26 N., R. 18 W., executed concurrently under this same group.</p> <p>S. 68°55' W., on line 1-2.</p>
7.89	<p>Point for AP 2, sec. 1.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> <p>T25N R18W S1</p>  <p>AP2 MTWA 1995</p> </div>



Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/>
	<p>N. 74°47' W., on line 2-3.</p>
10.66	<p>AP 3, sec. 1, on the N. bdy. of the Tp., identical with AP 5, sec. 36, T. 26 N., R. 18 W., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 17 ins. above ground, in a supporting mound of stone, 4 1/2 ft. base, to top, with brass cap mkd. T26N R18W AP5 S36 S1 AP3 MTWA T25N 1994 as described in the field notes of the metes-and-bounds survey of the Mount Tipton Wilderness Area Bdy., T. 26 N., R. 18 W., executed concurrently under this same group.</p> <hr/>
	<p>From AP 4, sec. 1, on the N. bdy. of the Tp., identical with AP 11, sec. 36, T. 26 N., R. 18 W., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 18 ins. above ground, in a supporting mound of stone, 4 1/2 ft. base, to top, with brass cap mkd. T26N R18W S36 AP11 AP4 S1 T25N MTWA 1994, as described in the field notes of the metes-and-bounds survey of the Mount Tipton Wilderness Area Bdy., T. 26 N., R. 18 W., executed concurrently under this same group.</p>
	<p>S. 74°53' W., on line 4-5.</p>
2.48	<p>Point for AP 5, sec. 1.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>T25N R18W S1</p>  <p>AP5 MTWA 1995</p> </div>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/>
	<p>N. 68°24' W., on line 5-6.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS					
1.75	<p>AP 6, sec. 1, on the N. bdy. of the Tp., identical with AP 12, sec. 36, T. 26 N., R. 18 W., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. T26N R18W AP12 S36 S1 AP6 MTWA T25N 1994, as described in the field notes of the metes-and-bounds survey of the Mount Tipton Wilderness Area Bdy., T. 26 N., R. 18 W., executed concurrently under this same group.</p> <hr/> <p style="text-align: center;">In Sec. 6</p> <hr/> <p>From the point for AP 1, sec. 6, on the N. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S31</p> <hr style="width: 50px; margin: 0 auto;"/> <table style="margin: 0 auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S6</td> <td style="padding: 0 5px;">AP 1</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">MTWA</td> </tr> </table> <p>T25N 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the cor. of Tps. 25 and 26 N., Rs. 18 and 19 W., hereinbefore described, bears S. 89°24' W., 15.01 chs. dist.</p> <p>S. 0°01' W., on line 1-2.</p>	S6	AP 1		MTWA
S6	AP 1				
	MTWA				
0.76	<p>Point for AP 2, sec. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S6</p> <hr style="width: 50px; margin: 0 auto;"/> <table style="margin: 0 auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">AP 2</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">MTWA</td> </tr> </table> <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on Mt. Tipton Water Company right-of-way.</p>		AP 2		MTWA
	AP 2				
	MTWA				

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Bdy.
 T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
<p>1.00</p>	<p style="text-align: center;">_____</p> <p>S. 89°24' W., on line 2-3.</p> <p>Point for AP 3, sec. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S6</p>  <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on Mt. Tipton Water Company right-of-way.</p> <p style="text-align: center;">_____</p>
<p>2.51</p>	<p>S. 0°28' E., on line 3-4.</p> <p>Point for AP 4, sec. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S6</p>  <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on Mt. Tipton Water Company right-of-way.</p> <p style="text-align: center;">_____</p>
<p>1.89</p>	<p>S. 89°32' W., on line 4-5.</p> <p>Point for AP 5, sec. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T25N R18W AP5 MTWA S6 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on Mt. Tipton Water Company right-of-way.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°28' W., on line 5-6.</p>
2.51	<p>Point for AP 6, sec. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W AP6 MTWA S6 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on Mt. Tipton Water Company right-of-way.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89°24' W., on line 6-7.</p>
12.12	<p>Point for AP 7, sec. 6, on the line bet. secs. 1 and 6, on the W. bdy. of the Tp.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in a drill hole, cemented in place, on a boulder 3 x 2 1/2 x 1 1/2 ft., with top mkd.</p> <p style="text-align: center;">T25N R19W R18W S6 S1 AP7 MTWA 1995</p> <p>Deposit a magnet, 1 x 7/8 ins. beneath brass tablet.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on Mt. Tipton Water Company right-of-way.</p> <p>From this cor. point, the cor. of Tps. 25 and 26 N., Rs. 18 and 19 W., hereinbefore described, bears N. 0°01' E., 0.76 chs. dist.</p> <hr/> <p>From the point for AP 8, sec. 6, on the line bet. secs. 1 and 6, on the W. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 716 1029 936" data-label="Diagram"> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 23 lks. W. of a barbed wire fence, 4 strand bears N, and S.</p> <p>From this cor. point, the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described, bears S. 0°11' E., 12.46 chs. dist.</p> <p>S. 13°30' E., on line 8-9.</p>
2.20	<p>Point for AP 9, sec. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 1545 1029 1696" data-label="Diagram"> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 30 lks. E. of a barbed wire fence, 4 strand bears N. and S.</p> <hr/>


Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
9.33	<p>S. 0°27' W., on line 9-10.</p> <p>Point for AP 10, sec. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S6 MTWA AP10</p> <hr style="width: 50px; margin: 0 auto;"/> <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 50%; margin: 0 auto;"/>
6.98	<p>S. 86°51' E., on line 10-11.</p> <p>Point for AP 11, sec. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W MTWA AP11</p> <hr style="width: 50%; margin: 0 auto;"/> <p>S6 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 50%; margin: 0 auto;"/>
32.76	<p>S. 88°56' E., on line 11-12.</p> <p>AP 12, identical with the 1/4 sec. cor. of secs. 6 and 7, hereinbefore described.</p> <hr style="width: 80%; margin: 0 auto;"/> <div style="text-align: center;"> <p>In Sec. 18</p> <hr style="width: 50%; margin: 0 auto;"/> </div> <p>From AP 1, sec. 18 identical with the cor. of secs. 7, 8, 17 and 18, hereinbefore described.</p> <p>S. 89°52' W., on line 1-2.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Bdy.
 T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
20.26	<p>Point for AP 2, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W</p> <p>S18 AP2 MTWA</p> <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 0°19' W., on line 2-3.</p>
1.13	<p>Point for AP 3, sec 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W</p> <p>S18 MTWA</p> <p>— AP3</p> <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°36' W., on line 3-4.</p>
1.32	<p>Point for AP 4, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W</p> <p>AP4 S18</p> <p>MTWA </p> <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
1.16	<p>N. 3°51' W., on line 4-5.</p> <p>Point for AP 5, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/>
6.47	<p>S. 89°45' W., on line 5-6.</p> <p>Point for AP 6, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to bedrock, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W</p> <p>S18</p> <hr/> <p>AP 6</p> <p>MTWA</p> <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 1 lk. S. of 4 strand barbed wire fence, bears E. and W.</p> <hr/>
24.69	<p>N. 89°56' W., on line 6-7.</p> <p>Point for AP 7, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p>



Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	<div data-bbox="860 304 1015 367" style="text-align: center;"> <p>T25N R18W S18</p> <hr style="width: 50%; margin: auto;"/> </div> <div data-bbox="893 399 974 493" style="text-align: center;"> <p>AP 7 MTWA 1995</p> </div> <div data-bbox="414 525 1429 598"> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> </div> <div data-bbox="414 619 1437 693"> <p>Cor. is located 1 lk. S. of 4 strand barbed wire fence, bears E. and W.</p> <hr style="width: 50%; margin: auto;"/> </div> <div data-bbox="414 745 836 787"> <p>N. 89°56' W., on line 7-8.</p> </div> <div data-bbox="251 808 803 850"> <p>25.31 Point for AP 8, sec. 18.</p> </div> <div data-bbox="414 871 1388 976"> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> </div> <div data-bbox="852 997 1015 1060" style="text-align: center;"> <p>T25N R18W S18</p> <hr style="width: 50%; margin: auto;"/> </div> <div data-bbox="893 1092 974 1197" style="text-align: center;"> <p>AP 8 MTWA 1995</p> </div> <div data-bbox="414 1228 1429 1291"> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> </div> <div data-bbox="414 1323 1437 1386"> <p>Cor. is located 1 lk. S. of 4 strand barbed wire fence, bears E. and W.</p> <hr style="width: 50%; margin: auto;"/> </div> <div data-bbox="414 1449 836 1480"> <p>S. 47°20' W., on line 8-9.</p> </div> <div data-bbox="267 1512 803 1543"> <p>1.71 Point for AP 9, sec. 18.</p> </div> <div data-bbox="414 1575 1388 1680"> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> </div> <div data-bbox="852 1701 1015 1764" style="text-align: center;"> <p>T25N R18W S18</p> <hr style="width: 50%; margin: auto;"/> </div> <div data-bbox="893 1764 1015 1858" style="text-align: center;"> <p>AP 9 MTWA 1995</p> </div>
--------	--




Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS									
38.80	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 50 ft., E. of the line bet. secs. 13 and 18, on the Mohave County right-of-way.</p> <hr/> <p>S. 0°15' W., on line 9-10, parallel with the line bet. secs. 13 and 18, along the right-of-way granted to Mohave County.</p> <p>Point for AP 10, sec. 18, on the E. and W. center line of sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W</p> <table style="margin: auto;"> <tr> <td style="text-align: center;">S</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">AP MT</td> </tr> <tr> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">C</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">C</td> </tr> <tr> <td style="text-align: center;">18</td> <td style="text-align: center;">10 WA</td> </tr> <tr> <td colspan="2" style="text-align: center;">1995</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 13 and 18, on the W. bdy. of the Tp., hereinbefore described, bears N. 89°59' W., 0.75 chs. dist.</p> <hr/> <p>S. 0°14' E., on line 10-11, parallel with the line bet. secs. 13 and 18, along the right-of-way granted to Mohave County.</p>	S	AP MT	C	C	18	10 WA	1995	
S	AP MT								
C	C								
18	10 WA								
1995									
28.91	<p>Point for AP 11, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W</p> <table style="margin: auto;"> <tr> <td style="text-align: center;">MTWA</td> </tr> <tr> <td style="text-align: center;">AP11</td> </tr> <tr> <td style="text-align: center;">S18</td> </tr> <tr> <td style="text-align: center;">1995</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>	MTWA	AP11	S18	1995				
MTWA									
AP11									
S18									
1995									




Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located 50 ft., E. of the line bet. secs. 13 and 18, on the Mohave County right-of-way.</p> <hr/>
	<p>AP 12 through AP 29, sec. 18, are located N. of a track road; the Mount Tipton Wilderness Area Bdy. is approximately parallel to the center line of this track road at about a 35 ft. offset.</p>
	<p>N. 47°51' E., on line 11-12.</p>
1.25	<p>Point for AP 12, sec 18.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<div style="text-align: center;">  <p>T25N R18W MTWA AP12 S18 1995</p> </div>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/>
	<p>N. 67°27' E., on line 12-13.</p>
6.85	<p>Point for AP 13, sec. 18.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<div style="text-align: center;">  <p>T25N R18W MTWA AP13 S18 1995</p> </div>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/>
	<p>N. 76°27' E., on line 13-14.</p>
6.76	<p>Point for AP 14, sec. 18.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>




Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T25N R18W MTWA AP14</p> <p style="text-align: center;">  S18 1995 </p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 83°29' E., on line 14-15.</p>
5.77	<p>Point for AP 15, sec 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W MTWA AP15</p> <p style="text-align: center;">  S18 1995 </p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 85°26' E., on line 15-16.</p>
5.24	<p>Point for AP 16, sec 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W MTWA AP16</p> <p style="text-align: center;">  S18 1995 </p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 70°38' E., on line 16-17.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
6.47	<p>Point for AP 17, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W MTWA AP17 S18 1995</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/>
	<p>N. 62°37' E., on line 17-18.</p>
5.96	<p>Point for AP 18, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W MTWA AP18 S18 1995</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/>
	<p>N. 50°51' E., on line 18-19.</p>
2.61	<p>Point for AP 19, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap</p> <div style="text-align: center;"> <p>T25N R18W MTWA AP19 S18 1995</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
<p>5.82</p>	<p>N. 59°11' E., on line 19-20.</p> <p>Point for AP 20, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  <p>T25N R18W MTWA AP20 S18 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/>
<p>4.57</p>	<p>N. 45°29' E., on line 20-21.</p> <p>Point for AP 21, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  <p>T25N R18W MTWA AP21 S18 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/>
<p>7.66</p>	<p>N. 49°04' E., on line 21-22.</p> <p>Point for AP 22, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  <p>T25N R18W MTWA AP22 S18 1995</p> </div>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
5.96	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 66°10' E., on line 22-23.</p> <p>Point for AP 23, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 688 1008 842" style="text-align: center;"> <p>T25N R18W MTWA AP23 S18 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 38°34' E., on line 23-24.</p> <p>Point for AP 24, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 1262 1008 1415" style="text-align: center;"> <p>T25N R18W MTWA AP24 S18 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 52°14' E., on line 24-25.</p> <p>Point for AP 25, sec. 18, on the E. and W. center line of sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
3.22	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 38°34' E., on line 23-24.</p> <p>Point for AP 24, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 1262 1008 1415" style="text-align: center;"> <p>T25N R18W MTWA AP24 S18 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 52°14' E., on line 24-25.</p> <p>Point for AP 25, sec. 18, on the E. and W. center line of sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="857 298 1039 485" data-label="Diagram"> </div> <p data-bbox="414 520 1422 583">Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="414 617 1370 680">From this cor. point, the 1/4 sec. cor. of secs. 17 and 18, hereinbefore described, bears S. 89°59' E., 17.52 chs. dist.</p> <hr data-bbox="750 705 1182 709"/> <p data-bbox="414 743 860 774">N. 50°41' E., on line 25-26.</p>
7.19	<p data-bbox="414 806 813 837">Point for AP 26, sec. 18.</p> <p data-bbox="414 869 1390 963">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 999 1023 1186" data-label="Diagram"> </div> <p data-bbox="414 1222 1422 1285">Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr data-bbox="750 1310 1182 1314"/> <p data-bbox="414 1348 860 1379">N. 70°22' E., on line 26-27.</p>
4.43	<p data-bbox="414 1415 813 1446">Point for AP 27, sec. 18.</p> <p data-bbox="414 1478 1390 1572">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 1604 1006 1753" data-label="Diagram"> </div> <p data-bbox="414 1789 1422 1852">Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr data-bbox="734 1877 1166 1881"/>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
5.04	<p>N. 44°16' E., on line 27-28.</p> <p>Point for AP 28, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 556 1023 714" style="text-align: center;"> <p>T25N R18W MTWA AP28 S18 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
5.39	<p>N. 52°54' E., on line 28-29.</p> <p>Point for AP 29, sec. 18, on the line bet. secs. 17 and 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to bedrock, in a mound of stone, 3 ft base to top, with brass cap mkd.</p> <div data-bbox="852 1129 1015 1312" style="text-align: center;"> <p>T25N R18W MTWA AP29 S18 S17 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the cor. of secs. 7, 8, 17 and 18, hereinbefore described, bears N. 0°10' E., 27.08 chs. dist.</p> <hr/> <p>AP 30 through AP 49, sec. 18, are located S. of a track road; the Mount Tipton Wilderness Area Bdy. is approximately parallel to the center line of this track road at about a 35 ft. offset.</p> <p>From the point for AP 30, sec. 18, on the line bet. secs. 17 and 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to bedrock, in a mound of stone, 3 ft base to top, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="841 304 1015 493" data-label="Diagram"> </div> <p data-bbox="414 525 1421 588">Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="414 619 1356 682">From this cor. point, the 1/4 sec. cor. of secs. 17 and 18, hereinbefore described, bears S. 0°10' W., 11.85 chs. dist.</p> <p data-bbox="414 714 860 745">S. 42°46' W., on line 30-31.</p>
3.06	<p data-bbox="414 777 812 808">Point for AP 31, sec. 18.</p> <p data-bbox="414 840 1388 934">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<div data-bbox="857 966 1006 1123" data-label="Diagram"> </div> <p data-bbox="414 1155 1421 1218">Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr data-bbox="747 1249 1177 1260"/> <p data-bbox="414 1281 860 1312">S. 47°44' W., on line 31-32.</p>
6.95	<p data-bbox="414 1354 795 1386">Point for AP 32, sec 18.</p> <p data-bbox="414 1417 1388 1512">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<div data-bbox="844 1543 1006 1701" data-label="Diagram"> </div> <p data-bbox="414 1732 1421 1795">Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr data-bbox="747 1816 1177 1827"/> <p data-bbox="414 1858 860 1890">S. 64°31' W., on line 32-33.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
5.30	<p>Point for AP 33, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="852 493 1015 651" style="text-align: center;"> <p>T25N R18W S18 AP33 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 61°00' W., on line 33-34.</p>
1.83	<p>Point for AP 34, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="852 1102 1015 1260" style="text-align: center;"> <p>T25N R18W S18 AP34 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 39°54' W., on line 34-35.</p>
2.29	<p>Point for AP 35, sec. 18, on the E. and W. center line of sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="844 1701 1006 1890" style="text-align: center;"> <p>T25N R18W S18 AP35 MTWA 1995</p> </div>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Bdy.
 T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.97	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 17 and 18, hereinbefore described, bears S. 89°59' E., 15.04 chs. dist.</p> <hr/> <p>S. 56°48' W., on line 35-36.</p> <p>Point for AP 36, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S18 AP36 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>S. 40°08' W., on line 36-37.</p>
2.73	<p>Point for AP 37, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S18 AP37 MTWA 1995</p> </div>
4.49	<p>Point for AP 38, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>



Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T25N R18W S18 AP38 MTWA 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 51°32' W., on line 38-39.</p>
5.70	<p>Point for AP 39, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W S18 AP39 MTWA 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 48°15' W., on line 39-40.</p>
7.50	<p>Point for AP 40, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W S18 AP40 MTWA 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 53°06' W., on line 40-41.</p>
3.29	<p>Point for AP 41, sec. 18.</p>




Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Bdy.
 T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S18 AP41 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/>
5.82	<p>S. 57°28' W., on line 41-42.</p> <p>Point for AP 42, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S18 AP42 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/>
7.46	<p>S. 63°29' W., on line 42-43.</p> <p>Point for AP 43, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S18 AP43 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 71°55' W., on line 43-44.</p>



Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
5.03	<p>Point for AP 44, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S18</p>  <p>AP44 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 85°11' W., on line 44-45.</p>
5.51	<p>Point for AP 45, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S18</p>  <p>AP45 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 82°20' W., on line 45-46.</p>
5.52	<p>Point for AP 46, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>



Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Bdy.
 T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T25N R18W S18</p>  <p style="text-align: center;">AP46 MTWA 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 77°07' W., on line 46-47.</p>
6.74	<p>Point for AP 47, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W S18</p>  <p style="text-align: center;">AP47 MTWA 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 67°26' W., on line 47-48.</p>
6.69	<p>Point for AP 48, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T25N R18W S18</p>  <p style="text-align: center;">AP48 MTWA 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 50°06' W., on line 48-49.</p>
1.90	<p>Point for AP 49, sec. 18.</p>




Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 50 ft., E. of the line bet. secs. 13 and 18, on the Mohave County right-of-way.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 0°14' W., on line 49-50, parallel with the line bet. secs. 13 and 18, along the Mohave County right-of-way.</p>
9.88	<p>Point for AP 50, sec. 18, on the line bet. secs. 18 and 19.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described, bears S. 89°59' W. 0.76 chs. dist.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">In Sec. 30</p> <hr style="width: 20%; margin: 10px auto;"/> <p>AP 1 through AP 11, sec. 30, are located S. of a track road; the Mount Tipton Wilderness Area Bdy. is approximately parallel to the center line of this track road at about a 35 ft. offset.</p> <p>From the point for AP 1, sec. 30., on the line bet. secs. 19 and 30.</p>




Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Bdy.
 T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  <p>T25N R18W S19</p> <p>S30</p> <p>AP1 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 19 and 30, hereinbefore described, bears N. 89°52' E., 9.53 chs. dist.</p> <p>S. 76°37' W., on line 1-2.</p> <p>5.28 Point for AP 2, sec. 30.</p>
<p>2.73</p>	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  <p>T25N R18W S30</p> <p>AP2 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 66°41' W., on line 2-3.</p> <p>Point for AP 3, sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Bdy.
 T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> <p>T25N R18W S30</p>  <p>AP3 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 47°35' W., on line 3-4.</p>
2.21	<p>Point for AP 4, sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>T25N R18W S30</p>  <p>AP4 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 70°50' W., on line 4-5.</p>
3.32	<p>Point for AP 5, sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>T25N R18W S30</p>  <p>AP5 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 75°22' W., on line 5-6.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Bdy.
 T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
<p>4.29</p>	<p>Point for AP 6, sec 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S30</p>  <p>AP6 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 71°00' W., on line 6-7.</p>
<p>3.27</p>	<p>Point for AP 7, sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S30</p>  <p>AP7 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 64°22' W., on line 7-8.</p>
<p>6.79</p>	<p>Point for AP 8, sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T25N R18W S30</p>  <p>AP8 MTWA 1995</p> </div>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 88°55' W., on line 8-9.</p>
2.03	<p>Point for AP 9, sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="862 688 1036 877" style="text-align: center;"> <p>T25N R18W S30 AP9 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 36°10' W., on line 9-10.</p>
2.42	<p>Point for AP 10, sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="862 1293 1008 1482" style="text-align: center;"> <p>T25N R18W S30 AP10 MTWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 69°13' W., on line 10-11.</p>
1.02	<p>Point for AP 11, sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="857 302 1029 485" data-label="Diagram"> </div> <p data-bbox="415 522 1419 583">Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr data-bbox="748 611 1179 617"/> <p data-bbox="415 648 841 678">S. 0°06' W., on line 11-12.</p>
32.60	<p data-bbox="415 716 808 745">Point for AP 12, sec. 18.</p> <p data-bbox="415 779 1386 869">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 905 1006 1058" data-label="Diagram"> </div> <p data-bbox="415 1098 1419 1159">Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr data-bbox="748 1186 1179 1192"/> <p data-bbox="415 1224 841 1253">S. 0°35' E., on line 12-13.</p>
12.97	<p data-bbox="415 1287 667 1316">Point for AP 13.</p> <p data-bbox="415 1350 1386 1440">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="857 1476 1006 1629" data-label="Diagram"> </div> <p data-bbox="415 1669 1419 1730">Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr data-bbox="748 1757 1179 1764"/> <p data-bbox="415 1791 841 1820">S. 0°55' W., on line 13-14.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Bdy.
T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
26.78	<p>AP 14, identical with the cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <hr/> <p>The area embraced by this survey varies from mountainous along the 6th Stan. Par. N., to nearly level on the 5th Guide Mer. W. The heart of the Mount Tipton Wilderness Area, which is part of the Cerbat Mountains, lies in the central portion of the township.</p> <p>The post office in Dolan Springs, a settlement with less than one thousand inhabitants lies approximately 2 miles west of the northwest cor. of the township.</p> <p>Elevations vary from about 3500 ft. to 5000 ft. above sea level. Sandy loam and native grasses dominate the lower elevations. Juniper and pinyon pine are the predominant species at the higher elevations.</p> <p>The Mount Tipton Water Company leases a right-of-way and a water tank site necessary for water delivery in section 6. Indian Springs, a perennial source of water lies in section 17.</p> <hr/> <p style="text-align: center;">Description of the Mount Tipton Wilderness Area Bdy., T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p>The following description is for informational purposes only.</p> <hr/> <p>Beginning at Angle Point 1, sec. 1, identical with Angle Point 4, sec. 36, T. 26 N., R. 18 W., on the N. bdy. of the Tp.</p> <p>thence S. 68°55' W., 7.89 chs. dist., to Angle Point 2, sec. 1; thence N. 74°47' W., 10.66 chs. dist., to Angle Point 3, sec. 1, identical with Angle Point 5, sec. 36, T. 26 N., R. 18 W., on the N. bdy. of the Tp.</p> <hr/> <p>From Angle Point 4, sec. 1, identical with Angle Point 11, sec. 36, T. 26 N., R. 18 W., on the N. bdy. of the Tp.</p> <p>thence S. 74°53' W., 2.48 chs. dist., to Angle Point 5, sec. 1;</p>

T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS

thence N. 68°24' W., 1.75 chs. dist., to Angle Point 6, sec. 1,
 identical with Angle Point 12, sec. 36, T. 26 N., R. 18 W.,
 on the N. bdy. of the Tp.

From Angle Point 1, sec. 6, on the N. bdy. of the Tp.

thence S. 0°01' W., 0.76 chs. dist., to Angle Point 2, sec. 6;
 thence S. 89°24' W., 1.00 ch. dist., to Angle Point 3, sec. 6;
 thence S. 0°28' E., 2.51 chs. dist., to Angle Point 4, sec. 6;
 thence S. 89°32' W., 1.89 chs. dist., to Angle Point 5, sec. 6;
 thence N. 0°28' W., 2.51 chs. dist., to Angle Point 6, sec. 6;
 thence S. 89°24' W., 12.12 chs. dist., to Angle Point 7, sec. 6,
 on the W. bdy of the Tp.;

thence S. 0°01' W., 39.39 chs. dist., bet. secs. 1 and 6, on the
 W. bdy. of the Tp., to the 1/4 sec. cor. of secs. 1 and 6;
 thence S. 0°11' E., 27.31 chs. dist., bet. secs. 1 and 6, on the
 W. bdy. of the Tp., to Angle Point 8, sec. 6;
 thence S. 13°30' E., 2.20 chs. dist., to Angle Point 9, sec. 6;
 thence S. 0°27' W., 9.33 chs. dist., to Angle Point 10, sec. 6;
 thence S. 86°51' E., 6.98 chs. dist., to Angle Point 11, sec. 6;
 thence S. 88°56' E., 32.76 chs. dist., to Angle point 12, sec. 6,
 identical with the 1/4 sec. cor. of secs. 6 and 7;
 thence S. 89°53' E., 39.96 chs. dist., bet. secs. 6 and 7, to the
 true point for the cor. of secs. 5, 6, 7, and 8;
 thence S. 0°03' W., 40.04 chs. dist., bet. secs. 7 and 8, to the
 1/4 sec. cor. of secs. 7 and 8;
 thence S. 0°02' W., 39.93 chs. dist., bet. secs. 7 and 8, to the
 cor. of secs. 7, 8, 17, and 18, identical with Angle Point
 1, sec. 18;

thence S. 89°52' W., 20.26 chs. dist., to Angle Point 2, sec. 18;
 thence S. 0°19' W., 1.13 chs. dist., to Angle Point 3, sec. 18;
 thence S. 89°36' W., 1.32 chs. dist., to Angle Point 4, sec. 18;
 thence N. 3°51' W., 1.16 chs. dist., to Angle Point 5, sec. 18;
 thence S. 89°45' W., 6.47 chs. dist., to Angle Point 6, sec. 18;
 thence N. 89°56' W., 24.69 chs. dist., to Angle Point 7, sec. 18;
 thence N. 89°56' W., 25.31 chs. dist., to Angle Point 8, sec. 18;
 thence S. 47°20' W., 1.71 chs. dist., to Angle Point 9, sec. 18;
 thence S. 0°15' W., 38.80 chs. dist., to Angle Point 10, sec.
 18 on the E. and W. center line of sec. 18;

thence S. 0°14' E., 28.91 chs. dist., to Angle Point 11, sec.
 18;

thence N. 47°51' E., 1.25 chs. dist., to Angle Point 12, sec.
 18;

thence N. 67°27' E., 6.85 chs. dist., to Angle Point 13, sec.
 18;

thence N. 76°27' E., 6.76 chs. dist., to Angle Point 14, sec.
 18;

thence S. 83°29' E., 5.77 chs. dist., to Angle Point 15, sec.
 18;

T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	thence N. 85°26' E., 5.24 chs. dist., to Angle Point 16, sec. 18;
	thence N. 70°38' E., 6.47 chs. dist., to Angle Point 17, sec. 18;
	thence N. 62°37' E., 5.96 chs. dist., to Angle Point 18, sec. 18;
	thence N. 50°51' E., 2.61 chs. dist., to Angle Point 19, sec. 18;
	thence N. 59°11' E., 5.82 chs. dist., to Angle Point 20, sec. 18;
	thence N. 45°29' E., 4.57 chs. dist., to Angle Point 21, sec. 18;
	thence N. 49°04' E., 7.66 chs. dist., to Angle Point 22, sec. 18;
	thence N. 66°10' E., 5.96 chs. dist., to Angle Point 23, sec. 18;
	thence N. 38°34' E., 2.51 chs. dist., to Angle Point 24, sec. 18;
	thence N. 52°14' E., 3.22 chs. dist., to Angle Point 25, sec. 18, on the E. and W. center line of sec. 18;
	thence N. 50°41' E., 7.19 chs. dist., to Angle Point 26, sec. 18;
	thence N. 70°22' E., 4.43 chs. dist., to Angle Point 27, sec. 18;
	thence N. 44°16' E., 5.04 chs. dist., to Angle Point 28, sec. 18;
	thence N. 52°54' E., 5.39 chs. dist., to Angle Point 29, sec. 18, on the line bet. secs. 17 and 18;
	thence N. 0°10' E., 27.08 chs. dist., bet. secs. 17 and 18, to the cor. of secs. 7, 8, 17 and 18;
	thence S. 89°47' E., 39.87 chs. dist., bet. secs. 8 and 17, to the 1/4 sec. cor. of secs. 8 and 17;
	thence S. 89°40' E., 39.80 chs. dist., bet. secs. 8 and 17, to the cor. of secs. 8, 9, 16 and 17;
	thence S. 0°03' W., 40.02 chs. dist., bet. secs. 16 and 17, to the 1/4 sec. cor. of secs. 16 and 17;
	thence N. 89°43' W., 19.93 chs. dist., on the E. and W. center line of sec. 17, to the center E. 1/16 sec. cor. of sec. 17;
	thence N. 0°05' E., 20.01 chs. dist., on the N. and S. center line of the NE 1/4 of sec. 17, to the NE 1/16 sec. cor. of sec. 17;
	thence N. 89°42' W., 19.91 chs. dist., on the E. and W. center line of the NE 1/4 of sec. 17, to the center N. 1/16 sec. cor. of sec. 17;
	thence S. 0°07' W., 20.02 chs. dist., on the N. and S. center line of sec. 17, to the center 1/4 sec. cor. of sec. 17;
	thence N. 89°43' W., 39.91 chs. dist., on the E. and W. center line of sec. 17, to the 1/4 sec. cor. of secs. 17 and 18;
	thence N. 0°10' E., 11.85 chs. dist., bet. secs. 17 and 18, to Angle Point 30, sec. 18;

T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	thence S. 42°46' W., 3.06 chs. dist., to Angle Point 31, sec. 18;
	thence S. 47°44' W., 6.95 chs. dist., to Angle Point 32, sec. 18;
	thence S. 64°31' W., 5.30 chs. dist., to Angle Point 33, sec. 18;
	thence S. 61°00' W., 1.83 chs. dist., to Angle Point 34, sec. 18;
	thence S. 39°54' W., 2.29 chs. dist., to Angle Point 35, sec. 18, on the E. and W. center line of sec. 18;
	thence S. 56°48' W., 4.97 chs. dist., to Angle Point 36, sec. 18;
	thence S. 40°08' W., 2.73 chs. dist., to Angle Point 37, sec. 18;
	thence S. 66°39' W., 4.49 chs. dist., to Angle Point 38, sec. 18;
	thence S. 51°32' W., 5.70 chs. dist., to Angle Point 39, sec. 18;
	thence S. 48°15' W., 7.50 chs. dist., to Angle Point 40, sec. 18;
	thence S. 53°06' W., 3.29 chs. dist., to Angle Point 41, sec. 18;
	thence S. 57°28' W., 5.82 chs. dist., to Angle Point 42, sec. 18;
	thence S. 63°29' W., 7.46 chs. dist., to Angle Point 43, sec. 18;
	thence S. 71°55' W., 5.03 chs. dist., to Angle Point 44, sec. 18;
	thence S. 85°11' W., 5.51 chs. dist., to Angle Point 45, sec. 18;
	thence N. 82°20' W., 5.52 chs. dist., to Angle Point 46, sec. 18;
	thence S. 77°07' W., 6.74 chs. dist., to Angle Point 47, sec. 18;
	thence S. 67°26' W., 6.69 chs. dist., to Angle Point 48, sec. 18;
	thence S. 50°06' W., 1.90 chs. dist., to Angle Point 49, sec. 18;
	thence S. 0°14' W., 9.88 chs. dist., to Angle Point 50, sec. 18, on the line bet. secs. 18 and 19;
	thence N. 89°59' E., 39.16 chs. dist., bet. secs. 18 and 19, to the 1/4 sec. cor. of secs. 18 and 19;
	thence S. 89°59' E., 40.05 chs. dist., bet. secs. 18 and 19, to the cor. of secs. 17, 18, 19, and 20;
	thence S. 0°03' E., 39.92 chs. dist., bet. secs. 19 and 20, to the 1/4 sec. cor. of secs. 19 and 20;
	thence S. 0°07' W., 39.99 chs. dist., bet. secs. 19 and 20, to the cor. of secs. 19, 20, 29, and 30;
	thence S. 89°56' W., 40.02 chs. dist., bet. secs. 19 and 30, to the 1/4 sec. cor. of secs. 19 and 30;

T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>thence S. 89°52' W., 9.53 chs. dist., bet. secs. 19 and 30, to Angle Point 1, sec. 30;</p> <p>thence S. 76°37' W., 5.28 chs. dist., to Angle Point 2, sec. 30;</p> <p>thence S. 66°41' W., 2.73 chs. dist., to Angle Point 3, sec. 30;</p> <p>thence S. 47°35' W., 2.21 chs. dist., to Angle Point 4, sec. 30;</p> <p>thence S. 70°50' W., 3.32 chs. dist., to Angle Point 5, sec. 30;</p> <p>thence S. 75°22' W., 4.29 chs. dist., to Angle Point 6, sec. 30;</p> <p>thence S. 71°00' W., 3.27 chs. dist., to Angle Point 7, sec. 30;</p> <p>thence S. 64°22' W., 6.79 chs. dist., to Angle Point 8, sec. 30;</p> <p>thence N. 88°55' W., 2.03 chs. dist., to Angle Point 9, sec. 30;</p> <p>thence N. 36°10' W., 2.42 chs. dist., to Angle Point 10, sec. 30;</p> <p>thence N. 69°13' W., 1.02 chs. dist., to Angle Point 11, sec. 30;</p> <p>thence S. 0°06' W., 32.60 chs. dist., to Angle Point 12, sec. 30;</p> <p>thence S. 0°35' E., 12.97 chs. dist., to Angle Point 13, sec. 30;</p> <p>thence S. 0°55' W., 26.78 chs. dist., to Angle Point 14, identical with the cor. of secs. 25, 30, 31, and 36, on the W. bdy of the Tp.</p> <p>thence S. 0°10' E., 39.88 chs. dist., bet. secs. 31 and 36, on the W. bdy of the Tp., to the 1/4 sec. cor. of secs. 31 and 36;</p> <p>thence S. 0°10' W., 40.00 chs. dist., bet. secs. 31 and 36, on the W. bdy of the Tp., to the stan. cor. of Tps. 25 N., Rs. 18 and 19 W.</p> <hr/> <p>From Angle Point 12, sec. 6, T. 24 N., R. 18 W., on the S. bdy. of sec. 31, on the S. bdy. of the Tp.</p> <p>thence West, 4.48 chs. dist., on the S. bdy. of sec. 31, to the stan. E. 1/16 sec. cor. of sec. 31.</p> <p>thence N. 0°02' E., 20.05 chs. dist., on the N. and S. center line of the SE 1/4 of sec. 31, to the SE 1/16 sec. cor. of sec. 31.</p> <p>thence S. 89°58' E., 19.97 chs. dist., on the E. and W. center line of the SE 1/4 of sec. 31, to the S. 1/16 sec. cor. of secs. 31 and 32.</p> <p>thence S. 0°01' E., 20.035 chs. dist., bet. secs. 31 and 32 to the stan. cor. of secs. 31 and 32, on the S. bdy. of the Tp.</p> <p>thence West, 12.21 chs. dist., on the S. bdy. of sec. 31, to Angle Point 13, sec. 6, T. 24 N., R. 18 W.</p> <hr/>

T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS

The following parcels in this township are excluded from the Mountain Tipton Wilderness Area.

in sec. 4; SW 1/4 of the NW 1/4

in sec. 20; SE 1/4 of the SE 1/4

in sec. 33; ALL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
W. William Foster	Surveying Technician
Mark R. Searles	Surveying Technician

CERTIFICATE OF SURVEY

I, Gordon R. Bubel, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 8th day of April, 1994, I have dependently resurveyed portions of the Sixth Standard Parallel North, through Range 18 West, portions of the Fifth Guide Meridian West, through Township 25 North, and a portion of the subdivisional lines, the subdivision of sections 17, 18 and 31, and the metes-and-bounds survey of the Mount Tipton Wilderness Area Boundary, in Township 25 North, Range 18 West, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 8, 1998
(Date)

Gordon R. Bubel
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of portions of the Sixth Standard Parallel North, through Range 18 West, portions of the Fifth Guide Meridian West, through Township 25 North, and a portion of the subdivisional lines, the subdivision of sections 17, 18 and 31, and the metes-and-bounds survey of the Mount Tipton Wilderness Area Boundary, in Township 25 North, Range 18 West, Gila and Salt River Meridian, Arizona, executed by Gordon R. Bubel, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

7/22/98
(Date)

Tenny D. Savitar
(Chief Cadastral Surveyor of Arizona)

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 25 N., R. 18 W., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.

(Date)

(Chief Cadastral Surveyor of Arizona)