

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE

DEPENDENT RESURVEY OF THE FOURTH STANDARD PARALLEL NORTH,

THROUGH PORTIONS OF RANGES 4 AND 5 EAST (NORTH BOUNDARY),

A PORTION OF THE SOUTH AND EAST BOUNDARIES

AND A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF CERTAIN SECTIONS

AND A METES-AND-BOUNDS SURVEY IN SECTION 22,

IN TOWNSHIP 16 NORTH, RANGE 4 EAST

Of the Gila and Salt River Meridian,
In the State of Arizona

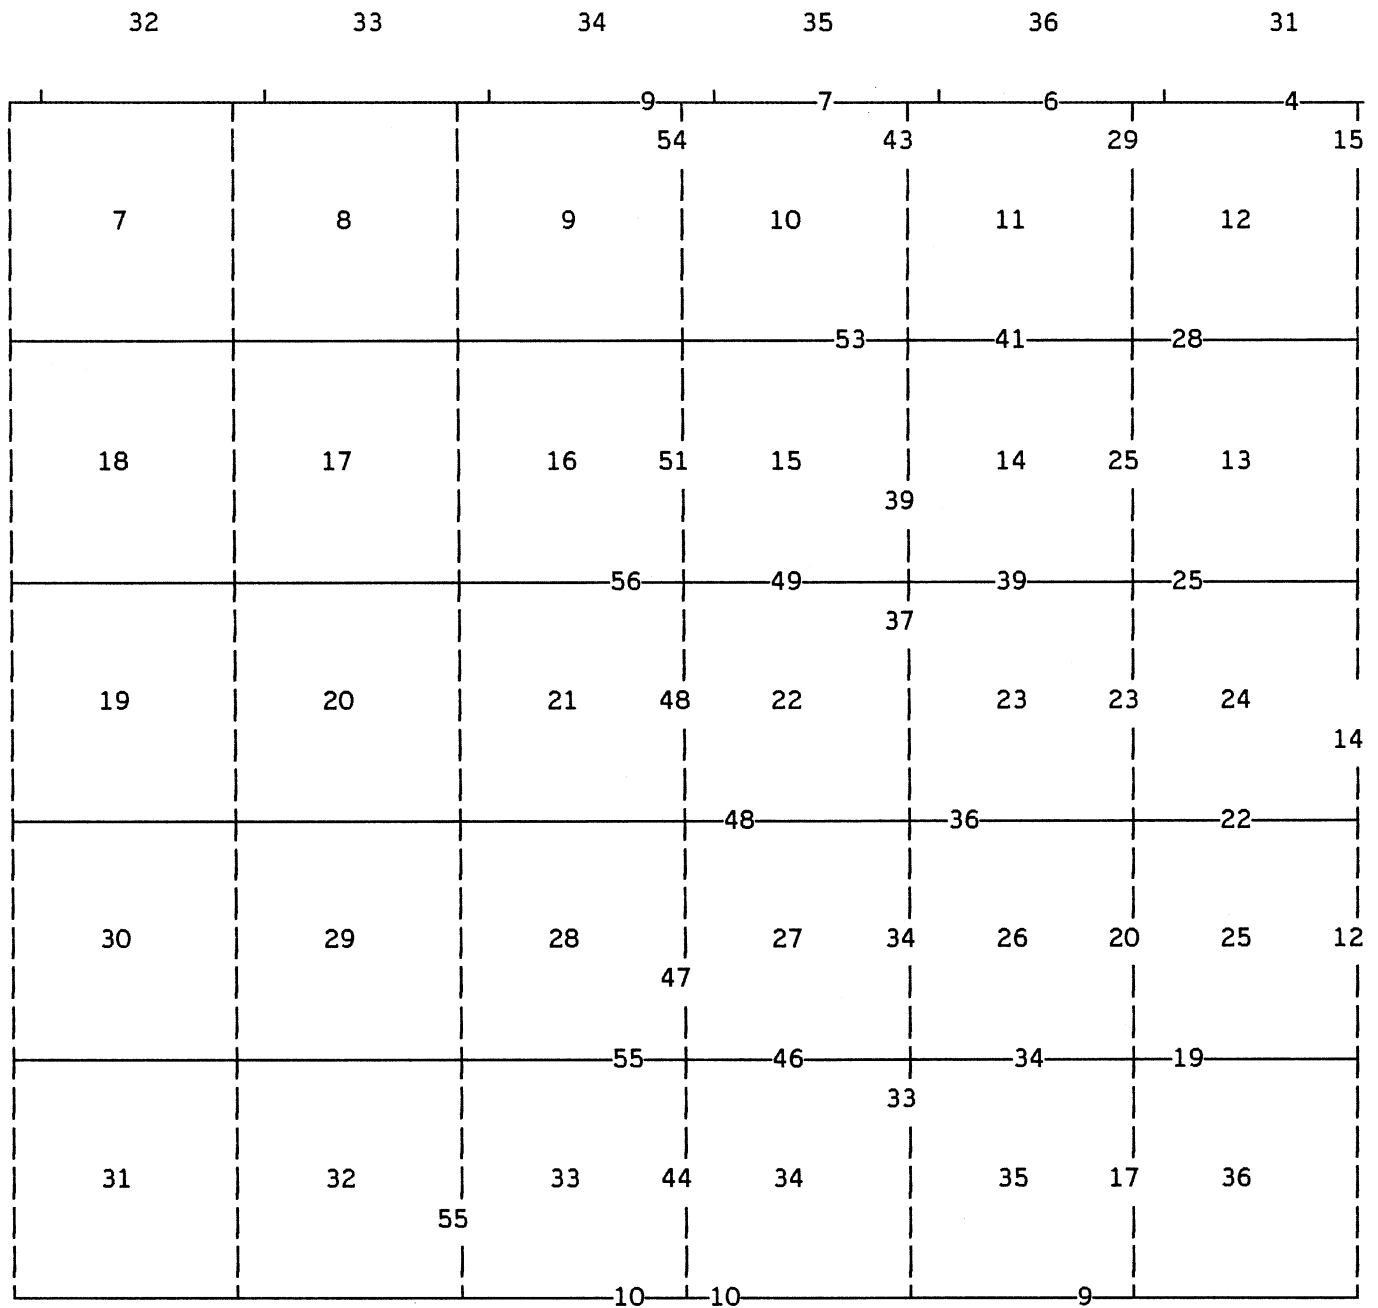
EXECUTED BY
Gordon R. Bubel, Cadastral Surveyor

Under Special Instructions dated August 18, 1997, approved August 18, 1997, and Supplemental Special Instructions dated February 10, 1998, approved February 10, 1998, which provided for the surveys included under Group Number 819 and assignment instructions dated August 18, 1997.

Survey commenced August 25, 1997
Survey completed July 16, 1998

INDEX DIAGRAM

TOWNSHIP 16 NORTH, RANGE 4 EAST,



Subdivision of Sec. 10 pp. 57-58
 Subdivision of Sec. 11 pp. 58-60
 Subdivision of Sec. 12 pp. 60-63
 Subdivision of Sec. 13 pp. 63-68
 Subdivision of Sec. 14 pp. 68-76
 Subdivision of Sec. 15 pp. 76-81
 Subdivision of Sec. 22 pp. 81-83
 Subdivision of Sec. 23 pp. 83-84

Subdivision of Sec. 25 pp. 84-87
 Subdivision of Sec. 26 pp. 87-89
 Subdivision of Sec. 27 pp. 89-92
 Subdivision of Sec. 33 pp. 92-95
 Subdivision of Sec. 35 pp. 95-104
 Subdivision of Sec. 36 pp. 104-105
 Metes-and-Bounds Survey pp. 105-107

T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes describe the dependent resurvey of the Fourth Standard Parallel North through portions of Ranges 4 and 5 East (N. bdy.), a portion of the south and east boundaries and a portion of the subdivisional lines, the subdivision of certain sections and a metes-and-bounds survey in sec. 22, in Township 16 North, Range 4 East, Gila and Salt River Meridian, Arizona.

The history of surveys pertaining to this resurvey is as follows: The south boundary and a portion of the subdivisional lines were surveyed by C. Burton Foster, in 1877. In 1883, Johnston B. McLaughlin surveyed the Fourth Standard Parallel North through Ranges 4 and 5 East. In 1886, R.C. Powers, resurveyed the Fourth Standard Parallel North through Range 5 East. In 1902, James B. Girand and Park W. Latimer resurveyed the Fourth Standard Parallel North through Range 5 East and surveyed the east boundary. In 1904, Edgar G. Dietrich resurveyed the Fourth Standard Parallel North through Range 4 East. In 1916, William H. Richards, Jr. retraced a portion of the Fourth Standard Parallel North through Range 4 East and retraced and resurveyed a portion of the Fourth Standard Parallel North through Range 5 East. Richards also retraced and resurveyed portions of the south and east boundaries and the subdivisional lines and surveyed a portion of the subdivisional lines. In 1938, Ty White, N. E. Shearer and Frank Kennon dependently resurveyed a portion of the south boundary and a portion of the subdivisional lines. In 1956, Leslie H. Goodwin and Donald E. Harding dependently resurveyed the Fourth Standard Parallel North through Range 5 East. In 1974-75, Harry K. Smith dependently resurveyed a portion of the south boundary. Small Tracts Act Survey, Arizona No. 39, located in section 22 was executed by Joseph D. Jones, Arizona Registered Land Surveyor No. 4491 and Patrick W. Naville, Arizona Registered Land Surveyor No. 13015, in 1992.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated August 18, 1997, and Supplemental Special Instructions dated February 10, 1998 for Group No. 819, Arizona.

The directions of all lines was determined and distances measured, by the technique of differential positioning using Trimble model 4400 Global Positioning System receivers utilizing the Real Time Kinematic technique, and refer to the true meridian.

T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The geographic position of the 1/4 section corner of secs. 1 and 36, on the south boundary of the township was determined by Global Positioning System, using the technique of Real Time Kinematic. Arizona Department of Transportation triangulation station "SHEEP 2 1979" was used as the control station. The coordinates refer to the top of the monument.

Latitude 34°43'55.71" N. Longitude 111°52'37.93" W.
NAD83(1992)

The mean magnetic declination is 12 1/2° E.

Dependent Resurvey of the Fourth Stan. Par. North,
Through a Portion of Range 5 East, (N. bdy.),
Gila and Salt River Meridian, Arizona

Restoring the resurvey executed by
Leslie H. Goodwin & Donald E. Harding, in 1956

Beginning at the standard cor. of secs. 31 and 32, T. 17 N., R. 5 E., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 9 ins. above ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. SC T17N R5E S31 S32 1956.

from which the 1956 bearing tree

A juniper, 9 ins. diam., bears N. 72° W., 15 lks. dist.,
mkd. T17N R5E SC S31 BT. (Record: N. 80° W.)

Add the marks 1998 to the brass cap.

Cor. is located on a steep, rocky, W. facing slope.

S. 89°40' W., on the S. bdy. of sec. 31.

Over mountainous land, through scattered juniper timber.

4.00

Oak Creek, 50 lks. wide, 1 ft. deep, course SSW.

Dependent Resurvey of a Portion of the Fourth Stan. Par. North,
Through Range 5 East (N. bdy.), Gila and Salt River Meridian, Arizona

CHAINS	
11.19	Point for the closing cor. of Tps. 16 N., Rs. 4 and 5 E., hereinafter described.
25.99	The E. 1/16 sec. cor. of sec. 12 only, T. 16 N., R. 4 E., hereinafter described.
28.00	Descend over red sandstone ledge, 40 ft. high, bears SE and NW.
39.47	The standard 1/4 sec. cor. of sec. 31, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd. SC 1/4 S31 1916.
	Add the marks T17N R5E 1998 to the brass cap.
	Cor. is located on a sandstone ledge, of a near vertical S. facing slope.
	S. 89°50' W., beginning new measurement.
5.10	Oak Creek, 1 ch. wide, 1 ft. deep, course WNW, thence across bottom lands.
6.64	Point for the 1/4 sec. cor. of sec. 12 only, T. 16 N., R. 4 E., hereinafter described.
11.68	Barbed wire fence, 4 strands, bears ESE and WNW, thence across pasture.
12.21	Barbed wire fence, 4 strands, bears SSW and NNE for 16 lks. to cor. of fences bearing ESE and W.
16.20	Graded road, 8 ft. wide, in curve, bears SE and W.
21.12	Intersect the easterly side of a wood framed cabin, 25 x 16 ft. the long side bears N. 62°20' E., the NE cor. bears N. 27°40' W., 0.5 lks. dist.
21.14	Intersect the northerly side of same cabin, the NE corner bears N. 62°20' E., 1.4 lks. dist., thence across concrete patio.
23.40	Oak Creek, 75 lks. wide, 3 ft. deep, drains SSW.; thence ascend over E. facing slope.
29.70	Deer Pass Ranch road, bladed, 30 lks. wide, bears N. and S.
39.27	The standard cor. of Tps. 17 N., Rs. 4 and 5 E., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd. T17N R4E R5E SC S36 S31 1956.

Dependent Resurvey of a Portion of the Fourth Stan. Par. North,
Through Range 5 East (N. bdy.), Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Add the marks 1998 to the brass cap.</p> <p>Cor. is located on steep SE facing slope.</p>
	<p>Dependent Resurvey of the Fourth Stan. Par. North, Through a Portion of Range 4 East, (N. bdy.), Gila and Salt River Meridian, Arizona</p>
	<p>Restoring the resurvey executed by Edgar G. Dietrich, in 1904, and the retracement executed by William H. Richards, Jr., in 1916.</p>
	<p>From the stan. cor. of Tps. 17 N., Rs. 4 and 5 E., hereinbefore described.</p>
	<p>S. 89°55' W., on the S. bdy. of sec. 36.</p>
	<p>Over mountainous land, through scattered juniper timber.</p>
7.61	<p>Point for the closing cor. of secs. 11 and 12, T. 16 N., R. 4 E., hereinafter described.</p>
39.83	<p>The stan. 1/4 sec. cor. of sec. 36, monumented with a malpais stone, 30 x 11 x 8 ins., firmly set, projecting 19 ins. above ground, faintly mkd. 1/4 on the N. face, with a scattered mound of stone to the N.</p>
	<p>from which the 1904 bearing tree</p>
	<p>A forked juniper, 24 ins. diam. at base, bears N. 49 1/2° W., 259 lks. dist., with illegible scribe marks on a limb, 9 ins. diam. (Record: 262 lks. dist.)</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">SC T17N R4E 1/4 S36 ----- 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Fourth Stan. Par. North,
Through Range 4 East (N. bdy.), Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Bury the stone, alongside the stainless steel post and raise a mound of stone, 3 1/2 ft. base, 3 ft. high, N. of cor.</p> <hr/>
	<p>N. 89°40' W., beginning new measurement.</p>
6.61	<p>Point for the 1/4 sec. cor. of sec. 11 only, T. 16 N., R. 4 E., hereinafter described.</p>
40.28	<p>The stan. cor. of secs. 35 and 36, monumented with a limestone, 20 x 12 x 7 ins., firmly set, projecting 12 ins. above ground, mkd. SC on the N. face, with 1 groove on the E. face and 5 grooves on the W. face, with a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, N. of cor.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">SC T17N R4E S35 S36 ----- 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
	<p>Bury the stone, alongside the stainless steel post.</p> <hr/>
	<p>N. 89°54' W., on the S. bdy. of sec. 35.</p>
	<p>Over mountainous land, through scattered juniper timber.</p>
5.16	<p>The closing cor. of secs. 10 and 11, Tp. 16 N., R. 4 E., hereinafter described.</p>
39.87	<p>The stan. 1/4 sec. cor. of sec. 35, monumented with a malpais stone, 26 x 14 x 8 ins., firmly set, projecting 10 ins. above ground, mkd. SC 1/4 on the N. face, with a mound of stone, 2 1/2 ft. base, 1 ft. high to the N.</p>
	<p>from which the remains of the 1904 bearing tree</p>
	<p style="padding-left: 40px;">A juniper stump, 18 ins. diam., bears N. 12 3/4° W., 141 lks. dist., with burned out blaze.</p>
	<p>At the cor. point</p>

Dependent Resurvey of a Portion of the Fourth Stan. Par. North,
Through Range 4 East (N. bdy.), Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">SC T17N R4E 1/4 S35 <hr/>1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
	<p>Bury the stone, alongside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/>
	<p>S. 89°51' W., beginning new measurement.</p>
7.60	<p>Point for the 1/4 sec. cor. of sec. 10 only, T. 16 N., R. 4 E., hereinafter described.</p>
10.98	<p>Easterly Right-of-Way fence, U.S. Highway No. 89A, 4 strand barbed wire, bears NNE and SSW.</p>
12.07	<p>Center of pavement, U.S. Highway No. 89A, 38 lks. wide, bears NNE and SSW.</p>
13.21	<p>Westerly Right-of-Way fence, U.S. Highway No. 89A, 4 strand barbed wire, bears NNE and SSW.</p>
40.01	<p>The stan. cor. of secs. 34 and 35, determined from the remains of the 1904 bearing trees</p>
	<p style="padding-left: 40px;">A juniper stump, 8 ins. diam., bears N. 2° E., 58 lks. dist., with a scribe mark. (Record: N. 3 1/2° E.)</p>
	<p style="padding-left: 40px;">A juniper stump, 13 ins. diam., bears N. 56° W., 69 lks. dist., with no marks visible.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">SC T17N R4E S34 S35 <hr/>1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Fourth Stan. Par. North,
Through Range 4 East (N. bdy.), Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.</p> <hr/>
	<p>N. 89°56' W., on the S. bdy. of sec. 34.</p>
	<p>Descending over W. slope of mesa.</p>
9.90	<p>Point for the closing cor. of secs. 9 and 10, Tp. 16 N., R. 4 E., hereinafter described.</p>
40.06	<p>The stan. 1/4 sec. cor. of sec. 34, determined from the remains of the 1904 bearing tree</p>
	<p>A juniper stump, 16 ins. diam., bears N. 60 1/2° E., 275 lks. dist., with rotted blaze.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd.</p>
	<p>SC</p>
	<p>T17N R4E</p>
	<p>1/4 S34</p> <hr/>
	<p>1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
	<p>Cor. is located in a track road, 14 lks. wide, bears SE and NW.</p> <hr/>
	<p>Dependent Resurvey of a Portion of the South Boundary, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona</p> <hr/>
	<p>Restoring the resurvey executed by</p>
	<p>Ty White, Norville E. Shearer and Frank Kennon, in 1938</p> <hr/>
	<p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. T16N R4E S35 S36 S2 S1 T15N 1916.</p>
	<p>Add the marks 1997 to the brass cap.</p>
	<p>Cor. is located 18 lks. N. of a bladed road, 30 lks. wide, bears E. and W.</p>

Dependent Resurvey of a Portion of the South Boundary,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS.	
40.11	<p>S. 89°53' W., bet. secs. 2 and 35, on the S. bdy. of the Tp. Over nearly level land, through dense creosote.</p> <p>The 1/4 sec. cor. of secs. 2 and 35, monumented with an iron post, 1 in. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. 1/4 S35 S2 1938.</p> <p>Add the marks T16N R4E T15N 1997 to the brass cap.</p> <p>Cor. is located in a woven wire fence, bears N. and WSW; and 20 lks. N. of a bladed road, 30 lks. wide, bears N. and WSW.</p>
36.50	<p>From the 1/4 sec. cor. of secs. 3 and 34, monumented with an iron post, 1 in. diam., firmly set 19 ins. below the surface of the ground, with brass cap mkd. 1/4 S34 S3 1938.</p> <p>Cor. is located 3 lks. S. of a fence cor. with four strand barbed wire fences bearing N. and W.</p> <p>N. 89°45' W., bet. secs. 3 and 34, on the S. bdy. of the Tp. Over nearly level land, along fence line, through cultivated field.</p>
40.43	<p>Oak Creek, 3 chs. wide, course NW.</p> <p>True point for the cor. of secs. 3, 4, 33 and 34, at proportionate dist., occupied with an open end iron pipe of unknown origin, 1 in. diam., firmly set, projecting 10 ins. above ground.</p> <p>Cor. point falls in the dry bed of Oak Creek, where it is impracticable to establish a permanent monument.</p>
2.90	<p style="text-align: center;">Restoring the resurvey executed by Harry K. Smith, in 1975</p> <hr/> <p>N. 89°45' W., bet. secs. 4 and 33, on the S. bdy. of the Tp. Across bottom land, through dense undergrowth.</p> <p>The witness cor. to the cor. of secs. 3, 4, 33 and 34, monumented with an iron post, 2 ins. diam., firmly set, projecting 5 ins. above ground, in a mound of stone 3 ft. base, to top, with brass cap mkd. WC T16N R4E S33 S34 S4 S3 T15N 1975 1938.</p>

Dependent Resurvey of a Portion of the South Boundary,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>from which the 1938 bearing trees</p> <p>A willow stump, 24 ins. diam., bears N. 17 3/4° E., 122 lks. dist., no marks visible.</p> <p>An ash, 33 ins. diam., bears S. 72 1/4° E., 49 lks. dist., with healed blaze.</p> <p>A dead mesquite, 8 ins. diam., bears S. 78 3/4° W., 13 1/2 lks. dist., with healed blaze.</p> <p>A mesquite stump, 7 ins. diam., bears N. 19° W., 51 lks. dist., with rotted blaze.</p> <p>Add the marks 1997 to the brass cap.</p> <hr/> <p>N. 89°45' W., beginning new measurement.</p> <p>Over nearly level land, through dense undergrowth.</p>
15.20	Oak Creek, 2 chs. wide, course S.
16.80	Cornville ditch, 12 lks. wide, drains S.
17.30	<p>The E. 1/16 sec. cor. of secs. 4 and 33, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with a mound of stone, 2 1/2 ft. base, 1 ft. high to the N., with brass cap mkd. T16N R4E E1/16 S33 S4 1975.</p> <p>Add the marks 1997 to the brass cap.</p> <hr/> <p>N. 89°45' W., beginning new measurement.</p>
20.20	<p>The 1/4 sec. cor. of secs. 4 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, in a mound of stone 2 1/2 ft. base, to top, with brass cap mkd. T16N R4E 1/4 S33 S4 T15N 1975 1938.</p> <p>from which the original bearing tree</p> <p>A juniper, 13 ins. diam., bears S. 18° W., 24 lks. dist., mkd. 1/4 S BT, at chest height.</p> <p>and a 1938 bearing tree</p> <p>A juniper, 18 ins. diam., bears N. 17 1/2° W., 130 lks. dist., mkd. 1/4 S33 BT, at chest height. (Record: 132 lks. dist.)</p>

Dependent Resurvey of a Portion of the South Boundary,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS

Add the marks 1997 to the brass cap.

Dependent Resurvey of a Portion of the East Boundary,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

Restoring the resurvey and retracement executed by
William H. Richards, Jr., in 1916

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the
Tp., monumented with a basalt stone, 20 x 16 x 10 ins., firmly
set, projecting 9 ins. above ground, plainly mkd. with 5 notches
on the N. edge and 1 notch on the S. edge.

from which the original bearing trees

A juniper, 16 ins. diam., bears S. 34° E., 70 lks.
dist., mkd. T16N R5E S31 BT. (Record: 72 lks. dist.)

A forked juniper, 20 ins. diam., bears S. 81 1/2° W.,
23 lks. dist., mkd. T16N R4E S36 BT on a limb, 11 ins.
diam.

An oak, 9 ins. diam., bears N. 3°45' W., 47 lks. dist.,
with healed blaze.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
20 ins. in the ground to bedrock, in a mound of stone, 3 ft.
base, to top, with brass cap mkd.

T16N	
R4E	R5E
S25	S30

S36	S31
1997	

Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath
the stainless steel post.

Deposit the stone alongside the stainless steel post in the mound
of stone.

N. 0°02' E., on the W. bdy. of sec. 30, T. 16 N., R. 5 E.

Over mountainous land, through scattered timber.

Dependent Resurvey of a Portion of the East Boundary,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.74	<p>The 1/4 sec. cor. of sec. 30 only, T. 16 N., R. 5 E., monumented with a basalt stone, 23 x 13 x 6 ins., firmly set, projecting 9 ins. above ground, in a mound of stone, 2 1/2 ft. diam., to top, plainly mkd. 1/4 on the W. face.</p> <p>from which the original bearing tree</p> <p style="padding-left: 40px;">A juniper, 37 ins. diam., bears N. 41 1/4° E., 19 lks. dist., mkd. 30 BT on a partially healed blaze.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top with brass cap mkd.</p> <p style="text-align: center;">T16N R4E R5E 1/4 S30 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the stone alongside the stainless steel post in the mound of stone.</p> <p>Cor. is located 52 lks. N. of the center of a rocky wash, 20 lks. wide, 3 ft. deep, drains SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°01' E., beginning new measurement.</p>
0.75	<p>Point for the 1/4 sec. cor. of sec. 25 only, T. 16 N., R. 4 E., hereinafter described.</p>
40.00	<p>The cor. of secs. 19 and 30 only, T. 16 N., R. 5 E., monumented with a basalt stone, 29 x 8 x 8 ins., firmly set, projecting 12 ins. above ground, in a mound of stone, 3 1/2 ft. base, to top, plainly mkd. with 4 grooves on the N. face and 2 grooves on the S. face.</p> <p>from which the remaining original bearing trees</p> <p style="padding-left: 40px;">A juniper, 16 ins. diam., bears N. 51 1/2° E., 77 lks. dist., mkd. T16N R5E S19 BT. (Record: N. 53°33' E.)</p>

Dependent Resurvey of a Portion of the East Boundary,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS							
	<p>A forked juniper, 23 ins. diam., bears S. 12 1/2° E., 113 lks. dist., mkd. T16N R5E S30 BT, on a limb, 7 ins. diam. (Record: S. 7°56' E., 118 lks.)</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T16N</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">R4E</td> <td style="padding: 0 5px;">R5E</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S25</td> <td style="padding: 0 5px;">S19</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S30</td> </tr> </table> <p>1997</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the marked stone alongside the stainless steel post, in the mound of stone.</p> <hr/> <p>N. 0°05' E., on the W. bdy. of sec. 19, T. 16 N., R. 5 E.</p> <p>Over mountainous land, through scattered timber.</p> <p>0.86 The closing cor. of secs. 24 and 25, T. 16 N., R. 4 E., hereinafter described.</p> <p>39.79 The 1/4 sec. cor. of secs. 19 and 24, determined at the center of an imbedded mound of stone, 2 1/2 ft. base, 1/2 ft. high.</p> <p>from which the remains of the original bearing tree</p> <p style="padding-left: 40px;">A stump hole, bears S. 52 1/2° W., 33 lks. dist., with a down forked juniper, 30 ins. diam. alongside, plainly mkd. 1/4 S24 BT, on a limb, 10 ins. diam.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>	R4E	R5E	S25	S19		S30
R4E	R5E						
S25	S19						
	S30						

Dependent Resurvey of a Portion of the East Boundary,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> <p>T16N R4E R5E 1/4 S24 S19 1997</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <hr/> <p>From the 1/4 sec. cor. of sec. 7 only, T. 16 N., R. 5 E., monumented with a malpais stone, 20 x 12 x 6 ins., firmly set, projecting 12 ins. above ground, in a scattered mound of stone, with no marks visible.</p> <p>from which the original bearing tree</p> <p style="padding-left: 40px;">A juniper, 24 ins. diam., bears S. 1 1/4° E., 90 lks. dist., mkd. 1/4 S7 BT.</p> <p>and a 1916 bearing tree</p> <p style="padding-left: 40px;">A juniper, 19 ins. diam., bears N. 53 1/2° E., 144 lks. dist., mkd. 1/4 S7 BT.</p> <p>Rebuild mound of stone, 3 ft. base, 2 ft. high, around original stone.</p> <p>N. 0°18' E., on W. bdy. of sec. 7, T. 16 N., R. 5 E.</p> <p>Over mountainous land, through moderate juniper timber.</p> <p>2.88 The 1/4 sec. cor. of sec. 12 only, T. 16 N., R. 4 E., monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. 1/4 S12 1916.</p> <p>from which the 1916 bearing trees</p> <p style="padding-left: 40px;">A forked juniper, 25 ins. diam. at base, bears S. 66 1/2° W., 103 lks. dist., mkd. 1/4 S12 BT on a limb, 9 ins. diam. (Record: 101 lks.)</p> <p style="padding-left: 40px;">A juniper, 13 ins. diam., bears N. 73 3/4° W., 131 lks. dist., mkd. 1/4 S12 BT</p> <p>Add the marks T16N R4E R5E 1998 to the brass cap.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°03' W., beginning new measurement.</p>

Dependent Resurvey of a Portion of the East Boundary,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over mountainous land, through moderate juniper timber.
20.08	Point for the N. 1/16 sec. cor. of sec. 12 only.
	Not monumented.
27.50	Oak Creek, 1 ch. wide, 2 ft. deep, course SW.
32.14	Intersect the Fourth Standard Parallel North.
	Point for the closing cor. of Tps. 16 N., Rs. 4 and 5 E.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	28 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T17N R5E S31</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">S12 S7 R4E R5E T16N CC 1998</p>
	Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath
	the stainless steel post.
	From this cor. point, the stan. cor. of secs. 31 and 32,
	T. 17 N., R. 5 E., bears N. 89°40' E., 11.19 chs. dist.,
	hereinbefore described.
	Cor. is located in a graded road, 12 lks. wide, bears NE and SSW.
	From this same cor. point, the point for the original closing
	cor., bears N. 0°03' W., 0.07 chs. dist., determined from the
	original bearing tree
	<p style="margin-left: 40px;">A forked juniper, 18 ins. diam. at base, bears</p>
	<p style="margin-left: 40px;">S. 70 1/2° W., 190 lks. dist., mkd. T16N R4E S12 BT, on a</p>
	<p style="margin-left: 40px;">limb, 7 ins. diam.</p>
	Found the original closing cor., a sandstone 18 x 12 x 6 ins.,
	mkd. with 6 grooves on a face, 4 grooves on a face, 3 grooves on
	a face, and a partial C on a face, lying loose nearby.
	Pulverize the sandstone, and use it as backfill for the stainless
	steel post.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Restoring the surveys and resurveys executed by William H. Richards, Jr., in 1916, and Ty White, Norville E. Shearer and Frank Kennon, in 1938.</p> <hr/> <p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°02' E., bet. secs. 35 and 36.</p> <p>Over rolling land, through medium creosote and mesquite.</p>
15.60	Left bank of gulch, 15 ft. deep, drains W.
15.90	Right bank of same gulch.
17.05	Track road, 12 lks. wide, bears E. and W.
18.60	Left bank of wash, 12 ft. deep, course W.
19.10	Right bank of same wash.
20.10	Point for the S. 1/16 sec. cor. of secs. 35 and 36.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S 1/16 S35 S36 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.</p>
37.20	Track road, 12 lks. wide, bears SE. and NNW.
40.20	<p>The 1/4 sec. cor. of secs. 35 and 36, monumented with a limestone 22 x 12 x 8 ins., firmly set, projecting 12 ins. above ground, in a scattered mound of stone, 3 1/2 ft. diam., plainly mkd. 1/4 on the W. face.</p> <p>from which the 1916 bearing trees</p> <p style="text-align: center;">A juniper, 17 ins. diam., bears N. 64 3/4° E., 135 lks. dist., with healed blaze. (Record: 122 lks. dist.)</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A forked juniper, 33 ins. diam., bears S. 64° W., 50 lks. dist., with illegible scribe marks, on a limb, 9 ins. diam.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E 1/4 S35 S36 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Deposit marked stone, in the mound of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°09' W., beginning new measurement.</p> <p>Over broken land, through scattered timber.</p>
1.30	Gulch, 30 lks. wide at bottom, drains NNW.
5.05	Track road, 12 lks. wide, bears E. and W.
5.79	A rebar, 1/2 in. diam., firmly set, projecting 4 ins. above ground, encircled with a collar of stone, with an affixed washer stamped LS 5713.
18.20	Top of limestone knoll, descend.
19.895	<p>The N. 1/16 sec. cor. of secs. 35 and 36, established by Joseph D. Jones, Arizona Registered Land Surveyor No. 4491. Monumented with a rebar, 18 ins. long, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. diam. yellow plastic cap, stamped MKJ LS 4491. This is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>T16N R4E N 1/16 S35 S36 1997</p>
	<p>Deposit the rebar inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a steep N, facing slope.</p> <p>From this cor. point, a rebar of unknown origin, 1/2 in. diam., firmly set, projecting 8 ins. above ground, bears N. 9°16' E., 6 lks. dist.</p> <hr/> <p>N. 0°09' W., beginning new measurement.</p> <p>Over broken land, through scattered timber.</p>
0.97	Wash, 17 lks. wide, 3 ft. deep, course NW.
11.90	Gulch, 50 lks. wide at bottom, drains WSW.
19.895	<p>The cor. of secs. 25, 26, 35 and 36, monumented with an iron post 2 ins. diam., firmly set, projecting 18 ins. above ground, with brass cap mkd. T16N R4E S26 S25 S35 S36 1938.</p> <p>from which the original bearing tree remarked in 1938</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 51° E., 12 lks. dist., mkd. IVE SXXXVI BT, on a partially healed blaze.</p> <p>Add the marks 1997 to the brass cap.</p> <p>Cor. is located at the intersection of 5 strand barbed wire fences, bearing N. and W.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 25 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 7 ins. above ground, in a mound of stone, 3 1/2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S25 S36 1916.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <p>West, bet. secs. 25 and 36.</p> <p>Over broken land, through medium creosote and mesquite.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.03	Point for the W. 1/16 sec. cor. of secs. 25 and 36, occupied with an iron pin of unknown origin, 14 ins. long, 1/2 in. diam., firmly set, projecting 3 ins. above ground.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.
	T16N R4E S25 W 1/16 — S36 1997
	Deposit the rebar inside the stainless steel post.
	Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
24.55	Wash, 11 lks. wide, 3 ft. deep, drains SW.
31.40	Wash, 12 lks. wide, 3 ft. deep, drains SSW.
40.06	The cor. of secs. 25, 26, 35 and 36.
	N. 0°07' E., bet. secs. 25 and 26.
	Over broken land, scattered timber and undergrowth.
5.90	Edge of spur, bears NE and SW, descend into Oak Creek bottom lands.
2.07	Center of pavement, Page Springs road, asphalt surfaced, 36 lks. wide, bears E. and W.
18.00	Oak Creek, 2 chs. wide, course W.
38.45	Right bank of Oak Creek, course SE.
40.45	Left bank of Oak Creek.
40.56	Point for the 1/4 sec. cor. of secs. 25 and 26, at proportionate distance, by the method of irregular boundary adjustment, based on the plat of survey executed by Scott J. Smith, Arizona Registered Land Surveyor No. 19853, in 1990, on file and recorded in Yavapai County Recorders Office, Book 11, P. 27 of land surveys; there is no remaining evidence of the original cor.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Not monumented.
	<hr/> N. 0°06' E., beginning new measurement.
	Over bottom land, across cultivated fields.
9.55	Center of pavement, Page Springs road, asphalt surfaced, 36 lks. wide, bears E. and W. Leave bottom land, enter broken land.
20.06	The N. 1/16 sec. cor. of secs. 25 and 26, established by Patrick W. Naville, Arizona Registered Land Surveyor No. 13015, monumented with a rebar, 18 ins. long, 1/2 in. diam., firmly set, projecting 8 ins. above ground. This accepted as a careful and faithful determination of the position of the cor.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	<div style="text-align: center;"> T16N R4E N 1/16 S26 S25 1997 </div>
	Deposit the rebar inside the stainless steel post.
	Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.
	From this cor. point, a rebar of unknown origin, 5/8 in. diam., firmly set, projecting 2 ins. above ground, bears S. 3°46' E., 5 lks. dist.
	<hr/> N. 0°06' E., beginning new measurement.
20.06	The cor. of secs. 23, 24, 25 and 26 monumented with an iron post, 2 ins. diam., firmly set, projecting 13 ins. above ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. T16N R4E S23 S24 S26 S25 1938.
	from which the 1938 bearing trees
	<div style="padding-left: 40px;"> A forked juniper, 24 ins. diam., bears N. 41 1/2° E., 172 lks. dist., mkd. T16N R4E S24 BT, on a limb, 5 ins. diam. (Record: 175 lks. dist.) </div>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A forked juniper, 10 ins. diam., bears S. 63° E., 127 lks. dist., mkd. T16N R4E S25 BT, on a limb, 4 ins. diam. (Record: 130 lks. dist.)</p> <p>A juniper, 7 ins. diam., bears S. 45° W., 81 lks. dist., mkd. T16N R4E S26 BT.</p> <p>A forked juniper, 15 ins. diam., bears N. 42 1/2° W., 108 lks. dist., marked T16N R4E S23 BT, on a limb, 8 ins. diam. (Record: 110 lks. dist.)</p> <p>Add the marks 1997 to the brass cap.</p> <hr/> <p>East, bet. secs. 24 and 25.</p> <p>Over mountainous land, through scattered timber.</p>
20.01	Point for the W. 1/16 sec. cor. of sec. 25 only.
	Not monumented.
20.02	Point for the W. 1/16 sec. cor. of sec. 24 only.
	Not monumented.
29.80	Gulch, 45 lks. wide at bottom, drains SSW.
40.02	The 1/4 sec. cor. of secs. 24 and 25, monumented with an iron post, 1 in. diam., firmly set, projecting 13 ins. above ground, in a mound of stone, 3 ft. base., to top, with brass cap mkd. 1/4 S24 S25 1916.
	from which the 1916 bearing trees
	<p>A forked juniper, 24 ins. diam., bears N. 5 1/2° E., 94 lks. dist., mkd. 1/4 S24 BT, on a limb, 6 ins. diam.</p>
	<p>A juniper, 33 ins. diam., bears S. 69° W., 131 lks. dist., marked 1/4 S25 BT.</p>
	Add the marks T16N R4E 1997 to the brass cap.
	S. 89°59' E., beginning new measurement.
39.96	The closing cor. of secs. 24 and 25, T. 16 N., R. 4 E., at intersection with the E. bdy., monumented with an iron post, 2 ins. diam., firmly set, projecting 14 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. T16N R4E R5E S24 CC S25 1916.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>from which the remaining original bearing tree</p>
	<p>A forked juniper, 24 ins. diam., bears S. 32° W., 238 lks. dist., mkd. T16N R4E S25 BT CC, on a limb, 7 ins. diam.</p>
	<p>Add the marks 1997 to the brass cap.</p>
	<p>From this cor. point, the cor. of secs. 19 and 30 only, T. 16 N., R. 5 E., bears S. 0°05' W., 0.86 chs. dist., hereinbefore described.</p>
	<hr/> <p>Point for the 1/4 sec. cor. of sec. 25 only, is at proportionate dist. on the E. bdy. of sec. 7.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top with brass cap mkd.</p>
	<p style="text-align: center;">T16N</p>
	<p style="text-align: center;">R4E R5E</p>
	<p style="text-align: center;">1/4 S25 </p>
	<p style="text-align: center;">1997</p>
	<p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>
	<p>From this cor. point, the 1/4 sec. cor. of sec. 30 only, T. 16 N., R. 5 E., bears S. 0°01' W., 0.75 chs. dist., hereinbefore described.</p>
	<hr/> <p>From the cor. of secs. 23, 24, 25 and 26.</p>
	<p>N. 0°34' E., bet. secs. 23 and 24.</p>
	<p>Over broken land, through scattered timber.</p>
11.30	<p>Center of wash, 38 lks. wide, 8 ft. deep, drains SW.</p>
19.905	<p>The S. 1/16 sec. cor. of secs. 23 and 24, established by Patrick W. Naville, Arizona Registered Land Surveyor No. 13015, monumented with a rebar, 18 ins. long, 5/8 in. diam., firmly set, projecting 3 ins. above ground, with 1 1/2 ins. diam. aluminum cap mkd. SEC RLS 13015. This is accepted as a careful and faithful determination of the position of the cor.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Not remonumented.</p> <p>From this cor. point, a rebar of unknown origin, 1/2 in. diam., firmly set, projecting 11 ins. above ground, bears S. 3°38' E., 6 lks. dist.</p> <hr/> <p>N. 0°34' E., beginning new measurement.</p>
10.20	Barbed wire fence, 4 strand, bears NNE and SSW.
19.905	<p>The 1/4 sec. cor. of secs. 23 and 24, monumented with a granite boulder, 4 x 3 x 2 ft. high, mkd. 1/4 on the SW face.</p> <p>from which the 1916 bearing trees</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 34° E., 66 lks. dist., mkd. 1/4 S24 BT. (Record: 54 lks. dist.)</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 28° W., 64 lks. dist., mkd. 1/4 S23 BT.</p> <p>Impracticable to remonument corner position.</p> <hr/> <p>N. 0°19' W., beginning new measurement.</p>
0.15	Wash, 22 lks. wide, 3 ft. deep, course W.
21.30	Wash, 15 lks. wide, 4 ft. deep, course W.
39.87	<p>The cor. of secs. 13, 14, 23 and 24, monumented with an iron post, 2 ins. diam., firmly set, projecting 14 ins. above ground, in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd. T16N R4E S14 S13 S23 S24 1916.</p> <p>from which the 1916 bearing trees</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears N. 4 1/4° E., 92 lks. dist., marked T16N R4E S13 BT. (Record: 86 lks. dist.)</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 43 1/2° E., 81 lks. dist., marked T16N R4E S24 BT. (Record: S. 41 1/4° E., 79 lks. dist.)</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears S. 53 3/4° W., 89 lks. dist., marked T16N R4E S23 BT. (Record: S. 63 3/4° W.)</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears N. 73 1/2° W., 108 lks. dist. mkd. T16N R4E S14 BT.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Add the marks 1997 to the brass cap.
	<hr/> <p>From the 1/4 sec. cor. of secs. 13 and 24, monumented with an iron post, 1 in. diam., firmly set, projecting 23 ins. above ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. 1/4 S13 S24 1916.</p>
	from which the remains of the 1916 bearing trees
	<p>A juniper snag, 11 ins. diam., bears S. 43 1/2° W., 121 lks. dist., mkd. 1/4 S24 BT. (Record: S. 44 3/4° W.)</p>
	<p>A root hole, bears N. 5 1/4° W., 141 lks. dist., with a fallen juniper, 13 ins. diam., alongside, mkd. 1/4 S13 BT.</p>
	Add the marks T16N R4E 1998 to the brass cap.
	N. 89°43' W., bet. secs. 13 and 24.
	Over mountainous land, through medium juniper timber.
19.965	Point for the W. 1/16 sec. cor. of secs. 13 and 24.
	Not monumented.
39.82	The cor. of secs. 13, 14, 23 and 24.
	<hr/> <p>N. 2°54' E., bet. secs. 13 and 14.</p>
	Over broken and mountainous land, through scattered timber.
19.95	Point for the S. 1/16 sec. cor. of sec. 13 only.
	Not monumented.
20.50	Point for the S. 1/16 sec. cor. of sec. 14 only.
	Not monumented.
29.925	Point for the N-S 1/64 sec. cor. of sec. 13 only, falls on the
	face of a granite cliff, where it is impracticable to establish a
	permanent monument.
	From this point, the point selected for the witness cor. to the
	N-S 1/64 sec. cor. of sec. 13 only, bears S. 45°45' E., 0.73 ch.
	dist.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to bedrock in a supporting mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T16N R4E ↙ N-S 1/64 S13 1998</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a ledge of a steep, rocky W. facing slope.</p>
30.75	<p>Point for the N-S 1/64 sec. cor. of sec. 14 only, occupied with a rebar of unknown origin, 1/2 in. diam., firmly set, projecting 6 ins. above ground.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock, in a supporting mound of stone, 6 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T16N R4E N-S 1/64 S14 1998</p> </div> <p>Deposit the rebar, 18 ins. long, inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>
34.85	<p>Oak Creek, 1 ch. wide, 2 ft. deep, course SSW.</p>
39.90	<p>The 1/4 sec. cor. of sec. 13 only, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. 1/4 S13 1916.</p> <p>from which</p> <p style="padding-left: 40px;">The NW cor. of a block house, 30 x 24 ft., bears S. 67° W., 45 lks. dist., long side bears S. 32° W.</p> <p>Add the marks T16N R4E 1998 to the brass cap.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 3°25' E., beginning new measurement.</p> <p>Through residential area.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
1.10	<p>The 1/4 sec. cor. of sec. 14 only, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. 1/4 S14 1916.</p> <p>Add the marks T16N R4E 1998 to the brass cap.</p> <p>Cor. is located in four strand barbed wire fence, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 3°25' E., beginning new measurement.</p> <p>Through residential area.</p>
18.89	<p>Point for the N. 1/16 sec. cor. of sec. 13 only.</p> <p>Not monumented.</p>
20.41	<p>Point for the N. 1/16 sec. cor. of sec. 14 only.</p> <p>Not monumented.</p>
25.20	<p>Oak Creek, 1 ch. wide, 2 ft. deep, course ESE, ascend over steep, S. facing slope.</p>
28.89	<p>Point for the N-N 1/64 sec. cor. of sec. 13 only.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T16N R4E N-N 1/64 S13 1998</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a steep, rocky S. facing slope.</p>
30.615	<p>The N-N 1/64 sec. cor. of sec. 14 only, established by David S. Dickey, Sr., Arizona Registered Land Surveyor No.25384, monumented with a rebar, 16 ins. long, 1/2 in. diam., firmly set, projecting 4 ins. above ground, with 1 in. diam., plastic cap mkd. COR-STONE LS 25384. This is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>


Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
10.205	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T16N R4E N-N 1/64 S14 1998</p> </div> <p>Deposit the rebar inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 3°25' E., beginning new measurement.</p> <p>Ascend over steep S. facing slope.</p> <p>The cor. of secs. 11, 12, 13 and 14, monumented with an iron post, 2 ins. diam., firmly set, projecting 15 ins. above ground, in a mound of stone, 3 ft. base, to top, with a scattered mound of stone to the W., with brass cap mkd. T16N R4E S11 S12 S14 S13 1916.</p> <p>from which the 1916 bearing trees</p> <p style="padding-left: 40px;">A forked juniper, 24 ins. diam., bears N. 71 3/4° E., 145 lks. dist., mkd. T16N R4E S12 BT on a limb, 7 ins. diam. (Record: N. 88 1/4° E., 138 lks. dist.)</p> <p style="padding-left: 40px;">A forked juniper, 30 ins. diam., bears N. 29° W., 114 lks. dist., mkd. T16N R4E S11 BT on a limb, 10 ins. diam.</p> <p>Add the marks 1998 to the brass cap.</p> <p>Raise a mound of stone, 4 ft. base, 5 ft. high, W. of cor.</p> <hr/> <p>From the 1/4 sec. cor. of sec. 12 only, on the S. bdy. of the sec., monumented with an iron post, 1 in. diam., firmly set, projecting 19 ins. above ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. 1/4 S12 1916.</p> <p>from which the 1916 bearing trees</p> <p style="padding-left: 40px;">A juniper snag, 24 ins. diam., bears N. 24 1/2° E., 144 lks. dist., mkd. 1/4 S12 BT. (Record: 132 lks. dist.)</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A forked juniper, 24 ins. diam. at base, bears N. 10 1/4° W., 103 lks. dist., mkd. 1/4 S12 BT on a limb, 7 ins. diam.</p>
	<p>Add the marks T16N R4E 1998 to the brass cap.</p>
	<p>S. 89°55' W., bet. secs. 12 and 13.</p>
	<p>Over mountainous land, through moderate juniper timber.</p>
5.17	<p>The 1/4 sec. cor. of sec. 13 only, monumented with an iron post, 1 in. diam., firmly set, projecting 11 ins. above ground, with brass cap mkd. 1/4 S13 1916.</p>
	<p>from which the 1916 bearing tree</p>
	<p>A forked juniper, 24 ins. diam. at base, bears S. 82 3/4° E., 89 lks. dist., mkd. 1/4 S13 BT on a limb, 7 ins. diam. (Record: 121 lks. dist.)</p>
	<p>Add the marks T16N R4E 1998 to the brass cap.</p>
	<hr/> <p>S. 89°58' W., beginning new measurement.</p>
20.09	<p>Point for the W. 1/16 sec. cor. of sec. 13 only.</p>
	<p>Not monumented.</p>
34.99	<p>The cor. of secs. 11, 12, 13 and 14.</p>
	<hr/> <p>From the 1/4 sec. cor. of secs. 11 and 12, determined from the 1916 bearing trees</p>
	<p>A juniper snag, 12 ins. diam., bears S. 76 1/2° E., 90 lks. dist., mkd. 1/4 S12 BT (Record: S. 73 1/2° E.)</p>
	<p>A sycamore, 12 ins. diam., bears S. 21 1/4° W., 150 lks. dist., no marks visible (Record: S. 20° W.)</p>
	<p>The cor. point falls in Oak Creek, where it is impracticable to establish a permanent monument.</p>
	<p>From this point, the point selected for the witness 1/4 sec. cor. of secs. 11 and 12, bears S. 50°21' E., 0.76 chs. dist.</p>
	<p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in a drill hole, cemented in place, flush with a sandstone outcropping, 4 x 2 x 2 ft. high, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  <p>WC T16N R4E 1/4 S11 S12 1998</p> </div>
	<p>Cor. is located 16 lks. S. of left bank of Oak Creek, 2 ft. high, course SW.</p>
	<p>N. 0°03' W., bet. secs. 11 and 12.</p>
	<p>Across Oak Creek.</p>
0.55	<p>Right bank of Oak Creek, 1 ft. high, course SW.</p>
3.92	<p>Track road, 12 lks. wide, bears NE and SW.</p>
19.51	<p>Four strand barbed wire fence, bears NNE and SSW.</p>
20.04	<p>Point for the N. 1/16 sec. cor. of secs. 11 and 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T16N R4E N 1/16 S11 S12 1998</p> </div>
	<p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, a rebar 1/2 in. diam., firmly set, projecting 3 ins. above ground, with 1 in. diam. plastic cap, mkd. LS 19853, bears S. 6°44' W., 2.1 lks. dist. This position was established by Scott J. Smith, Arizona Registered Land Surveyor No. 19853, in 1996, using improper control.</p>
31.68	<p>Intersect the Fourth Standard Parallel North.</p> <p>Point for the closing cor. of secs. 11 and 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS

T17N R4E
S36

S11 | S12
CC
T16N R4E
1998

Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.

From this cor. point, the stan. cor. of Tps. 17 N., Rs. 4 and 5 E., bears N. 89°55' E., 7.61 chs. dist., hereinbefore described.

From this same cor. point, the 1916 closing cor., bears N. 0°03' W., 0.015 ch. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. T17N S36 S31 CC S11 S12 T16N R4E 1916, from which the 1916 bearing trees

A forked juniper snag, 24 ins. diam. at base, bears S. 56 1/2° E., 54 lks. dist., mkd. T16N R4E S12 CC BT on a limb, 6 ins. diam.

A forked juniper snag, 24 ins. diam. at base, bears S. 14 1/2° W., 50 lks. dist., mkd. T16N R4E S11 CC BT on a limb. 8 ins. diam. (Record: 47 lks. dist.)

Chisel the marks AM on the brass cap, invert the iron post, 36 ins. long, and bury in place.

Point for the 1/4 sec. cor. of sec. 12 only, is at proportionate dist. on the N. bdy. of sec. 12.

Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, with aluminum cap mkd.

T17N R5E

1/4 S12
T16N R4E
1998

from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 9°07' E., 75.7 ft. dist., with cap mkd. RM T16N R4E 1/4 S12 75.7 FT TO COR 1998, and an arrow pointing to the cor.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS

Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 23 ins. in the ground, for a reference monument, bears S. 54°13' W., 67.5 ft. dist., with cap mkd. RM T16N R4E 1/4 S12 67.5 FT TO COR 1998, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.

Cor. is located 26 lks. S. of the edge of water of Oak Creek, course WNW.

From this cor. point, the stan. 1/4 sec. cor. of sec. 31, T. 17 N., R. 5 E., bears N. 89°50' E., 6.64 chs. dist., hereinbefore described.

The E. 1/16 sec. cor. of sec. 12 only, on the N. bdy. of sec. 12, established at proportionate dist. by Scott J. Smith, Arizona Registered Land Surveyor No. 19853, monumented with a rebar, 12 ins. long, 5/8 in. diam., firmly set 8 ins. in the ground, with a 1 in. diameter plastic cap mkd. LS 19853. This is accepted as a careful and faithful determination of the cor. position.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T17N R5E

E 1/16 S12

T16N R4E

1998

Deposit the rebar inside the stainless steel post.

Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.

From this cor. point, the stan. 1/4 sec. cor. of sec. 31, T. 17 N., R. 5 E., bears S. 89°40' W., 13.48 chs. dist., hereinbefore described.

From this same cor. point, an iron pipe of unknown origin, 3/4 in. diam., firmly set, projecting 4 ins. above ground, bears S. 84°15' W., 29 lks. dist.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
9.995	<p>From the 1/4 sec. cor. of secs. 34 and 35, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd. 1/4 S34 S35 1938.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <p>Cor. is located within the Oak Creek School grounds, 3 lks. E. of a woven wire fence, bears N. 5° E., and S. 5° W.</p> <p>N. 0°11' E., bet. secs. 34 and 35.</p> <p>Over rolling land, through medium undergrowth.</p> <p>Point for the S-N 1/64 sec. cor. of secs. 34 and 35, occupied with a rebar of unknown origin, 18 ins. long, 1/2 in. diam., firmly set, projecting 3 ins. above ground.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S-N 1/64 S34 S35 1997</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Cor. located 1 lk. W. of a 4 strand barbed wire fence, bears N. and S.</p>
19.99	<p>The N. 1/16 sec. cor. of secs. 34 and 35, established by Wallace R. Ott, Arizona Registered Land Surveyor No. 9431. Monumented with an aluminum rod, 3/4 in. diam., firmly set, projecting 1/2 in. above ground, with 2 1/2 ins. diam. aluminum cap mkd. U.S. DEPT. OF AGRICULTURE N 1/16 S34 S35 1987 U.S. FOREST SERVICE RLS 9431. This accepted as a careful and faithful determination of the position of the cor.</p> <p>Not remonumented.</p> <p>Cor. is located at the intersection of 4 strand barbed wire fences, bearing N., S. and E.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°11' E., beginning new measurement.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
18.30	Graded road, 12 lks. wide, bears NE and SW.
19.79	<p>The witness cor. to the cor. of secs. 26, 27, 34 and 35, monumented with an iron post, 2 ins. diam., firmly set, projecting 36 ins. above ground, in a mound of stone, 5 ft. base, to top, with brass cap mkd. WC T16N R4E S26 S27 S34 S35 1938.</p> <p>Add the marks 1997 to the brass cap.</p> <hr/> <p>N. 0°11' E., beginning new measurement.</p>
0.10	Left cut bank of Oak Creek, bears E. and W.
0.20	<p>True point for the cor. of secs. 26, 27, 34 and 35. Cor. position falls on a steep bank of Oak Creek, where it is impracticable to establish a permanent monument.</p> <hr/> <p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>S. 89°08' W., bet. sec. 26 and 35.</p> <p>Over broken land, through scattering timber, descending.</p>
11.78	Center of pavement, Page Spring road, asphalt surfaced, 36 lks. wide, leave broken land, enter bottom land.
14.20	Irrigation ditch, 11 lks. wide, drains S.
19.975	<p>Point for the E. 1/16 sec. cor. of secs. 26 and 35.</p> <p>Not monumented.</p>
28.80	Oak Creek, 1 ch. wide, 3 ft. deep, course SE.
39.95	<p>The 1/4 sec. cor. of secs. 26 and 35, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, in a mound of stone, 4 ft. base., to top, with brass cap mkd. 1/4 S26 S35 1938.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <hr/> <p>N. 89°27' W., beginning new measurement.</p>
19.975	<p>Point for the W. 1/16 sec. cor. of secs. 26 and 35.</p> <p>Not monumented.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.95	The true point for the cor. of secs. 26, 27, 34 and 35.
	<hr/> N. 0°42' W., bet. sec. 26 and 27. Descend over broken land, through scattered timber.
2.50	Oak Creek, 1 ch. wide, 5 ft. deep, course W., ascend.
20.065	Point for the S. 1/16 sec. cor. of secs. 26 and 27.
	Not monumented.
38.65	Graded road, 24 lks. wide, bears NNE and SSW.
40.13	The 1/4 sec. cor. of secs. 26 and 27, monumented with an iron post, 1 in. diam., loosely set, projecting 16 ins. above ground, in a scattered mound of stone, with a scattered mound of stone to the W. The brass cap has been vandalized and is unreadable.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.
	<div style="text-align: center;"> <p>T16N R4E 1/4 S27 S26 1997</p> </div>
	Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.
	Bury the iron post alongside the stainless steel post.
	Rebuild the mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, W. of cor.
	<hr/> N. 1°09' W., beginning new measurement.
38.70	The cor. of secs. 22, 23, 26 and 27 monumented with an iron post, 2 ins. diam., firmly set, projecting 11 ins. above ground, with brass cap mkd. T16N R4E S22 S23 S27 S26 1938.
	from which the remains of the original bearing tree
	A juniper stump, 6 ins. diam., bears N. 45° E., 44 lks. dist., with rotted blaze. (Record: N. 49° E., 45 lks. dist.)



Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>and the remaining 1938 bearing trees</p> <p>A juniper, 16 ins. diam., bears N. 15 1/2° E., 155 lks. dist., mkd. T16N R4E S23 BT. (Record: N. 14 1/2° E.)</p> <p>A forked juniper, 18 ins. diam., at base, bears N. 73° W., 147 lks. dist., mkd. T16N R4E S22 BT on a limb, 5 ins. diam. (Record: 151 lks. dist.)</p> <p>Add the marks 1997 to the brass cap.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 23 and 26, monumented with an iron post, 1 in. diam., firmly set, projecting 22 ins. above ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. 1/4 S23 S26 1938.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <p>Cor. is located at the terminus of an abandoned 4 strand barbed wire fence, bears S.</p> <p>From this cor. point, a 4 strand barbed wire fence cor., bears N. 27° E., 8 lks. dist., with fences extending S. and W.</p> <p>S. 86°55' W., bet. secs. 23 and 26.</p> <p>Over broken land, through scattered timber.</p>
20.655	<p>Point for the W. 1/16 sec. cor. of secs. 23 and 26.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to bedrock, in a supporting mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S23 W 1/16 — S26 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, an iron pipe of unknown origin, 1 1/2 ins. diam., firmly set, projecting 7 ins. above ground, in a mound of stone, 3 ft. base, to top, bears N. 75°28' E., 3.5 lks. dist.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
41.31	<p>The cor. of secs. 22, 23, 26 and 27.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 22 and 23, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, encircled in a collar of stone, with brass cap mkd. 1/4 S22 S23 1938.</p> <p>from which the 1938 bearing trees</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears S. 12 1/4° E., 121 lks. dist., mkd. 1/4 S23 BT.</p> <p style="padding-left: 40px;">A forked juniper, 24 ins. diam., at base, bears S. 52 1/4° W., 169 lks. dist., mkd. 1/4 S22 BT on a limb, 5 ins. diam.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <p>N. 2°18' E., bet. secs. 22 and 23.</p> <p>Over broken land, through scattered timber.</p>
3.03	<p>Point for AP 1 of the metes-and-bounds survey in sec. 22, identical with a 1/2 in. diam., aluminum rod, firmly set, projecting 5 ins. above ground, encircled with a collar of stone, with 3 1/2 ins. diam. aluminum cap mkd. U.S. DEPT. OF AGRICULTURE COR 4 STA AZ 39 RLS 13015 1992 CADASTRAL SURVEY FOREST SERVICE. This cor. was established as part of Small Tract Act Survey No. 39, Arizona. The survey was executed by Joseph D. Jones, Arizona Registered Land Surveyor No. 4491 and Patrick W. Naville, Arizona Registered Land Surveyor No. 13015, in 1992, which is recorded and on file in Yavapai County Recorders Office, Book 19, Page 41 of Land Surveys.</p> <p>Not remonumented.</p> <p>Through residential area, descending through scattered timber.</p>
8.03	<p>Four strand powerline, bears E. and W.</p>
15.23	<p>Four strand powerline, bears ESE and WNW.</p>
29.56	<p>Point for AP 5, of the metes-and-bounds survey in sec. 22, at the intersection with the westerly right-of-way of Page Springs Road.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 9 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  <p>T16N R4E AP S22 S23 1998</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, PT Station 298 + 96.20, located on the easterly right of way of Page Spring Road, monumented with a 5/8 in. diam. rebar, firmly set, projecting 1 1/2 ins. above ground, bears S. 87°12.5' E., 1.12 chs. dist., of unknown origin.</p> <p>From this same cor. point, PC Station 300 + 30.77, located on the easterly right of way of Page Spring Road, monumented with a 5/8 in. diam. rebar, firmly set, projecting 2 ins. above ground, bears N. 9°09' E., 1.83 chs. dist., of unknown origin.</p>
30.64	Center of pavement, Page Springs Road, 30 lks. wide, in curve, tangents bear SSE and NNW.
31.82	<p>Point for AP 6, of the metes-and-bounds survey in sec. 22, at the intersection with the easterly right-of-way of Page Springs Road, identical with a rebar, 20 ins. long, 5/8 in. diam., firmly set, projecting 1 in. above ground, with 1 1/2 ins. diam. aluminum cap mkd. AG F DEPT. PE 2410, established by Quinton J. Sagrillo, Arizona Professional Engineer No. 12410 and Arizona Registered Land Surveyor No. 16192, in 1981. The cor. was established as part of a survey for Arizona Game and Fish Department, recorded and on file in Yavapai County Recorders Office, at Book 3, Page 11 of Land Surveys.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  <p>T16N R4E AP S22 S23 1998</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar, inside the stainless steel post.</p> <p>From this cor. point, PC Station 300 + 30.77, located on the easterly right of way of Page Spring Road, bears S. 24°18' E., 0.49 chs. dist., hereinbefore described.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
41.20	<p>The cor. of secs. 14, 15, 22 and 23 monumented with an iron post, 2 ins. diam., firmly set, 8 ins. below the surface of the ground, with brass cap mkd. T16N R4E S15 S14 S22 S23 1938.</p> <p>from which the 1938 bearing trees</p> <p>A black walnut, 24 ins. diam., bears N. 67 1/2° E., 296 lks. dist., with healed blaze. (Record: hickory)</p> <p>A cottonwood, 38 ins. diam., bears S. 59° E., 543 lks. dist., with illegible scribe marks on a partially healed blaze. (Record: 547 lks. dist.)</p> <p>A juniper, 36 ins. diam., bears S. 86 1/4° W., 122 lks. dist., with healed blaze.</p> <p>A walnut, 30 ins. diam., bears N. 34 1/4° W., 313 lks. dist., with healed blaze. (Record N. 33 3/4° W.)</p> <p>Add the marks 1997 to the brass cap.</p> <p>Cor. is located in a recreation vehicle storage area.</p> <p>From this cor. point, an iron pipe, 3 ins. diam., firmly set, projecting 15 ins. above ground, bears S. 62°44' W., 2.05 chs. dist.</p>
	<hr/> <p>From the cor. of secs. 13, 14, 23 and 24.</p> <p>S. 89°50' W., bet. secs. 14 and 23.</p> <p>Over mountainous land, through scattered juniper timber.</p>
20.095	<p>Point for the E. 1/16 sec. cor. of secs. 14 and 23.</p> <p>Not monumented.</p>
27.60	<p>Dry wash, 30 lks. wide, 2 ft. deep, course S., ascend over E. slope.</p>
40.19	<p>The 1/4 sec. cor. of secs. 14 and 23, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, encircled with a collar of stone, with a mound of stone, 4 ft. base, 2 ft. high, to the N., with brass cap mkd. 1/4 S14 S23 1938.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <hr/> <p>S. 89°57' W., beginning new measurement.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
19.53	<p>Point for the W. 1/16 sec. cor. of secs. 14 and 23.</p> <p>Not monumented.</p>
21.00	<p>Oak Creek, 1 ch. wide, 3 ft. deep, course SE, thence across bottomlands.</p>
39.06	<p>The cor. of secs. 14, 15, 22 and 23.</p> <hr/> <p>N. 7°35' E., bet. secs. 14 and 15.</p> <p>Over bottomlands, through riparian vegetation.</p>
20.79	<p>Point for the S. 1/16 sec. cor. of secs. 14 and 15.</p> <p>Not monumented.</p> <p>From this point, an iron pipe of unknown origin, 2 ins. diam., set flush with the surface of the ground, bears S. 16°50' E., 1.5 lks. dist.</p>
24.00	<p>Dry wash at bottom of gully, 15 lks. wide, 2 ft. deep, course ESE.</p>
25.99	<p>Point for the S-N-S 1/256 sec. cor. of secs. 14 and 15</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S-N-S 1/256 S15 S14 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on steep, rocky, S. facing slope.</p> <p>From this cor. point, a rebar of unknown origin, 5/8 in. diam., firmly set, projecting 2 ins. above ground, in a mound of stone, 2 ft. base, 2 ft. high, bears S. 3°25' W., 4 lks. dist.</p>
41.58	<p>The 1/4 sec. cor. of secs. 14 and 15, monumented with an iron post, 1 in. diam., firmly set, projecting 15 ins. above ground, in a mound of stone, 3 ft. base., to top, with brass cap mkd. 1/4 S15 S14 1938.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>from which the 1938 bearing trees</p> <p>A forked juniper, 48 ins. diam., at base, bears N. 26° E., 32 lks. dist., mkd. 1/4 S14 BT on a limb, 12 ins. diam. (Record: N. 8 1/2° E.)</p> <p>A forked juniper, 14 ins. diam., at base, bears N. 62° W., 40 lks. dist., mkd. 1/4 S15 BT on a limb, 8 ins. diam. (Record: 42 lks. dist.)</p> <p>Add the marks T16N R4E 1998 to the brass cap.</p> <p>Cor. is located on steep, rocky, E. facing slope.</p> <hr/>
	<p>From the cor. of secs. 11, 12, 13 and 14.</p> <p>N. 88°30' W., bet. secs. 11 and 14.</p> <p>Descend over mountainous land, through scattered juniper timber.</p>
18.76	<p>Point for the E. 1/16 sec. cor. of secs. 11 and 14.</p> <p>Not monumented.</p>
37.52	<p>The 1/4 sec. cor. of secs. 11 and 14, monumented with a malpais stone, 18 x 16 x 12 ins., firmly set, projecting 12 ins. above ground, mkd. 1/4 on the N. face, with a scattered mound of stone to the W.</p> <p>from which the 1916 bearing tree</p> <p>A forked juniper, 24 ins. diam., at base, bears S. 7 1/2° E., 188 lks. dist., mkd. 1/4 S14 BT on a limb, 7 ins. diam. (Record: S. 8° W.)</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T16N R4E S11 1/4 — S14 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Destroy scattered mound of stone to the W., and raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.</p> <p>Incorporate original stone, as part of the mound of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°17' W., beginning new measurement.</p>
12.00	Oak Creek, 70 lks. wide, 6 ins. deep, course SE.
17.62	<p>Point for the W. 1/16 sec. cor. of secs. 11 and 14, occupied with a rebar of unknown origin, 16 ins. long, 1/2 in. diam., firmly set, projecting 4 ins. above ground.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, in a mound of stone, 4 ft. base, to top with brass cap mkd.</p>
	<p>T16N R4E S11 W 1/16 — S14 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar, inside the stainless steel post.</p> <p>From this cor. point, an iron pipe of unknown origin, 1 1/4 ins. diam., firmly set, projecting 4 ins. above ground, bears N. 88°31' W., 1 lk. dist.</p>
23.76	<p>Intersect the southeasterly side of a wood shed, 14 x 14 ft., the most southerly cor. bears S. 55° W., 2 lks. dist., sides extend N. 55° E., and N. 35° W.</p>
23.79	Intersect the southwesterly side of same shed, the most southerly cor. bears S. 35° E., 1.5 lks. dist.
28.20	Track road, 15 lks. wide, bears ENE and WSW.
35.24	<p>The cor. of secs. 10, 11, 14 and 15, monumented with an iron post, 2 ins. diam., firmly set, projecting 9 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. T16N R4E S10 S11 S15 S14 1938.</p> <p>from which the 1938 bearing trees</p> <p style="padding-left: 40px;">A juniper, 13 ins. diam., bears N. 59 1/2° E., 53 lks. dist., mkd. T16N R4E S11 BT.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A juniper stump, 36 ins. diam., bears S. 81° E., 264 lks. dist., mkd. T16N R4E S14 BT.</p> <p>A juniper, 12 ins. diam., bears S. 11 1/2° W., 95 lks. dist., mkd. T16N R4E S15 BT.</p> <p>A juniper snag, 9 ins. diam., bears N. 53 3/4° W., 28 lks. dist., mkd. T16N R4E S10 BT.</p> <p>Add the marks 1998 to the brass cap.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 10 and 11, monumented with a volcanic stone, 23 x 14 x 4 ins., loosely set, projecting 14 ins. above ground, in a scattered mound of stone, mkd. 1/4 on the W. face.</p> <p>from which the original bearing tree</p> <p>A juniper, 24 ins. diam., bears S. 15 1/2° W., 159 lks. dist., mkd. 1/4 S BT (Record: S. 12° W.)</p> <p>and the bearing tree mkd. in 1938</p> <p>A juniper, 24 ins. diam., bears S. 28 1/2° E., 158 lks. dist., mkd. 1/4 S 11 BT (Record: S. 33 1/2° E.)</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;">T16N R4E 1/4 S10 S11 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor., and incorporate original stone within accessory mound.</p> <p>N. 0°06' W., bet. secs. 10 and 11.</p> <p>Over rolling and mountainous land, through moderate juniper timber.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
31.86	<p>The closing cor. of secs. 10 and 11, at intersection with the Fourth Standard Parallel North, monumented with an iron post, 2 ins. diam., firmly set, projecting 9 ins. above ground, with a mound of stone, 2 1/2 ft. base, 2 ft. high, to the S., with brass cap mkd. T17N S35 S36 CC S10 S11 T16N R4E 1916.</p> <p>from which the original bearing tree</p> <p style="padding-left: 40px;">A juniper 32 ins. diam., bears S. 47 3/4° E., 186 lks. dist., mkd. T16N R4E S11 CC BT (Record: 182 lks. dist.)</p> <p>Add the marks 1998 to the brass cap.</p> <p>From this cor. point, the standard cor. of secs. 35 and 36, T. 17 N., R. 4 E., bears S. 89°54' E., 5.16 chs. dist., hereinbefore described.</p> <hr/> <p>Point for the 1/4 sec. cor. of sec. 11 only, is at midpoint on the N. bdy. of sec. 11.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T17N R4E ----- 1/4 S11 T16N R4E 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the stan. 1/4 sec. cor. of sec. 36, T. 17 N., R. 4 E., bears S. 89°40' E., 6.61 chs. dist., hereinbefore described.</p> <hr/> <p>From the true point for the cor. of secs. 3, 4, 33 and 34 on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°20' E., bet. secs. 33 and 34.</p> <p>Over nearly level land.</p>
7.80	Oak Creek, 2 chs. wide, 2 ft. deep, course W.
19.55	Graded road, 12 lks. wide, bears E. and W, thence enter broken land.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
19.88	<p>The S. 1/16 sec. cor. of secs. 33 and 34, established by Scott J. Smith, Arizona Registered Land Surveyor No. 19853, monumented with a rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. diam. yellow plastic cap mkd. JJA LS 19853. This is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point.</p> <p>Set an aluminum driver, 36 ins. long, 3/4 in. diam., 34 ins. in the ground, over the rebar, with aluminum cap mkd.</p> <p style="text-align: center;">T16N R4E S1/16 S33 S34 1997</p> <p>Cor. is located 1 lk. E. of a 4 strand barbed wire fence, bears N. and S., on a precipitous S. facing cut bank.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°20' E., beginning new measurement.</p>
13.25	<p>Improved bladed road, 30 lks. wide, bears SE and NW.</p>
19.88	<p>The 1/4 sec. cor. of secs. 33 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. 1/4 S33 S34 1938.</p> <p>from which the 1938 bearing trees</p> <p style="padding-left: 40px;">A forked mesquite, 12 ins. diam. at base, bears N. 77 1/2° E., 74 lks. dist., mkd. 1/4 S34 BT on a limb, 6 ins. diam. (Record: N. 75 3/4° E., 76 lks. dist.)</p> <p style="padding-left: 40px;">A forked mesquite, 9 ins. diam., at base, bears N. 45° W., 117 lks. dist., with illegible scribe marks on a partially healed blaze.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <p>Cor. is located at the intersection of 4 strand barbed wire fences, bearing E. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°31' E., beginning new measurement.</p>
40.01	<p>The cor. of secs. 27, 28, 33 and 34, monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. T16N R4E S28 S27 S33 S34 1938.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Add the marks 1997 to the brass cap.</p>
	<p>Cor. is located in a 4 strand barbed wire fence, bears E. and W.</p> <hr/>
	<p>From the true point for the cor. of secs. 26, 27, 34 and 35.</p>
	<p>N. 89°53' W., bet. secs. 27 and 34.</p>
	<p>Over broken land, along steep slope of left bank of Oak Creek.</p>
1.63	<p>Wood rail fence, bears S. 39 1/2° W. and N. 39 1/2° E. for 23 lks. to the cor. of fences, with a woven wire fence extending N. 49° W., thence across lawn.</p>
4.07	<p>Woven wire fence, bears N. 48 1/2° E., and S. 48 1/2° W., leave lawn, descend.</p>
8.50	<p>Oak Creek, 2 chs. wide, 1 ft. deep, course SSW, ascend over broken land.</p>
20.045	<p>Point for the E 1/16 sec. cor. of secs. 27 and 34, occupied with a rebar of unknown origin, 18 ins. long, 1/2 in. diam., firmly set, projecting 8 ins. above ground.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T16N R4E S27 E 1/16 — S34 1997</p>
	<p>Deposit the rebar inside the stainless steel post.</p>
	<p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>
	<p>Cor. is located at the intersection of 4 strand barbed wire fences, bearing N. and E.</p>
	<p>From this cor. point, an iron rod of unknown origin, 1 in. diam., firmly set, projecting 5 ins. above ground, bears N. 86°56' E., 5 lks. dist.</p>
	<p>Through residential area.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.09	<p>The 1/4 sec. cor. of secs. 27 and 34, monumented with an iron rod of unknown origin, 26 ins. long, 1 1/2 ins. diam., firmly set, projecting 1 in. above ground. This is accepted as the best available evidence of the position of the 1938 reestablished cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S27 1/4 — S34 1997</p> <p>Deposit the iron rod inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, an iron rod of unknown origin, 1 in. diam., firmly set, projecting 1 in. above ground bears N. 78°15' E., 2 lks. dist.</p>
	<hr style="width: 20%; margin: auto;"/> <p>N. 89°53' W., beginning new measurement.</p>
	<p>Along N. bdy. of residential area.</p>
9.10	<p>Cement block retaining wall, bears S. and N. for 4.5 lks. to cor. of fences, with woven wire fence extending N. 32° E.</p>
9.68	<p>Center of pavement, Oak Creek Valley Road, asphalt surfaced, 53 lks. wide, bears N. and S.</p>
10.23	<p>Cement block retaining wall, bears S. and N. for 3.5 lks. to cor. of fences, with woven wire fence extending N. 40° W., ascend.</p>
31.66	<p>Cor. of 4 strand barbed wire fences, bears S., 1 lk. dist., with fences extending E. and N. 47° W.</p>
32.20	<p>Cor. of 4 strand barbed wire fences bears, N., 51 lks. dist., with fences extending S. 47° E. and S. 86° W.</p>
40.09	<p>The cor. of secs. 27, 28, 33 and 34.</p> <hr style="width: 50%; margin: auto;"/>
	<p>N. 0°37' E., bet. secs. 27 and 28.</p>
7.15	<p>Track road, 15 lks. wide, bears SE and WNW.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
13.71	Center of pavement, Oak Creek Valley Road, asphalt surfaced, 41 lks. wide, bears E. and W.
25.80	Wash, 45 lks. wide, 4 ft. deep, course SE.
39.93	<p>The 1/4 sec. cor. of secs. 27 and 28, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd. 1/4 S28 S27 1938.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <p>Cor. is located 2 lks. SW, of a fence cor., with 4 strand barbed wire fences bearing N. and E.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 22 and 27, monumented with an iron post, 1 in. diam., firmly set, projecting 4 ins. above ground, encircled in a collar of stone, with brass cap mkd. 1/4 S22 S27 1938, with a mound of stone, 3 ft. base, 1 ft. high, to the N.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <p>Cor. is located 3 lks. NE, of a fence cor., with 4 strand barbed wire fences extending S. and W.</p> <p>N. 89°09' W., bet. secs. 22 and 27.</p> <p>Over broken land, through scattered timber and undergrowth.</p>
18.12	Woven wire fence, bears SE and NW.
23.70	Spring Creek, 10 lks. wide, 1 ft. deep, course SSE.
39.00	<p>The cor. of secs. 21, 22, 27 and 28 monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. T16N R4E S21 S22 S28 S27 1938, with a mound of stone, 3 ft. base, 2 ft. high, to the W.</p> <p>Add the marks 1997 to the brass cap.</p> <p>Cor. is located 2 lks. NW, of a fence cor., with 4 strand barbed wire fences extending N., E., and S.</p> <hr/> <p>N. 0°11' E., bet. secs. 21 and 22.</p> <p>Over broken land, through scattered timber and undergrowth, along 4 strand barbed wire fence.</p>
17.95	Bladed road, 38 lks. wide, bears SSE and SSW.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.01	<p>Point for the S. 1/16 sec. cor. of secs. 21 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S1/16 S21 S22 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located in a 4 strand barbed wire fence, bears N. and S., and 6 lks. S. of a fence cor. with 4 strand barbed wire fences extending N., S., and E.</p>
23.80	<p>Wash, 15 lks. wide, 2 ft. deep, course E.</p>
40.02	<p>The 1/4 sec. cor. of secs. 21 and 22, monumented with an iron post, 1 in. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. 1/4 S21 S22 1938.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <p>Cor. is located 1.5 lks. W, of a fence cor., with 4 strand barbed wire fences extending S. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 1°40' E., beginning new measurement.</p>
40.79	<p>True point for the cor. of secs. 15, 16, 21 and 22; falls in the bed of Spring Creek, where it is impracticable to establish a permanent monument.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>N. 89°46' W., bet. sec. 15 and 22.</p> <p>Over bottom land, across recreational vehicle storage area.</p>
3.10	<p>Woven wire fence, bears SSE and NNW, enter pasture.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
6.21	<p>Point for AP 8, of the metes-and-bounds survey in sec. 22, monumented with an aluminum rod, 3/4 in. diam., firmly set, projecting 4 ins. above ground, with 3 1/2 ins. diam. aluminum cap mkd. U.S. DEPT. OF AGRICULTURE COR 1 STA AZ 39 LS 4491 1992 CADASTRAL SURVEY U.S. FOREST SERVICE. This cor. was established by Joseph D. Jones, Arizona Registered Land Surveyor No. 4491, and Patrick W. Naville, Arizona Registered Land Surveyor No. 13015, in 1992, and is recorded and on file in Yavapai County Recorders Office, at Book 19, Page 41 of Land Surveys.</p> <p>Not remonumented</p> <p>Cor. is located in the easterly right of way fence of Page Springs Road, 4 strand barbed wire, bears SE and NW.</p>
6.87	<p>Center of pavement, Page Springs Road, 33 lks. wide, bears SE and NW.</p>
7.48	<p>A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. diam. damaged plastic cap mkd. LS 19.</p>
7.53	<p>From this point, a rebar, 1/2 in. diam., firmly set, projecting 6 ins. above ground, with 1 in. diam. plastic cap mkd. LS 4491, bears S., 3 lks. dist.</p>
19.725	<p>Point for the E. 1/16 sec. cor. of secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S15 E 1/16 — S22 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, an iron rod of unknown origin, 5/8 in. diam., firmly set, projecting 4 ins. above ground, bears N. 89°55' E., 15 lks. dist.</p> <p>From this same cor. point, a rebar of unknown origin, 1/2 in. diam., firmly set, projecting 2 ins. above ground, bears S. 32°40' W., 7 lks. dist.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.45	<p>The 1/4 sec. cor. of secs. 15 and 22, monumented with an iron post, 1 in. diam., firmly set, projecting 9 ins. above ground, in a mound of stone, 2 ft. base, to top, with brass cap mkd. 1/4 S15 S22 1938.</p> <p>from which the 1938 bearing trees</p> <p>A forked juniper, 24 ins. diam., at base, bears N. 20 1/4° E., 305 lks. dist., mkd. 1/4 S15 BT on a limb, 6 ins. diam. (Record: N. 30 1/4° E., 290 lks. dist.)</p> <p>A forked juniper, 18 ins. diam., at base, bears S. 69° W., 585 lks. dist., mkd. 1/4 S22 BT on a limb, 8 ins. diam. (Record: S. 64° W., 565 lks. dist.)</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <hr/> <p>N. 89°46' W., beginning new measurement.</p>
19.735	<p>Point for the W. 1/16 sec. cor. of secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S15 W 1/16 — S22 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, an open end iron pipe of unknown origin, 1 1/2 ins. diam., firmly set, projecting 4 ins. above ground, bears S. 88°43' W., 69 lks. dist.</p>
20.50	Barbed wire fence, 4 strand, bears E. and W.
39.47	<p>The true point for the cor. of secs. 15, 16, 21 and 22.</p> <hr/> <p>N. 0°11' E., bet. secs. 15 and 16.</p>
19.98	<p>Point for the S. 1/16 sec. cor. of secs. 15 and 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>T16N R4E S1/16 S16 S15 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>
	<p>From this cor. point, an iron pipe of unknown origin, 1 1/4 ins. diam., firmly set, projecting 6 ins. above ground, bears N. 74°07' W., 67 lks. dist.</p>
20.16	Four strand barbed wire fence, bears E. and W.
39.96	<p>The 1/4 sec. cor. of secs. 15 and 16, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. 1/4 S16 S15 1938.</p> <p>from which the 1938 bearing trees</p> <p style="padding-left: 40px;">A forked juniper, 29 ins. diam., at base, bears S. 67 1/2° E., 94 lks. dist., mkd. 1/4 S15 BT on a limb, 7 ins. diam. (Record: 96 lks.)</p> <p style="padding-left: 40px;">A forked juniper, 36 ins. diam., at base, bears S. 65 1/2° W., 120 lks. dist., mkd. 1/4 S16 BT on a limb, 13 ins. diam. (Record: S. 64 1/2° W.)</p> <p>Add the marks T16N R4E 1998 to the brass cap.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°17' E., beginning new measurement.</p>
25.89	Easterly Right-of-Way fence, to U.S. Highway No. 89A, four strand barbed wire, bears NE and SW.
27.57	Center of pavement, U.S. Highway No. 89A., 38 lks. wide, bears NE and SW.
28.90	Westerly Right-of-Way fence, to U.S. Highway No. 89A, four strand barbed wire, bears NE and SW.
39.99	<p>The cor. of secs. 9, 10, 15 and 16 monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, in a mound of stone, 2 ft. base, to top, with brass cap mkd. T16N R4E S9 S10 S16 S15 1938.</p> <p>from which an original bearing tree</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A forked juniper, 18 ins. diam., at base, bears N. 68° W., 20 lks. dist., mkd. TXVIN RIVE SIX BT on a limb, 8 ins. diam.</p>
	<p>and the bearing trees marked in 1938</p>
	<p>A forked juniper, 32 ins. diam., at base, bears N. 13 1/2° E., 69 lks. dist., mkd. T16N R4E S10 BT, on a limb, 8 ins. diam.</p>
	<p>A juniper, 16 ins. diam., bears S. 20 1/2° E, 78 lks. dist., mkd. T16N R4E S15 BT.</p>
	<p>A forked juniper, 34 ins. diam., at base, bears S. 39 1/2° W., 360 lks. dist., mkd. T16N R4E S16 BT, on a limb, 14 ins. diam.</p>
	<p>Add the marks 1998 to the brass cap.</p> <hr/>
	<p>From the cor. of secs. 10, 11, 14 and 15.</p>
	<p>N. 89°02' W., bet. secs. 10 and 15.</p>
	<p>Over rolling and mountainous land, through scattered juniper timber.</p>
6.65	<p>Single wire power line, bears NE and SW.</p>
22.05	<p>Graded road, 38 lks. wide, in curve, bears SSE and WNW.</p>
39.75	<p>The 1/4 sec. cor. of secs. 10 and 15, monumented with an iron post, 1 in. diam., firmly set, projecting 17 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. 1/4 S10 S15 1938.</p>
	<p>from which the 1938 bearing trees</p>
	<p>A juniper stump, 11 ins. diam., bears N. 86° E., 61 lks. dist., mkd. BT.</p>
	<p>A forked juniper, 30 ins. diam., at base, bears S. 12 1/2° E., 136 lks. dist., mkd. 1/4 S15 BT on a limb, 9 ins. diam.</p>
	<p>Add the marks T16N R4E 1998 to the brass cap.</p> <hr/>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the 1/4 sec. cor. of secs. 9 and 10, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. 1/4 S9 S10 1916.</p>
	<p>Add the marks T16N R4E 1998 to the brass cap.</p>
	<p>N. 0°02' W., bet. secs. 9 and 10.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
5.00	<p>Graded road, 22 lks. wide, bears SE and NW.</p>
33.62	<p>Intersect the Fourth Standard Parallel North.</p>
	<p>Point for the closing cor. of secs. 9 and 10.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>T17N R4E S34</p> <hr style="width: 50%; margin: auto;"/> <p>S9 S10 CC</p> <p>T16N R4E 1998</p> </div>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
	<p>Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, S. of cor.</p>
	<p>From this cor. point, the stan. cor. of secs. 34 and 35, T. 17 N., R. 4 E., bears S. 89°56' E., 9.90 chs. dist., hereinbefore described.</p>
	<p>From this same cor. point, the original closing cor., bears N. 0°02' W., 0.02 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. T17N S34 S35 CC S9 S10 T16N R4E 1916</p>
	<p>Chisel the marks AM on the brass cap, invert the iron post, (36 ins. long), and bury in place.</p>
	<hr/> <p>Point for the 1/4 sec. cor. of sec. 10 only, is at midpoint on the N. bdy. of sec. 10.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T17N R4E ----- 1/4 S10 T16N R4E 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
	<p>From this cor. point, the stan. 1/4 sec. cor. of sec. 35, T. 17 N., R. 4 E., bears N. 89°51' E., 7.60 chs. dist., hereinbefore described.</p>
	<p>From this same cor. point, an iron pipe of unknown origin, 1/2 in. diam., firmly set, projecting 8 ins. above ground, bears N. 78°18' E., 6 lks. dist.</p>
	<hr/> <p>From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, projecting 4 ins. above ground, encircled with a collar of stone, with brass cap mkd. T16N R4E S32 S33 S5 S4 T15N 1938.</p>
	<p>Add the marks 1997 to the brass cap.</p>
	<p>N. 0°08' E., bet. secs. 32 and 33.</p>
	<p>Over broken land, through scattered timber and undergrowth.</p>
39.89	<p>The 1/4 sec. cor. of secs. 32 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd. 1/4 S32 S33 1938.</p>
	<p>Add the marks T16N R4E 1997 to the brass cap.</p>
	<hr/> <p>From the cor. of secs. 27, 28, 33 and 34.</p>
	<p>N. 89°53' W., bet. secs. 28 and 33.</p>
	<p>Over rolling land, through scattered juniper timber.</p>
20.275	<p>Point for the E. 1/16 sec. cor. of secs. 28 and 33, occupied with an iron pin of unknown origin, 14 ins. long, 3/4 in. diam., firmly set, projecting 1 in. above ground.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T16N R4E S28 E 1/16 — S33 1997</p>
	<p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>
	<p>Deposit the iron pin inside the stainless steel post.</p>
	<p>Cor. is located in a 4 strand barbed wire fence, bearing N. and S., 7 lks. S. of cor. of fences bearing E., W. and S.</p>
40.55	<p>The 1/4 sec. cor. of secs. 28 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 21 ins. above ground, in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd. 1/4 S28 S33 1938.</p>
	<p>Add the marks T16N R4E 1997 to the brass cap.</p>
	<p>Cor. is located 7 lks. S. of 4 strand barbed wire fence, bears E. and W.</p>
	<hr/> <p>From the true point for the cor. of secs. 15, 16, 21 and 22. S. 89°31' W., bet. secs. 16 and 21.</p>
	<p>Over bed of Spring Creek, through riparian zone.</p>
1.20	<p>Right bank of Spring Creek, 3 ft. high, course SSE, thence over nearly level land.</p>
1.28	<p>Barbed wire fence, 4 strand, bears N. and S.</p>
1.30	<p>The witness cor. to the cor. of secs. 15, 16, 21 and 22, monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd.</p>
	<p style="text-align: center;">T16N R4E S16 S15 ——— WC S21 S22 1938</p>
	<p>Remark the brass cap to read</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> <p>WC T16N R4E S16 S15 — —→ S21 S22 1938 1997</p> </div> <p>from which the remaining 1938 bearing trees</p> <p>A willow stump, 30 ins. diam., bears N. 84 1/2° E., 135 lks. dist., with rotted out blaze.</p> <p>A mulberry stump, 18 ins. diam., bears S. 7 1/2° E., 130 lks. dist., with rotted out blaze. (Record: S. 4 3/4° E.)</p> <hr/> <p>S. 89°31' W., beginning new measurement.</p> <p>39.04 The 1/4 sec. cor. of secs. 16 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. 1/4 S16 S21 1938, with a mound stone, 3 ft. base, 2 ft. high, N. of the cor.</p> <p>Add the marks T16N R4E 1997 to the brass cap.</p> <p>Cor. is located, 18 lks. E. of the E. Right-of-Way fence to U.S. Highway. 89A, 4 strand barbed wire, bears NNE and SSW.</p> <hr/> <p style="text-align: center;">Subdivision of Section 10, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 10 and 15.</p> <p>N. 6°05' W., on the N. and S. centerline of sec. 10.</p> <p>Over rolling and mountainous land, through medium juniper timber.</p> <p>7.30 Graded road, 30 lks. wide, bears ENE and WSW.</p> <p>38.41 Point for the center 1/4 sec. cor. of sec. 10, at intersection with the E. and W. centerline of sec. 10.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>

Subdivision of Section 10,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>T16N R4E C1/4 S10 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 97 lks. N. of a wash, 5 ft. wide, 2 ft. deep, course SSW.</p> <p>From this cor. point, an iron rod of unknown origin, 1/2 in. diam., firmly set, projecting 3 ins. above ground, bears S. 51°19' E., 4 lks. dist.</p>
71.32	<p>The 1/4 sec. cor. of sec. 10 only, on the N. bdy. of the Tp.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 10 and 11.</p> <p>S. 88°47' W., on the E. and W. centerline of sec. 10.</p> <p>Over rolling and mountainous land, through scattered juniper timber.</p>
38.89	<p>The center 1/4 sec. cor. of sec. 10.</p>
57.91	<p>Easterly Right-of-Way fence, to U.S. Highway No. 89A, four strand barbed wire, bears NNE and SSW.</p>
59.04	<p>Center of pavement, U.S. Highway No. 89A., 38 lks. wide, bears NNE and SSW.</p>
60.33	<p>Westerly Right-of-Way fence, to U.S. Highway No. 89A, four strand barbed wire, bears NNE and SSW.</p>
77.25	<p>Graded road, 27 lks. wide, bears SE and NW.</p>
84.68	<p>The 1/4 sec. cor. of secs. 9 and 10.</p> <hr/> <p style="text-align: center;">Subdivision of Section 11, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 11 and 14.</p> <p>N. 1°07' W., on the N. and S. centerline of sec. 11.</p> <p>Over rolling and mountainous land, through medium juniper timber.</p>
10.65	<p>Oak Creek, 1 ch. wide, 4 ft. deep, course WNW.</p>

Subdivision of Section 11,
T. 16 N., R. 4. E, Gila and Salt River Meridian, Arizona

CHAINS	
22.46	Four strand barbed wire fence, bears ESE and WNW.
25.70	Foot of mesa, edge bears SE and NW, ascend.
39.24	Point for the center 1/4 sec. cor. of sec. 11, at intersection with the E. and W. centerline of sec. 11.
	Not monumented.
70.91	The 1/4 sec. cor. of sec. 11 only, on the N. bdy. of the Tp.
	From the true point for the 1/4 sec. cor. of secs. 11 and 12.
	N. 89°59' W., on the E. and W. centerline of sec. 11.
	Across Oak Creek.
0.75	Edge of Oak Creek, course SW.
38.25	The point for the center 1/4 sec. cor. of sec. 11.
57.95	Point for the center W. 1/16 sec. cor. of sec. 11.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, to bedrock, in a mound of stone, 5 ft. base, to top, with brass cap mkd.
	T16N R4E W 1/16 C—C S11 1998
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	From this cor. point, an iron pipe of unknown origin, 1 in. diam., firmly set, projecting 3 ins. above ground, bears S. 66°11' W., 24 lks. dist.
	From this same cor. point, the cor. of four strand barbed wire fences extending NNE and S., bears N. 84°22' W., 15 lks. dist.
61.95	Toe of slope, edge bears SSE and NNW, enter commercial stone yard.
66.70	Leave commercial stone yard, edge bears SSE and NNW.
67.50	SW cor. of abandoned house trailer, 30 x 8 ft., bears N., 61 lks. dist., the long side bears NE.

Subdivision of Section 11,
T. 16 N., R. 4. E, Gila and Salt River Meridian, Arizona

CHAINS	
68.50	Arroyo, 38 lks. wide, 15 lks. deep, course S.
76.42	Four strand barbed wire fence, bears ENE and WSW.
77.65	The 1/4 sec. cor. of secs. 10 and 11.
<hr/> SW 1/4 <hr/>	
	From the W. 1/16 sec. cor. of secs. 11 and 14.
	N. 4°08' W., on the N. and S. center line of the SW 1/4 of sec. 11.
	Over broken and mountainous land, descending.
4.15	Oak Creek, 2 chs. wide, 1 ft. deep, course ESE.
10.78	NW cor. of abandoned wood frame house, 38 x 28 ft., bears E., 2.07 chs. dist., the long side bears N. 65° W.
19.90	Oak Creek, 2.5 chs. wide, 2 ft. deep, course WSW.
25.96	Cor. of four strand barbed wire fences extending S. and WNW, bears W., 8 lks. dist.
29.84	Four strand barbed wire fence, bears ENE and WSW.
39.56	The center W. 1/16 sec. cor. of sec. 11.
<hr/> Subdivision of Section 12, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona <hr/>	
	From the 1/4 sec. cor. of sec. 12 only, on the S. bdy. of the sec.
	N. 0°01' E., on the N. and S. centerline of sec. 12.
	Over mountainous land, through moderate juniper timber.
40.10	Point for the center 1/4 sec. cor. of sec. 12, at intersection with the E. and W. centerline of section 12.
	Not monumented.
60.08	Four strand barbed wire fence, bears E. and W.
60.10	Point for the center N. 1/16 sec. cor. of sec. 12.

Subdivision of Section 12,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E C N 1/16 S12 C 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, a rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. diam. yellow plastic cap mkd. LS 19853, bears S. 18°24' E., 1 lk. dist. This position was established by Scott J. Smith, Arizona Registered Land Surveyor No. 19853, in 1996, using improper procedures.</p>
71.97	<p>The 1/4 sec. cor. of sec. 12 only, on the N. bdy. of the Tp.</p> <hr/>
	<p>From the 1/4 sec. cor. of sec. 12 only, on the E. bdy of the Tp. N. 89°53' W., on the E. and W. centerline of sec. 12.</p> <p>Over mountainous land, through moderate juniper timber.</p>
14.84	<p>Point for the center E. 1/16 sec. cor. of sec. 12.</p>
	<p>Not monumented.</p>
34.95	<p>The point for the center 1/4 sec. cor. of sec. 12.</p>
75.15	<p>The true point for the 1/4 sec. cor. of secs. 11 and 12.</p> <hr/>
	<p style="text-align: center;">NE 1/4</p> <hr/>
	<p>From the point for the center E. 1/16 sec. cor. of sec. 12. North, on the N. and S. center line of the NE 1/4 of sec. 12.</p>
20.05	<p>Point for the NE 1/16 sec. cor. of sec. 12, at intersection with the E. and W. centerline of the NE 1/4 sec. 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>

Subdivision of Section 12,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T16N R4E NE 1/16 S12 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>
	<p>Cor. is located on a spur, slopes SSW.</p>
	<p>From this cor. point, a rebar, 1/2 in. diam., firmly set, projecting 3 ins. above ground, with 1 in. diam. yellow plastic cap mkd. LS 19853, bears S. 2°47' E., 3 lks. dist. This position was established by Scott J. Smith, Arizona Registered Land Surveyor No. 19853, in 1996, using improper control.</p>
	<p>From this same cor. point, an iron pipe of unknown origin, 1 1/2 ins. diam., firmly set, projecting 10 ins. above ground, bears N. 87°51' W., 23 lks. dist.</p>
32.02	<p>The E. 1/16 sec. cor. of sec. 12 only, on the N. bdy. of the Tp.</p> <hr/>
	<p>From the point for the N. 1/16 sec. cor. of sec. 12 only, on the E. bdy. of the Tp.</p>
	<p>N. 89°59' W., on the E. and W. centerline of the NE 1/4 of sec. 12.</p>
14.82	<p>The NE 1/16 sec. cor. of sec. 12.</p>
29.75	<p>Oak Creek, 1 ch. wide, 1 ft. deep, course NNE.</p>
31.10	<p>E. edge of grass lawn, bears NNE and SSW.</p>
31.39	<p>SE cor. of west wing of wood cabin, 33 x 26 ft., bears N., 3.5 lks. dist., the long side bears N.</p>
32.05	<p>W. edge of grass lawn, bears SSE and NNW.</p>
32.21	<p>Four strand barbed wire fence, bears SSE and NNW.</p>
33.05	<p>Four strand barbed wire fence, bears ESE and WNW.</p>
33.60	<p>Track road, 12 lks. wide, bears SSE and NNW.</p>
34.94	<p>The center N. 1/16 sec. cor. of sec. 12.</p> <hr/>

Subdivision of Section 12,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	NW 1/4

	From the center N. 1/16 sec. cor. of sec. 12.
	N. 89°50' W., on the E. and W. centerline of the NW 1/4 of sec. 12.
0.36	A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. diam. yellow plastic cap mkd. LS 19853, bears S. 1 lk. dist.
3.96	SW cor. of wood frame house, 55 x 45 ft., bears N., 23 lks. dist., the long side bears N. 77° E.
6.42	Gate in four strand barbed wire fence, bears S. 65° E., for 13 lks., thence E., and N. 65° W., for 9 lks., thence W.
12.88	Four strand barbed wire fence, bears N. 55° E. and S. 55° W.
14.30	Deer Pass Ranch road, graded, 24 lks. wide, bears N. 55° E. and S. 55° W., curving westerly.
14.71	Four strand barbed wire fence, parallel with road.
17.92	Four strand barbed wire fence, bears N. 50° W. and S. 50° E. for 6 lks., thence E.
18.44	Deer Pass Ranch road, graded, 24 lks. wide, bears N. 50° W., and S. 50° E., curving easterly.
19.15	Four strand barbed wire fence, bears S. 50° E. and N. 50° W.
21.50	Oak Creek, 1 ch. wide, 2 ft. deep, course SSW.
25.17	Deer Pass Ranch road, graded, 24 lks. wide, bears NE and SW.
27.55	Deer Pass Ranch road, graded, 24 lks. wide, bears NNE and SSW.
40.22	The N. 1/16 sec. cor. of secs. 11 and 12.

	Subdivision of Section 13, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

	From the 1/4 sec. cor. of secs. 13 and 24.
	N. 0°12' W., on the N. and S. centerline of sec. 13.
	Over mountainous land, through medium juniper timber.

Subdivision of Section 13,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
19.95	<p>Point for the center S. 1/16 sec. cor. of sec. 13.</p> <p>Not monumented.</p>
39.90	<p>Point for the center 1/4 sec. cor. of sec. 13, at intersection with the E. and W. centerline of sec. 13.</p> <p>Not monumented.</p>
59.87	<p>Point for the center N. 1/16 sec. cor. of sec. 13, not monumented.</p>
81.90	<p>The 1/4 sec. cor. of sec. 13 only, on the N. bdy. of the sec.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 13 and 18, on the E. bdy of the Tp., monumented with a volcanic stone, 24 x 12 x 8 ins., firmly set, projecting 10 ins. above ground, in a scattered mound of stone, mkd. 1/4 on the N. face.</p> <p>from which the remains of the original bearing trees</p> <p style="padding-left: 40px;">A juniper stump, 9 ins. diam., bears S. 54° E., 55 lks. dist., mkd. 1/4 S 18 BT. (Record: S. 53°10' E., 52 lks. dist.)</p> <p style="padding-left: 40px;">A juniper snag, 7 ins. diam., bears N. 28 3/4° W., 52 lks. dist., mkd. 1/4 S13 BT. (Record: N. 31°48' W.)</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T16N R4E R5E 1/4 S13 S18 1998</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>N. 89°47' W. on the E. and W. centerline of sec. 13.</p>
40.01	<p>The point for the center 1/4 sec. cor. of sec. 13.</p>


Subdivision of Section 13,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
60.13	Point for the center W. 1/16 sec. cor. of sec. 13. Not monumented.
70.19	Point for the center W-W 1/64 sec. cor. of sec. 13. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to bedrock, in a mound of stone, 5 ft. base, to top, with brass cap mkd. <div style="text-align: center;"> T16N R4E W-W 1/64 C———C S13 1998 </div> Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post. Cor. is located on a steep, rocky W. facing slope.
77.66	The 1/4 sec. cor. of sec. 13 only, on the W. bdy. of the sec. <hr style="width: 100%;"/> <div style="text-align: center;"> SW 1/4 _____ </div> From the point for the W. 1/16 sec. cor. of secs. 13 and 24. N. 0°26' W., on the N. and S. centerline of the SW 1/4 of sec. 13.
19.94	Point for the SW 1/16 sec. cor. of sec. 13, at intersection with the E. and W. centerline of the SW 1/4 of sec. 13. Not monumented.
39.88	The point for the center W. 1/16 sec. cor. of sec. 13. <hr style="width: 100%;"/> From the point for the center S. 1/16 sec. cor. of sec. 13. N. 89°45' W., on the E. and W. centerline of the SW 1/4 of sec. 13.
20.04	The point for the SW 1/16 sec. cor. of sec. 13.
38.73	The point for the S. 1/16 sec. cor. of sec. 13 only, on the W. bdy. of the sec. <hr style="width: 100%;"/>

Subdivision of Section 13,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the true point for the N-S 1/64 sec. cor. of sec. 13 only, on the W. bdy. of the sec.</p> <p>S. 89°46' E. on a portion of the E. and W. centerline of the NW 1/4 of the SW 1/4 of sec. 13.</p> <p>Ascending over steep, rocky NW facing slope.</p>
8.07	<p>Point for the NW-SW 1/64 sec. cor. of sec. 13.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in a drill hole, cemented in place, flush with a granite outcropping, 4 x 4 x 3 ft. high, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S13 NW-SW 1/64 1998</p> <p>From this cor. point, a rebar of unknown origin, 3/8 in. diam., firmly set, projecting 4 ins. above ground, bears S. 76°34' E., 15 lks. dist.</p>
	<p style="text-align: center;">_____</p> <p>N. 0°33' W. on a portion of the N. and S. centerline of the NW 1/4 of the SW 1/4 of sec. 13.</p> <p>Along steep, rocky W. facing slope, descending.</p>
9.97	<p>The center W-W 1/64 sec. cor. of sec. 13.</p>
	<p style="text-align: center;">_____</p> <p style="text-align: center;">NW 1/4</p> <p style="text-align: center;">_____</p> <p>From the point for the center W. 1/16 sec. cor. of sec. 13.</p> <p>N. 0°10' W., on the N. and S. centerline of the NW 1/4 of sec. 13.</p> <p>Over mountainous land.</p>
19.97	<p>Point for the NW 1/16 sec. cor. of sec. 13, at intersection with the E. and W. centerline of the NW 1/4 of sec. 13.</p> <p>Not monumented.</p>
41.92	<p>Point for the W. 1/16 sec. cor. of sec. 13 only, on the N. bdy. of the sec.</p> <p style="text-align: center;">_____</p>

Subdivision of Section 13,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the point for the center N. 1/16 sec. cor. of sec. 13. N. 89°48' W., on the E. and W. centerline of the NW 1/4 of sec. 13.</p>
20.10	<p>The point for the NW 1/16 sec. cor. of sec. 13.</p>
30.23	<p>Point for the center W-NW 1/64 sec. cor. of sec. 13, falls in the flood plain of Oak Creek, where it is impracticable to establish a permanent monument.</p> <p>From this point, the point selected for the witness center W-NW 1/64 sec. cor. of sec. 13, bears N. 76°00' E., 1.19 chs. dist.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in a drill hole, cemented in place, flush with a sandstone shelf, 24 x 16 x 10 ft. high, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T16N R4E S13 C-W-NW 1/64 1998</p>  </div>
36.38	<p>Point for the N. 1/16 sec. cor. of sec. 13 only, on the W. bdy. of the sec.</p> <hr/> <p>From the center W-W 1/64 sec. cor. of sec. 13. N. 0°23' W., on the N. and S. centerline of the SW 1/4 of the NW 1/4 of sec. 13. Over steep, rocky W. facing slope, descending.</p>
1.21	<p>A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. diam. plastic cap mkd. JJA LS 4491.</p>
9.85	<p>Enter Oak Creek flood plain, edge bears NNE and SSW.</p>
19.96	<p>The true point for the center W-NW 1/64 sec. cor. of sec. 13.</p> <hr/> <p>From the true point for the center W-NW 1/64 sec. cor. of sec. 13. N. 0°03' E. on a portion of the N. and S. centerline of the NW 1/4 of the NW 1/4 of sec. 13.</p>

Subdivision of Section 13,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
9.98	<p>Point for the NW-NW 1/64 sec. cor. of sec. 13, falls on a near vertical precipitous slope, where it is impracticable to establish a permanent monument.</p> <p>From this point, the point selected for the witness NW-NW 1/64 sec. cor. of sec. 13, bears S. 0°47' E., 0.09 ch. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to bedrock, in a supporting mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">WC T16N R4E S13 NW-NW ↑ 1/64 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a ledge of a steep, rocky S. facing slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°44' W. on a portion of the E. and W. centerline of the NW 1/4 of the NW 1/4 of sec. 13.</p>
5.56	<p>The N-N 1/64 sec. cor. of sec. 13 only, on the W. bdy. of the sec.</p>
<hr/> <p>Subdivision of Section 14, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona</p> <hr/>	
	<p>From the 1/4 sec. cor. of secs. 14 and 23.</p> <p>N. 4°58' E., on the N. and S. centerline of sec. 14.</p> <p>Over mountainous and broken land.</p>
20.64	<p>Point for the center S. 1/16 sec. cor. of sec. 14.</p> <p>Not monumented.</p>
25.60	<p>Graded road, 12 lks. wide, in curve, bears ESE and NNW.</p>
28.25	<p>Oak Creek, 50 lks. wide, 1 ft. deep, course NW, ascend over steep rocky S. facing slope.</p>

Subdivision of Section 14,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
41.28	<p>Point for the center 1/4 sec. cor. of sec. 14, at intersection with the E. and W. centerline of sec. 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E C 1/4 S14 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a small ledge, within a near vertical S. facing slope.</p>
54.10	Graded road, 24 lks. wide, bears SSW and curving ENE.
62.19	<p>Point for the center N. 1/16 sec. cor. of sec. 14.</p> <p>Not monumented.</p>
70.00	Oak Creek, 1 ch. wide, 1 ft. deep, course SSE.
83.10	The 1/4 sec. cor. of secs. 11 and 14.
	<hr/> <p>From the 1/4 sec. cor. of sec. 14 only, on the E. bdy. of the sec.</p> <p>N. 89°55' W. on the E. and W. centerline of sec. 14.</p> <p>Across residential area.</p>
5.05	Graded road, 15 lks. wide, bears NNE and SSW, leave residential area, ascending over E. facing slope.
9.675	<p>Point for the center E-E 1/64 sec. cor. of sec. 14, occupied with a rebar of unknown origin, 18 ins. long, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. diam., smashed plastic cap.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

Subdivision of Section 14,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T16N R4E E-E 1/64 C-----C S14 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
	<p>Deposit the rebar inside the stainless steel post.</p>
13.42	<p>Graded road, 12 lks. wide in curve, bears SW and NNW.</p>
19.35	<p>Point for the center E. 1/16 sec. cor. of sec. 14. Not monumented.</p>
38.70	<p>The center 1/4 sec. cor. of sec. 14.</p>
57.27	<p>Point for the center W. 1/16 sec. cor. of sec. 14.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, to bedrock, in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T16N R4E W 1/16 C-----C S14 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
75.84	<p>The 1/4 sec. cor. of secs. 14 and 15.</p> <hr/> <p style="text-align: center;">NE 1/4</p> <hr/>
	<p>From the point for the center E. 1/16 sec. cor. of sec. 14. N. 4°12' E., on the N. and S. centerline of the NE 1/4 of sec. 14.</p>
	<p>Over mountainous and broken land,</p>
20.66	<p>Point for the NE 1/16 sec. cor. of sec. 14, at intersection with the E. and W, centerline of the NE 1/4 of sec. 14. Not monumented.</p>

Subdivision of Section 14,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
41.32	The point for the E. 1/16 sec. cor. of secs. 11 and 14.
	<hr/> <p>From the point for the N. 1/16 sec. cor. of sec. 14 only, on the E. bdy. of the sec.</p> <p>N. 89°13' W., on the E. and W. centerline of the NE 1/4 of sec. 14.</p>
9.53	<p>Point for the center E-NE 1/64 sec. cor. of sec. 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S14 C-E-NE 1/64 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
9.65	Stone fence, 6 lks. wide, 4 lks. high, bears N. and S.
19.06	The point for the NE 1/16 sec. cor. of sec. 14.
38.11	The point for the center N. 1/16 sec. cor. of sec. 14.
	<hr/> <p>From the center E-NE 1/64 sec. cor. of sec. 14.</p> <p>N. 3°49' E., on a portion of the N. and S. centerline of the NE 1/4 of the NE 1/4 of sec. 14.</p>
0.44	Stone fence, 5 lks. wide, 3 lks. high, bears N 40° E. and S. 40° W., for 18 lks., thence S.
3.75	Oak Creek, 1 ch. wide, 1 ft. deep, course ENE.
10.265	<p>The NE-NE 1/64 sec. cor. of sec. 14, established by David S. Dickey, Sr., monumented with a rebar, 16 ins. long, 1/2 in. diam., firmly set, projecting 3 in. above ground, with 1 in. diam. plastic cap, mkd. COR STONE LS 25384. This is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p>

Subdivision of Section 14,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T16N R4E S14 NE-NE 1/64 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>
	<p>Deposit the rebar inside the stainless steel post.</p>
	<p>S. 88°52' E., on a portion of the E. and W. centerline of the NE 1/4 of the NE 1/4 of sec. 14.</p>
	<p>Over steep rocky S. facing slope.</p>
9.455	<p>The N-N 1/64 sec. cor. of sec. 14 only, on the E. bdy. of the sec.</p>
	<p>From the center E-E 1/64 sec. cor. of sec. 14.</p>
	<p>N. 3°49' E., on the N. and S. centerline of the SE 1/4 of the NE 1/4 of sec. 14.</p>
	<p>Over E. facing slope, through medium juniper timber.</p>
15.10	<p>Graded road, 21 lks. wide, bears SE and NW.</p>
15.28	<p>Along stone fence, 8 lks. wide, 5 lks. high.</p>
19.09	<p>Leave stone fence, 6 lks. wide, 3 lks. high, bears N. 5° W.</p>
20.53	<p>The center E-NE 1/64 sec. cor. of sec. 14.</p>
	<p style="text-align: center;">SE 1/4</p>
	<p>From the point for the E. 1/16 sec. cor. of secs. 14 and 23.</p>
	<p>N. 3°57' E., on the N. and S. centerline of the SE 1/4 of sec. 14.</p>
	<p>Over broken and mountainous land.</p>

Subdivision of Section 14,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.57	<p>Point for the SE 1/16 sec. cor. of sec. 14, at intersection with the E. and W. centerline of the SE 1/4 of sec. 14.</p>
	<p>Not monumented.</p>
41.13	<p>The point for the center E. 1/16 sec. cor. of sec. 14.</p>
	<hr/> <p>From the point for the S. 1/16 sec. cor. of sec. 14 only, on the E. bdy. of the sec.</p>
	<p>S. 89°57' W., on the E. and W. centerline of the SE 1/4 of sec. 14.</p>
19.72	<p>The point for the SE 1/16 sec. cor. of sec. 14.</p>
39.44	<p>The point for the center S. 1/16 sec. cor. of sec. 14.</p>
	<hr/> <p>From the N-S 1/64 sec. cor. of sec. 14 only, on the E. bdy. of the sec.</p>
	<p>N. 89°59' W. on a portion of the E. and W. centerline of the NE 1/4 of the SE 1/4 of sec. 14.</p>
2.70	<p>Oak Creek, 1 ch. wide, 2 ft. deep, course SW.</p>
9.765	<p>Point for the NE-SE 1/64 sec. cor. of sec. 14, occupied with a rebar of unknown origin, 18 ins. long, 1/2 in. diam., firmly set, projecting 1 in. above ground.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T16N R4E S14 NE-SE 1/64 1998</p>
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
	<p>Deposit the rebar inside the stainless steel post.</p>
	<hr/> <p>N. 3°26' E., on a portion of the N. and S. centerline of the NE 1/4 of the SE 1/4 of sec. 14.</p>

Subdivision of Section 14,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
10.265	The center E-E 1/64 sec. cor. of sec. 14.
	<hr/>
	SW 1/4
	<hr/>
	From the point for the W. 1/16 sec. cor. of secs. 14 and 23.
	N. 6°17' E., on the N. and S. centerline of the SW 1/4 of sec. 14.
	Over Oak Creek flood plain.
20.71	Point for the SW 1/16 sec. cor. of sec. 14, at intersection with the E. and W. centerline of the SW 1/4 of sec. 14.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T16N R4E
	SW 1/16 S14
	1998
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
28.20	Oak Creek, 1 ch. wide, 2 ft. deep, course SW, ascend over steep, rocky, S. facing slope.
41.42	The center W. 1/16 sec. cor. of sec. 14.
	<hr/>
	From the point for the center S. 1/16 sec. cor. of sec. 14.
	N. 89°59' W., on the E. and W. centerline of the SW 1/4 of sec. 14.
	Over broken land.
16.30	Graded road, 15 lks. wide, bears S. 10° W. and N. 10° E., curving northeasterly, thence across bottom land.
19.05	The SW 1/16 sec. cor. of sec. 14.
21.33	Gate in four strand barbed wire fence, bears S. 45° W. and N. 45 E. for 10 lks., thence N. 40° W.
21.55	Irrigation ditch, 12 lks. wide, 4 ft. deep, course SW, enter pasture.

Subdivision of Section 14,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
30.60	Leave pasture, enter riparian area, edge bears NNE and SSW.
33.10	Oak Creek, 20 lks, wide, 2 ft. deep, course SW.
33.34	Point for the center W-W-SW 1/256 sec. cor. of sec. 14, occupied with an Arizona Alder, 6 ins. diam. Mark an X at breast height on the south side.
	from which
	An X chiseled on the top of a granite boulder, 2 x 2 x 1 1/2 ft. high, bears S. 72° W., 21 lks. dist.
38.10	The point for the S. 1/16 sec. cor. of secs. 14 and 15.
	From the center W-W-SW 1/256 sec. cor. of sec. 14.
	N. 7°15.5' E., on a portion of the N. and S. centerline of the SW 1/4 of the NW 1/4 of the SW 1/4 of sec. 14.
5.195	Point for the SW-NW-SW 1/256 sec. cor. of sec. 14.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;">T16N R4E S14 SW-NW-SW 1/256 1998</p>
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	from which
	A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 25 ins. in the ground, for a reference monument bears S. 43°15' E., 47.1 ft. dist., with cap mkd. RM T16N R4E 1/256 47.1 FT TO COR S14 1998, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.
	Cor. is located on a steep, rocky S. facing slope.
	N. 89°58' W., on a portion of the E. and W. centerline of the SW 1/4 of the NW 1/4 of the SW 1/4 of sec. 14.

Subdivision of Section 14,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over steep, rocky S. facing slope.
4.735	The S-N-S 1/256 sec. cor. of secs. 14 and 15.
<hr/> Subdivision of Section 15, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona <hr/>	
	From the 1/4 sec. cor. of secs. 15 and 22.
	N. 7°22' E., on the N. and S. centerline of sec. 15.
	Over mountainous and broken land.
20.48	Point for the center S. 1/16 sec. cor. of sec. 15.
	Not monumented.
40.96	Point for the center 1/4 sec. cor. of sec. 15, at intersection with the E. and W. centerline of sec. 15.
	Not monumented.
68.57	Center of pavement, Page Springs road, 33 lks. wide, bears SE. and NW.
83.58	The 1/4 sec. cor. of secs. 10 and 15.
<hr/> From the 1/4 sec. cor. of secs. 14 and 15. <hr/>	
	S. 89°22' W. on the E. and W. centerline of sec. 15.
15.05	Center of pavement, Page Springs road, 33 lks. wide, bears N. and S.
19.845	Point for the center E. 1/16 sec. cor. of sec. 15.
	Not monumented.
39.69	The point for the center 1/4 sec. cor. of sec. 15.
61.985	Point for the center W. 1/16 sec. cor. of sec. 15.
	Not monumented.
84.28	The 1/4 sec. cor. of secs. 15 and 16.
<hr/>	

Subdivision of Section 15,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>SE 1/4</p> <hr style="width: 20%; margin: auto;"/>
	<p>From the E. 1/16 sec. cor. of secs. 15 and 22. N. 7°29' E., on the N. and S. centerline of the SE 1/4 of sec. 15. Over eastern slope of mesa.</p>
4.30	<p>A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. diam. yellow plastic cap mkd. COR STONE LS25384. From this point, a rebar, 1/2 in. diam., firmly set, projecting 4 ins. above ground, with damaged 1 in. diam. plastic cap, bears W., 4.5 lks. dist.</p>
8.53	<p>A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. diam. yellow plastic cap mkd. COR STONE LS25384. From this point, a rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with damaged 1 in. diam. plastic cap, bears W., 5.5 lks. dist.</p>
8.67	<p>From this point, a rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, at the cor. of four strand barbed wire fences, extending N. and E., bears E., 2.5 lks. dist.</p>
16.68	<p>Cor. of barbed wire fences, extending E. and S., bears W., 3 lks. dist.</p>
19.07	<p>Four strand barbed wire fence, bears S. 4° E. and N. 4° W.,</p>
19.21	<p>Four strand barbed wire fence, bears S. 89° E. and N. 89° W., for 4.5 lks., thence S. 4° E. and N. 4° W. Across lawn area.</p>
20.635	<p>Point for the SE 1/16 sec. cor. of sec. 15, at intersection with the E. and W. centerline of the SE 1/4 of sec. 15. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>
	<p>T16N R4E SE1/16 S15 1998</p>

Subdivision of Section 15,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on the E. face of a volcanic landscaped terrace, and 31 lks. E. of a four strand barbed wire fence, bears S. 4° E. and N. 4° W.</p> <p>From this cor. point, a galvanized iron pipe of unknown origin, 1 in. diam., firmly set, projecting 4 ins. above ground, bears N. 3 1/2° E., 5.5 lks. dist.</p>
21.62	Four strand barbed wire fence bears S. 88° E. and N. 88° W., for 52 lks., thence S. 4° E.
41.27	The point for the center E. 1/16 sec. cor. of sec. 15.
	<hr/> <p>From the point for the S. 1/16 sec. cor. of secs. 14 and 15.</p> <p>S. 89°48' W., on the E. and W. centerline of the SE 1/4 of sec. 15.</p> <p>Over residential area.</p>
9.89	<p>The center E-SE 1/64 sec. cor. of sec. 15, established by David S. Dickey, Sr., monumented with a rebar, 16 ins. long, 1/2 in. diam., firmly set, flush with the ground, with 1 in. diam. plastic cap mkd. COR STONE LS 25384. This is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S15 C-E-SE 1/64 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar inside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89°48' W., beginning new measurement.</p>

Subdivision of Section 15,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
0.02	A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. diam. yellow plastic cap mkd. COR STONE LS 25384.
0.05	Barbed wire fence, 4 strands, bears S. and N., for 25 lks., thence N. 82° W.
2.99	Woven wire fence, 4 ft. high, bears S. 11° W. and N. 11° E., for 66 lks., to intersection with 4 strand barbed wire fence extending S. 82° E.
3.49	A 1/2 in. diam., rebar, set flush with pavement in center line of Page Springs road, 32 lks. wide, bears NNE and SSW, with 1 in. diam. plastic cap mkd. COR-STONE LS 25384.
3.85	Four strand barbed wire fence, bears NNE and SSW, enter across lawn area.
9.00	SW cor. of woven wire fence enclosing a vegetable garden, 60 x 36 ft., long side bears N., bears N. 4 lks. dist.
9.89	The SE 1/16 sec. cor. of sec. 15.
10.20	Four strand barbed wire fence, bears S. 4° E. and N. 4° W.
29.675	The point for the center S. 1/16 sec. cor. of sec. 15.
<hr/>	
From the center E-SE 1/64 sec. cor. of sec. 15.	
N. 7°32' E. on a portion of the N. and S. centerline of the NE 1/4 of the SE 1/4 of sec. 15.	
0.60	Track road, 12 lks. wide, bears E. and curving NW.
3.05	Overhead powerline, bears ENE and WSW.
5.18	Point for the center S-NE-SE 1/256 sec. cor. of sec. 15.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.	
<p>T16N R4E S15 C-S-NE-SE 1/256 1998</p>	
Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.	

Subdivision of Section 15,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located 7 lks. E. of a four strand barbed wire fence, bears N. and S.</p> <hr/>
	<p>N. 89°41' E., on the E. and W. centerline of the SE 1/4 of the NE 1/4 of the SE 1/4 of sec. 15.</p>
9.90	<p>The S-N-S 1/256 sec. cor. of secs. 14 and 15.</p> <hr/>
	<p style="text-align: center;">SW 1/4</p> <hr/>
	<p>From the W. 1/16 sec. cor. of secs. 15 and 22.</p>
	<p>N. 3°49' E. on the N. and S. centerline of the SW 1/4 of sec. 15.</p>
	<p>Over mountainous and broken land.</p>
20.19	<p>Point for the SW 1/16 sec. cor. of sec. 15, at intersection with the E. and W. centerline of the SW 1/4 of sec. 15.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T16N R4E</p>
	<p style="text-align: center;">SW 1/16 S15</p>
	<p style="text-align: center;">1998</p>
	<p>Deposit six 40D nails beneath the stainless steel post.</p>
	<p>From this cor. point, an iron pipe of unknown origin, 1 1/2 ins. diam., firmly set, projecting 8 ins. above ground, bears</p>
	<p>S. 43°45' W., 111 lks. dist.</p>
40.38	<p>The point for the center W. 1/16 sec. cor. of sec. 15.</p> <hr/>
	<p>From the point for the center S. 1/16 sec. cor. of sec. 15.</p>
	<p>S. 89°46' W., on the E. and W. centerline of the SW 1/4 of sec. 15.</p>
21.015	<p>The SW 1/16 sec. cor. of sec. 15.</p>

Subdivision of Section 15,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
42.03	<p>The S. 1/16 sec. cor. of secs. 15 and 16.</p> <hr/> <p style="text-align: center;">Subdivision of Section 22, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 22 and 27.</p> <p>N. 1°16' E., on the N. and S. center line of sec. 22.</p> <p>Over broken and mountainous land, through scattered timber and undergrowth.</p>
7.45	Bladed road, 30 lks. wide, bears SE and NW.
20.12	<p>Point for the center S. 1/16 sec. cor. of sec. 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E C S1/16 S22 C 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 4 lks. S. of a fence cor., with 4 strand barbed wire fences extending N. and W.</p>
27.90	Wash, 15 lks. wide, 6 ft. deep, course NW.
37.10	Wash, 20 lks. wide, 1 ft. deep, course SSW.
40.24	<p>Point for the center 1/4 sec. cor. of sec. 22, at intersection with the E. and W. center line of sec. 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E C1/4 S22 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>

Subdivision of Section 22,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Cor. is located 1.5 lks. NE of a fence cor., with 4 strand barbed wire fences extending S. and W.
60.00	Ascend 300 ft., to top of mesa.
81.22	The 1/4 sec. cor. secs. 15 and 22.
<hr/>	
	From the 1/4 sec. cor. of secs. 22 and 23.
	N. 89°28' W., on the E. and W. center line of sec. 22.
	Over broken and mountainous land, through scattered timber and undergrowth.
34.30	Wash, 15 lks. wide, 1 ft. deep, course WSW.
38.70	The center 1/4 sec. cor. of sec. 22.
58.58	Point for the center W. 1/16 sec. cor. of sec. 22, occupied with an iron pipe of unknown origin, 18 ins. long, 1 1/2 ins. diam., firmly set, projecting 12 ins. above ground.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.
	T16N R4E W1/16 C—C S22 1997
	Deposit the iron pipe inside the stainless steel post.
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	Cor. is located in a 4 strand barbed wire fence, bears N. and S., and 2 lks. N. of a fence cor., with 4 strand barbed wire fences bears N. and E.
63.15	Track road, 15 lks. wide, bears NNE and SSW.
73.45	Spring Creek, 15 lks. wide, 2 ft. deep, course SSW.
78.46	The 1/4 sec. cor. of secs. 21 and 22.
<hr/>	

Subdivision of Section 22,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<hr/> SW 1/4 <hr/>
	From the center S. 1/16 sec. cor. of sec. 22.
	N. 89°19' W., on the E. and W. center line of the SW 1/4 of sec. 22.
17.40	Spring Creek, 18 lks. wide, 1 ft. deep, course SW.
18.75	Barbed wire fence, 4 strand, bears NNE and SSW.
27.90	Wash, 20 lks. wide, 1 ft. deep, course SSE.
39.38	The S. 1/16 sec. cor. of secs. 21 and 22.
	<hr/> NW 1/4 <hr/>
	From the center W. 1/16 sec. cor. of sec. 22.
	N. 1°28' E., on the N. and S. center line of the NW 1/4 of sec. 22.
	Over broken and mountainous land, through scattered timber and undergrowth.
40.89	The W. 1/16 sec. cor. of secs. 15 and 22.
	<hr/> Subdivision of Section 23, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona <hr/>
	From the 1/4 sec. cor. of secs. 23 and 26.
	North, on the N. and S. center line of sec. 23.
	Descend over pasture land.
38.93	Point for the center 1/4 sec. cor. of sec. 23, at intersection with the E. and W. center line of sec. 23.
	Cor. point falls in Oak Creek, not monumented.
79.41	The 1/4 sec. cor. of secs. 14 and 23.
	<hr/> From the 1/4 sec. cor. of secs. 23 and 24. <hr/>

Subdivision of Section 23,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	S. 88°58' W., on the E. and W. center line of sec. 23.
25.00	Enter pasture land.
40.43	The point for the center 1/4 sec. cor. of sec. 23.
60.79	Point for the center W. 1/16 sec. cor. of sec. 23.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.
	T16N R4E W1/16 C—C S23 1997
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	From this cor. point, an iron pipe of unknown origin, 1 1/2 ins. diam., firmly set, projecting 8 ins. above ground bears, N. 85°22' E., 8.0 lks. dist.
81.15	The 1/4 sec. cor. of secs. 22 and 23.
	<hr/> SW 1/4 <hr/>
	From the W. 1/16 sec. cor. of secs. 23 and 26.
	N. 0°24' E., on the N. and S. center line of the SW 1/4 of sec. 23.
	Over rocky E. facing slope, through scattered timber and undergrowth.
39.68	The center W. 1/16 sec. cor. of sec. 23.
	<hr/> Subdivision of Section 25, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona <hr/>
	From the 1/4 sec. cor. of secs. 25 and 36.
	N. 0°04' E., on the N. and S. center line of sec. 25.

Subdivision of Section 25,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over broken mountainous land, through scattered timber and undergrowth.
38.90	Rocky wash, 12 lks. wide, 4 ft. deep, course SW.
40.56	Point for the center 1/4 sec. cor. of sec. 25, at intersection with the E. and W. center line of sec. 25.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to bedrock in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T16N R4E C1/4 S25 1997
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	Cor. is located on rocky, moderately steep, W. facing slope.
46.10	Rocky wash, 12 lks. wide, 4 ft. deep, course SSW, thence ascend.
54.60	Ridge, 145 ft. above wash, bears ENE and WSW.
60.62	Point for the center N. 1/16 sec. cor. of sec. 25.
	Not monumented.
80.68	The 1/4 sec. cor. of secs. 24 and 25.
	<hr/>
	From the 1/4 sec. cor. of sec. 25 only, on the E. bdy of the Tp.
	West, on the E. and W. center line of sec. 25
	Over broken and mountainous land, through scattered timber and undergrowth.
40.00	The center 1/4 sec. cor. of sec. 25.
42.30	Rocky wash, 18 lks. wide, 3 ft. deep, drains SSW.
60.02	Point for the center W. 1/16 sec. cor. of sec. 25.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to bedrock, in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.

Subdivision of Section 25,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	T16N R4E W1/16 C———C S25 1997
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	From this cor. point, a rebar of unknown origin, 1/2 in. diam., firmly set, projecting 1 in. above ground, bears S. 3°26' W., 3.5 lks. dist.
80.04	The point for the 1/4 sec. cor. of secs. 25 and 26.
	<hr/> SW 1/4 <hr/>
	From the W. 1/16 sec. cor. of secs. 25 and 36.
	N. 0°05' E., on the N. and S. center line of the SW 1/4 of sec. 25.
9.55	Graded road, 20 lks. wide, bears ENE and WSW.
19.90	Intersect the W. side of a carport, 30 x 20 ft., the SW cor. bears S. 2° E., 10 lks. dist., the long side bears N. 2° W.
20.39	Intersect the S. side of a wooden shed, 12 x 5 ft., the SW cor. bears S. 80° W., 3.5 lks. dist., the long side bears N. 10° W.
21.06	Intersect the S. side of a propane storage tank, 10 ft. long, 3 ft. diam., at a point S. 70° E., 5 lks. dist. from the westerly end.
40.56	The center W. 1/16 sec. cor. of sec. 25.
	<hr/> NW 1/4 <hr/>
	From the center W. 1/16 sec. cor. of sec. 25.
	N. 0°05' E., on the N. and S. center line of the NW 1/4 of sec. 25.
	Over broken mountainous land, through scattered timber and undergrowth.

Subdivision of Section 25,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.06	Point for the NW 1/16 sec. cor. of sec. 25, at intersection with the E. and W. center line of the NW 1/4 sec. 25.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.
	T16N R4E NW 1/16 S25 1997
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	From this cor. point, a rebar of unknown origin, 5/8 in diam., firmly set, in a mound of stone, 2 ft. base, projecting 4 ins. above ground, bears S. 6°19' W., 7 lks. dist.
40.12	The point for the W. 1/16 sec. cor. of sec. 25 only, on the N. bdy. of the sec.
	From the point for the center N. 1/16 sec. cor. of sec. 25. West, on the E. and W. center line of the NW 1/4 of sec. 25.
20.015	The NW 1/16 sec. cor. of sec. 25.
40.03	The N. 1/16 sec. cor. of secs. 25 and 26.
	Subdivision of Section 26, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona
	From the 1/4 sec. cor. of secs. 26 and 35. N. 0°02' E., on the N. and S. center line of sec. 26.
11.65	Track road, 18 lks. wide, bears SSE and NNW.
20.42	A rebar of unknown origin, 1/2 in. diam., firmly set, projecting 2 ins. above ground.
23.00	Wash, 35 lks. wide, 3 ft. deep, course SE.
36.70	Power line, bears ESE and WNW.

Subdivision of Section 26,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.84	<p>Point for the center 1/4 sec. cor. of sec. 26, at intersection with the E. and W. center line of sec. 26, occupied with an open end iron pipe of unknown origin, 1 in. diam., firmly set, projecting 4 ins. above ground.</p> <p>Cement a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in the end of the iron pipe, with top mkd.</p> <p style="text-align: center;">T16N R4E C1/4 S26 1997</p> <p>Cor. is located in a crevice, on the NE face of a granite cliff, 20 ft. high, bears NE and SW.</p>
81.43	<p>The 1/4 sec. cor. of secs. 23 and 26.</p> <hr/> <p>From the point for the 1/4 sec. cor of secs. 25 and 26.</p> <p>S. 89°32' W., on the E. and W. center line of sec. 26.</p> <p>Across bottom lands of Oak Creek.</p>
40.00	<p>The center 1/4 sec. cor. of sec. 26.</p> <p>Leave bottom land, enter rolling land.</p>
60.23	<p>The center W. 1/16 sec. cor. of sec. 26, established by George Lay, Arizona Registered Land Surveyor No. 5541, monumented with a rebar, 18 ins. long, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. diam. yellow plastic cap mkd. MINGUS RLS 5541. This is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E W1/16 C—C S26 1997</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>

Subdivision of Section 26,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor., an iron pipe of unknown origin, 1 in. diam., firmly set, projecting 5 ins. above ground, bears S. 87°10' E., 2 lks. dist.</p>
	<p>S. 89°32' W., beginning new measurement.</p>
20.23	<p>The 1/4 sec. cor. of secs. 26 and 27.</p>
	<p style="text-align: center;">NW 1/4</p>
	<p>From the center W. 1/16 sec. cor. of sec. 26.</p>
	<p>N. 0°32' W., on the N. and S. center line of the NW 1/4 of sec. 26.</p>
4.40	<p>Graded road, 30 lks. wide, bears SE and NW.</p>
11.40	<p>Gully, 12 lks. wide, 10 ft. deep, drains ESE.</p>
19.82	<p>A rebar, 1/2 in. diam., established by George Lay, Arizona Registered Land Surveyor No. 5541, firmly set, projecting 5 in. above ground, with 1 in. diam. yellow plastic cap mkd. MINGUS RLS 5541.</p>
	<p>Cor. is located 2 lks. NW of a cor. of fences, with 4 strand barbed wire fences bearing S. and E.</p>
	<p>From this cor. point, an iron pipe of unknown origin, 1 in diam., firmly set, projecting 6 ins. above ground, bears N. 45°00' E., 4 lks. dist.</p>
20.47	<p>Power line, bears NNE and SSW.</p>
39.64	<p>The W. 1/16 sec. cor. of secs. 23 and 26.</p>
	<p style="text-align: center;">Subdivision of Section 27, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona</p>
	<p>From the 1/4 sec. cor. of secs. 27 and 34.</p>
	<p>N. 0°10' W., on the N. and S. center line of sec. 27.</p>

Subdivision of Section 27,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over broken and mountainous land, through scattered timber and undergrowth.
20.015	Point for the center S. 1/16 sec. cor. of sec. 27, occupied with a rebar of unknown origin, 18 ins. long, 1/2 in. diam., firmly set, projecting 2 ins. above ground.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T16N R4E C S1/16 S27 C 1997</p>
	Deposit the rebar inside the stainless steel post.
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	Cor. is located at the cor. of fences, with 4 strand barbed wire fences extending N., E. and S.
20.40	Track road, 12 lks. wide, bears E. and WSW.
22.35	Spring Creek, 23 lks. wide, 1 ft. deep, course NE.
40.03	Point for the center 1/4 sec. cor. of sec. 27, at intersection with the E. and W. center line of sec. 27, occupied with a rebar of unknown origin, 18 ins. long, 1/2 in. diam., firmly set, projecting 8 ins. above ground.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to bedrock, in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;">T16N R4E C1/4 S27 1997</p>
	Deposit the rebar inside the stainless steel post.
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
79.30	The 1/4 sec. cor. of secs. 22 and 27.
	From the 1/4 sec. cor of secs. 26 and 27.

Subdivision of Section 27,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	S. 89°58' W., on the E. and W. center line of sec. 27.
5.70	Bladed road, 40 lks. wide, bears SSE and NNW.
10.10	Track road, 15 lks. wide, bears NNE and S.
19.855	Point for the center E. 1/16 sec. cor. of sec. 27. Not monumented.
39.60	Power line, bears SE and NW.
39.71	The center 1/4 sec. cor. of sec. 27.
41.56	Cor. of fences, bears N., 12 lks. dist., with 4 strand barbed wire fences extending N. and W.
61.50	Spring Creek, 50 lks. wide, 2 ft. deep, course SSW.
79.26	The 1/4 sec. cor. of secs. 27 and 28.
	<hr/> SE 1/4 <hr/>
	From the E. 1/16 sec. cor. of secs. 27 and 34.
	N. 0°26' W., on the N. and S. center line of the SE 1/4 of sec. 27.
20.04	The point for the SE 1/16 sec. cor. of sec. 27, at intersection with the E. and W. center line of the SE 1/4 of sec. 27, occupied with a rebar of unknown origin, 18 ins. long, 1/2 in. diam., firmly set, projecting 1 in. above ground. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.
	T16N R4E SE 1/16 S27 1997
	Deposit the rebar inside the stainless steel post. Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
40.08	The point for the center E. 1/16 sec. cor. of sec. 27.

Subdivision of Section 27,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the point for the S. 1/16 sec. cor. of secs. 26 and 27. N. 89°57' W., on the E. and W. center line of the SE 1/4 of sec. 27.</p>
19.95	The SE 1/16 sec. cor. of sec. 27.
29.70	Spring Creek, 40 lks. wide, 2 ft. deep, course SW.
39.90	The center S. 1/16 sec. cor. of sec. 27.
<hr/> <p>Subdivision of Section 33, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona</p> <hr/>	
	<p>From the 1/4 sec. cor. of secs. 4 and 33, on the S. bdy. of the Tp.</p>
	N. 0°18' E., on the N. and S. center line of sec. 33.
	Over broken and mountainous land, through scattered timber and undergrowth.
19.84	Point for the center S. 1/16 sec. cor. of sec. 33.
	Not monumented.
39.68	<p>Point for the center 1/4 sec. cor. of sec. 33, at intersection with the E. and W. center line of sec. 33, occupied with an iron pipe of unknown origin, 18 ins. long, 1 in. diam., firmly set, projecting 3 ins. above ground.</p>
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<p>T16N R4E C1/4 S33 1997</p>
	Deposit the iron pipe inside the stainless steel post.
	Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.
79.66	The 1/4 sec. cor. of secs. 28 and 33.
<hr/> <p>From the 1/4 sec. cor. of secs. 33 and 34. N. 89°51' W., on the E. and W. center line of sec. 33.</p>	

Subdivision of Section 33,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.205	<p>The point for the center E. 1/16 sec. cor. of sec. 33, occupied with an iron pipe of unknown origin, 13 ins. long, 1 in. diam., firmly set, projecting 3 ins. above ground.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to bedrock, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E E1/16 C———C S33 1997</p> <p>Deposit the iron pipe inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
40.41	The center 1/4 sec. cor. of sec. 33.
80.80	The 1/4 sec. cor. of secs. 32 and 33.
	<hr/> <p>NE 1/4</p> <hr/>
	<p>From the center E. 1/16 sec. cor. of sec. 33.</p> <p>N. 0°25' E., on the N. and S. center line of the NE 1/4 of sec. 33.</p> <p>Over broken mountainous land, through scattered timber and undergrowth.</p>
3.47	A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. diam. yellow plastic cap mkd. JJ & A LS 4491.
3.48	Cor. of fences with 4 strand barbed wire fences extending N., E., and W., thence along fence line.
15.28	A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. diam. yellow plastic cap mkd. JJ & A LS 4491.
20.00	A rebar, 1/2 in. diam., firmly set, projecting 3 ins. above ground, with a damaged and illegible 1 in. diam. yellow plastic cap.
22.32	A rebar, 1/2 in. diam., firmly set, projecting 4 ins. above ground, with 1 in. diam. yellow plastic cap illegibly mkd. lying loose nearby.

Subdivision of Section 33,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.00	The E. 1/16 sec. cor. of secs. 28 and 33.
	<hr/> SE 1/4 <hr/>
	From the E. 1/16 sec. cor. of secs. 4 and 33, on the S. bdy. of the Tp.
	N. 0°20' E., on the N. and S. center line of the SE 1/4 of sec. 33.
1.30	Irrigation canal, 12 lks. wide, 2 ft. deep, course SE.
3.10	Center of wash, 40 lks. wide, 4 ft. deep, drains SSE.
3.77	Barbed wire fence, 4 strand, bears ESE and WSW.
4.03	Irrigation canal, 12 lks. wide, 2 ft. deep, course W.
19.86	<p>The SE 1/16 sec. cor. of sec. 33, established by David S. Dickey, Arizona Registered Land Surveyor No. 25384, monumented with a rebar, 12 ins. long, 1/2 in. diam., firmly set, projecting 3 ins. above ground, with 1 in. diam. yellow plastic cap mkd. COR-STONE LS 25384. This is accepted as a careful and faithful determination of the position of the cor.</p>
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to bedrock in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.
	T16N R4E SE 1/16 S33 1997
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	Deposit the rebar inside the stainless steel post.
	From this cor. point, a rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with affixed washer stamped PE 8069, bears S. 24°05' W., 3.0 lks. dist.
	From this same cor. point, an iron pipe of unknown origin, 1 in. diam., firmly set, projecting 4 ins. above ground, bears N. 5°04' W., 7.5 lks. dist.

Subdivision of Section 33,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 0°20' E., beginning new measurement.
19.86	The center E. 1/16 sec. cor. of sec. 33.
	From the S. 1/16 sec. cor. of secs. 33 and 34.
	N. 89°48' W., on the E. and W. center line of the SE 1/4 of sec. 33.
14.13	A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. diam. yellow plastic cap mkd. COR-STONE LS 25384.
20.20	The SE 1/16 sec. cor. of sec. 33
	N. 89°48' W., beginning new measurement.
20.20	The point for the center S. 1/16 sec. cor. of sec. 33.
	Subdivision of Section 35, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona
	From the 1/4 sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp.
	N. 0°03' E., on the N. and S. center line of sec. 35.
	Over nearly level land, through moderate creosote, along woven wire fence.
2.12	A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground.
5.90	Wash, 22 lks. wide, 5 ft. deep, course SW.
15.06	A rebar, 1/2 in. diam., firmly set, projecting 3 ins. above ground, with 1 in. diam. yellow plastic cap mkd. J.J.A. LS 19853.
15.44	The easterly right of way fence to Page Springs road, 4 strand barbed wire, bears NE and SW.
16.25	Center of pavement, Page Springs road, 38 lks. wide, bears NE and SW.
16.98	A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. yellow plastic cap mkd. COR STONE LS 25384.

Subdivision of Section 35,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
17.20	A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. yellow plastic cap mkd. COR STONE LS 25384.
17.38	The westerly right of way fence to Page Springs road, 4 strand barbed wire, bears NE and SW.
17.39	A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. yellow plastic cap mkd. J.J.A. LS 19853.
20.04	<p>The center S. 1/16 sec. cor. of sec. 35, established by Scott J. Smith, Arizona Registered Land Surveyor No. 19853, monumented with a rebar, 18 ins. long, 1/2 in. diam., firmly set, projecting 3 ins. above ground, with 1 in. diam. yellow plastic cap mkd. J.J.A. LS 19853. This is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E C S1/16 S35 C 1997</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°03' E., beginning new measurement.</p>
0.76	A rebar, 1/2 in. diam., firmly set, projecting 10 ins. above ground, with 1 in. yellow plastic cap mkd. COR STONE LS 25384.
4.38	A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. yellow plastic cap mkd. COR STONE LS 25384.
5.30	Wash, 12 lks. wide, 4 ft. deep, course W.
6.99	A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. yellow plastic cap mkd. LS 19853.
9.60	A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. yellow plastic cap mkd. LS 19853.

Subdivision of Section 35,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
12.22	A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. yellow plastic cap mkd. COR STONE LS 25384.
20.04	Point for the center 1/4 sec. cor. of sec. 35, at intersection with the E. and W. center line of sec. 35, occupied with an iron pipe of unknown origin, 40 ins. long, 2 ins. diam., firmly set, projecting 16 ins. above ground. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.
	T16N R4E C1/4 S35 1997
	Bury the iron pipe alongside the stainless steel post.
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	From this cor. point, an iron pin of unknown origin, 5/8 in. diam., set 2 ins. below the surface of the ground, bears S. 63° E., 1.5 lks. dist.
20.40	Bladed road, 30 lks. wide, bears ESE and WNW.
20.80	A rebar, 5/8 in. diam., loosely set, projecting 12 ins. above ground, located at cor. of fences, with woven wire fences extending N. and ESE.
25.19	A rebar, 5/8 in. diam., firmly set, projecting 6 ins. above ground, located at cor. of fences, with woven wire fences extending N., S. and E.
29.58	A rebar, 5/8 in. diam., firmly set, projecting 8 ins. above ground, located at cor. of fences, with woven wire fences extending N., S. and E.
31.78	An iron pipe, 1/2 in. diam., firmly set, projecting 4 ins. above ground, located at cor. of fences, with 4 strand barbed wire fences extending N. and E., and woven wire fence extending S.
34.74	A rebar, 5/8 in. diam., firmly set, projecting 4 ins. above ground.

Subdivision of Section 35,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.74	<p>The center N. 1/16 sec. cor. of sec. 35, established by Wallace R. Ott, Arizona Registered Land Surveyor No. 9431, monumented with an aluminum rod, 3/4 in. diam., firmly set, projecting 3 ins. above ground, with 2 1/2 ins. diam. aluminum cap mkd. U.S. DEPT. OF AGRICULTURE C N1/16 C S35 1987 U.S. FOREST SERVICE RLS 9431. This is accepted as a careful and faithful determination of the position of the cor.</p>
	<p>Not remonumented.</p> <hr/>
	<p>N. 0°03' E., beginning new measurement.</p>
5.00	<p>Oak Creek, 1 ch. wide, course W.</p>
10.30	<p>Bladed road, 20 lks. wide, bears ESE and W.</p>
10.77	<p>Fence cor., with 4 strand barbed wire fences extending N. and SSE.</p>
13.82	<p>A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. yellow plastic cap mkd. LS 19853.</p>
19.70	<p>The 1/4 sec. cor. of secs. 26 and 35.</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 35 and 36.</p>
	<p>S. 89°42' W., on the E. and W. center line of sec. 35.</p>
	<p>Over broken land, through scattered timber and undergrowth.</p>
17.64	<p>Center of pavement, Page Springs road, 40 lks. wide, bears NE and SW.</p>
20.05	<p>The center E. 1/16 sec. cor. of sec. 35, established by David S. Dickey, Sr., Arizona Registered Land Surveyor No. 25384, monumented with a rebar, 16 ins. long, 1/2 in. diam., firmly set, projecting 3 ins. above ground, with 1 in. diam. yellow plastic cap mkd. COR STONE LS 25384. This is accepted as a careful and faithful determination of the position of the cor.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Subdivision of Section 35,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	<p style="text-align: center;">T16N R4E E1/16 C———C S35 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, N. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°42' W., beginning new measurement.</p> <p>0.24 Wash, 20 lks. wide, 5 ft. deep, course N.</p> <p>1.40 Wash, 10 lks. wide, 3 ft. deep, course NE.</p> <p>6.40 Track road, 20 lks. wide, bears ENE and W.</p> <p>20.05 The center 1/4 sec. cor. of sec. 35.</p> <p>26.43 A rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, located at cor. of fences, with woven wire fences extending S. and W.</p> <p>36.42 An iron pin, 1/2 in. diam., firmly set, projecting 5 ins. above ground, located at cor. of fences, with woven wire fence extending E., and 4 strand barbed wire fence extending S. and W.</p> <p>40.07 Point for the center W. 1/16 sec. cor. of sec. 35.</p> <p>Not monumented.</p> <p>40.34 Fence cor., with 3 strand barbed wire fences extending E. and S.</p> <p>45.075 The point for the center E-W-W 1/256 sec. cor. of sec. 35, occupied with a rebar of unknown origin, 18 ins. long, 5/8 in. diam., firmly set, 3 ins. below the surface of an improved graded road.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. below the surface of the road, with brass cap mkd.</p>
--------	--

Subdivision of Section 35,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T16N R4E S35 C-E-W-W 1/256 1997</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground for a reference monument, bears N. 8°01' W., 48.4 ft. dist., with cap mkd. RM T16N R4E S35 48.4 FT TO COR 1997, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p>
52.07	Woven wire fence, 6 ft. high, bears N. 84° E., and S. 84° W., enter Oak Creek School grounds.
56.84	Intersect the E. side of a classroom wing of Oak Creek School, 100 x 70 ft., the long side bears North, the SE corner bears S., 21 lks. dist.
57.35	Intersect the W. side of same classroom wing of Oak Creek School, the SW corner bears S., 20 lks. dist.
58.82	Intersect the E. side of a gymnasium of Oak Creek School, 142 x 70 ft., the long side bears North, the SE corner bears S., 10 lks. dist.
59.88	Intersect the W. side of same gymnasium of Oak Creek School, the SW corner bears S. 7 lks. dist.
60.09	The 1/4 sec. cor. of secs. 34 and 35.
	<hr/> <p>NE 1/4</p> <hr/>
	<p>From the center E. 1/16 sec. cor. of sec. 35.</p> <p>N. 0°02' W., on the N. and S. center line of the NE 1/4 of sec. 35.</p> <p>Descend over broken land, through moderate mesquite and undergrowth.</p>

Subdivision of Section 35,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
6.10	Wash, 12 lks. wide, 4 ft. deep, course ENE.
13.80	Power line, bears ENE and WSW.
14.50	Irrigation canal, 12 lks. wide, 3 ft. deep, course WNW.
15.15	Enter lawn area, edge bears ESE and WSW.
17.50	Leave lawn area.
19.10	Enter orchard.
19.80	<p>The NE 1/16 sec. cor. of sec. 35, established by David S. Dickey, Sr., Arizona Registered Land Surveyor No. 25384, monumented with a rebar, 1/2 in. diam., set flush with the surface of the ground, with 1 in. diam. yellow plastic cap mkd. COR STONE LS 25384. This is accepted as a careful and faithful determination of the position of the cor.</p>
	<p>from which</p>
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 23 ins. in the ground for a reference monument, bears S. 14°39' E., 45.6 ft. dist., with cap mkd. RM T16N R4E S35 45.6 FT TO COR 1997, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p>
	<p>Cor. is located in an orchard, and not remonumented at the request of the adjoining landowner.</p>
	<p>From this cor. point, a rebar of unknown origin, 1/2 in. diam., set 2 ins. below the surface of the ground, bears N. 71°59' E., 2.5 lks. dist.</p>
	<hr/> <p>N. 0°02' W., beginning new measurement.</p>
	<p>Over residential area.</p>
19.80	<p>The point for the E. 1/16 sec. cor. bet. secs. 26 and 35.</p>
	<hr/> <p>From the N. 1/16 sec. cor. of secs. 35 and 36.</p>
	<p>S. 89°25' W., on the E. and W. center line of the NE 1/4 of sec. 35.</p>
4.25	<p>A rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground.</p>

Subdivision of Section 35,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
6.98	A rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with 1 in. yellow plastic cap mkd. LS 5541.
12.75	Center of pavement, Page Springs road, 40 lks. wide, bears NNE and S.
17.69	Intersect the E. side of a wood barn, 44 x 30 ft., the long side bears N. 11 1/4° E., the SE cor. bears S. 11 1/4° W., 27 lks. dist. From this same point, the SE cor. of a woven wire fence bears S. 11°20' W., 81 lks. dist., fences extend N. 11 1/2° E. and N. 85 1/2° W.
18.16	Intersect the W. side of same wood barn, the SW cor. bears S. 11 1/4° W., 18 lks. dist. From this same point, the intersection of a woven wire fence with the W. side of the wood barn, bears N. 11 1/4° E., 3 lks. dist., fence bears N. 79 1/2° W.
19.61	Woven wire fence, the NW cor. bears N. 17 1/2° E., 31 lks. dist., the SW cor. bears S. 17 1/2° W., 66 lks. dist., enter orchard.
20.01	The NE 1/16 sec. cor. of sec. 35. _____
	S. 89°25' W., beginning new measurement.
20.01	The center N. 1/16 sec. cor. of sec. 35. _____
	SE 1/4 _____
	From the S. 1/16 sec. cor. of secs. 35 and 36. S. 89°48' W., on the E. and W. center line of the SE 1/4 of sec. 35.
6.90	Wash, 75 lks. wide, 8 ft. deep, course W.
10.90	Track road, 15 lks. wide, bears E. and W.
36.75	Center of pavement, Page Springs road, asphalt surfaced, 40 lks. wide, bears NE and SW.
40.10	The center S. 1/16 sec. cor. of sec. 35. _____

Subdivision of Section 35,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>NW 1/4</p> <hr/>
	<p>From the point for the center W. 1/16 sec. cor. of sec. 35.</p> <p>N. 0°07' E., on the N. and S. center line of the NW 1/4 of sec. 35.</p>
19.845	<p>Point for the NW 1/16 sec. cor. of sec. 35, at intersection with the E. and W. center line of the NW 1/4 of sec. 35.</p> <p>Not monumented.</p>
39.69	<p>The point for the W. 1/16 sec. cor. bet. secs. 26 and 35.</p> <hr/>
	<p>From the center N. 1/16 sec. cor. of sec. 35.</p> <p>N. 89°53' W., on the E. and W. center line of the NW 1/4 of sec. 35.</p>
20.00	<p>The point for the NW 1/16 sec. cor. of sec. 35.</p>
40.00	<p>The N. 1/16 sec. cor. of secs. 34 and 35.</p> <hr/>
	<p>From the center E-W-W 1/256 sec. cor. of sec. 35.</p> <p>N. 0°08' E. on the N. and S. center line of the SE 1/4 of the SW 1/4 of the NW 1/4 of sec. 35.</p>
9.94	<p>Point for the center E-SW-NW 1/256 sec. cor. of sec. 35, occupied with a rebar of unknown origin, 18 ins. long, 1/2 in. diam., firmly set, projecting 4 ins. above ground.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E S35 C-E-SW-NW 1/256 1997</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/>

Subdivision of Section 35,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
15.005	<p>S. 89°54.5' W., on a portion of the E. and W. center line of the SW 1/4 of the NW 1/4 of sec. 35.</p> <p>The S-N 1/64 sec. cor. of secs. 34 and 35.</p>
32.00 40.08 79.92	<p style="text-align: center;">Subdivision of Section 36, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. T16N R4E 1/4 S36 S1 T15N 1975.</p> <p>Add the marks 1997 to the brass cap.</p> <p>Cor. is located at the cor. of fences, with 4 strand barbed wire fence bearing N. and S., and woven wire fence bearing W.</p> <p>N. 0°04' W., on the N. and S. center line of sec. 36.</p> <p>Over rolling land, through moderate mesquite and juniper timber.</p> <p>Wash, 22 lks. wide, 6 ft. deep, drains WNW.</p> <p>Point for the center 1/4 sec. cor. of sec. 36, at intersection with the E. and W. center line of sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T16N R4E C1/4 S36 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 4 1/2 ft. base, 2 1/2 ft. high, W. of the cor.</p> <p>The 1/4 sec. cor. of secs. 25 and 36.</p>
	<hr/> <p>From the 1/4 sec. cor. of secs. 31 and 36, on the E. bdy. of the Tp., monumented with a limestone, 16 x 11 x 5 ins., firmly set, 6 ins. in the ground, with no marks visible.</p> <p>At the cor. point</p>

Subdivision of Section 36,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T16N R4E R5E 1/4 S36 S31 1997</p>
	Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.
	Bury the stone, alongside the stainless steel post.
	Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.
	Cor. is located at an abandoned fence cor., with downed 4 strand barbed wire fences extending N., S., and W.
	N. 89°56' W., on the E. and W. center line of sec. 36.
40.02	The center 1/4 sec. cor. of sec. 36.
80.03	The 1/4 sec. cor. of secs. 35 and 36.
<hr/> <p>Metes-and-Bounds Survey in Section 22, T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona</p> <hr/>	
	<p>Note: The following metes-and-bounds survey was executed to identify the remaining federal lands in section 22, adjacent to certain lands which were quit-claimed by the Forest Service under the authority of the Small Tracts Act of January 12, 1983 (96 STAT. 2535). A survey of the lands so transferred, designated Small Tract Act Survey No. 39, Arizona, was executed by Joe D. Jones, Arizona Registered Land Surveyor No. 4491 and Patrick W. Naville, Arizona Registered Land Surveyor No. 13015, in 1992, and is recorded and on file in Yavapai County Recorders Office, at Book 19, Page 41 of Land Surveys.</p>
	From AP 1, on the line bet. secs. 22 and 23, hereinbefore described.
	N. 88°24' W., on line 1-2.
0.13	Point for AP 2, identical with a 3/4 in. diam., aluminum rod, firmly set, projecting 8 ins. above ground, encircled with a collar of stone, with 3 1/2 ins. diam. aluminum cap mkd. U.S. DEPT. OF AGRICULTURE COR 3 STA AZ 39 RLS 13015 1992 CADASTRAL SURVEY FOREST SERVICE.

Metes-and-Bounds Survey in Section 22,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Not remonumented.</p> <hr/> <p>N. 0°15' W., on line 2-3.</p>
29.41	<p>Point for AP 3, at intersection with the westerly right-of-way of Page Springs road, occupied with a rebar of unknown origin, 24 ins. long, 1/2 in. diam., firmly set, projecting 4 ins. above ground.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="808 751 982 877" style="text-align: center;"> <p>T16N R4E S22 AP 1998</p> </div> <p>Deposit the rebar inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 in. white plastic case beneath the stainless steel post.</p> <p>From this cor., the Point of Tangency on the westerly right-of-way of Page Springs road, bears N. 31°49' W., 8.30 chs. dist.</p> <hr/> <p>Thence, on line 3-4, along a circular curve to the right, having a central angle of 2°14'40", a radius 2789.43 ft., along the westerly right-of-way of Page Springs road, the chord of said arc bears S. 25°04'20" E., 1.655 chs. dist.</p>
1.655	<p>Point for AP 4, identical with the point of curvature, occupied with a rebar of unknown origin, 18 ins. long, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with 1 in. diam. damaged yellow plastic cap illegibly mkd.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to bedrock, in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="815 1633 982 1759" style="text-align: center;"> <p>T16N R4E S22 AP 1998</p> </div> <p>Deposit the rebar inside the stainless steel post.</p>

Metes-and-Bounds Survey in Section 22,
T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 ins. white plastic case beneath the stainless steel post.</p> <hr/>
	<p>S. 23°57' E., on line 4-5, along the westerly right-of-way of Page Springs road.</p>
1.535	<p>AP 5, on the line bet. secs. 22 and 23, hereinbefore described.</p> <hr/>
	<p>From AP 6, on the easterly right of way Page Springs road on the line bet. secs. 22 and 23, hereinbefore described.</p>
	<p>Thence, on line 6-7, along a circular curve to the left, having a central angle of 12°53'00", a radius 2855.43 ft., on the easterly right-of-way of Page Springs road, the chord of said arc bears N. 31°01'30" W., 9.705 chs. dist.</p>
3.175	<p>An aluminum rod, 3/4 in. diam., firmly set, flush with the ground, with 3 1/2 ins. diam. aluminum cap mkd. U.S. DEPT. OF AGRICULTURE COR 2 STA AZ 39 LS 4491 1992 CADASTRAL SURVEY FOREST SERVICE.</p>
9.725	<p>Point for AP 7, identical with the point of tangency, not monumented.</p> <hr/>
	<p>N. 37°28' W., on line 7-8, on the westerly right-of-way of Page Springs road.</p>
1.375	<p>AP 8, on the line bet. secs. 15 and 22, hereinbefore described.</p> <hr/>
GENERAL DESCRIPTION	
<p>The area encompassed by this resurvey varies from the westerly rocky slopes of House Mountain, the bottom lands of Oak Creek in the easterly sections to the rolling hills in the central sections. Elevations vary from about 3500 ft. to 4500 ft. above sea level.</p>	
<p>Oak Creek is the principal water course in the township, entering the township in section 12, meandering in the easterly part of the township and exiting in section 33.</p>	
<p>Scattered junipers are found on the mountain slopes, cottonwoods, sycamores and willows are present along the creek bottoms. Mesquite, catclaw, creosote, prickly pear and native grasses are found throughout the township.</p>	

T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona

CHAINS

The soil varies from sandy loam along the creek bottoms to gravelly and rocky on the mountain slopes.

Cattle grazing and recreation are the primary users.

The mean magnetic declination, of 12 1/2° E. was derived from U.S. Geological Survey computer program MAGPOINT, utilizing the Regional Magnetic Field Model for Epoch 1995 for the dates of the survey.

CERTIFICATE OF SURVEY

I, Gordon R. Bubel, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 18th day of August, 1997, and Supplemental Special Instructions bearing the date of the 10th day of February, 1998, I have dependently resurveyed the Fourth Standard Parallel North through portions of Ranges 4 and 5 East (north boundary), a portion of the south and east boundaries and a portion of the subdivisional lines, subdivided certain sections and executed a metes-and-bounds survey in section 22, in Township 16 North, Range 4 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

JANUARY 18, 2002
(Date)

Gordon R. Bubel
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of the Fourth Standard Parallel North through portions of Ranges 4 and 5 East, a portion of the south and east boundaries and a portion of the subdivisional lines, the subdivision of certain sections and the metes-and bounds survey in section 22, in Township 16 North, Range 4 East, Gila and Salt River Meridian, Arizona, executed by Gordon R. Bubel, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

January 22, 2002
(Date)

Kenny D. Ravnikar
(Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 16 N., R. 4 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~_____~~
~~(Date)~~

~~_____~~
~~(Chief Cadastral Surveyor of Arizona)~~