

May 18, 1927

1

4-683

MINERAL SURVEY No. 4041

Arizona Land District.

FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

W. Deckersaw

KNOWN AS THE

Iron King Lode

Tombstone Mining District,

Cochise County, Arizona

Section 5 14 23, Township 20 5, Range 22 E

Surveyed under instructions dated March 18, 1927

by John A. Ruffell
U. S. Mineral Surveyor.

Claim located See Notice, 19

Survey commenced March 18, 1927

Survey completed March 21, 1927

Address of claimant's Attorney, Wm. D. Monmonier
P.O. Box 14 Pearce Arizona

DATES OF AMENDED LOCATIONS.

MINERAL SURVEY NO. 4041

Feet

Iron King Lode.

Beginning at Corner No. 1; Set a limestone 18 x 14 x 6 ins. 4 ins. in ground in a crack in bed rock: surround it with rocks: chisel a cross (X) at exact point and I. K. 1-4041: monument along side.

Whence:

Corner of location, a stone monument, bears West 7 ft.

A post in mound of stone, scribed H.T.M.C. No. 3 bears

N 66° 15' W, 2.9 ft. being Cor. No. 3 Hidden Treasure lode Sur. No. 873

The $\frac{1}{4}$ Sec. Cor. between Secs. 14-23, T. 20 S, R 22 E bears N 8° 49' W, 666.3 ft.

X B R 1 - 4041 chisled on a face in a limestone reef 18 X 12 ins. bears S 51° 31' W 7.10 ft.

X.B.R. 1-4041 chisled on limestone bed-rock exposing 5 x 3 ft. bears N 38° 55' W, 19.10 ft.

Post in a mound of stone, scribed S.W.M.C. No. 6 and

W.M.C. No. 5, bears N 37° 33' E, 279.82 ft. being Cors. Nos. 6 & 5, Side Wheel and Wauban lodes Sur. #643 & #637 E W Cor. 3 Corona lode, Sur. No. 647 bears N. 0° 51' E

268.0 ft.

Thence: N 32° 28' E, Va. 12° 55' E.

275.52 Intersect line 5 - 6 Side Wheel lode, Sur. No. 643 and line 4 - 5 Wauban lode, Sur. No. 637 at N 64° 53' W, 25.0 ft from common corner 6 and 5. respectively.

313.25 Intersect N. end Corona lode, Sur. No. 647 at S 88° 43' E 164.23 ft. from Cor. No. 3 and N 88° 43' W, 219.77 ft. from point for Cor. No. 7. (Corner has Disappeared).

397.92 Intersect line 5-6 Wauban lode at N 20° 43' E, 121.75 ft. from Cor. No. 5.

1088.0 Center of wash in gulch 5 ft. wide, course - Northerly.

1175.0 Center of same wash, course - Northeasterly.

1363.0 Center of same wash, course - Northerly.

1457.6 Center of road leading up to works of this lode; bears Southerly and Northerly.

1495.6 To Cor. No. 2: Set a limestone 20 x 16 x 6 ins., 8 ins. in ground to bed rock; chisel a cross (X) at exact point and ^{I.K.} 2-4041; monument alongside.

Whence:

Cor. of location; a stone monument bears N 32° 28' E, 4 ft.,

N. Center End Hidden Treasure lode Sur. No. 873 bears S 57° 36' 30" E, 294.5 ft.

X.B.R. 2-4041 chiseled on a limestone 30 x 24 x 10 ins.

bears S 32° 39' E, 9.75 ft.

X.B.R. 2-4041 chiseled on a limestone reef bears S 35° 50' W, 12.90 ft.

This corner is set at the point where a post stood in mound of stone, the post now lying on the ground is scribed H.T.M.C. No. 4, for Cor. No. 4 Hidden Treasure lode, Sur. No. 873

Thence: S 57° 38' E. - Va. 13° 10' E.

297.5 N. Center End: Chisel a cross (X) and N.C.E. - I.K. 4041 on limestone bed-rock exposing 24 x 18 ins. Monument alongside.

Whence: Post in mound of stone, scribed H.T.M.C. for Cor. 5 Hidden Treasure lode, Sur. No. 873, No. 5 bears N 60° 15' W, 3.0 ft.

N. Center End location, a stone monument, bears N 32° 22' E, 4.0 ft,

392.5 Center of road leading Southerly to Fearless Shaft.

595.8 To Cor. No. 3: Set a limestone 16 x 10 x 10. ins., 9 ins. in ground to bed-rock; chisel a cross (X) at exact point and I.K. 3-4041; monument alongside.

Whence:

Corner of location, a stone monument, bears N 32° 22' ^(4.5) E, 4.5 ft.

N. Center End Hidden Treasure lode Sur. No. 873 bears N 57° 39' 30" W, 301.3 Ft.

X.B.R. 3-4041 chiseled on a limestone reef exposing

36 x 24 inches bears S 78° 00' E, 6.10 ft.

X.B.R. 3-4041 chiseled on limestone face exposing 36 x 30 ins. bears S 7° 28' W, 9.32 ft.

This corner is set at a point where a post stood in mound

- of Stone: post now down is scribed H.T.M.C. No. 6 for Cor. No. 6 Hidden Treasure lode, Sur. No. 873
- Thence: S32°22'W. - Va. 13°10'E.
- 761 Center of road to Fearless Shaft bears Southerly and Northerly.
- 1371.45 Intersect line 3-4 Honey Comb lode, Sur. No. 480 at S57°45'E, 377.19ft. from Cor. No. 4.
- 1495.5 To cor. No. 4, identical with a post scribed H.T.M.C. No. 7 for Cor. No. 7 Hidden Treasure lode, Sur No. 873. Set a limestone 18 x 9 x 6 ins., 12 ins. in ground in mound of stone; Chisel a cross (x) at exact point, and I.K.4-4041; monument alongside.
- Whence:
- Cor. of location, a stone monument, bears S6°30'W, 6.0 ft.
- U. S. Mineral Monument No. 6 bears S63°12'W, 489.4 ft.
- X.B.R.4-4041 chiseled on limestone reef bears N.81°30'W.15.9 ft.
- X.B.R.4-4041 chiseled on limestone in place 18 x 12 x 12 ins., bears N 20°08' W, 25.3 ft.
- Thence: N 57°38' W - Va. 13°00' E.
- 231.44 Intersect line 7-6 Corona lode, Sur. No. 647, at S 9°43' W, 462.38 ft. from Cor. No. 7 and 133.83 ft. from intersection with line 3-4 Honey Comb lode, Sur. No. 480.
- 298.3 South Center End; set a limestone 18 x 10 x 6 Ins., 12 ins. in ground: Chiseled a cross (X) and S C E - I K - 4041; monument alongside.
- Whence:
- S. Center end of location, a stone monument, bears S 32° 22' W, 4.0 ft.
- Center of a mound of stone, post down scribed H.T.M.C. No. for Cor. No. 2 Hidden Treasure lode, Sur. No. 873, 2, bears N 73°00' W, 4.0 ft.
- An unmarked post bears N 0°58' E, 135.0 ft.
- 398.77 Intersect line 4-5 of Honey Comb lode, Sur. No. 480 at S 42°18' W, 125.2 ft. from Cor. No. 4.
- 562.15 Intersect line 6-7 of Side Wheel lode at S 30°08' W, 278.89 ft. from Cor. No. 6.
- 598.3 To Cor. No. 1, the place of beginning.

Total area Iron King lode,	20.499 Acres
Area in conflict with;	
Honey Comb lode, Sur. No. 480	1.102
Side Wheel lode, Sur. No. 643	.194
Waubun lode, Sur. No. 637	.035
Corona lode, Sur. No. 647,	2.473
Corona lode, Sur.No.647, exclusive of its conflict with Side Wheel lode, Sur. No. 643	2.279
Corona lode, Sur.No.647, exclusive of its conflict with Waubun lode, Sur. No. 637	2.453
Corona lode, Sur. No. 647, Exclu- sive of its conflict with Honey Comb lode, Sur. No. 480	2.102
Hidden Treasure lode, Sur. No. 873	20.498

LOCATION

This claim lies in Secs. 14 and 23, T 20. S., R 22 E,
G. & S. R. M., in Tombstone Mining District, Cochise
County, Arizona.

VEIN OR LODE

The presumed course of the vein is from discovery
N 32°22' E, 760.5 ft. to N.C.E. and S 32°22' W, 735. ft.
to S.C.E.

ADJACENT GROUND

On the North: Unknown lode, Unsurveyed, Claimant unknown.
On the East: Fearless lode, unsurveyed, Sam Morgan claimant.
On the South: Honey Comb lode, Sur.No.480; Claimant un-
known; Corona lode, Sur.No. 647, claimant unknown.
On the West: Sidewheel lode; Sur.No.643, and Waubun lode,
Sur.No.637, Bunker Hill Mines Co. claimant of both, and
Unknown lode, unsurveyed, claimant unknown.

EXPENDITURE OF \$500.00

I certify that the value of labor and improvements upon
this claim, placed thereon by the claimant and his grantors,
is not less than Five Hundred Dollars (\$500.00) and that

said improvements consist of:

No. 1 Discovery Shaft, the center of west side of which, on lode line, bears from North Center End $S32^{\circ}22'W$, 760.5 ft. Shaft $6 \times 4\frac{1}{2}$ ft., 8 ft. deep, at end of open-stope, old work.

Value \$75.00

No. 2 Work in tunnel. The mouth of cut leading to tunnel bears from point on lode line at $S 32^{\circ}22' W$, 961.6 ft. from N.C.E., $N 77^{\circ}26' E$, 67.8 ft. Cut 8 ft. wide, course $S 25^{\circ} E$, 19 ft. to portal of tunnel--10 ft. face. Thence tunnel $6\frac{1}{2} \times 4\frac{1}{2}$ ft., 207 ft. to face. At 60 ft., center of foot wall of winze unsafe to explore; at 147 ft., point whence old work by prior locators ceased and new work began. Hence 60 ft. of tunnel to be credited to this ~~six~~ claimant. See affidavit of Samuel Watt, a part of these notes. 60 ft of tunnel in very hard limestone at \$12. per foot

Value \$720.00

No. 3 Work in old stope per affidavit of Samuel Watt: From point on lode line at $S 32^{\circ}22' W$, 695.5 ft. from N.C.E. Southerly end of stope bears $N 24^{\circ}15' W$, 36 ft. Thence stope extends Northeasterly 36 ft.; average $3\frac{1}{2}$ ft. wide 3 ft. deep in very hard rock.

Value of work by this claimant \$100.00

OTHER IMPROVEMENTS

A. An open stope, the northerly end of which bears from point on lode line at $S 32^{\circ}22' W$, 695.5 ft., $S 43^{\circ}40' W$ 35 ft. Stope extends southerly to present discovery shaft; very irregular, 3 to 5 ft. wide, 4 to 8 ft. deep.

From a point on line 1-2 at $N 32^{\circ}28' W$, 1104.9 ft., from Cor. No. 1;

B A Shaft, the center of which bears $S 73^{\circ}35' E$, 158 ft., shaft deep--unsafe to explore.

C. An Incline shaft, the center of foot wall of which bears $S 30^{\circ}42' E$, 224.2 ft. Shaft deep--unsafe to explore.

Claimant of all of above old work unknown.

INSTRUMENT

This survey was made with a Young and Son "Mountain Transit", provided with Smith Solar Attachment. The courses were deflected from true meridian as determined by direct solar observations. The measurements were made with 500 ft. and 50 ft. steel tapes.


REPORT

The $\frac{1}{4}$ Sec. corner between Secs. 14-23 is a rock firmly set in ground, scribed $\frac{1}{4}$ on the North, and witnessed by a monument on the North. // Corners 5, 6 and 7 of the Side Wheel lode, Sur. No. 643 and 4, 5 and 6 of the Waubun lode Sur. No. 637, are posts 4 ins $\frac{1}{2}$ square well set in mounds of stone and plainly scribed. // None of the true corners of Honey Comb lode, Sur. No. 480 could be identified. Presuming the ground to be public land, local miners have located it and worked it and built new monuments. Hence the corners as referred to are theoretical; taken from official notes with title to U.S.M.M. No. 6. The assessor's records of Cochise County contain name of this lode, but owners unknown. // The N.W. Corner of Corona lode, Sur. No. 647, is a mound of stone--post gone. Corners No. 2 and 7 have disappeared. I found posts properly marked for Corners 2, 3 and 7 of the Corona, but they had no reasonable relation to the claim lines as originally reported and did not harmonize with the recorded topography, hence the conclusion that they were spurious corners was unavoidable. This point corresponds very closely with the point described in records as Cor. No. 3, as shown in conflict with Side Wheel lode, Sur. No. 643: Hence was adopted as Corner No. 3; the others by record therefrom. // Nearly all of the ground included in this survey was at one time surveyed, as the Hidden Treasure lode, Sur. No. 873, but not finally patented. // U. S. Mineral Monument No. 6 is a 6 x 6 post 9 ft. above ground, properly scribed and surrounded by a conical mound of stone,

7.

7 ft. base - 5 ft. high. The differences between the lines of former surveys as redorded and as here reported, are due to errors in the former surveys.// The stones used in marking corners were below the size prescribed; Larger size of stones was not available.

John A. Rockwell
U. S. Mineral Surveyor

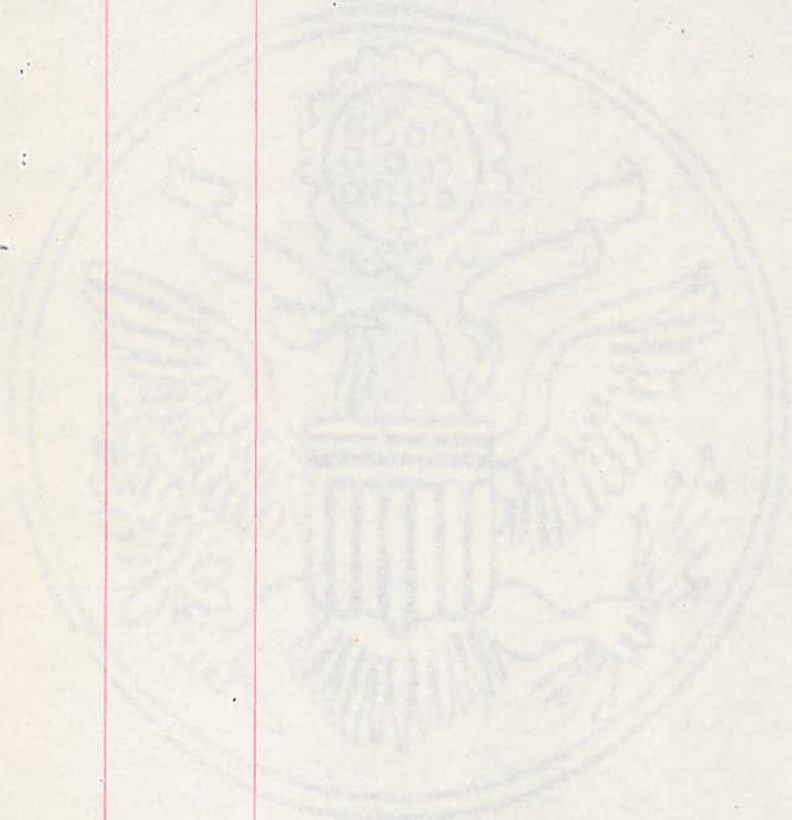

State of Arizona }
County of Cochise } s s

---Samuel Watt--- first being duly sworn states that he is familiar with the workings of the Iron King mine in Tombstone Mining District for which W.Deckeraw has made application for survey: that he worked in the tunnel described as Improvement No.2 in said survey: that the last sixty feet of said tunnel was run in the interest of and at the expense of W.Deckeraw and partner: also that work in Improvement No.3 was done by him to the extent of one hundred dollars or more: also other work.

Samuel Watt

Subscribed and sworn to by the above named perso before me this 22d day of March, 1927.

Lee J. Thier

My commission expires may 15, 1927.

Notary Public.

COCHISE COUNTY ARIZONA

ACQUISITION BOND

FINAL OATHS FOR SURVEYS.

LIST OF NAMES.

A list of the names of the individuals employed by John A. Rockfellow
United States Mineral Surveyor, to assist in running, measuring, and marking the lines, corners, and
boundaries described in the foregoing field notes of the survey of the mining claim of _____

W. Dickerson

known as the Iron King lode

and showing the respective capacities in which they acted.

Samuel Watt, Chainman.

_____, Chainman.

_____, Acman.

_____, Flagman.

FINAL OATHS OF ASSISTANTS.

~~We~~, I, Samuel Watt

and _____, do solemnly swear that we assisted John A

Rockfellow, United States Mineral Surveyor, in marking the corners and surveying

the boundaries of the mining claim of W. Dickerson

known as the Iron King lode

represented in the foregoing field notes as having been surveyed by said mineral surveyor and under his
direction; and that said survey has been in all respects, to the best of our knowledge and belief, faithfully

and correctly executed, and the corner and boundary monuments established according to law and the instruc-
tions furnished by the United States Surveyor General for Office Cadastral Engineer at Phoenix
Arizona

Samuel Watt, Chainman.

_____, Chainman.

_____, Acman.

_____, Flagman.

Subscribed and sworn to by the above-named persons before me this 22nd

day of March, 1927

Lee J. Thine

Notary Public

My commission expires may 15, 1927.

FINAL OATH OF U. S. MINERAL SURVEYOR.

I, John A. Rockefeller, U. S. Mineral Surveyor,
do solemnly swear that, in pursuance of instructions received from the Office Cadastral Engineer,
at Phoenix, Ariz., dated March 18 1927,
I have, in strict conformity to the laws of the United States, the official regulations and instruc-
tions thereunder, and the instructions of said Office Cadastral Engineer, faithfully and correctly
executed the survey of the Mining Claim of W. Dickerson
....., known as the
Iron King lode
situate in Tombstone Mining District,
Cochise County, Arizona, in Section 5
14023, Township No. 20S, Range No. 22E G.T.S.R.M.,
and designated as Survey No. 4041, as represented
in the foregoing field notes, which accurately show the boundaries of said mining claim as distinctly
marked by monuments on the ground, and described in the attached copy of the location certifi-
cate, which was received by me from the Office Cadastral Engineer with said instructions, and
that all corners of said survey have been established and perpetuated in strict accordance with
the law, official regulations and instructions thereunder; and I do further solemnly swear that the
foregoing are the true and original field notes of said survey and my report therein, and that the
labor expended and improvements made upon said mining claim by claimant or his
grantors are as therein fully stated, and that the character, extent, location, and itemized value
thereof are specified therein with particularity and full detail, and that no portion of said labor
or improvements so credited to this claim has been included in the estimate of expenditures upon
any other claim.

John A. Rockefeller
U. S. Mineral Surveyor.

Subscribed and sworn to by the said John A. Rockefeller
U. S. Mineral Surveyor, before me Wm. Monnomier
a Notary Public Cochise County, Ariz. this 4th
day of May, 1927

My commission
expires February 25, 1928

Wm. Monnomier
Notary Public

~~U. S. SURVEYOR-GENERAL'S~~ FINAL CERTIFICATE ON FIELD NOTES.

Department of the Interior,
PUBLIC SURVEY OFFICE
~~OFFICE OF U. S. SURVEYOR-GENERAL,~~

Phoenix, Arizona,

June 10, 1927

I, ~~U. S. Surveyor-General for~~ OFFICE CADASTRAL ENGINEER, at Phoenix, Arizona,

do hereby certify that the foregoing transcript of the Field Notes, return and approval of the survey of the mining claim of _____

W. Deckeraw

known as the IRON KING lode

situate in Tombstone

Mining District, Cochise County, Arizona

in Section S 14 & 23, Township No. 20 S., Range No. 22 E., and

designated as Survey No. 4041, has been correctly copied from the originals on file in this office; that said Field Notes furnish such an accurate description of said mining claim as will, if incorporated into a patent, serve fully to identify the premises, and that such reference is made therein to natural objects or permanent monuments as will perpetuate and fix the locus thereof.

And I further certify that five hundred dollars' worth of labor has been expended or improvements made upon said mining claim by claimant or his grantors, and that said improvements consist of 1 shaft, and work in old tunnel and stope, total value \$895.

and that no portion of said labor or improvements has been included in the estimate of expenditures upon any other claim.

I further certify that the plat thereof, filed in the U. S. Land Office at Phoenix, Arizona, is correct and in conformity with the foregoing Field Notes.

John D. Adams

~~United States Surveyor-General for~~ OFFICE CADASTRAL ENGINEER
at Phoenix, Arizona.

CERTIFICATE OF APPROVAL OF FIELD NOTES AND SURVEY OF MINING CLAIM

DEPARTMENT OF THE INTERIOR PUBLIC SURVEY OFFICE

At Phoenix, Arizona,

June 10, 1927

I, Office Cadastral Engineer at Phoenix, Arizona,

do hereby certify that the foregoing and hereto attached Field Notes and Return of the Survey of the Mining Claim of

W. Deckeraw

, known as the

IRON KING lode

situate in Tombstone mining district,

Cochise County, Arizona

in Sections 14 & 23, Township No. 20 S., Range No. 22 E.

, designated as Survey No. 4041

executed by John A. Rockfellow, U. S. Mineral

Surveyor, March 18 - 21, 1927, under my instructions dated

March 18, 1927, have been critically examined and the necessary

corrections and explanations made, and the said Field Notes and Return, and the Survey they describe,

are hereby approved. The certified copy of the location certificate filed by the applicant for survey is

on file in this office and a true copy of said certified copy of said location certificate is included and

made a part of the transcript of the field notes.

Handwritten signature of the Office Cadastral Engineer in blue ink.

Office Cadastral Engineer, Phoenix, Arizona.