

10-26-31  
12-3-31  
1

4-688

MINERAL SURVEY No. 4147

ARIZONA Land District

### FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

TEXONA MINING COMPANY

KNOWN AS THE

Vulture North Extension Nos. 1-2-3-4-5-6-7-8-9-10-11-12-13-14-15-16,  
Thomas Fraction, Vulture Northwest Fraction and Vulture North Extension  
Fraction, Vulture North Extension No. 2

Vulture Mining District,

Maricopa County, Arizona.

Section 30 -31 Township 6 N. Range 5 W. unsurveyed  
Section 25-26-36 Township 6 N. Range 6 W. unsurveyed

Surveyed under instructions dated June 24, 1931.

By J. WILLIAM WAARA  
U. S. Mineral Surveyor.

Claim located see location notices. 19

Survey commenced June 25 1931

Survey completed Aug. 1 1931

Address of claimant Mr Louis H. Bunte Atty. for  
Texona Mining Company  
Prescott Arizona.

DATES OF AMENDED LOCATIONS

See location notices.



SURVEY NO. 4147

Mineral Survey No. 4147 was made with a Lietz Light Mountain transit No. 9503 Model No. 9 with horizontal limb 5 ins. diameter having double opposite verniers, and full vertical circle 5 ins. diameter, having double opposite verniers; the horizontal verniers reading to thirty seconds of arc, and the vertical verniers reading to one minute of arc; the eye-piece is fitted to receive a prismatic eye-piece suitable for making direct observations upon the sun. This instrument is also equipped with a Saegmuller Solar attachment for making observations upon the sun. The instrument was in good condition at the time of the survey and all adjustments were in good order. Altitude observations of the sun for ~~time and~~ azimuth, and at noon on the meridian for latitude, were made, the details of which observations are shown in the calculation sheets herewith submitted for examination. All azimuths in this record are referred to the true meridian thus determined, by the method of deflection angles and calculated courses.

The lines were measured with a 1/8 inch steel tape 500 feet in length, graduated every foot, having been compared with a steel standard tape at the time of beginning the survey, and found correct.

All lines and connections of this survey were run by direct methods ~~where the lines are accessible; the inaccessible lines were run by traverse methods, as shown by the calculation sheets herewith submitted,~~

The magnetic variation observed at each corner of the survey gave a uniform value of 14 -30'E.

THOMAS FRACTION LODE

Beginning at Cor. No. 1 of the Thomas Fraction lode-  
 Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground supported, by a substantial mound of



earth and rock, fitted with 3 inch flange and copper plate marked T F 1 4147 with center for exact corner point; whence;

The Southeast corner Sec. 36 T. 6 N.R.6 W of the Gila and Salt River Base and Meridian brs. S.  $1^{\circ}-46'-50''$ W. 4387.0 feet

Cor.No.1 Vulture North Extension No. 11 lode of this survey brs. N. $88^{\circ}-36'E$ . 344.9 ft.

~~On line being~~ north boundary of Thomas lode, unsurveyed, N. $79^{\circ}-44'-30''$ W. 257.8 ft. from N.E.Cor.

~~On line being~~ west boundary of Ross De Oro No.2 lode, unsurveyed, S. $0^{\circ}-57'W$ . 474.86 ft. from N.W.Cor.

No bearings available.

Thence N. $79^{\circ}-44'-30''$ W.

1242.2 COR. No.2, identical with N.W.Cor. Thomas lode, unsurveyed.

On line being east boundary of Walters Fraction lode unsurveyed.

iron  
Set a  $3/4$  inch galvanized/pipe 40 inches long, 18 inches in the ground supported by a substantial mound of earth and rock, fitted with 3 inch flange and copper plate marked T F 2 4147 with center for exact corner point; whence;

No bearings available.

Thence N. $10^{\circ}-25'E$ .

55.8 West Center end.

357.2 Set a post 4x4x5 ft long ~~and~~ twelve inches in the ground.

337.2 Cor. No.3 identical with Cor. No. 1 Vulture North Extension No.1 lode of this survey, and N.E.Cor. Walters Fraction lode unsurveyed.

On line 2-3 Vulture North Extension No.11 lode of this survey.

iron  
Set a  $3/4$  inch galvanized/pipe 40 inches long, 18 inches in the ground supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked T F 3, V N E 1-1, 4147 with center for exact corner point, ~~whence.~~



No bearings available.

Thence S. 79°-41'-30"E.

1186.2 Intersect west boundary Rosa De Oro No.2 lode, unsurveyed, S.0°-57'W. 134.16 ft. from the N.W.Cor. of said lode.

1242.2 Cor. No. 4

Set a 3/4 inch galvanized <sup>iron</sup> pipe 40 inches long, 18 inches in the ground supported by a substantial mound of earth and rock, fitted with 3 inch flange and copper plate marked T F 4 4147 with center for exact corner point, whence;

Cor.No.1 Vulture <sup>this survey</sup> North Extension No.11 lode, brs. S. 41°-23'-30"E. 429.5 ft.

No other bearings available.

Thence S. 10°-25'W.

268.0 Intersect line 1-2 Vulture North Extension No.11 lode of this survey.

280.4 EAST CENTER END. - Vulture North Extension No.11 lode of

Set a post 4x4x5 feet long twelve inches in the ground.

336.2 COR. NO.1 and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENSION NO. 11 LODE.

Beginning at Cor. No.1 of the Vulture North Extension No. 11 lode.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground supported by a substantial mound of earth and rock, -fitted with a 3 inch flange and copper plate marked V N E 11 4147 with center for exact corner point, whence,

The Southeast corner Sec. 36, brs. S.6°-14'-35"W. 4419.7 ft.

The Northwest corner Rosa De Oro No.2 lode, unsurveyed brs. N. 35°-50'W. 575.2 ft.

No other bearings available.

Thence N. 80°-00'-00"W.

337.44 Intersect line 1-4 Thomas Fraction lode of this survey.



- 348.8 Intersect west boundary of the Rosa De Oro No.2 lode, Unsurveyed, S.0°-57'W. 405.8 ft. from the Northwest corner of said lode.
- 1500.0 COR.NO.2  
Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked V N E 11 4147 with center for exact corner point, whence,  
No bearings available.  
Thence N. 5°-47'W.
- 285.1 Cor.No.3 Thomas Fraction lode identical with Cor. No.1 Vulture North Extension No.1 lode, both of this survey.
- 311.0 WEST CENTER END.  
Set a post 4x4x5 feet long twelve inches in the ground.
- 622.0 COR.NO.3 identical with Cor. No. 2 Vulture North Extension Fraction lode of this survey.  
On line 1-4 Vulture North Extension No.1 lode of this survey.  
Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 3-V N E 11, V N E F 2 4147 with center for exact corner point, whence;  
No bearings available.  
Thence S. 80°-00'-30"E.
- 1240.9 Intersect line 2-3 Vulture North Extension No.14 lode of this survey.
- 1500.0 COR.NO.4, identical with Cor. No. 1 Vulture North Extension Fraction lode of this survey.  
Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked V N E 11-4, V N E F 1 4147 with center for exact corner point, whence,  
Cor.No.2 Vulture North Extension No.14 lode of this



survey brs. S.60°-55'W. 313.6 feet.

Thence S. 5°-47'E.

200.3 Intersect north boundary of Rosa De Oro No.2 lode unsurveyed, identical with line 1-2 Vulture North Extension No.14 lode of this survey, S.80°-57'E. 298.0 feet from the N.W.Cor. and Cor.No.2 respectively.

311.0 EAST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

622.0 COR.NO.1, and place of beginning.All corners agree with their respective locations.

VULTURE NORTH EXTENSION FRACTION Lode

Beginning at Cor. No.1 Vulture North Extension Fraction lode, identical with Cor. No. 4 Vulture North Extension No.11 lode of this survey, whence,

The southeast corner Sec. 36, brs. S. 4°-46'-00"W. 5029.7 feet.

Thence N. 80°-00'-30"W.

259.1 Intersect line 2-3 Vulture North Extension No.14 lode of this survey.

1500.0 COR. NO. 2 identical with Cor. No. 3 Vulture North Extension No.11 lode of this survey.

On line 1-4 Vulture North Extension No.1 lode of this survey.

Thence N.5°-47'W.

81.5 WEST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

123.4 COR.NO.3 identical with Cor. No.2 Vulture North Extension No.12 lode of this survey.

On line 1-4 Vulture North Extension No.1 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 3 V N E F, 2 V N E 12 4147 with center for exact corner point, whence,

No bearings available.



Thence S. 80°-01'E.

1265.0 Intersect line 2-3 Vulture North Extension No.14 lode of this survey.

1500.0 COR. NO. 4 identical with Cor. No.1 Vulture North Extension No.12 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 4 V N E F, 1 V N E 12 4147 with center for exact corner point, whence,

No bearings available.

Thence S. 5°-47'E.

41.9 EAST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

123.4 COR. NO.1 and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENSION NO. 12 LODE

Beginning at Cor. No.1 Vulture North Extension No.12 lode, identical with Cor. No.4 Vulture North Extension Fraction lode of this survey, whence,

The Southeast corner Sec. 36, brs. S.4°-31'-00"W. 5151.1 feet.

Thence N. 80°-01'W.

235.0 Intersect line 2-3 Vulture North Extension No.14 lode of this survey.

1500.0 COR. NO. 2, identical with Cor.No.3 Vulture North Extension Fraction lode of this survey.

On line 1-4 Vulture North Extension No.1 lode of this survey.

Thence N. 5°-47'W.

311.0 WEST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

622.0 COR. NO. 3 identical with Cor. No. 2 Vulture North Extension No. 13 lode of this survey.

On line 1-4 Vulture North Extension No. 1 lode of this



survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 3 V N E 12, 2 V N E 13, 4147 with center for exact corner point, ~~whence,~~

No bearings available.

Thence S. 80°-01'-30"E.

1386.4 Intersect line 2-3 Vulture North Extension No.14 lode of this survey.

1500.0 COR.NO.4, identical with Cor. No. 1 Vulture North Extension No.13 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock; fitted with a 3 inch flange and copper plate, marked 4 V N E 12, 1 V N E 13 4147 with center for exact corner point, ~~whence,~~

No bearings available.

Thence S.5°-47'E.

311.0 EAST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

622.0 COR.NO.1 and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENSION NO. 13 LODE.

Beginning at Cor. No.1 Vulture North Extension No.13 lode identical with Cor. No.4 Vulture North Extension No.12 lode of this survey, whence,

The southeast corner Sec. 36, brs. S. 3°-24'-35"W.

5764.4 feet.

Thence N.80°-01'-30"W.

113.6 Intersect line 2-3 Vulture North Extension No.14 lode of this survey.

1500.0 COR.NO.2 identical with Cor. No. 3 Vulture North Extension No. 12 lode of this survey.

On line 1-4 Vulture North Extension No.1 lode of this



survey.

Thence N. 5°-47'W.

271.1 WEST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

417.7 Cor. No. 4 Vulture North Extension No.1 lode, identical with Cor.No.1 Vulture North Extension No.3 lode of this survey

582.1 COR.NO.3

On line 1-4 Vulture North Extension No. 3 lode of this survey.

Set a 3/4 inch galvanized iron pipe, 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 3 V N E <sup>13</sup> 4147 with center for exact corner point, ~~whence~~

No bearings available.

Thence S. 80°-02'E.

1500.0 COR.NO.4 identical with Cor. No.3 Vulture North Extension No. 14 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 4 V N E 13, 3 V N E 14 4147 with center for exact corner point, ~~whence~~

No bearings available.

Thence S. 5°-47'E.

311.0 EAST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

582.1 COR.NO.1 and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENSION NO.14 lode

Beginning at Cor. No.1 Vulture North Extension No.14 lode

On north boundary Rosa De Oro No.2 lode unsurveyed,

S.80°-57'E. 314.6 feet from the N:W.Cor.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial



mound of earth and rock, fitted with a 3 inch flange and copper plate marked 1 V N E 14 4147 with center for exact corner point, whence;

The Southeast corner Sec. 36, brs. S.5°-24'-05"W. 4831.8 feet.

No other bearings available.

Thence N.80°-57'W.

14.6 SOUTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

16.6 Intersect line 1-4 Vulture North Extension No. 11 lode of this survey.

314.6 COR. NO. 2 identical with Northwest Corner Rosa De Oro No.2 lode unsurveyed.

Set a 3/4 inch galvanized iron pipe 40 inches long ,18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 2 V N E 14 4147 with center for exact corner point, whence.

No bearings available.

Thence N. 5°-26'E.

198.2 Intersect line 3-4 Vulture North Extension No. 11 lode identical with line 1-2 Vulture North Extension Fraction lode both of this survey.

317.3 Intersect line 3-4 Vulture North Extension Fraction lode, identical with line 1-2 Vulture North Extension No.12 lode, both of this survey.

917.8 Intersect line 3-4 Vulture North Extension No.12 lode, identical with line 1-2 Vulture North Extension No.13 lode both of this survey.

1479.8 COR.NO.3 identical with Cor. No. 4 Vulture North Extension No. 13 lode of this survey.

Thence S.80°-57'E.

300.0 NORTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

375.9 COR.NO.4

Set a galvanized iron pipe 40 inches long, 1 1/4 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 4 V N E 14 4147 with center for exact corner point, whence.



Set a 3/4 inch galvanized iron pipe 40 inches long 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 4 V N E 14 4147 with center for exact corner point, whence;

No bearings available.

Thence S. 7°-49'W.

1477.2 COR.NO.1, and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENSION NO.1 lode.

Beginning at Cor. No.1 identical with Cor.No.3 Thomas and unsurveyed Fraction lode. of this survey, /N.E. Cor Walters Fraction lode/ On line 2-3 Vulture North Extension No.11 lode of this survey.

The southeast corner Sec. 36, brs. S.11°-43'-40"E.

5043.1 feet.

No other bearings available.

Thence N.80°-55'W.

300.0 SOUTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

609.2 COR.NO.2 identical with Cor. No. 4 Vulture North Extension #.16 lode of this survey.

On north boundary Walters Fraction lode unsurveyed.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 2 V N E 1, 4 V N E 16 4147 with center for exact corner point, whence,

No bearings available.

Thence N. 5°-48'W.

1500.0 COR.NO.3 identical with Cor. No. 3 Vulture North Extension #.16 lode of this survey.

On line 1-2 Vulture North Extension No. 3 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial



- mound of earth and rock, fitted with a 3 inch flange and copper plate marked 3 V N E 1, 3 V N E 16 4147 with center for exact corner point, whence,  
No bearings available.  
Thence S. 80°-55'E.
- 309.5 NORTH CENTER END.  
Set a post 4x4x5 feet long twelve inches in the ground.
- 609.6 COR.NO.4, identical with Cor. No.1 Vulture North Extension No. 3 lode of this survey.  
On line 2-3 Vulture North Extension No.13 lode of this survey  
Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 4 VNE 1, 1 V N E 3 4147 with center for exact corner point, whence,  
No bearings available.  
Thence S. 5°-47'E.
- 146.6 West center end Vulture North Extension No. 13 lode of this survey.
- 417.7 Cors. No. 3 and 2 Vulture North Extension Nos. 12 and 13/ lodes respectively, of this survey.
- 728.7 West center <sup>End</sup> Vulture North Extension No. 12 lode of this survey.
- 1039.7 Cors. No. 3 and 2 Vulture North Extension Fraction and Vulture North Extension No. 12 lodes respectively of this survey.
- 1081.6 West Center end Vulture North Extension Fraction lode of this survey.
- 1163.1 Cors. No. 2 and 3 Vulture North Extension Fraction and Vulture North Extension No. 11 lodes respectively, of this survey.
- 1474.1 West Center end Vulture North Extension No. 11 lode of this survey.
- 1500.0 COR.NO.1, and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENSION # 16 LODE

Beginning at Cor. No. 1, identical with Cor. No. 4



Vulture North Extension No. 2 lode of this survey.

On north boundary Walters Fraction lode, unsurveyed.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in diameter and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 4 V N E 2, 1 V N E 16 4147 with center for exact corner point, whence,

The south 1/4 corner Sec. 36, brs, S.10°-47'-20"W.

5130.5 feet.

No other bearings available.

Thence N.5°-23'W.

1497.0 COR.NO.2, identical with Cor. No. 3 Vulture North Extension No. 2 lode of this survey.

On line 1-2 Vulture North Extension No.3 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 2 V N E 16, 3 V N E 2 4147 with center for exact corner point, whence,

No bearings available.

Thence S.80°-55'E.

21.4 NORTH CENTER END.

Set a post 4x4x5 ft. long twelve inches in the ground.

41.4 COR.NO.3 identical with Cor. No. 3 Vulture North Extension No.1 lode of this survey.

Thence S. 5°-48'E.

1500.0 COR.NO.4, identical with Cor. No. 2 Vulture North Extension No.1 lode of this survey.

Thence N.80°-55'W.

20.0 SOUTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground

52.7 COR.NO.1 and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENTION NO. 2 LODE

Beginning at Cor.No.1 Vulture North Extension No.2 lode,



identical with Cor.No.1 Vulture North Extension No. 10 lode of this survey.

On north boundary of Walters Fraction lode, unsurveyed.

Set a 3/4 inch galvanized iron pipe 40 inches long 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 1 V N E 10, 1 V N E 2 4147 with center for exact corner point, whence,

The south 1/4 corner Sec. 36 brs. S. 3°-52'-10"W. 5149.6 feet.

No other bearings available.

Thence N.5°-17'W.

1396.4 Cross gulch, flows southwesterly.

1496.4 COR.NO.2 identical with Cor. No.4 Vulture North Extension No. 10 lode of this survey.

On line 1-2 Vulture North Extension No.3 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 2 V N E 2, 4 V N E 10 4147 with center for exact corner point, whence,

No bearings available.

Thence S.80°-55'E.

50.0 Cross gulch, flows southwesterly.

307.4 NORTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

617.7 COR.NO. 3, identical with Cor. No. 2 Vulture North Extension #.16 lode of this survey.

Thence S.5°-23'E.

1497.0 COR.NO.4, identical with Cor. No.1 Vulture North Extension # 16 lode of this survey.

Thence N.80°-55'W.

310.3 SOUTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

620.6 COR.NO.1, and place of beginning. All corners agree with



their respective locations.

VULTURE NORTH EXTENSION NO. 10 LODE.

Beginning at Cor. No.1, identical with Cor. No.1 Vulture North Extension No. 2 lode of this survey, whence,

The south 1/4 corner Sec. 36 brs. S. 3°-52'-10"W. 5149.6 feet.

Thence N.80°-55'W.

217.0 Intersect east boundary Hutchinson lode unsurveyed, S.10°-25'W. 292.6 feet from its Northeast Corner, said intersection point being identical with Northwest corner of Walters Fraction lode, unsurveyed.

309.0 SOUTH CENTER END.

Set a substantial mound of stone.

563.6 Witness corner to Cor.No.2.

Set a 3/4 inch galvanized iron pipe 40 inches long 18

inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper

plate, marked W C 2 V N E 10 4147 with center for exact

corner point, whence,

No bearings available.

571.1 COR.NO.2.

brg. southerly

This point falls in a water course/where a permanent corner cannot be established; From this point, I established a witness corner S.80°-55'E. 7.5 feet.

The northeast corner of the Hutchinson lode, unsurveyed, brs. N. 60°-03'E. 464.6 feet.

Thence N.5°-49'W.

312.6 Cor.No. 1 Vulture North Extension No. 15 lode of this survey, and intersecting north boundary of the Hutchinson lode unsurveyed, N.79°-41'-30"W. 441.5 feet from its northeast corner.

650.0 Cross gulch, flows southwesterly.

1365.9 Intersect line 1-4 Vulture North Extension No.5 lode of this survey.

1499.6 COR.NO.3, identical with Cor. No. 4 Vulture North Extension No.15 lode of this survey.



On-line-1-2-Vulture-North-Extension-No.-3-lode-of-this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 3 V N E 10, 4 V N E 15 4147 with center for exact corner point, whence,

Cor.No. 1 Vulture North Extension No.5 lode of this survey brs. S.55°-15'W 356.7 feet.

Thence S.80°-55'E.

275.8 Intersect line 4-3 Vulture North Extension No. 5 lode, identical with line 1-2 Vulture North Extension No. 4 lode both of this survey.

286.1 NORTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

354.3 Cor.No.2 Vulture North Extension No.3 lode of this survey, and intersection with line 1-4 Vulture North Extension No. 4 lode of this survey.

585.2 COR.NO.4, identical with Cor. No. 2 Vulture North Extension No. 2 lode of this survey.

Thence S.5°-17'E.

100.0 Cross Gulch, flows southwesterly.

1496.4 COR.NO.land place of beginning.All corners agree with their respective locations.

VULTURE NORTH EXTENSION NO. 15 LODE

Beginning at Cor. No.1 Vulture North Extension No.15 lode On line 2-3 Vulture North Extension No.10 lode of this survey.

On north boundary line Hutchinson lode unsurveyed, N.79°-41'-30"W. 441.5 feet from its northeast corner.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 1 V N E 15 4147 with center for exact corner point, whence,

The south 1/4 corner section 36, brs. S.2°-33'-55"E.



5545.0 feet.

No other bearings available.

Thence N.80°-55'W.

200.0 Cross gulch flows southerly.

310.0 SOUTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

598.5 Cor.No.2. identical with Cor.No.1 Vulture North Extension No.9 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 2 V N E 15, 1 V N E 9 4147 with center for exact corner point, ~~whence,~~

No bearings available.

Thence N.5°-49'W.

13.3 Intersect the north boundary line of the Hutchinson lode unsurveyed, N.79°-41'-30"W. 1043.6 feet from its north-east corner.

290.0 East center end, Vulture North Extension No.9 lode of this survey.

588.4 Cor.Nos. 4 and 1 Vulture North Extension ~~lodes~~ Nos.9 and 8/ respectively of this survey.

891.0 East center end, Vulture North Extension No. 8 lode of this survey.

1187.0 Cor.No.3 identical with Cor. No.4 Vulture North Extension No.8 lode of this survey.

On line 1-2 Vulture North Extension No.7 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long 18

inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper

plate, marked 3 V N E 15, 4 V N E 8 4147 with center for exact corner point, ~~whence,~~

No bearings available.

Thence S.80°-55'E.

213.1 Cor.No.1 Vulture North Extension No.7 lode of this survey

and intersect ~~(ion with)~~ line 1-2 Vulture North Extension No.



5 lode of this survey.

288.5 NORTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

598.5 COR.NO.4 identical with Cor. No. 3 Vulture North Extension No.10 lode of this survey.

Thence S.5°-49'E.

133.7 Intersect line -4 Vulture North Extension No.5 lode of this survey.

850.0 Cross gulch flows southwesterly.

1187.0 Cor.No.1 and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENSION NO. 9 LODGE

Beginning at Cor. No.1, identical with Cor. No.2 Vulture North Extension No.15 lode of this survey, whence,

The south 1/4 corner section 36 brs. S.8°-28'-15"

E. 5696.0 feet.

The Northwest Corner of the Hutchinson lode, unsurveyed brs. N.78°-06'W. 460.3 feet.

No other bearings available.

Thence N.79°-21'W.

460.1 Intersect the west boundary of Hutchinson lode, identical with east boundary Bessie lode both unsurveyed, S.10°-25'W. 9.8 feet from the northwest and northeast corners respectively.

~~1359.9 Southeast corner Bessie North Extension lode, unsurveyed.~~

1496.9 COR.NO.2

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 2 V N E 9 4147 with center for exact corner point, whence,

The northeast corner Bessie lode unsurveyed brs. S.79°-54'E. 1037,4 feet.

No other bearings available.

Thence N.5°-49'W.

5.5 Intersect the north boundary line of Bessie lode unsurveyed identical with south boundary Bessie North Ext. lode, unsurveyed



N.79°-36'W. 1038.9 feet from the northeast corner, and 137.0 ft. from the southeast corner, of the respective lodes.  
285.0 WEST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

583.4 Cor.No.3 identical with Cor. No.2 Vulture North Extension No.8 lode of this survey, and Cor. No.1 Vulture Northwest Fraction lode of this survey.

On east boundary line Bessie North Extension lode unsurveyed, N.17°-52'W. 630.1 feet from the southeast corner of said lode.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 3 V N E 9, 2 V N E 8, 1 V N W F 4147 with center for exact corner point, whence,

No bearings available.

Thence S.79°-32'E.

1495.6 COR.NO. 4 identical with Cor. No.1 Vulture North Extension No.8 lode of this survey.

On line 2-3 Vulture North Extension No.15 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 4 V N E 9, 1 V N E 8 4147 with center for exact corner point, whence,

No bearings available.

Thence S.5°-49'E.

298.4 EAST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

575.1 Intersect the north boundary of the Hutchinson lode unsurveyed S.79°-41'-30"E. 456.4 feet from the Northwest corner.

588.4 Cor.No.1 and place of Beginning. All corners agree with their respective locations.

#### VULTURE NORTH EXTENSION NO.8 LODE

Beginning at Cor. No.1 identical with Cor.No.4 Vulture



North Extension No.9 lode of this survey.

On line 2-3 Vulture North Extension No.15 lode of this survey.whence,

The south 1/4 corner Section 36, brs. S.8°-13'-20"E.  
6284.0 feet.

No other bearings available.

Thence N.79°-32'W.

1495.6 COR. NO.2 identical with Cor.No.3 Vulture North Extension No.9 lode and Cor.No.1 Vulture Northwest Fraction lode, both of this survey.

No bearings available.

Thence N.5°-49'W.

312.6 WEST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

561.2 COR.NO.3.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 3 V N E 8 4147 with center for exact corner point, whence

No bearings available.

Thence S.80°-55'E.

210.2 Cor.No.5 Vulture Northwest Fraction lode, identical with Cor. No.2 Vulture North Extension No. 7 lode, both of this survey.

1485.4 COR.NO.4 identical with Cor. No.3 Vulture North Extension No. 15 lode of this survey.

On line 1-2 Vulture North Extension No. 7 lode of this survey.

No bearings available.

Thence S.5°-49'E.

296.0 EAST CENTER END,

Set a post 4x4x5 feet long twelve inches in the ground.

598.6 COR.NO.1 and place of beginning. All corners agree with their respective locations.



## VULTURE NORTH EXTENSION NO. 7 Lode

Beginning at Cor. No. 1 Vulture North Extension No. 7 lode,  
 On line 1-2 Vulture North Extension No. 5 lode of this survey  
 On line 3-4 Vulture North Extension No. 15 lode of this survey  
 Set a 3/4 inch galvanized iron pipe 40 inches long, 18  
 inches in the ground and supported by a substantial mound  
 of earth and rock, fitted with a 3 inch flange and copper  
 plate marked 1 V N E 7 4147 with center for exact corner  
 point, whence,

The south 1/4 corner Sec. 36, brs. S. 6°-18'-10"E  
 5822.6 feet.

No other bearings available.

Thence N. 80°-55'W.

213.1 Cor. No. 3 Vulture North Extension No. 15 lode, identical  
 with Cor. No. 4 Vulture North Extension No. 8 lode, both  
 of this survey.

1488.1 COR. NO. 2 identical with Cor. No. 5 Vulture Northwest  
 Fraction lode of this survey.

On line 3-4 Vulture North Extension No. 8 lode of this  
 survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18  
 inches in the ground and supported by a substantial mound  
 of earth and rock, fitted with a 3 inch flange and copper  
 plate marked 2 V N E 7, 5 V N W F 4147 with center for  
 exact corner point, whence,

No bearings available.

Thence N. 5°-49'W.

304.0 Intersect line 1-4 Vulture North Extension No. 6 lode of  
 this survey.

310.4 WEST CENTER END.  
 Set a post 4x4x5 feet long, twelve inches in the ground.

619.9 COR. NO. 3, identical with Cor. No. 4 Vulture Northwest  
 Fraction lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18  
 inches in the ground and supported by a substantial  
 mound of earth and rock, fitted with a 3 inch flange and



copper plate marked 3 V N E 7, 4 V N W F 4147 with center for exact corner point, whence,  
No bearings available.

Thence S.79°-57'E.

1348.8 COR.NO.4 identical with Cor. No. 4 Vulture North Extension No.6 lode of this survey.

On line 1-2 Vulture North Extension No. 5 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long ,18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 4 V N E 7, 4 V N E 6 4147 with center for exact corner point, whence,

No bearings available.

Thence S.80°-55'E.

145.5 COR.NO.5.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 5 V N E 7 4147 with center for exact corner point, whence,

No bearings available.

Thence S. 5°-49'E.

298.4 EAST CENTER END.

Set a post 4x4x5 feet long, twelve inches in the ground.

596.6 COR.NO.1 and place of beginning. All corners agree with their respective locations, excepting Cor. No.4. which is within the lines of the original location.

VULTURE NORTHWEST FRACTION LODE

Beginning at Cor. No.1 Vulture Northwest Fraction, identical with Cor. No. 3 Vulture North Extension No. 9 and Cor. No.2 Vulture North Extension No. 8, whence,

The southwest Corner Section 36 hrs. S. 2°-23'-15"W.

6495.7 feet.

No other bearings available.

Thence N. 19°-25'W.



1410.6 <sup>No.1</sup> Intersect the south boundary of the Sun Eclipse/lode, unsurveyed, N.89°-31'W. 1384.0 feet from its southeast corner.

1434.5 COR.NO.2.  
Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 2 V N W F 4147 with center for exact corner point, whence,  
No bearings available.  
Thence S. 85°-00'E.

190.4 NORTH CENTER END,  
Set a post 4x4x5 feet long twelve inches in the ground.

284.9 COR.NO.3 identical with Cor. No. 2 Vulture North Extension No.6 lode of this survey.  
<sup>No.1</sup>  
On south boundary Sun Eclipse/lode unsurveyed, N.89°-31'W. 1108.1 feet from its southeast corner.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 2 V N E 6, 3 V N W F 4147 with center for exact corner point, whence,  
The location Monument. brs. S.85°-00'E. 260.0 ft.  
Thence S. 56°-29'E.

336.9 COR.NO.4 identical with Cor. No.3 Vulture North Extension No. 7 lode of this survey.  
Thence S. 5 -49'E.

309.5 West center end Vulture North Extension No.7 lode of this survey.

315.9 Intersect line 1-4 Vulture North Extension No.6 lode of this survey.

619.9 COR.NO.5 identical with Cor. No. 2 Vulture North Extension No.7 lode of this survey.

On line 3-4 Vulture North Extension No. 8 lode of this survey.



No bearings available.

Thence S.  $8^{\circ}-42'E$ .

552.0 COR.NO.6.

Set a  $3/4$  inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 6 V N W F 4147 with center for exact corner point, whence,

The location monument. brs. S.  $85^{\circ}-00'E$ . 325.0 ft.

Thence N.  $85^{\circ}-00'W$ .

44.7 SOUTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

235.1 COR.NO.1 and place of beginning. Corners Nos.1 and 2 agree with their respective locations.

VULTURE NORTH EXTENSION NO.6 LODE

Beginning at Cor. No.1 Vulture North Extension No.6 lode,

Set a  $3/4$  inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 1 V N E 6 4147 with center for exact corner point, whence,

The southwest corner Section 36 brs. S.  $1^{\circ}-55'-50''W$ . 7313.0 feet.

No other bearings available.

Thence N.  $18^{\circ}-19'W$ .

296.9 WEST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

536.6 COR. NO. 2 identical with Cor. No. 3 Vulture Northwest Fraction. lode of this survey.

On south boundary line Sun Eclipse No.1 lode unsurveyed,

N.  $89^{\circ}-31'W$ . 1108.1 feet. from the southeast corner.

Thence N.  $86^{\circ}-18'E$ .

1111.1 Intersect east boundary Sun Eclipse No.1 lode unsurveyed, identical with west boundary Sun Eclipse No.3 lode, unsurveyed, N.  $00^{\circ}-29'E$ . 80.4 feet from the southeast and southwest corners respectively.

1441.7 COR.NO.3, identical with Cor. No. 2 Vulture North Exten-



sion No. 5 lode of this survey.

On south boundary Sun Eclipse No. 3 lode unsurveyed, N. 72° - 54' E. 345.9 feet from its southwest corner.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 3 V N E 6, 2 V N E 5 4147 with center for exact corner point, whence,

No bearings available.

Thence S. 18° - 19' E.

242.1 EAST CENTER END,

Set a post 4x4x5 feet long twelve inches in the ground.

542.1 COR. NO. 4 identical with Cor. No. 4 Vulture North Extension No. 7 lode of this survey.

On line 1-2 Vulture North Extension No. 5 lode of this survey, whence,

No bearings available.

Thence S. 86° - 31' W.

1298.5 Intersect line 2-3 Vulture North Extension No. 7 lode of this survey and line 4-5 Vulture Northwest Fraction lode of this survey.

1443.1 COR. NO. 1 and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENSION NO. 5 LODE

Beginning at Cor. No. 1 Vulture North Extension No. 5 lode,

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 1 V N E 5 4147 with center for exact corner point, whence,

The south 1/4 corner Sec. 36, brs. S. 5° - 47' - 45" E 6550.5 feet.

No other bearings available.

Thence N. 18° - 19' W.

278.3 Cor. No. 1 Vulture North Extension No. 7 lode of this survey, and intersection with line 3-4 Vulture North Extension



- No.15 lode of this survey.
- 927.7 Cor. Nos. 4 and 4, Vulture North Extension Nos. 7 and 6/<sup>lodes</sup> respectively, of this survey
- 1227.7 East Center end Vulture North Extension No.6 lode of this survey.
- 1469.8 COR.NO.2 identical with Cor. No. 3 Vulture North Extension No.6 lode of this survey.
- ON south boundary Sun Eclipse No.3 lode unsurveyed, N.72°-54'E. 345.9 feet from its southwest corner:  
Thence N.77°-05'E.
- 300.0 NORTH CENTER END.
- Set a post 4x4x5 feet long twelve inches in the ground.
- 598.4 COR.NO.3 identical with Cor.No.2 Vulture North Extension No. 4 lode of this survey.  
Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 3 V N E 5-2 V N E 4 4147 with center for exact corner point, ~~whence~~  
No bearings available.  
Thence S.18°-19'E.
- 1444.2 Intersect line 3-4 Vulture North Extension No. 10 lode of this survey.
- 1469.8 COR.NO.4 identical with Cor. No. 1 Vulture North Extension No. 4 lode of this survey.  
Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate marked 4 V N E 5, 1 V N E 4<sup>4147</sup> with center for exact corner point, ~~whence~~  
No bearings available.  
Thence S.77°-05'W.
- 284.2 Intersect line 1-4 Vulture North Extension No.15 lode, identical with line 3-2 Vulture North Extension No.10 lode, both of this survey.
- 298.4 SOUTH CENTER END. (38)



Set a post 4x4x5 feet long twelve inches in the ground.  
 598.4 COR.NO.1 and place of beginning. All corners agree with  
 their respective locations.

VULTURE NORTH EXTENSION NO.4 LODE

Beginning at Cor. No.1 Vulture North Extension No.4 lode,  
 identical with Cor. No.4 Vulture North Extension No.5 lode  
 of this survey,whence,

The south 1/4 corner Sec. 36, brs. S. 00°-40'-20"E,  
 6650.5 feet.

No other bearings available.

Thence N.18°-19'W.

25.6 Intersect line 3-4 Vulture North Extension No.10 lode  
 of this survey.

1469.8 COR.NO. 2, identical with Cor. No.3 Vulture North Extension  
 No.5 lode of this survey.

No bearings available.

Thence N.77°-05'E.

300.0 NORTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

450.0 Cross gulch, flows southerly.

600.0 COR.NO.3.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18  
 inches in the ground and supported by a substantial mound  
 of earth and rock, fitted with a 3 inch flange and copper  
 plate marked 3 V N E<sup>4</sup>4147 with center for exact corner  
 point, whence,

No bearings available.

Thence S.18°-19'E.

1022.3 Intersect line 3 -4 Vulture North Extension No.3 lode of  
 this survey.

1469.8 COR.NO.4.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18  
 inches in the ground and supported by a substantail mound  
 of earth and rock, fitted with a 3 inch flange and copper  
 plate marked 4 VNE<sup>4</sup>4147 with center for exact corner point,



whence,

No bearings available.

Thence S.77°-05'W.

250.0 Cross gulch flows southerly.

300.0 SOUTH CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

539.2 Cor.No.2 Vulture North Extension No.3 lode of this survey, and intersection with line 3-4 Vulture North Extension No.10 lode of this survey.

600.0 COR.NO.1 and place of beginning. All corners agree with their respective locations.

VULTURE NORTH EXTENSION NO.3 LODGE

Beginning at Cor. No.1, identical with Cor. No.4 Vulture North Extension No. 1 lode of this survey, whence,

The southeast corner Section 36 brs. S.10°-22'E. 6536.8 feet.

Thence N.80°-55'W.

300.1 North Center end Vulture North Extension No.1 lode of this survey.

609.6 Cor.Nos.3 and 3 Vulture North Extension No. 1 and 16 lodes of this survey.

629.6 North Center end Vulture North Extension # 16 lode of this survey.

651.0 Cor.Nos. 2 and 3 Vulture North Extension #16 lode and Vulture North Extension No.2 lodes respectively of this survey.

961.3 North center end Vulture North Extension No.2 lode of this survey.

1218.7 Cross gulch, flows southwesterly.

1268.7 Cor.Nos. 2 and 4 Vulture North Extension Nos. 2 and Vulture North Extension No.10 lodes respectively of this survey.

1499.6 COR.NO.2.

On line 3-4 Vulture North Extension No. 10 lode of this survey.

On line 1-4 Vulture North Extension No.4 lode of this survey.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground, and supported by a substantial



mound of earth and rock, fitted with a 3 inch flange and copper plate marked 2 V N E/4147 with center for exact corner point, ~~whence.~~

No bearings available.

Thence N.5°-47'W.

310.0 WEST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.

620.2 COR.NO.3

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground supported by a substantial mound of earth and rock, fitted with a 3 inch flange and copper plate, marked 3 V N E 3 4147 with center for exact corner point, ~~whence.~~

Cor:Nor4 Vulture North Extension No.4 lode of this survey brs. S. 49°-49'-30"E. 769.6 feet.

No other bearings available.

Thence, S.80°-54'E.

180.0 Cross gulch, flows southerly.

453.1 Intersect line 3-4 Vulture North Extension No. 4 lode of this survey.

895.1 Intersect west boundary of Aristocrat No.3 lode unsurveyed N.5°-47'W. 154.6 feet from its southwest corner.

1420.5 Intersect south boundary of Aristocrat No.3 lode, identical with north boundary of the La Confidencia No.1 lode both unsurveyed, N.82°-00'E. 508.1 feet from their S.W. and N.W. corners respectively.

1499.6 COR.NO.4.

Set a 3/4 inch galvanized iron pipe 40 inches long, 18 inches in the ground and supported by a substantial mound of earth and rock fitted with a 3 inch flange and copper plate marked 4 V N E 3 4147 with center for exact corner point, ~~whence.~~

No bearings available.

Thence S.5°-47'E.

309.8 EAST CENTER END.

Set a post 4x4x5 feet long twelve inches in the ground.



406.9 Intersect the south boundary line La Confidencia No.1  
 465.6 ft.  
 lode, unurveyed, N.80°-29'E./from its southwest corner,  
 whence its northwest corner brs. N.21°-03'W. 454.0 ft.  
 455.4 Cor. No. 3 Vulture North Extension No.13 lode of this  
 survey.  
 619.8 TO COR.NO.1 -and place of beginning. All corners agree  
 with their respective locations.

LODE LINES.

The presumed course of the vein of each of the  
 several locations embraced in this survey, counted from  
 the respective points of discovery, is as follows:

Vulture North Extension No.11 lode.  
 N.80°-00'W. 200 ft. and S.80°-00'E. 1300 ft.  
 Thomas Fraction lode  
 N.79°-44'-00"W. 290 ft.and S.79°-44'-00"E. 952.2 ft.

Vulture North Extension Fraction lode  
 N.80°-00'-30"W. 130 ft. and S.80°-00'-30"E. 1470 ft.

Vulture North Extension No.12 lode  
 N.80°-01'-30"W. 350 ft and S.80°-01'-30"E.1150 ft.

Vulture North Extension No.13 lode  
 N.80°-01'-30"W.260 ft and S.80°-01'-30"E. 1240 ft.

Vulture North Extension No.14 lode  
 N. 5°-26'E. 844.8 ft and S.5°-26'W. 635 ft.

Vulture North Extension No.1 lode  
 N.5°-47'W. 635 ft and S.5°-47'E. 865 ft.

Vulture North Extension #16 lode.  
 N. 5°-48'W. 700 ft and S.5°-48'E. 800 ft.

Vulture North Extention No. 2 lode  
 N.5°-23'W. 997 ft and S.5°-23'E. 500 ft.

Vulture North Extension No. 10 lode  
 N. 4°-55'W.843.5 ft and S.4°-55'E. 650 ft.

Vulture North Extension No. 15 lode  
 N. 5°-49'W. 1087.0 ft and S.5°-49'E. 100 ft.

Vulture North Extension No. 9 lode,  
 N.79°-30'W. 815.7 ft and S.79°-30'E. 680 ft.



Vulture North Extension No. 8 lode  
 N. 79°-10'W. 185 ft and S. 79°-10'E. 1313.2 ft.

Vulture North Extension No. 7 lode  
 N. 80°-30'W. 190 ft and S. 80°-30'E. 1301.2 ft.

Vulture North Extension No. 6 lode  
 N. 86°-24'E. 166 ft and S. 86°-24'W. 1276.3 ft.

Vulture Northwest Fraction lode  
 N. 19°-25'W. 174 ft and S. 19°-25'E. 1260.5 ft.

Vulture North Extension No. 5 lode  
 N. 18°-19'W. 680 ft and S. 18°-19'E. 789.8 ft.

Vulture North Extension No. 4 lode  
 N. 18°-19'W. 839.8 ft. and S. 18°-19'E. 630 ft.

Vulture North Extension No. 3 lode  
 N. 80°-55'W. 584.6 ft and S. 80°-55'E. 915 ft.

AREAS  
 Total area Thomas Fraction lode - - - acres 9.602

Area in conflict with

Rosa De Oro No. 2 lode, unsurveyed, - - - 0.216

Vulture North Extension No. 11 lode, this survey, 7.482

Rosa De Oro No. 2 lode exclusive of its conflict  
 with Vulture North Extension No. 11 lode, this survey, 0.009

Total area Vulture North Extension No. 11 lode 20.611

Area in conflict with

Rosa De Oro No. 2 lode, unsurveyed, - - - 2.999

Total area Vulture North Extension Fraction lode 4.089

Total area Vulture North Extension No. 12 lode 20.613

Total area Vulture North Extension No. 13 lode 19.292

Total area Vulture North Extension No. 14 lode 11.705

Area in conflict with

Vulture North Extension Fraction lode, this survey, 0.673

Vulture North Extension No. 11 lode, this survey, 1.250

Vulture North Extension No. 12 lode, this survey, 2.395

Vulture North Extension No. 13 lode, this survey, 0.730

Total area Vulture North Extension No. 14 lode, 20.281



Total area Vulture North Extension No.16 lode, 1.566

Total area Vulture North Extension No.2 lode, 20.604

Total area Vulture North Extension No.10 lode, 19.237

Area in conflict with

Total area

Hutchinson lode, unsurveyed, - - - - -	2.711
Vulture North Extension No.4 lode, this survey, -	0.018
Vulture North Extension No.5 lode, this survey, -	0.286

Total area Vulture North Extension No. 15 lode 15.760

Area in conflict with

Hutchinson lode, unsurveyed, - - - - -	0.088
Vulture North Extension No. 5 lode, this survey, - -	1.571

Total area Vulture North Extension No. 9 lode 19.309

Area in conflict with

Hutchinson lode, unsurveyed, - - - - -	0.119
Bessie lode, unsurveyed, - - - - -	0.180
Bessie North Extension lode, -unsurveyed, - - - - -	0.873

Total area Vulture North Extension No.8-lode,- 19.111

Total area Vulture North Extension No.7 lode, 20.042

Area in conflict with

Vulture North Extension No.5 lode, this survey, - - - 0.963

Total area Vulture North Extension No.6 lode, 17.273

Area in conflict with

Sun Eclipse No.1 lode, unsurveyed, - - - - -	1.023
Sun Eclipse No.3 lode, unsurveyed, - - - - -	0.304
Vulture North Extension No.7 lode, unsurveyed, - -	4.704

Total area Vulture North Extension No.5 lode, 20.102

Total area Vulture Northwest Fraction lode, - -11.592

Area in conflict with.

Sun Eclipse No.1 lode, unsurveyed, - - - - -	0.071
Vulture North Extension No. 6 lode, unsurveyed, -	1.806
Vulture North Extension No. 8 lode, unsurveyed, -	2.756

Total area Vulture North Extension No.4 - - - 20.155

Total area Vulture North Extension No.3 - - - 20.629

Area in conflict with

Aristocrat No.3 lode, unsurveyed, - - - - - 0.901



La Confidencia No. 1 lode, unsurveyed, - - - - - 5.241  
 Vulture North Extension No.4 lode, unsurveyed, - - 5.875

LOCATION

This survey is located in Sections 30 and 31 T.6 N.R. unsurveyed 5 W./and Sections 25-26 and 36 T.6 N.R.6 W unsurveyed, of the Gila and Salt River Base and Meridian

EXPENDITURE OF FIVE HUNDRED DOLLARS.

I hereby certify that the value of the labor and improvements made upon or for the benefit of each of the lode locations embraced in said mining claim by the claimant or its grantors is less than five hundred dollars, and that said improvements consist of:

Thomas Fraction lode

No.1 The discovery shaft, on the lode line the center of which brs. S.79°-44'E. 290 feet from the West Center End, 4x6x8 feet deep.  
 Value 80.00

Vulture North Extension No.11 lode

No.1 The discovery shaft, on the lode line, the center of which brs. S.80°-00'E. 200 feet, from the West Center End, 4x6x8 feet deep.  
 Value \$80.00

Vulture North Extension No.12 lode

No.1 The discovery shaft, on the lode line, the center of which brs. S. 80°-01'-30"E. 350 feet from the West Center End, 4x6x8 feet deep.  
 Value \$80.00

Vulture North Extension Fraction lode

No.1 The discovery shaft, on the lode line, the center of which brs. S.80°-00'-30"E. 30 ft. from the West Center End, 4x6x8 feet deep.  
 Value \$80.00

Vulture North Extension No.13.lode,

No.1 The discovery shaft, on the lode line, the center of which brs. S. 80°-01'-30"E . 260 feet from the West Center End, 4x6x8 feet deep.  
 Value \$80.00

Vulture North Extension No. 14 lode.



No.1 The discovery cut, on the lode line, the center of which  
 is S. 5°-26'W. 844.8 feet from the North Center end, 4x12x10  
 foot face brs. east.  
 Value \$80.00

Vulture North Extension No.1 lode;

No.1 The discovery cut, on the lode line, the center of which  
 is brs. S. 5°-47'E. 635 feet from the North Center End, 4x20  
 x10 foot face. brs. west.  
 Value \$125.00

Vulture North Extension No. 16 lode,

No.1 The discovery cut, on the lode line, the center of which  
 is brs. S. 5°-48'E. 700 feet from the North Center End, 4x10  
 x10 foot face. driven southerly from side of old cut.  
 Value \$100.00

Vulture North Extension No. 2 lode.

No.1 The discovery cut, on the lode line, the center of which  
 is brs. S. 5°-23'E. 997 feet from the North Center End, 4x  
 8x10 foot face, driven in south side of old shaft.  
 Value \$80.00

Vulture North Extension No.10 lode.

No.1 The discovery cut, on the lode line, the center of which  
 is brs. S. 4°-55'E. 843.5 feet from the North Center End, 4x6  
 x10 foot face brs. northwesterly, driven from west side  
 of old cut.

Value \$80.00

Vulture North Extension No. 15 lode.

No.1 The discovery cut, on the lode line, the center of which  
 is brs. S. 5°-49'E. 1087 feet from the North Center End, 4x17  
 x10 foot face, brs westerly.  
 Value \$100.00

Vulture North Extension No.9. lode.

No.1 The discovery shaft, on the lode line, the center of which  
 is brs. S. 79°-30'E. 815.7 feet from the West Center end, 4x6x  
 8 feet deep.  
 Value \$80.00

Vulture North Extension No. 8 lode.

No.1 The discovery cut, on the lode line, the center of which  
 is brs. S. 79°-10'E. 185 feet from the West Center end, 4x14  
 x10 foot face, brs. north.  
 Value \$80.00



## Vulture North Extension No.7. lode.

- No.1 The discovery shaft, on the lode line, the center of which brs. S.  $80^{\circ}$ - $30^{\circ}$ E. 190 feet from the West Center end, 4x6x8 feet deep.  
Value \$80.00

## Vulture North Extension No.6 lode.

- No.1 The discovery cut, on the lode line, the center of which brs. S.  $86^{\circ}$ - $24^{\circ}$ W. 166 feet from the East Center End, brs e east, 4x11x10 foot face.  
Value \$80.00

## Vulture North Extension No.5 lode.

- No.1 The discovery shaft, on the lode line, the center of which brs. S.  $18^{\circ}$ - $19^{\circ}$ E. 680 ft. from the North Center end, 4x6x8 feet deep.  
Value \$80.00

## Vulture Northwest Fraction lode.

- No.1 The discovery cut, on the lode line, the center of which brs. S.  $19^{\circ}$ - $25^{\circ}$ E. 174 feet from the North Center End, 4x14x10 foot face brs. south.  
Value \$100.00

## Vulture North Extension No.4 lode.

- No.1 The discovery cut, on the lode line, the center of which brs. S.  $18^{\circ}$ - $19^{\circ}$ E. 839.8 feet from the North Center End. 4x15x10 foot face, brs. west.  
Value \$80.00

## Vulture North Extension No.3 lode.

- No.1 The discovery shaft, on the lode line, the center of which brs. S.  $80^{\circ}$ - $55^{\circ}$ E. 584.6 feet from the West Center End, 4x6x8 feet deep.  
Value \$80.00

The work of drilling the diamond drill holes had not been completed at the time of this survey, so a supplementary report on expenditure of five hundred dollars will be filed on  
/ Diamond Drill holes Nos. 1-2-3-4-5 and the main working shaft.

## OTHER IMPROVEMENTS

A frame cabin 18x20 ft. the southwest corner of which brs. S.  $69^{\circ}$ - $30^{\circ}$ E. 287 feet from Cor. No. 3, Vulture North Extension No. 11 lode.



A cut, the face of which brs. N.6°-45'W. 745 feet from Cor.No.4 Vulture North Extension No. 16 lode, 4x10 x8 foot face.

A shaft, the center of which brs. N. 6°-30'W. 775 feet from Cor. No.4 Vulture North Extension #16 lode, 4x6x30 ft.

A cut, the center of which brs. N.5°-47'W. 804 ft. from the south Center end Vulture North Extension #.16 lode, runs westerly 12 ft to 12 foot face and easterly 12 ft to mouth of cut, 4 ft wide.

A shaft ,the center of which brs. N.5°-23'W. 508 feet from the south center end Vulture North Extension No.2 lode, 4x6x 40 ft deep.

A cut, the face of which brs. N. 15°-30'E. 620 ft from Cor. No. 2 Vulture North Extension No.10 lode, 4x20x8 foot face, brs. northwest.

A cut, the face of which brs. N. 5°-20'W. 650 ft from the south center end, Vulture North Extension No.10 lode, 4x 20x8 foot face, brs northwesterly.

A shaft, the center of which brs. N.9°-00'E. 495 ft. from Cor.No. 2 Vulture North Extension No. 15 lode, 4x6x8 ft deep.

A shaft, the center of which brs. N.77°-50'E. 810 ft from Cor. No. 2 Vulture North Extension No. 9 lode, 4x6x50 ft deep.

A cut, the face of which brs. N.28°-10'E. 295 feet from Cor. No.2 Vulture North Extension No. 7 lode.4x12x9 foot face.brs. north.

A cut, the face of which brs. S. 20°W. 236 ft. from Cor. No. 3 Vulture North Extension No. 6 lode, 4x10x9 foot face brs.east.

A shaft, the center of which brs. S. 42°-15'E. 735 feet from Cor. No. 2 Vulture North Extension No. 5 lode, 4x6x8 ft deep.

A cut, the face of which brs. S. 42°-30'E..555 ft. from Cor.No.2 Vulture North Extension No. 4 lode, 4x9x8 foot



face, brs west.

A cut, the face of which brs. S. 39°-30'E. 565 feet from Cor. No. 2 Vulture North Extension No.4 lode, 4x18x10 foot face, 'brs.west.

A shaft, the center of which brs. S. 56°E. 626 feet from Cor.No.3 Vulture North Extension No.3 lode, 4x6x8 feet deep.

A shaft, the center of which brs. S. 19°-45'E. 425 feet from Cor. No.2 Vulture North Extension No.2 lode, 4x6x 50 feet deep.

A tunnel, the mouth of which brs. N. 78°E. 365 feet from Cor.No.2 Vulture North Extension No.3 lode, 4x6x 26 ft long brs.' east, and cut 4x10x12 foot face brs west from mouth of tunnel.

A tunnel, the mouth of which brs. N. 70°E. 355 ft. from Cor.No.2.Vulture North Extension No.3 lode, 4x6x25 ft. long, brs east.

Claimant Texoña Mining Company  
CORNER DESCRIPTIONS:

The corners of the public Survey mentioned herein are pipe corners properly set and marked as called for in the field notes of the Public Land Survey.

The corners of this survey are 3/4 in galvanized iron pipe 40 inches long firmly driven 18 inches into the ground and supported by a substantial mound of earth and rock. A 3/4 inch floor flange (cast iron) having four three inches in diameter bolt holes and threaded, has been fitted to top of pipe. A three inch diameter copper plate neatly bolted to the floor flange gives a smooth marking surface, upon which the designation of each corner has been stamped with steel dies.

The discrepancies found existing between the claims as marked by the location monuments and as described in the location notices are due to errors in the location notices.



# FINAL OATHS FOR SURVEYS

## LIST OF NAMES

A list of the names of the individuals employed by J. WILLIAM WAARA

United States Mineral Surveyor, to assist in running, measuring, and marking the lines, corners, and boundaries described in the foregoing field notes of the survey of the mining claim of \_\_\_\_\_

TEXONA MINING COMPANY known as Vulture North Extension  
Nos. 1- ~~2~~-3-4-5-6-7-8-9-10-11-12-13-14-15-<sup>Vulture North Extension</sup>16- Thomas Fraction-Vulture  
~~known as the Northwest Fraction and Vulture North Extension Fraction~~  
Vulture North Extension No.2

and showing the respective capacities in which they acted.

G. R. Ballard \_\_\_\_\_, *Chainman.*

\_\_\_\_\_, *Chainman.*

\_\_\_\_\_, *Acman.*

\_\_\_\_\_, *Flagman.*

## FINAL OATHS OF ASSISTANTS

~~We, I.~~ G. R. Ballard

and \_\_\_\_\_, do solemnly swear that ~~we~~ <sup>I</sup> assisted J. William

Waara

\_\_\_\_\_, United States Mineral Surveyor, in marking the corners and surveying

the boundaries of the mining claim of TEXONA MINING COMPANY, known as the Vulture

North Extension Nos. 1- ~~2~~-3-4-5-6-7-8-9-10-11-12-13-14-15, <sup>Vulture North Extension #16,</sup> - Thomas

~~known as the Fraction, Vulture North Extension Fraction, Vulture North~~  
Extention No.2, Vulture Northwest Fraction

represented in the foregoing field notes as having been surveyed by said mineral surveyor and under his

direction; and that said survey has been in all respects, to the best of our knowledge and belief, faithfully

and correctly executed, and the corner and boundary monuments established according to law and the instruc-

tions furnished by the Office Cadastral Engineer, at PHOENIX ARIZONA

G. R. Ballard \_\_\_\_\_, *Chainman.*

\_\_\_\_\_, *Chainman.*

\_\_\_\_\_, *Acman.*

\_\_\_\_\_, *Flagman*

Subscribed and sworn to by the above-named persons before me this 1st

day of AUGUST, 19 31

J. William Waara  
\_\_\_\_\_  
U.S. MINERAL SURVEYOR



MINERAL SURVEY NO. 4147

OATH OF ASSISTANT SUBSCRIBED And SWORN TO  
BEFORE U.S. MINERAL SURVEYOR

Owing to great delay, expense and inconvenience which would have resulted in taking my assistant before a Notary Public at Wickenburg, for the purpose of administering oath of assistant, I took the acknowledgment in my capacity as a U.S. MINERAL SURVEYOR.

*William W. W. W.*  
U.S. Mineral Surveyor



FINAL OATH OF U. S. MINERAL SURVEYOR.

I, J. William Waara, U. S. Mineral Surveyor, do solemnly swear that, in pursuance of instructions received from the Office Cadastral Engineer, at Phoenix Arizona, dated June 24, 1931, I have, in strict conformity to the laws of the United States, the official regulations and instructions thereunder, and the instructions of said Office Cadastral Engineer, faithfully and correctly executed the survey of the Mining Claim of Texona Mining Company, known as Vulture North Extension Nos. 1-3-4-5-6-7-8-9-10-11-12, known as the Vulture North Extension 13-14-15, #16, Thomas Fraction, Vulture Northwest Fraction and Vulture North Extension Fraction, Vulture North Extension No. 2, situate in Vulture Mining District, Maricopa County, Arizona, in Section Sec. 30 and 31 T. 6 N. R. 5 W. unsurveyed, Township No. 6 N., Range No. 6 W. unsurveyed, and designated as Survey No. 4147, as represented in the foregoing field notes, which accurately show the boundaries of said mining claim as distinctly marked by monuments on the ground, and described in the attached copy of the location certificate, which was received by me from the Office Cadastral Engineer with said instructions, and that all corners of said survey have been established and perpetuated in strict accordance with the law, official regulations and instructions thereunder; and I do further solemnly swear that the foregoing are the true and original field notes of said survey and my report therein, and that the labor expended and improvements made upon said mining claim by claimant or its grantors are as therein fully stated, and that the character, extent, location, and itemized value thereof are specified therein with particularity and full detail, and that no portion of said labor or improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

J. William Waara
U. S. Mineral Surveyor.

Subscribed and sworn to by the said J. William Waara
U. S. Mineral Surveyor, before me a Notary Public
this 17th.
day of Sept. 1931, 1931

My Com Expires
11/10/33.

F. C. Bauer
Notary Public



OFFICE CADASTRAL ENGINEER'S FINAL CERTIFICATE ON FIELD NOTES

Department of the Interior

PUBLIC SURVEY OFFICE

Phoenix, Arizona,

January 21, 1932

I, Office Cadastral Engineer at Phoenix, Arizona,

do hereby certify that the foregoing transcript of the Field Notes, return and approval of the survey

of the mining claim of Texona Mining Company, known as the  
VULTURE NORTH EXTENSION NOS. 1, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15,  
VULTURE NORTH EXTENSION #16, THOMAS FRACTION, VULTURE NORTHWEST  
FRACTION, VULTURE NORTH EXTENSION FRACTION, and VULTURE NORTH  
EXTENTION NO. 2 lodes

situate in Vulture

Mining District Maricopa County Arizona

in Section 30 & 31 Township No. 6 N., Range No. 5 W., Unsurveyed,  
25, 26 & 36 6 N., " 6 W., and

designated as Survey No. 4147, has been correctly copied from the originals on file in

this office; that said Field Notes furnish such an accurate description of said mining claim as will, if  
incorporated into a patent, serve fully to identify the premises, and that such reference is made therein  
to natural objects or permanent monuments as will perpetuate and fix the locus thereof.

I further certify that less than Five Hundred Dollars worth of labor has been expended or improvements  
made upon, or for the benefit of, each location embraced in said mining claim by claimant

or its grantors,

and that said improvements consist of 9 shafts and 10 cuts, value \$1625.

and drill holes Nos. 1, 2, 3, 4 and 5 and the main working shaft,

to be incorporated in a supplemental report.

and that no portion of said labor or improvements has been included in the estimate of expenditures  
upon any other claim.

I further certify that the plat thereof, filed in the U. S. Land Office at Phoenix,  
Arizona is correct and in conformity with the foregoing Field Notes.

John D. Adams

Office Cadastral Engineer.



CERTIFICATE OF APPROVAL OF FIELD NOTES AND SURVEY OF  
MINING CLAIM

DEPARTMENT OF THE INTERIOR  
PUBLIC SURVEY OFFICE

At Phoenix, Arizona,

January 21, 1932

I, Office Cadastral Engineer at Phoenix, Arizona,

do hereby certify that the foregoing and hereto attached Field Notes and Return of the Survey of the Mining Claim of Texona Mining Company, known as the

VULTURE NORTH EXTENSION NOS. 1, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15,  
VULTURE NORTH EXTENSION #16, THOMAS FRACTION, VULTURE NORTHWEST  
FRACTION, VULTURE NORTH EXTENSION FRACTION, and VULTURE NORTH  
EXTENTION NO. 2 lodes

situate in Vulture mining district,

Maricopa County, Arizona

in Section s 30 & 31, Township No. 6 N., Range No. 5 W., Unsur.,  
25, 26, & 36, Township No. 6 N., Range No. 6 W., Unsur.

, designated as Survey No. 4147

executed by J. William Waara, U. S. Mineral

Surveyor, June 25 - Aug. 1, 1931, under my instructions dated

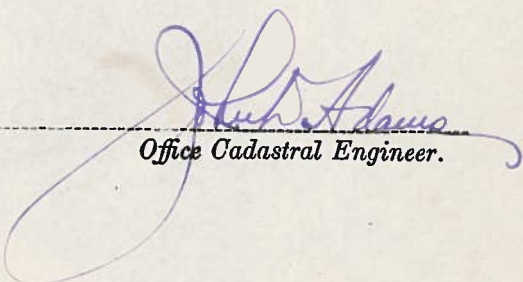
June 24, 1931, have been critically examined and the necessary

corrections and explanations made, and the said Field Notes and Return, and the Survey they describe,

are hereby approved. The certified copy of the location certificate filed by the applicant for survey is

on file in this office and a true copy of said certified copy of said location certificate is included and

made a part of the transcript of the field notes.

  
Office Cadastral Engineer.



UNITED STATES DEPARTMENT OF THE INTERIOR 9605 (956)  
BUREAU OF LAND MANAGEMENT M.S. 4147  
ARIZONA STATE OFFICE

---

NOTICE OF CANCELLATION OF MINERAL SURVEY

The Vulture North Extension No. 1, Vulture North Extension No. 3, Vulture North Extension No. 4, Vulture North Extension No. 5, Vulture North Extension No. 6, Vulture North Extension No. 7, Vulture North Extension No. 8, Vulture North Extension No. 9, Vulture North Extension No. 10, Vulture North Extension No. 11, Vulture North Extension No. 12, Vulture North Extension No. 13, Vulture North Extension No. 14, Vulture North Extension No. 15, Vulture North Extension #16, Vulture North Extension No. 2, Vulture North Extension Fraction, Vulture Northwest Fraction and Thomas Fraction lodes, Mineral Survey No. 4147, located in sections 30 and 31, Township 6 North, Range 5 West, and sections 25 and 36, Township 6 North, Range 6 West, Gila and Salt River Meridian, Arizona, are hereby canceled.


These claims have not been filed with the Arizona State Office, Bureau of Land Management, in accordance with Section 314, 90 STAT. 2769, (43 U.S.C. 1744).

This cancellation was necessitated to clear the record.

The Mineral Survey Plat should be noted as follows:

"Vulture North Extension No. 1, Vulture North Extension No. 3, Vulture North Extension No. 4, Vulture North Extension No. 5, Vulture North Extension No. 6, Vulture North Extension No. 7, Vulture North Extension No. 8, Vulture North Extension No. 9, Vulture North Extension No. 10, Vulture North Extension No. 11, Vulture North Extension No. 12, Vulture North Extension No. 13, Vulture North Extension No. 14, Vulture North Extension No. 15, Vulture North Extension #16, Vulture North Extension No. 2, Vulture North Extension Fraction, Vulture Northwest Fraction and Thomas Fraction lodes, M.S. 4147, were canceled March 25, 2002, by memo 9605 (956) M.S. 4147, which is now a part of the original field notes."

March 25, 2002  
Date

  
\_\_\_\_\_  
Chief Cadastral Surveyor of Arizona