

Form 3400-11
(September 1967)
(formerly 4-683)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Mineral Survey number
4768

State
Arizona

Land District
Arizona

FIELD NOTES

Of the Survey of the Mining Claim of *(name and address of Claimant)*


Continental Copper Inc.,
c/o Evans, Kitchel & Jenckes, P.C.
363 N. 1st Ave., Phoenix, AZ 85003

Known as the *(name of group, if any)*

CONSISTING OF LOCATIONS NAMED AND LOCATED AS FOLLOWS

NAME OF LOCATION	DATE	
	LOCATED	AMENDED
Daily Extension No. 2	9-21-73	
Daily Extension No. 3	9-21-73	
Daily Extension No. 4	9-21-73	

Mining district		Old Hat		County		Pima	
Section	Township	Range	Meridian	Survey under order dated			
17 and 18	11 South	16 East	Gila & Salt River	Nov. 14, 1973			
Survey commenced		Survey completed		Name of Mineral Surveyor			
May 5, 1974		July 15, 1974		Robert L. Frazer			

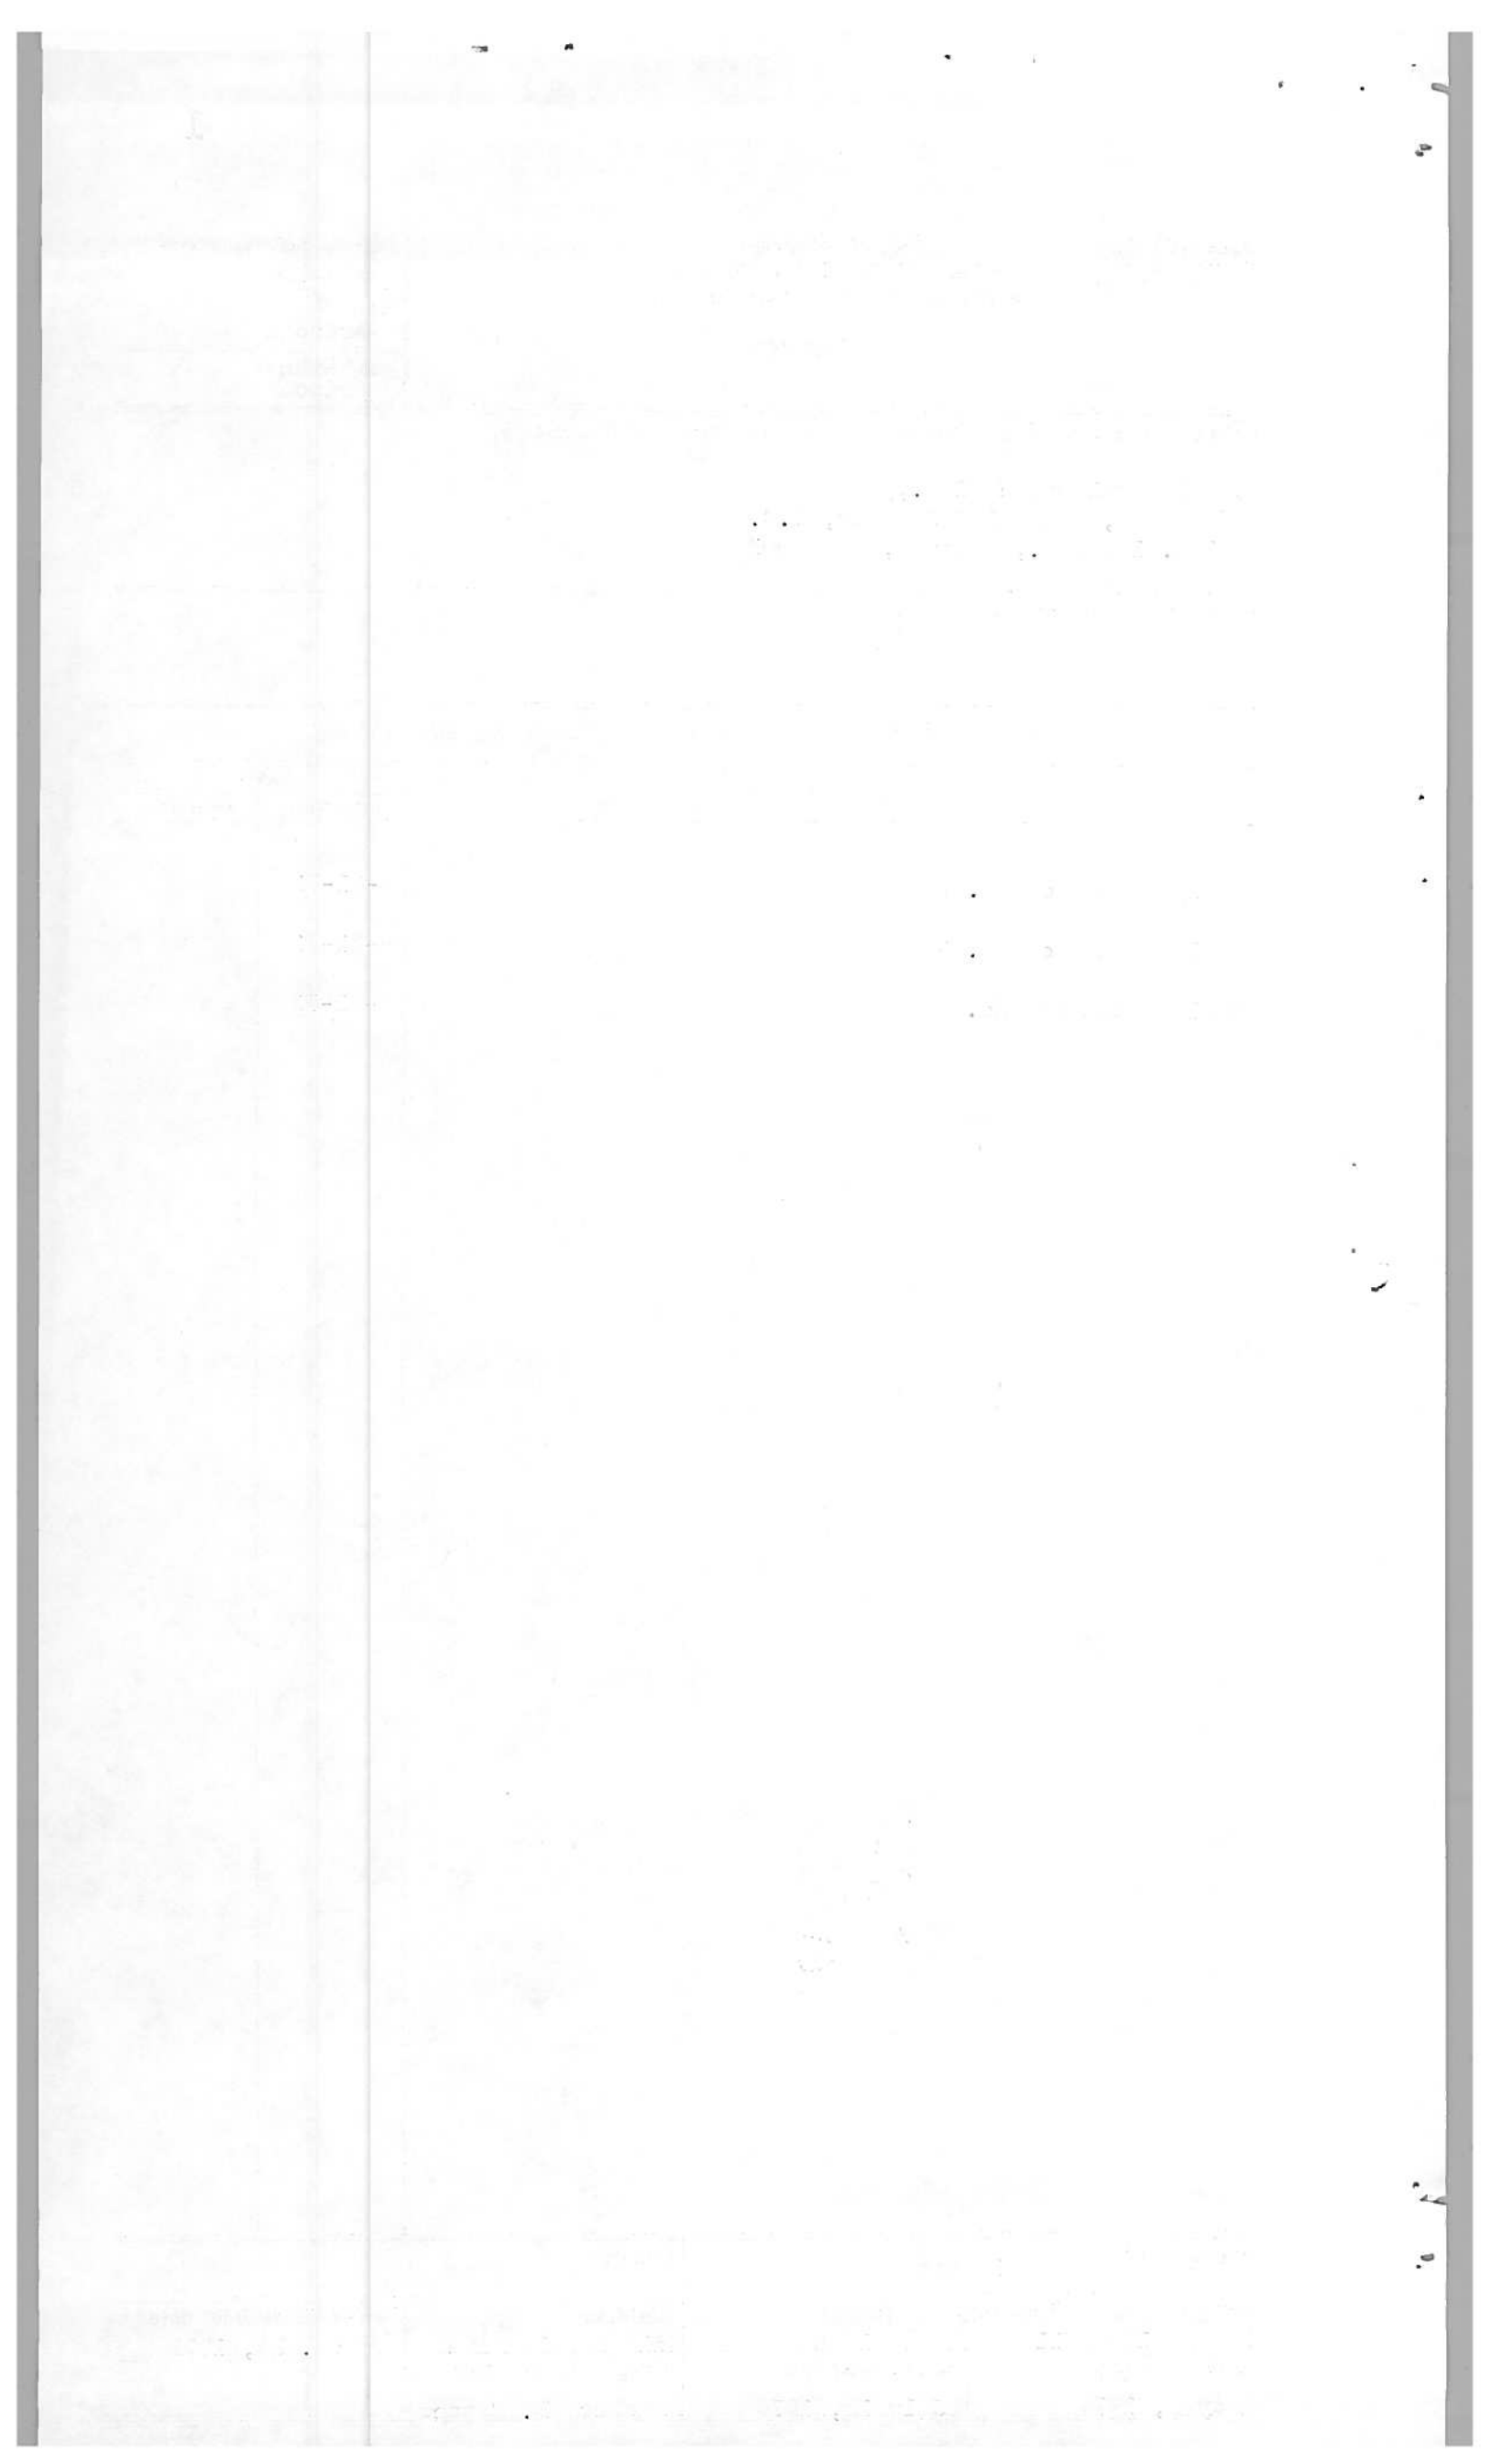

FEET

This survey was made with a Wilde T-2 theodolite, Serial No. 92997, with automatic vertical indexing and microscopic angle-reading capabilities enabling the instrument man to read angles, either horizontal or vertical, to 1 sec. of arc. Distances greater than 500 feet were measured with electronic distance measuring equipment, a Hewlett-Packard Model 3800 Distance Meter, having a range of 10,000 feet and an absolute accuracy of 0.01 feet plus the distance measured divided by 100,000 in the normal operating temperature range. Both of these instruments were in good condition at the time of the survey and all adjustments were in good order.

Due to the inter-relationship of this survey with Survey Nos. 4769 and 4770, a control traverse embracing all of the above surveys was made. Angular error was 0°00'02". Closure was in the proportion of 1:189,000. Two secondary traverses were made to tie in some points on this survey. Their accuracy was in the proportion of 1:7500 and 1:8000. Due to the steepness of the terrain, and heavy cover of brush and trees throughout most of the area, most corners were surveyed in by radiation from the control points. Some short traverses were used, and tied back into the control by closing angles. Angular values, horizontal and vertical, is the mean of direct and inverse observation from the distant signal. Final corners, wherever possible, were checked by measurement of angles between control points from the final point as set. The concurrency of this survey and Survey Nos. 4769 and 4770, and the fact that all surveys are based on the before-mentioned control traverse, the bearing of the sec. line common to secs. 17 and 18 was determined as follows:

June 4, 1974, at a G.L.O. Witness Cor., 2 chains northerly from the true point for the cor. of secs. 17, 18, 19 and 20, T. 11 S., R. 16 E., Gila and Salt River Meridian, according to the official record thereof, in Latitude 32°28'15" N., Longitude 110°44'46" W., (as determined by scaling from U.S.G.S. quadrangle, BELLOTA RANCH, dated 1957) I made two observations of Polaris, with the following results:

Observation No. 1

Average 105th Meridian	
time	= 8:38:48 p.m.
G.C.T. (June 5)	= 3:38:48
L.H.A.	= 165°34'42"
Horizontal angle,	
clockwise, from the	
½ sec. cor. of secs.	
17 and 18, to tra-	
verse point "C"	= 29°43'00"
Horizontal angle,	
clockwise, Polaris	
to point "C"	= 30°14'13"

FEET

Bearing of Polaris
(West of Meridian) = -0°15'00"
 Bearing, W.C. to
 point "C" = N. 29°59'13" E.
 Bearing of sec. line,
 W.C. to $\frac{1}{2}$ sec. cor.
 of secs. 17 and 18 = N. 0°16'13" W.

Observation No. 2

Average 105th Meridian
 time = 8:45:34 p.m.
 G.C.T. (June 5) = 3:45:34
 L.H.A. = 164°16'24"
 Horizontal angle,
 clockwise, from the
 $\frac{1}{2}$ sec. cor. of secs.
 17 and 18 to tra-
 verse point "C" = 29°43'00"
 Horizontal angle,
 clockwise, Polaris
 to point "C" = 30°13'34"
 Bearing of Polaris
 (West of Meridian) = -0°13'28"
 Bearing W.C. to
 point "C" = N. 30°00'06" E.
 Bearing of sec. line,
 W.C. to $\frac{1}{2}$ sec. cor.
 of secs. 17 and 18 = N. 0°17'06" W.

Used the average of the above data; sec. line,
 W.C. to $\frac{1}{2}$ sec. cor., N. 0°16'40" W., as a basis
 of bearings for this survey.

The geographic position of Cor. No. 1 of the
 Daily Extension No. 3 lode was computed (from its
 tie to the W.C. of secs. 17, 18, 19 and 20), to
 be Latitude 32°28'28" N., Longitude 110°44'40" W.

The lines were measured with either a Lufkin steel
 tape or with the aforementioned electronic dis-
 tance meter. The tape was 200 feet in length,
 graduated every foot for 200 ft., with an added
 foot on the zero end graduated in tenths and hun-
 dredths; the tape was compared with a 100.00 foot
 standard tape at the time of beginning the survey,
 and found to be correct. Distances were read
 twice with E.D.M. equipment. Chained distances
 were also measured twice.

The average magnetic declination was determined
 to be 13°30' E.

Mineral Survey No. 4768

DAILY EXTENSION NO. 2 LODGE

At Cor. No. 1 of the Daily Extension No. 2 lode,
 identical with Cor. No. 3, M.S. No. 2871 IMPERIAL
 lode, Cor. No. 2, M.S. No. 2871 HIDDEN TREASURE
 lode and Cor. No. 1, H T FRACTION lode, unsur-
 veyed.

FEET	
	<p>Found a broken stone with visible scribing T-2-2871 lying alongside an old mound of stone. Taking the center of the old mound of stone, set a 5/8 in. diam. steel pin, 30 ins. long, with aluminum cap, projecting 18 ins. above ground in the old mound of stone, mkd. M.S. 2871-I-3-HT-2-4768-DE-2-1; from which</p> <p>The W.C. of secs. 17, 18, 19 and 20, T. 11 S., R. 16 E., Gila and Salt River Meridian, bears S. 18°44'53" W., 1950.21 ft. dist.; monumented with an iron post, 2 ins. diam., 12 ins. above ground, firmly set, with brass cap properly mkd.</p> <p>The 1/2 sec. cor. of secs. 17 and 18, bears N. 43°14'58" W., 932.7 ft. dist.; monumented with an iron post, 1 in. diam., 10 ins. above ground, firmly set, with brass cap properly mkd.</p> <p>Cor. No. 4, M.S. No. 3499 DAILY EXTENSION lode, bears N. 44°21'24" W., 13.1 ft. dist.</p> <p style="text-align: center;">Thence S. 7°59'48" W.</p>
212.	Center of road, 20 ft. wide, bears N. 36° W. and S. 21° E.
300.00	Lode line; discovery point bears N. 81°01'56" W., 100.0 ft. dist.
338.67	Intersect the common lines, 5-1 M.S. No. 3499 DAILY EXTENSION lode, and 2-3 M.S. No. 3499 CAVE lode, at a point from which Cor. No. 5, DAILY EXTENSION lode, identical with Cor. No. 3, CAVE lode, bears N. 82°16' W., 7.33 ft. dist.
535.60	<p>Cor. No. 2, identical with Cor. No. 1 of the Daily Extension No. 3 lode of this survey.</p> <p>Set a 5/8 in. diam. steel pin, 30 ins. long, with aluminum cap, projecting 16 ins. in a mound of stone, mkd. M.S. 4768-DE-2-2-DE-3-1; from which</p> <p style="text-align: center;">Cor. No. 3, M.S. No. 3499 CAVE lode, identical with Cor. No. 5, M.S. No. 3499 DAILY EXTENSION lode, bears N. 5°51'50" E., 196.92 ft. dist.</p> <p style="text-align: center;">A cor. of the location bears N. 75°43'13" E., 38.8 ft. dist.</p> <p style="text-align: center;">Thence N. 81°36'56" W.</p>
7.64	Intersect line 3-4, M.S. No. 3499 CAVE lode, at a point from which Cor. No. 3, identical with Cor. No. 5, M.S. No. 3499 DAILY EXTENSION lode, bears N. 8°05'16" E., 196.72 ft. dist.

FEET	
50.	Center of road, 15 ft. wide, bears N. 33° W. and S. 33° E.
92.	Center of road, 15 ft. wide, bears N. 20° W. and S. 20° E.
345.	Wash, 10 ft. wide, course N. 35° E.
565.12	Intersect the line bet. secs. 17 and 18 at a point from which the $\frac{1}{2}$ sec. cor. of secs. 17 and 18 bears N. 0°16'40" W., 1127.35 ft. dist.
875.	Center of road, 15 ft. wide, bears North and South.
995.	Center of road, 15 ft. wide, bears N. 5° E. and S. 5° W.
1486.44	Intersect line 4-1 Daily Extension No. 4 lode of this survey.
1495.70	Cor. No. 3, identical with Cor. No. 4 of the Daily Extension No. 3 lode of this survey. Set a 5/8 in. diam. steel pin, 30 ins. long, with aluminum cap, projecting 24 ins. in a mound of stone, mkd. M.S. 4768-DE-2-3-DE-3-4; from which A cor. of the location bears S. 14°55' W., 43.7 ft. dist. Thence N. 7°59'48" E.
250.82	Lode line; discovery point bears S. 81°01'56" E., 1395.88 ft. dist.
330.87	Intersect line 1-2, M.S. No. 2871 LONE PINE lode, at a point from which Cor. No. 2 bears S. 19°52' 12" W., 87.68 ft. dist.
550.82	Cor. No. 4. Set a 5/8 in. diam. steel pin, 30 ins. long, with aluminum cap, projecting 20 ins. in a mound of stone, mkd. M.S. 4768-DE-2-4; from which Cor. No. 2, M.S. No. 2871 IMPERIAL lode, on line 1-2, M.S. No. 2871 LONE PINE lode, bears S. 67°09'15" E., 45.32 ft. dist. Cor. No. 2, M.S. No. 2871 LONE PINE lode, bears S. 11°22'24" W., 306.3 ft. dist. A cor. of the location bears N. 81°03'45" W., 10.52 ft. dist. Thence S. 81°01'56" E.
7.28	Intersect line 4-1 Daily Extension No. 4 lode of this survey.

FEET	
46.09	Intersect the common lines, 1-2 M.S. No. 2871 LONE PINE lode, and 1-2 M.S. No. 2871 IMPERIAL lode, at a point from which Cor. No. 2 IMPERIAL lode, bears S. 19°52'12" W., 11.07 ft. dist., and Cor. No. 2 LONE PINE lode, bears S. 19°52'12" W., 311.66 ft. dist.
245.	Center of road; 20 ft. wide, bears N. 11° E. and S. 11° W.
710.	Wash, 15 ft. wide, course N. 44° E.
851.75	Intersect the line bet; secs. 17 and 18 at a point from which the ¼ sec. cor. of secs. 17 and 18 bears N. 0°16'40" W., 578.95 ft. dist.
1425.	Road junction, 30 ft. wide, from which roads bear South, N. 9° E. and N. 39° E.
1485.58	Intersect line 4-5, M.S. No. 3499 DAILY EXTENSION lode, at a point from which Cor. No. 5, identical with Cor. No. 3, M.S. No. 3499 CAVE lode, bears S. 7°29'42" W., 338.99 ft. dist.
1495.88	Cor. No. 1, and place of beginning.
DAILY EXTENSION NO. 3 LODE	
Beginning at Cor. No. 1 of the Daily Extension No. 3 lode, identical with Cor. No. 2 of the Daily Extension No. 2 lode of this survey; from which	
The W.C. of secs. 17, 18, 19 and 20, bears S. 22°45'42" W., 1427.52 ft. dist., heretofore described.	
The ¼ sec. cor. of secs. 17 and 18, bears N. 25°01'01" W., 1334.99 ft. dist., heretofore described.	
Thence S. 6°54'16" W.	
50.	Center of road, 15 ft. wide, bears N. 44° W. and S. 44° E.
300.00	Lode line; discovery point bears N. 81°36'56" W., 100.0 ft. dist.
340.	Center of road; 12 ft. wide, bears N. 49° E. and S. 49° W.
404.25	Intersect the common lines, 4-1 M.S. No. 3499 CAVE lode, and 2-3 M.S. No. 3499 WEDGE NO 3 lode, at a point from which Cor. No. 4, CAVE lode, identical with Cor. No. 3, WEDGE NO 3 lode, bears N. 82°16' W., 16.0 ft. dist.
600.00	Cor. No. 2, identical with Cor. No. 4, M.S. No. 3679 KEENEY lode, and on line 3-4, M.S. No. 3499 WEDGE NO 3 lode.

(This form bound on left side)

FEET		
	<p>Found a 2 in. diam. brass disc, cemented in top of a mound of stone, projecting 24 ins., mkd. 3679 #4 Keeney. I add the marks M.S. 4768-DE-3-2 to the brass disc; from which</p> <p>Cor. No. 3, M.S. No. 3499 WEDGE NO 3 lode, identical with Cor. No. 4, M.S. No. 3499 CAVE lode, bears N. 2°14'25" E., 196.63 ft. dist.</p> <p>A cor. of the location bears S. 12°10'48" W., 35.7 ft. dist.</p> <p>Thence N. 81°36'36" W.</p> <p>Along line 3-4, M.S. No. 3679 KEENEY lode.</p>	
305.	Center of road, 15 ft. wide, bears N. 25° W. and S. 50° E.	
405.	Center of road, 18 ft. wide, bears N. 4° E. and S. 5° W.	
489.26	Intersect the line bet. secs. 17 and 18 at a point from which the W.C. of secs. 17, 18, 19 and 20 bears S. 0°16'40" E., 792.09 ft. dist.	
599.11	<p>Cor. No. 3, M.S. No. 3679 KEENEY lode, identical with Cor. No. 4, M.S. No. 3679 ALABAMA lode. Found a 6 x 8 in. stone, projecting 12 ins., mkd. X4A3K 3679.</p> <p>Continue N. 81°36'36" W., along line 3-4, M.S. No. 3679 ALABAMA lode.</p>	
640.	Wash, 10 ft. wide, course N. 29° E.	
855.	Center of road, 15 ft. wide, bears N. 25° W. and S. 25° E.	
1199.03	<p>Point for Cor. No. 3, M.S. No. 3679 ALABAMA lode, identical with Cor. No. 4, M.S. No. 3679 CONTACT lode, not found.</p> <p>Continue N. 81°36'36" W., along line 3-4, M.S. No. 3679 CONTACT lode.</p>	
1495.71	<p>Cor. No. 3, identical with Cor. No. 1 of the Daily Extension No. 4 lode of this survey, and on line 3-4, M.S. No. 3679 CONTACT lode.</p> <p>Set a 5/8 in. diam. steel pin, 30 ins. long, with aluminum cap, projecting 20 ins. in a mound of stone, mkd. M.S. 4768-DE-3-3-DE-4-1; from which</p> <p>A cor. of the location bears S. 24°26' W., 41.3 ft. dist.</p> <p>Thence N. 6°54'16" E.</p>	

FEET	
299.85	Lode line; discovery point bears S. 81°36'56" E., 1395.7 ft. dist.
599.85	Cor. No. 4, identical with Cor. No. 3 of the Daily Extension No. 2 lode of this survey. Thence S. 81°36'56" E.
9.26	Intersect line 4-1 Daily Extension No. 4 lode of this survey.
500.70	Center of road, 15 ft. wide, bears N. 5° E. and S. 5° W.
620.70	Center of road, 15 ft. wide, bears North and South.
930.58	Intersect the line bet. secs. 17 and 18 at a point from which the W.C. of secs. 17, 18, 19 and 20 bears S. 0°16'40" E., 1398.77 ft. dist.
1150.70	Wash, 10 ft. wide, course N. 35° E.
1403.70	Center of road, 15 ft. wide, bears N. 20° W. and S. 20° E.
1445.70	Center of road, 15 ft. wide, bears N. 33° W. and S. 33° E.
1488.06	Intersect line 3-4, M.S. No. 3499 CAVE lode, at a point from which Cor. No. 4, identical with Cor. No. 3, M.S. No. 3499 WEDGE NO 3 lode, bears S. 8°05'16" W., 404.31 ft. dist.
1495.70	Cor. No. 1, and place of beginning.
DAILY EXTENSION NO. 4 LODE	
	Beginning at Cor. No. 1 of the Daily Extension No. 4 lode, identical with Cor. No. 3 of the Daily Extension No. 3 lode of this survey, and on line 3-4, M.S. No. 3679 CONTACT lode; from which
	The W.C. of secs. 17, 18, 19 and 20, bears S. 46°47'43" E., 1371.29 ft. dist., heretofore described.
	The ½ sec. cor. of secs. 17 and 18, bears N. 31°52'55" E., 1869.29 ft. dist., heretofore described.
	Thence N. 81°36'36" W.
	Along line 3-4, M.S. No. 3679 CONTACT lode.
240.	Center of road, 30 ft. wide, bears N. 18° W. and S. 18° E.

FEET	
300.00	Lode line; discovery point bears N. $7^{\circ}47'25''$ E., 118.0 ft. dist. The discovery monument is approximately 7 ft. West of the lode line, at the foot of a drill road backslope.
303.24	Point for Cor. No. 3, M.S. No. 3679 CONTACT lode, identical with Cor. No. 4, M.S. No. 3679 APEX lode, not found. Continue N. $81^{\circ}36'36''$ W., along line 3-4, M.S. No. 3679 APEX lode.
582.50	Cor. No. 2, on line 3-4, M.S. No. 3679 APEX lode. Set a $5/8$ in. diam. steel pin, 30 ins. long, with aluminum cap, projecting 20 ins. in a mound of stone, mkd. M.S. 4768-DE-4-2; from which Cor. No. 3, M.S. No. 3679 APEX lode, bears N. $81^{\circ}36'36''$ W., 320.66 ft. dist. Cor. No. 3, M.S. No. 2871 LONE PINE lode, bears N. $75^{\circ}36'02''$ W., 742.12 ft. dist. A cor. of the location bears S. $6^{\circ}15'$ W., 46.5 ft. dist. Thence N. $7^{\circ}03'07''$ E.
225.	Center of road, 15 ft. wide, bears N. 80° W. and S. 80° E.
511.09	Intersect line 2-3, M.S. No. 2871 LONE PINE lode, at a point from which Cor. No. 2 bears N. $67^{\circ}34'$ E., 651.13 ft. dist.
730.	Center of road, 15 ft. wide, bears S. 88° W. and N. 88° E.
1165.	Center of road, 15 ft. wide, bears S. 61° W. and N. 61° E.
1190.98	Intersect the common lines, 4-1 M.S. No. 2871 LONE PINE lode, and 2-3 M.S. No. 2871 HOMESTAKE lode, at a point from which Cor. No. 1 LONE PINE lode, identical with Cor. No. 2 HOMESTAKE lode, on line 1-2, M.S. No. 2871 IMPERIAL lode, bears N. $67^{\circ}36'05''$ E., 854.61 ft. dist.
1347.	Center of road, 15 ft. wide, bears N. 62° W. and S. 62° E.
1358.91	Cor. No. 3: Set a $5/8$ in. diam. steel pin, 30 ins. long, with aluminum cap, projecting 18 ins. in a mound of stone, mkd. M.S. 4768-DE-4-3; from which A cor. of the location bears N. $81^{\circ}36'05''$ W., 20.01 ft. dist. Thence S. $81^{\circ}36'36''$ E.

FEET	
90.	Wash, 10 ft. wide, course N. 14° W.
130.	Center of road, 15 ft. wide, bears N. 18° E. and S. 18° W.
160.	Center of road, 15 ft. wide, bears N. 8° E. and S. 8° W.
285.68	Intersect the common lines, 2-3 M.S. No. 2871 HOMESTAKE lode, and 4-1 M.S. No. 2871 LONE PINE lode, at a point from which Cor. No. 2 HOMESTAKE lode, identical with Cor. No. 1 LONE PINE lode, on line 1-2, M.S. No. 2871 IMPERIAL lode, bears N. 67°36'05" E., 526.63 ft. dist.
300.00	Lode line; discovery point bears S. 7°47'25" W., 1240.62 ft. dist.
600.00	Cor. No. 4. Set a 5/8 in. diam. steel pin, 30 ins. long, with aluminum cap, projecting 18 ins. in a mound of stone, mkd. M.S. 4768-DE-4-4; from which Cor. No. 1, M.S. No. 2871 LONE PINE lode, identical with Cor. No. 2, M.S. No. 2871 HOMESTAKE lode, on line 1-2, M.S. No. 2871 IMPERIAL lode, bears N. 35°30'44" E., 302.87 ft. dist. A cor. of the location bears N. 60°30'48" E., 120.6 ft. dist. Thence S. 7°47'25" W.
208.16	Intersect line 4-1 Daily Extension No. 2 lode of this survey.
390.24	Intersect line 1-2, M.S. No. 2871 LONE PINE lode, at a point from which Cor. No. 2 bears S. 19°52'12" W., 126.26 ft. dist.
758.93	Intersect the common lines, 2-3 of the Daily Extension No. 2 lode, and 4-1 of the Daily Extension No. 3 lode of this survey.
1358.62	Cor. No. 1, and place of beginning.
Mineral Survey No. 4768	
AREAS	
	Acres
Total area, Daily Extension No. 2 lode - - - - -	18.652
Area in conflict with --	
M.S. No. 2871 LONE PINE lode -----	0.116
M.S. No. 2871 IMPERIAL lode -----	0.181
M.S. No. 3499 DAILY EXTENSION lode --	0.069

(This form bound on left side)

FEET	
	M.S. No. 3499 DAILY EXTENSION lode, exclusive of its conflict with M.S. No. 2871 IMPERIAL lode ----- 0.069
	M.S. No. 3499 CAVE lode ----- 0.034
	Daily Extension No. 4 lode of this survey ----- 0.105
	Daily Extension No. 4 lode of this survey, exclusive of its con- flict with M.S. No. 2871 LONE PINE lode ----- 0.069
	Total area, Daily Extension No. 3 lode ----- 20.593
	Area in conflict with --
	M.S. No. 3499 CAVE lode ----- 0.110
	M.S. No. 3499 WEDGE NO 3 lode ----- 0.036
	Daily Extension No. 4 lode of this survey ----- 0.064
	Total area, Daily Extension No. 4 lode ----- 18.440
	Area in conflict with --
	M.S. No. 2871 HOMESTAKE lode ----- 0.551
	M.S. No. 2871 LONE PINE lode ----- 8.588
	Daily Extension No. 3 lode of this survey ----- 0.064
	Daily Extension No. 2 lode of this survey ----- 0.105
	Daily Extension No. 2 lode of this survey, exclusive of its con- flict with M.S. No. 2871 LONE PINE lode ----- 0.069
	LOCATION
	This survey is located in secs. 17 and 18, T. 11 S., R. 16 E., Gila and Salt River Meridian.
	The survey of the Daily Extension No. 2, 3 and 4 lodes are wholly within the location as marked on the ground. Cor. No. 1 of the Daily Extension No. 2 lode is identical with a corner of the location; Cor. Nos. 2, 3 and 4 differ to the extent previously shown. Cor. Nos. 1, 2, 3 and 4 of the Daily Extension No. 3 lode and Daily Extension No. 4 lode differ to the extent previously shown. Loc. Mons. are mounds of stones with posts therein.
	EXPENDITURES
	The improvements and the value of the labor and improvements made upon or for the benefit of each of the lode locations embraced in said min- ing claim by the claimant or its grantors are as follows:
No. 1	The discovery point of the Daily Extension No. 2 lode, is on the lode line 100 ft. from a point on line 1-2, 300 ft. from Cor. No. 1. Value, none.
No. 1	The discovery point of the Daily Extension No. 3 lode, is on the lode line 100 ft. from a point on line 1-2, 300 ft. from Cor. No. 1. Value, none.

FEET	
No. 1	<p>The discovery point of the Daily Extension No. 4 lode, is on the lode line 118 ft. from a point on line 1-2; 300 ft. from Cor. No. 1. Value, none.</p>
No. 2	<p>A diamond drill hole designated No. 121 by claimant; the center of which bears N. 76°36'38" W., 249.91 ft. from Cor. No. 1 Daily Extension No. 4 lode; 4 in. diam., 454 ft. deep. Value of 454 ft. at \$6.40 per ft., \$2,905.60.</p>
	<p>An intersect in a common improvement described as follows:</p>
	<p>A diamond drill hole designated No. 76 by claimant; the center of which bears S. 13°49'50" W., 164.95 ft. from Cor. No. 1 Daily Extension No. 3 lode; 4 in. diam., 262 ft. deep. Value of 262 ft. at \$6.40 per ft., \$1,676.80. Value of $\frac{1}{2}$ interest, \$838.40.</p>
	<p>This improvement is for the development of the Daily Extension No. 2 and Daily Extension No. 3 lodes of this survey, which are contiguous lode claims owned in common within range of benefit of said improvement.</p>
	<p>Five hundred dollars or more has been expended in this improvement in such a manner as tends to the development of the said lodes of this survey subsequent to its location and to the time since which common ownership and contiguity have prevailed; therefore an undivided one-half interest in its value is hereby credited to each lode.</p>
	<p>Except as above stated, no portion of or interest in this improvement has been credited heretofore as patent expenditure to any lode claim.</p>
	<p>OTHER IMPROVEMENTS</p>
	<p>Primitive drilling access roads as indicated on the map of this survey. Claimant herein.</p>
	<p>OTHER CORNER DESCRIPTIONS AND SUPPLEMENTAL DATA</p>
	<p>M.S. No. 2871 HIDDEN TREASURE lode: Cor. No. 1, identical with Cor. Nos. 2, 3 and 4, M.S. No. 2871 ROOSEVELT, WAY-UP and IMPERIAL lodes, respectively, is monumented with a 5/8 in. diam. steel pin, in a mound of stone, no markings or bearing objects; Cor. No. 2, identical with Cor. No. 3, M.S. No. 2871 IMPERIAL lode, Cor. No. 1, H.T. FRACTION lode, uns. and Cor. No. 1, Daily Extension No. 2 lode of this survey, heretofore described; Cor. No. 3 is monumented with a stone firmly set and properly mkd. Line 1-2, common with line 3-4; M.S. No. 2871 IMPERIAL lode, was</p>

FEET

found to be S. 24°02'29" W., 616.08 ft., instead of S. 20°00' W., 600.0 ft., as approved; line 2-3 was found to be N. 77°39'04" E., 751.69 ft., instead of N. 76°53'40" E., 755.17 ft., as approved in M.S. No. 3499.

M.S. No. 2871 IMPERIAL lode: Cor. No. 1, identical with Cor. No. 2, M.S. No. 2871 WAY-UP lode and on line 1-2, M.S. No. 2871 HOMESTAKE lode could not be found; Cor. No. 2, on line 1-2, M.S. No. 2871 LONE PINE lode, is monumented with a stone, firmly set, top broken with visible markings I-871; Cor. Nos. 3 and 4 described above. That portion of line 1-2, in part common with line 1-2, M.S. No. 2871 LONE PINE lode, from Cor. No. 1, M.S. No. 2871 LONE PINE lode, identical with Cor. No. 2, M.S. No. 2871 HOMESTAKE lode, monumented with a stone, firmly set, visible markings H-2-2871 to Cor. No. 2 was found to be S. 19°52'12" W., 498.93 ft., instead of S. 20°00' W., 500.0 ft., as approved. The remainder of line 1-2 is shown as approved. Line 2-3 was found to be S. 81°27'39" E., 1451.93 ft., instead of S. 81°00' E., 1500.0 ft., as approved; line 3-4 described above.

M.S. No. 2871 LONE PINE lode: Cor. No. 1 described above; Cor. No. 2 is monumented with the base of a split stone, firmly set, visible markings 2871X; Cor. No. 3 is a partly scattered mound of stone, no markings or bearing objects; Cor. No. 4, identical with Cor. No. 3, M.S. No. 2871 HOMESTAKE lode, falls in the confluence area of several washes, could not be found. Its position (not monumented) was calculated by "broken boundary" adjustment of a traverse from Cor. No. 3 to Cor. No. 1. Line 1-2, in part common with line 1-2, M.S. No. 2871 IMPERIAL lode, was found to be S. 19°52'12" W., 799.52 ft., instead of S. 20°00' W., 800.0 ft., as approved; line 2-3 was found to be S. 67°34' W., 1496.67 ft., instead of S. 67°30' W., 1500.0 ft., as approved; line 3-4 was calculated to be N. 20°04'32" E., 803.37 ft., instead of N. 20°00' E., 800.0 ft., as approved; line 4-1, common with line 2-3, M.S. No. 2871 HOMESTAKE lode, was calculated to be N. 67°36'05" E., 1491.95 ft., instead of N. 67°30' E., 1500.0 ft., as approved.

M.S. No. 2871 HOMESTAKE lode: Cor. Nos. 1 and 4 could not be found; Cor. Nos. 2 and 3 described above. Lines 1-2 and 3-4 are shown as approved; line 2-3 described above.

M.S. No. 3499 DAILY EXTENSION lode: Cor. No. 1, identical with Cor. No. 2, M.S. No. 3499 CAVE lode and on line 2-3, M.S. No. 3499 DAILY NO 3 lode, was destroyed by road construction; Cor. No. 3 is a loose stone in a stone mound, top broken, visible markings X4 3499. Set a 40d nail. Cor. No. 4 is monumented with a stone, firmly set and properly mkd.; Cor. No. 5, identical with Cor. No. 3, M.S. No. 3499 CAVE lode, is

FEET		
	<p>monumented with an old mound of stone, no markings. Set a 40d nail. Line 3-4 was found to be S. 79°32'38" W., 725.0 ft., instead of S. 79°00' W., 728.0 ft., as approved; line 4-5 was found to be S. 7°29'42" W., 346.82 ft., instead of S. 7°13' W., 347.87 ft., as approved; line 5-1 common with line 2-3, M.S. No. 3499 CAVE lode is shown as approved. From Cor. No. 3 to Cor. No. 3, M.S. No. 2871 HIDDEN TREASURE lode bears N. 56°58'12" E., 36.4 ft., instead of N. 52°52' E., 37.95 ft., as approved.</p> <p>M.S. No. 3499 CAVE lode: Cor. No. 1, identical with Cor. Nos. 2, M.S. No. 3499 DAILY NO 3, CALUMET and WEDGE NO 3 lodes could not be found; Cor. Nos. 2 and 3 described above; Cor. No. 4, identical with Cor. No. 3, M.S. No. 3499 WEDGE NO 3 lode, is monumented with a stone, firmly set and properly mkd. Line 2-3 described above; line 3-4 was found to be S. 8°05'16" W., 601.03 ft., instead of S. 7°13' W., 600.0 ft., as approved; line 4-1 common with line 2-3, M.S. No. 3499 WEDGE NO 3 lode is shown as approved.</p> <p>M.S. No. 3499 WEDGE NO 3 lode: Cor. Nos. 2 and 3 described above; Cor. No. 4, identical with Cor. No. 4, M.S. No. 3499 WEDGE NO 2 lode and on line 4-1, M.S. 3679 KEENEY lode has been destroyed by road construction. Line 2-3 described above. That portion of line 3-4 from Cor. No. 3 to Cor. No. 4, M.S. No. 3679 KEENEY lode, identical with Cor. No. 2, Daily Extension No. 3 lode of this survey, heretofore described was found to be S. 2°14'25" W., 196.63 ft., instead of S. 1°18' W., 194.0 ft., as approved in M.S. No. 3679. The remainder of line 3-4, in part common with line 4-1, M.S. No. 3679 KEENEY lode, is shown as approved.</p> <p>M.S. No. 3679, KEENEY lode: Cor. No. 1, identical with Cor. No. 3, M.S. No. 3499 KATHERINE lode and Cor. Nos. 4, M.S. No. 3679 YELLOW COPPER and BORNITE lodes could not be found; Cor. No. 2, identical with Cor. Nos. 3, 4 and 1, M.S. No. 3679 BORNITE, Cuprite and ALABAMA lodes, respectively, could not be found; Cor. No. 3, identical with Cor. No. 4, M.S. No. 3679 ALABAMA lode and on line 2-3 Daily Extension No. 3 lode of this survey is monumented with a stone, firmly set and properly mkd.; Cor. No. 4 described above. Lines 2-3 and 4-1 are shown as approved; line 3-4 was found to be S. 81°36'36" E., 599.11 ft., instead of S. 82°16' E., 600.0 ft., as approved.</p> <p>M.S. No. 3679 ALABAMA lode: Cor. Nos. 1 and 4 described above; Cor. No. 2, identical with Cor. Nos. 3, 4 and 1, M.S. No. 3679 Cuprite, OVER THE TOP and CONTACT lodes, respectively, could not be found; Cor. No. 3, identical with Cor. No. 4, M.S. No. 3679 CONTACT lode and on line 2-3, Daily Extension No. 3 lode of this survey falls in a slide area.</p>	

(This form bound on left side)

FEET

The Cor. is a stone, properly mkd., found about 25 ft. southerly of its true position. The point for the cor. was determined by single proportionate measurement between Cor. No. 3, M.S. No. 3679 APEX lode, hereinafter described, and Cor. No. 4. Lines 2-3 and 4-1 are shown as approved; line 3-4 was found to be S. $81^{\circ}36'36''$ E., 599.92 ft., instead of S. $82^{\circ}16'$ E., 600.0 ft., as approved.

M.S. No. 3679 CONTACT lode: Cor. Nos. 1 and 4 described above; Cor. No. 2, identical with Cor. Nos. 3, 4 and 1, M.S. No. 3679 OVER THE TOP, APEX NO 2 and APEX lodes, respectively, could not be found; Cor. No. 3, identical with Cor. No. 4, M.S. No. 3679 APEX lode and on line 1-2, Daily Extension No. 4 lode of this survey has been destroyed by road construction. The point for Cor. No. 3 was determined by single proportionate measurement. Lines 2-3 and 4-1 are shown as approved; line 3-4 was found to be S. $81^{\circ}36'36''$ E., 599.92 ft., instead of S. $82^{\circ}16'$ E., 600.0 ft., as approved.

M.S. No. 3679 APEX lode: Cor. Nos. 1 & 4, described above; Cor. No. 2, identical with Cor. No. 3, M.S. No. 3679 APEX NO 2 lode could not be found; Cor. No. 3 is monumented with a brass disc in concrete, firmly set and properly mkd. Lines 2-3 and 4-1 are shown as approved; line 3-4 was found to be S. $81^{\circ}36'36''$ E., 599.92 ft., instead of S. $82^{\circ}16'$ E., 600.0 ft., as approved.

Note concerning the following unsurveyed lode location: H T FRACTION. Although this unsurveyed claim is senior in location to this survey, it has been discussed and shown on the plat with their corners referred to by corner number. The reason for this is that the H T FRACTION is presently being surveyed by me under order for Mineral Survey No. 4769. Since corner numbers have already been assigned, I have elected to refer to such corners by corner numbers rather than by general location. Due to the fact that this survey has not been approved, I have herein referred to said lode as unsurveyed. At the time of this survey, conditions were as follows:

H T FRACTION lode, uns.: All corners are in place. Line 1-2 bears N. $24^{\circ}02'29''$ E., 600.0 ft.; line 4-1 bears N. $79^{\circ}24'35''$ W., 1368.7 ft.

The line from the Witness Cor. for secs. 17, 18, 19 and 20 to the $\frac{1}{2}$ sec. cor. bet. secs. 17 and 18, heretofore described, was found to be N. $0^{\circ}16'40''$ W., 2526.12 ft., instead of N. $0^{\circ}03'$ W., 2508.0 ft., as described in the official record.

FEET

FIELD ASSISTANTS

Name	Capacity
<u>Joseph Domler</u>	<u>Instrumentman</u>
<u>Lee Jones</u>	<u>Chainman</u>

CERTIFICATE OF SURVEYOR

Name of Mineral Surveyor	Date
Robert L. Frazer	July 31, 1974

I HEREBY CERTIFY That in pursuance of an order received from the Bureau of Land Management, at Phoenix, Arizona, dated November 14, 1973, I have carefully executed the survey of the claim of Continental Copper, Inc. known as the (~~lode, placer, or mill-site~~) Daily Extension Nos. 2, 3, and 4, situated in Secs. 17 and 18, Township 11S, Range 16E, Gila and Salt River Meridian, in the State of Arizona.

This survey, designated as number 4768, has been executed by me and under my direction and has been made in strict conformity with said order, the Manual of Instructions for the Survey of Public Lands of the United States, and in specific manner described in the foregoing field notes.

I FURTHER CERTIFY That the labor expended and improvements made upon and for the benefit of the (~~lode or placer~~) lode location(s) embraced in the said mining claim by claimant(s) or its grantors are fully stated in my report. The character, extent, location, and itemized value are specified in full detail. No portion of, or interest in, said labor and improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

P.O. Box 1711, Tucson, AZ 85702
(Location)

Robert L. Frazer
(Signature of Mineral Surveyor)

CERTIFICATE OF APPROVAL

Office	Arizona State Office
Location	Phoenix, Arizona
Date	June 2, 1975

The foregoing field notes of mineral survey number 4768, in Sections 17 & 18, Range 16 E., Gila and Salt River Meridian, in the State of Arizona, surveyed unsurveyed Township 11 S., executed by Robert L. Frazer, Mineral Surveyor, under order dated November 14, 1973, having been critically examined and the necessary corrections made prior to their certification by the surveyor, the field notes and the survey therein described are hereby approved.

Edward F. Spang
Edward F. Spang (Authorized Signature) Acting State Director (Title)

CERTIFICATE OF TRANSCRIPT

I HEREBY CERTIFY That the foregoing transcript of field notes of the above-described mineral survey number is a true copy of the original field notes.

(Authorized Signature) (Title)

Title 18, U.S.C. section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction.

