Form 3860-10 (October 1979) (formerly 3400-11)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FIELD NOTES

Mineral Survey number 4823 A & B
State Arizona
Land District
Arizona


Of the Survey of the Mining Claim of (name and address of Claimant)
THE NEW JERSEY ZINC EXPLORATION COMPANY
c/o John Teet, Mgr., Western Exploration
2030 E. Broadway
Tucson, Arizona 85719

Known as the (name of group, if any)

CONSISTING OF LOCATIONS NAMED AND	LOCATED .	AS FOLLOWS
-----------------------------------	-----------	------------

		DATE	
NAME OF LOCATION	LOCATED	AMENDED	
OP # 9 OP # 10 OP # 11 OP # 13 OP # 14 OP # 15 OP # 16 JZ # 1 JZ # 2 JZ # 3 +W # 2 +W # 4 +W # 4 *WF # 4 *WF # 4 *WF # 10 *WF # 8 *WF # 10 *WF # 12 *WF # 12 *WF # 12 *WF # 14 *WF # 15 *WF # 16 *WF # 17 *WF # 18 *WF # 19 *WF # 19 *WF # 20 *WF # 20 *WF # 21 *WF # 22 *WF # 23 *WF # 23 *WF # 24	2/02/74 2/02/74 2/02/74 2/02/74 1/30/74 1/30/781 3/07/81 3/07/81 3/07/81 3/07/81 4/07/81	3/07/81 3/07/81 3/07/81 4/01/81 4/01/81 3/07/81	

Mining district Silver		County Yuma	
Section 25 & 36 Townsh 11 & 12 T. 4	ip 3 S. Range 23 W. S. R. 23 W.	Meridian Gila & Salt River	Survey under order dated June 5, 1981
Survey commenced June 29, 1981	Survey completed March 24, 1982	Name of Mineral Surveyo Gordon W. McLain	r

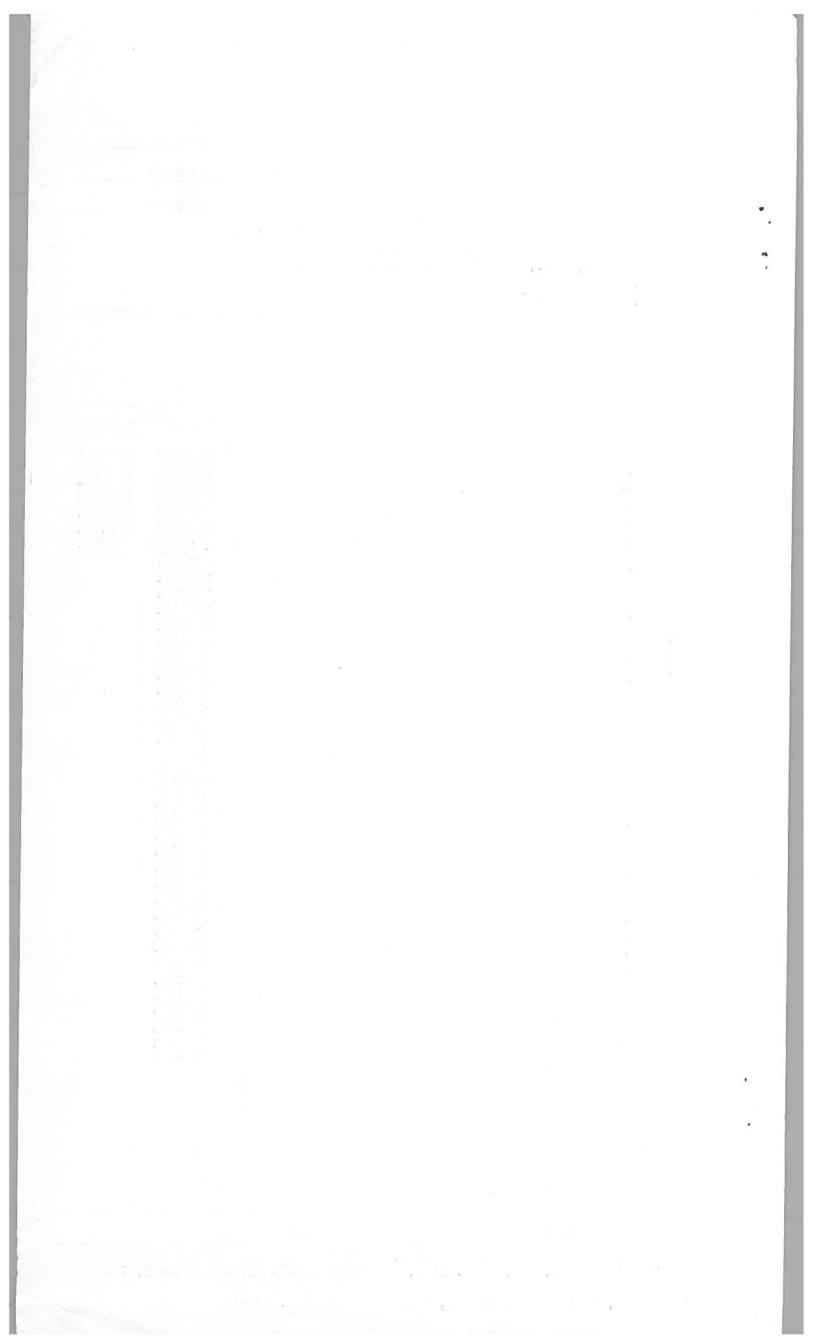

FEET

This survey was made with a Kern DKM-1 directional theodolite, Serial No. 166718, with a horizontal circle of 50 mm. diameter and a vertical circle of 50 mm. diameter; both circles are read through an optical microscope that views diametrically opposite points on the graduated circle scales; an index line is operated by a micrometer drum which reads both horizontal and vertical angles directly to 10" of arc and by estimation to 1" of arc. This instrument was in good condition at the time of the survey and all adjustments were in good order.

All azimuths in this record were determined by direction angles, measured to the right, and are referred to the meridian determined by the following observation:

January 10, 1982, at Cor. No. 4 of the POP #10 lode, in latitude 33°07'46" N., and longitude 114°34'52" W., elevation 1015 ft. above sea level, and temperature 40° F., make a series of six altitude observations on the sun for azimuth at approximately equal time intervals, three each with the telescope in direct and reversed positions, observing opposite limbs of the sun, and reading the horizontal angle from Cor. No. 4 of the POP #13 lode of this survey southeast to the sun:

Mean time of observation,
105th meridian standard
time =10^h00^m37^sa.m.

Declination of sun at mean time of observation =21°55'48" S.

Mean observed vertical angle to sun's center = 22°15'06"

Mean horizontal angle from
Cor. No. 4, POP #13 lode,
to sun's center = 340°24'00"

True bearing to Cor. No. 4, POP #13 lode = S.21°57'36" E.

The lines were measured with a Topcon DM-C2 electronic distance meter, Serial No. 911223, with a mean square error of +(0.02 ft. + 5 ppm), and with a Lufkin 100 ft. steel tape, graduated every foot for 99 ft. and the remainder in tenths and hundredths of a foot. The tape was compared with a 100 ft. standard tape at the beginning of the survey and found to be correct. The electronic distance meter was in good condition at the time of the survey and all adjustments were in good order.

The magnetic declination observed at each corner of the survey gave a uniform value of 13° E.

FEET	
Term Dr. Lugaria Lonecer and	Mineral Survey No. 4823 A
re i verez Geografia Le	POP #9 Lode
ini Marani ur ofeist do 1 na i Lases	At Cor. No. 1 of the POP #9 lode, identical with Cor. No. 2 of the POP #10 lode, of this survey and with cor. of the location.
ende ond end ende enderschip	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, cemented in drill hole on E. face of ledge, 4 ft. above the general surface, raised mound of stone, 3 ft. base, 3 ft. high, SE. of cor., marked the aluminum cap 1-P9 2-P10 MS 4823A; from which
TOP MEDICAL TOP	The S. 1/4 cor. of sec. 25, T.3 S., R.23 W., G.& S.R.M., bears S. 84°17'11"E., 815.87 ft. dist., monumented with an iron post, 1 ins. in diam. 20 ins. above the ground, firmly set, with the brass cap properly marked.
e interv	No local bearing objects or bearing trees available.
a store de	Thence N.21°57'36" W.
300.00	Lode line; discovery point bears N.68°02'24" E., 285.00 ft. dist.
550.	Center of wash, 6 ft. wide, course N.45° E.
600.00	Cor. No. 2, identical with a cor. of the location.
780	Set 3/4 in. diam. galvanized iron pipe, 26 ins. long, 15 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-P9 MS 4823A; from which
HT A	The S. face of a rock ledge, 3 ft. above the general surface, bears N.69°12' E., 18.76 ft. dist., marked X BO 2-P9 MS 4823A.
ope in Die	The SE. face of a 2 ft. sq. boulder, 3 ft. high, bears S. 0°46' W., 28.66 ft. dist., marked X BO 2-P9 MS 4823A.
i felde v	Thence N.68°02'24" E.
95.	Center of wash, 6 ft. wide, course N.25° E.
545.	Center of wash, 8 ft. wide, course S.65° E.
635.	Center of wash, 12 ft. wide, course N.25° E.
725.	Center of wash, 8 ft. wide, course S.35° E.
1025.	Center of road, 10 ft. wide, course N.45° E. and S.45° W.

		_
FEET 1145.	Center of wash, 8 ft. wide, course N.50° E.	
1245.	Center of wash, 8 ft. wide, course N. 30° W.	
1495.	Center of sand wash, 15 ft. wide, course S.40° E.	
1500.00	Cor. No. 3, identical with Cor. No. 2 of the NJZ #1 mill site of this survey and with a cor. of the location.	
li a	This Cor. falls in a sand wash, where a permanent monument cannot be established; from which	
11	A point for witness cor. No. 3, bears N.68°02'24"E., 9.00ft. dist., set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, cemented in a drill hole, on a rock ledge 4 ft. above the wash, raised mound of stone, 4 ft. base, 2 ft. high, W. of witness cor., marked the aluminum cap W.C. 3-P9 2-NJZ1 MS 4823A/B.	
ppo s	Thence S.21°57'36" E.	
30.	Center of sand wash, 20 ft. wide, course S.30° E.	
300.00	Lode line; discovery point bears S.68°02'24" W., 1215.00 ft. dist.	
330.00	Cor. No. 1 of the NJZ #1, identical with Cor. No. 2 of the NJZ #2, both mill sites of this survey.	
600.00	Cor. No. 4, identical with Cor. No. 3 of the POP #10 lode of this survey and with a cor. of the location, on line 1-2 of the NJZ #2 mill site of this survey.	
	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 11 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-P9 3-P10 M.S. 4823A.	
	No local bearing objects or bearing trees available.	
	Thence S.68°02'24" W.	
135.	Center of wash, 4 ft. wide, course S.65° E.	
245.	Center of wash, 4 ft. wide, course N.10° E.	
885.	Center of road, 10 ft. wide, course N.15° W. and S.15° E.	
930.	E. edge bulldozed area.	
965.	W. edge bulldozed area.	
1110.	Center of drill road, 12 ft. wide, course N.20° W. and S.20° E.	
		L

-	FEET	•
	1500.00	Cor. No. 1, and place of beginning.
	gir Albania	POP #10 Lode
		Beginning at Cor. No. 1 of the POP #10 lode, identical with Cor. No. 1 of the POP #11 lode of this survey and with a cor. of the location; from which
	A glenn gir	The S. 1/4 cor. of sec. 25, T.3 S., R.23 W., G.& S.R.M., bears N. 51°01'38" E., 755.61 ft. dist., heretofore described.
		This Cor. falls on a steep ledge of decomposed rock, where a permanent monument cannot be established.
	ere to the	Thence N.21°57'36" W.
	65.00	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, for witness cor. No. 1, raised mound of stone 3 ft. base, 2 ft.high, NE. of cor., marked the aluminum cap W.C. 1-P10 1-P11 MS 4823A.
	300.00	Lode line; discovery point bears N.68°02'24" E., 475.00 ft. dist.
	380.	Center of wash, 4 ft. wide, course due E.
	600.00	Cor. No. 2, identical with Cor. No. 1 of the POP #9 lode of this survey and with a cor. of the location.
	10 - oll	Thence N.68°02'24" E.
	390.	Center of drill road, 12 ft. wide, course N.20° W. and S.20° E.
	535.	W. edge bulldozed area.
	570.	E. edge bulldozed area.
	615.	Center of road, 10 ft. wide, course N.15° W. and S.15° E.
	1255.	Center of wash, 4 ft. wide, course N.10° E.
	1365.	Center of wash, 4 ft. wide, course S.65° E.
	1500.00	Cor. No. 3, identical with Cor. No. 4 of the POP #9 lode of this survey and with a cor. of the location.
	- 11 L E 820	Thence S.21°57'36" E.
	60.00	Cor. No. 1 of the NJZ #2 mill site identical with Cor. No. 1 of the NJZ #3 mill site both mill sites of this survey.
	100.	Center of wash, 4 ft. wide, course N.70° E.

-	FEET	
	300.00	Lode line; discovery point bears S.68°02'24" W., 1025.00 ft. dist.
	325.	Center of wash, 2 ft. wide, course N.45° E.
	390.00	Cor. No. 2 of the NJZ #3 mill site of this survey.
	600.00	Cor. No. 4, identical with Cor. No. 4 of the POP #11 lode of this survey.
	11.	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 17 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-10 4-P11 MS 4823A.
	_ =	No local bearing objects or bearing trees available.
		Thence S.68°02'24" W.
	1005.	Center of wash, 10 ft. wide, course S.10° E.
	1500.00	Cor. No. 1, and place of beginning.
		POP #11 Lode
		Beginning at cor. No.1 of the POP #11 lode, identical with cor. No. 1 of the POP #10 lode of this survey and with a cor. of the location.
		Thence S.21°57'36" E.
	250.	Center of wash, 6 ft. wide, course S.70° E.
	300.00	Lode line; discovery point bears N.68°02'24" E., 410.00 ft. dist.
	600.00	Cor. No. 2, identical with Cor. No. 2 of the POP #13 lode of this survey and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, ll ins. in the ground, surrounded by a 3ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-Pll 2-Pl3 MS 4823A; from which
	l Ha	The N. face of a 3 ft. X 6 ft. boulder, 3 ft. high, bears S.12°37' E., 76.20 ft. dist., marked X BO 2P-11 2-P13 MS 4823A.
	=	The E. face of a 2 ft. X 3 ft. boulder, 3 ft. high, bears S.22°51' W., 59.24 ft. dist., marked X BO 2P-11 2-P13 MS 4823A.
		Thence N.68°02'24" E.
	350.	Center of road, 10 ft. wide, course N.25° E. and S.25° W.

_		
	_{БЕЕТ} 450.	Center of wash, 3 ft. wide, course N.25° E.
3	515.	Center of wash, 7 ft. wide, course S.65° E.
	1415.	Center of sand wash, 10 ft. wide, course N.40° E.
	1485.	Center of road, 10 ft. wide, course N.60° W. and S.60° E.
	1500.00	Cor. No. 3, identical with Cor. No. 3 of the POP #13 lode of this survey and with a cor. of the location.
	11 -3 0127	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 13 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 3-P11 3-P13 MS 4823A.
		No local bearing objects or bearing trees available.
		Thence N.21°57'36" W.
	25.	Center of sand wash, 12 ft. wide, course S.85° E.
	300.00	Lode line; discovery point bears S.68°02'24" W., 1090.00 ft. dist.
	345.	Center of wash, 2 ft. wide, course N.70° E.
	470.	Center of wash, 2 ft. wide, course N.45° E.
	560.	Center of road, 10 ft. wide, course N.15° E. and S.15° W.
oa.	600.00	Cor. No. 4, identical with Cor. No. 4 of the POP #10 lode of this survey and with a cor. of the location.
	2 501	Thence S.68°02'24" W.
	1005.	Center of wash, 10 ft. wide, course S.10° E.
	1500.00	Cor. No. 1, and place of beginning.
-	THE STATE	POP #13 Lode
	and the control of th	Beginning at Cor. No. 1 of the POP #13 lode, identical with Cor. No. 1 of the POP #14 lode of this survey and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 9 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-Pl3 1-Pl4 MS 4823A; from which
Mir		The S. 1/4 cor. of sec. 25, T.3 S., R.23 W., G.& S.R.M., bears N. 4°59'27" E., 1594.22 ft. dist., heretofore described.

, ,	/	
	FEET	No local bearing objects or bearing trees available.
	_	Thence N.21°57'36" W.
	175.	Center of wash, 4 ft. wide, course N.65° E.
	300.00	Lode line; discovery point bears N.68°02'24" E., 255.00 ft. dist.
	600.00	Cor. No. 2, identical with Cor. No. 2 of the POP #11 lode of this survey and with a cor. of the location.
	,	Thence N.68°02'24" E.
	350.	Center of road, 10 ft. wide, course N.25° E. and S.25° W.
	385.	Center of road, 10 ft. wide, course due N. and S.
	450.	Center of wash, 3 ft. wide, course N.25° E.
	515.	Center of wash, 7 ft. wide, course S.65° E.
	1415.	Center of sand wash, 10 ft. wide, course N.40° E.
	1485.	Center of road, 10 ft. wide, course N.60° W. and S.60° E.
	1500.00	Cor. No. 3, identical with Cor. No. 3 of the POP #11 lode of this survey and with a cor. of the location.
		Thence S.21°57'36" E.
	20.	Center of road, 8 ft. wide, course N.60° W. and S.60° E., and center of wash, 2 ft. wide, course N.20° E.
	300.00	Lode line; discovery point bears S.68°02'24" W., 1245.00 ft. dist.
	600.00	Cor. No. 4, identical with Cor. No. 4 of the POP #14 lode of this survey and with a cor. of the location.
		Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone 4 ft. base, 3 ft. high, W. of cor., marked the aluminum cap 4-P13 4-P14 MS 4823A.
	*,1	No local bearing objects or bearing trees available.
		Thence S.68°02'24" W.
TI .	1110.	Center of road, 10 ft. wide, course N.50° W. and S.50° E.
II	1500.00	Cor. No. 1, and place of beginning.

	mineral barvey no. 4025 A	
FEET		
	POP #14 Lode	
	Beginning at Cor. No. 1 of the POP #14 lode, identical with Cor. No. 1 of the POP #13 lode of this survey and with a cor. of the location.	
to it has a	Thence S.21°57'36" E.	
300.00	Lode line; discovery point bears N.68°02'24" E., 390.00 ft. dist.	
350.	Center of wash, 15 ft. wide, course N.45° E.	
600.00	Cor. No. 2, identical with Cor. No. 2 of the POP #15 lode of this survey and with a cor. of the location.	
	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 3 ft. high, N. of cor., marked the aluminum cap 2-P14 2-P15 MS 4823A.	
	No local bearing objects or bearing trees available.	
	Thence N.68°02'24" E.	
310.	Center of road, 10 ft. wide, course N.25° W. and S.25° E.	
575.	Center of wash, 15 ft. wide, course S.30° E.	
975.	Center of wash, 12 ft. wide, course N.20° E.	
1030.	Center of wash, 2 ft. wide, course N.40° W.	
1500.00	Cor. No. 3, identical with Cor. No. 3 of the POP #15 lode of this survey and with a cor. of the location.	
- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 17 ins. in the ground, surrounded by a 4 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 3-P14 3-P15 MS 4823A.	
11 V	No local bearing objects or bearing trees available.	
	Thence N.21°57'36" W.	
60.	Center of wash, 12 ft. wide, course due. E.	
300.00	Lode line; discovery point bears S.68°02'24" W., 1110.00 ft. dist.	
600.00	Cor. No. 4, identical with Cor. No. 4 of the POP #13 lode of this survey and with a cor. of the location.	
	Thence S.68°02'24" W.	

21)	
FEET 1110.	Center of road, 10 ft. wide, course N.50° W. and S.50° E.
1500.00	Cor. No. 1, and place of beginning.
	POP #15 Lode
	Beginning at Cor. No. 1 of the POP #15 lode, identical with Cor. No. 1 of the POP #16 lode of this survey and with a cor. of the location.
	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, cemented in drill hole on SE. face of a rock ledge, at ground surface, encircled by a 3ft. diam., 2 ft. high mound of stone, marked the aluminum cap 1-P15 1-P16 MS 4823A; from which
	The S. 1/4 cor. of sec. 25, T.3 S., R.23 W., G.& S.R.M., bears N. 6°32'54" W., 2718.84 ft. dist., heretofore described.
	No local bearing objects or bearing trees available.
	Thence N.21°57'36" W.
300.00	Lode line; discovery point bears N.68°02'24" E., 475.00 ft. dist.
600.00	Cor. No. 2, identical with Cor. No. 2 of the POP #14 lode of this survey and with a cor. of the location.
	Thence N.68°02'24" E.
310.	Center of road, 10 ft. wide, course N.25° W. and S.25° E.
575.	Center of wash, 15 ft. wide, course S.30° E.
975.	Center of wash, 12 ft. wide, course N.20° E.
1030.	Center of wash, 2 ft. wide, course N.40° W.
1500.00	Cor. No. 3, identical with Cor. No. 3 of the POP $\#14$ lode of this survey and with a cor. of the location.
	Thence S.21°57'36" E.
300.00	Lode line; discovery point bears S.68°02'24" W., 1025.00 ft. dist.
315.	Center of wash, 2 ft. wide, course N.70° E.
590.00	Set an aluminum cap 2 ins.diam., 2 1/2 ins. stem, in concrete, at ground surface, for witness cor. No. 4, raised a mound of stone, 3 ft. base, 2 ft. high E. of cor., marked the aluminum cap W.C. 4-P15 4-P16 MS 4823A.

, p *	600.00	Cor. No. 4, identical with Cor. No. 4 of the POP #16 lode of this survey.
		This Cor. falls on an inaccessible cliff, where a monument cannot be set.
		Thence S.68°02'24" W.
	465.	Center of wash, 4 ft. wide, course S. 5° E.
	975.	Center of wash, 8 ft. wide, course S.45° E.
1	040.	Center of road, 10 ft. wide, course N.15° W. and S.15° E.
1	500.00	Cor. No. 1, and place of beginning.
		POP #16 Lode
		Beginning at Cor. No. 1 of the POP #16 lode, identical with Cor. No. 1 of the POP #15 lode of this survey and with a cor. of the location.
		Thence S.21°57'36" E.
	270.00	Cor. No. 4 of the G+W #1 mill site of this survey.
	300.00	Lode line; discovery point bears N.68°02'24" E., 385.00 ft. dist.
	600.00	Cor. No. 2, identical with Cor. No. 3 of the G+W #1 mill site of this survey and a cor. of the location, on line 2-3 of the G+W #2 mill site of this survey.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 16 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-P16 3-GW1 MS 4823A.
	- TOUR	No local bearing objects or bearing trees available.
	1- r -ar	Thence N.68°02'24" E.
	340.	Center of road, 10 ft. wide, course N.25° W. and S.25° E.
	370.	Center of wash, 8 ft. wide, course S.20° E.
	430.00	Cor. No. 3 of the G+W #2 mill site of this survey.
1	.265.	Center of wash, 6 ft. wide, course S.70° E.
1	.500.00	Cor. No. 3, identical with a cor. of the location.

`		
	FEET	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 2 ft. high, S. of cor., marked the aluminum cap 3-P16 MS 4823A; from which
		The S. face of a massive rock ledge, at the general surface, bears N.57°12' W., 7.80 ft. dist., marked X BO 3-P16 M.S. 4823A.
		The top of a massive rock ledge bears N. 3°18' E., 19.21 ft. dist., marked X BO 3-P16 MS 4823A.
		Thence N.21°57'36" W.
	300.00	Lode line; discovery point bears S.68°02'24" W., 1115.00 ft. dist.
	600.00	Cor. No. 4, identical with Cor. No. 4 of the POP #15 lode of this survey.
	, T	This Cor. falls on an inaccessible cliff, where a monument cannot be set; from which
	of the con-	A point for witness cor. No. 4 bears N.21°57'36" W., 10.00 ft. dist., heretofore described.
	X ER-	Thence S.68°02'24"W.
	465.	Center of wash, 4 ft. wide, course S. 5°E.
	975.	Center of wash, 8 ft. wide, course S. 45° E.
	1040.	Center of road, 10 ft. wide, course N. 15° W.
	1500.00	Cor. No. 1, and place of beginning.
	io Prijiv	Mineral Survey No. 4823B
	Rube	NJZ #1 mill site
	1.576 200 1.576 200 1.504	Beginning at Cor. No. 1 NJZ #1 mill site, identical with Cor. No. 2 of the NJZ #2 mill site of this survey and with a cor. of the location, on line 3-4 of the POP #9 lode of this survey.
		Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised mound of stone, 2 ft. base, 2 ft. high, E. of Cor., marked the aluminum cap 1-NJZ1 2-NJZ2 M.S. 4823B; from which
		The S. 1/4 cor. of sec. 25, T.3 S., R.23 W., G.&S.R.M., bears S. 28°11'21"W. 1012.69 ft. dist., heretofore described.
	1 52 men	The same of the sa

	FEET	
	1 1177	No local bearing objects or bearing trees available.
		Thence N.21°57'36"W.
19	300.	Center of sand wash, 20 ft. wide, course S.30°E.
	330.00	Cor. No. 2,
		This cor. falls in a sand wash, where a permanent monument cannot be established.
		Thence N. 68°02'24"E.
	9.00	Witness cor. No. 2, identical with witness cor. No. 3, POP #9 lode of this survey.
	360.	Center of road, 10 ft. wide, course N. 15°E. and S.15°W.
	405.	Center of wash, 2 ft. wide, course S.15°W.
	660.00	Cor. No. 3, identical with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 12 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 3-NJZ1 MS 4823B.
		No local bearing objects or bearing trees available.
	y Par Jane	Thence S.21°57'36" E.
	55.	Center of wash, 2 ft. wide, course S.50° W.
	330.00	Cor. No. 4, identical with Cor. No. 3 of the NJZ #2 mill site of this survey and with a cor. of the location.
	Pilipiti StV -	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 13 ins. in the ground, surrounded by a 4 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-NJZ1 3-NJZ2 MS 4823B.
	101 1 0 0 104	No local bearing objects or bearing trees available.
	AND A RES	Thence S.68°02'24" W.
	230.	Center of wash, 4 ft. wide, course S.30° E.
	255.	Center of wash, 2 ft. wide, course S.70° E.
	390.	Center of road, 10 ft. wide, course N.55° W. and S.55° E.
		Center of sand wash, 20 ft. wide, course S.40°
	660.00	Cor. No. 1, and place of beginning.

FEET	
7	NJZ #2 mill site
1 250 LT	Beginning at Cor. No. 1 NJZ #2 mill site, identical with Cor. No. 1 of the NJZ #3 mill site of this survey and with a cor. of the location, on line 3-4 of the POP #10 lode of this survey.
	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 18 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-NJZ2 1-NJZ3 MS 4823B;
	The S. 1/4 cor. of sec. 25, T.3 S., R.23 W., G.&S.R.M., bears S.45°44'09" W., 840.32 ft. dist., heretofore described.
	The N. face of a 1 1/2 ft. sq. boulder, 1 1/2 ft. high, bears S.42°39' E., 92.56 ft. dist., marked X BO 1-NJZ2 1-NJZ3 MS 4823B.
i de	The top of a 3 ft. X 4 ft. boulder, 2 ft. high, bears S.73°52' W., 28.71 ft. dist., marked X BO 1-NJZ2 1NJZ3 MS 4823B.
0 - 100 H	Thence N.21°57'36" W.
60.00	Cor. No. 4 of the POP #9, identical with Cor. No. 3 of the POP #10, both lodes of this survey.
330.00	Cor. No. 2, identical with Cor. No. 1 of the NJZ #1 mill site of this survey and with a cor. of the location, on line 3-4 POP #9 of this survey.
a. a	Thence N.68°02'24" E.
130.	Center of sand wash, 20 ft. wide, course S.40° E.
270.	Center of road, 10 ft. wide, course N.55° W. and S.55° E.
405.	Center of wash, 2 ft. wide, course S.70° E.
430.	Center of wash, 4 ft. wide, course S.30° E.
660.00	Cor. No. 3, identical with Cor. No. 4 of the NJZ #1 mill site of this survey and with a cor. of the location.
	Thence S.21°57'36" E.
330.00	Cor. No. 4, identical with Cor. No. 4 of the NJZ #3 mill site of this survey.
or the transfer of the transfe	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 15 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-NJZ2 4-NJZ3 MS 4823B;

	,	
	FEET	The S. face of a 2 ft. X 3 ft. boulder, 4 ft. high, bears N.46°35' E., 21.08 ft. dist., marked X BO 4-NJZ2 4-NJZ3 MS 4823B.
	20 770 x 10 20 010 x 30 100 0	The E. face of a 2 ft. X 4 ft. boulder, 1 ft. high, bears S.52°54' E., 23.76 ft. dist., marked X BO 4-NJZ2 4-NJZ3 MS 4823B.
	The state of the s	Thence S.68°02'24" W.
	160.	Center of wash, 4 ft. wide, course S.50° E.
	415.	Center of wash, 6 ft. wide, course S. 5° E.
	505.	Center of road, 10 ft. wide, course N.20° W. and S.20° E.
	615.	Center of wash, 2 ft. wide, course due N.
	660.00	Cor. No. 1, and place of beginning.
	Delige	PLACE Aread (teld . 11
	S _ relations	NJZ #3 mill site
	10. Eu, als 10.256	Beginning at Cor. No. 1 NJZ #3 mill site, identical with Cor. No. 1 of the NJZ #2 mill site of this survey and with a cor. of the location.
	die Last Josephie	Thence S.21°57'36" E.
	40.	Center of wash, 4 ft. wide, course N.70° E.
	265.	Center of wash, 2 ft. wide, course N.45° E.
	330.00	Cor. No. 2, identical with a cor. of the location, on line 3-4 of the POP #10 lode of this survey.
	distants ,	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 17 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-NJZ3 MS 4823B.
	era succa	No local bearing objects or bearing trees available.
	To "year"	Thence N.68°02'24" E.
8 0	80.	Center of road, 10 ft. wide, course N. 5° E. and S. 5° W.
	190.	Center of wash, 2 ft. wide, course S.70° E.
1	450.	Center of wash, 2 ft. wide, course N.65° E.
	610.	Center of wash, 4 ft. wide, course due N.
of the	637.50	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, for witness cor. No. 3, raised a mound of stone, 3 ft. base, 2 ft. high, W. of cor. marked the aluminum cap W.C. 3-NJZ3 MS 4823B.

	FEET	
	660.00	Cor. No. 3, identical with a cor. of the location.
		This Cor. falls in a sand wash, where a permanent monument cannot be established.
		Thence N.21°57'36" W.
	20.	Left bank of sand wash, course N.85° E.
П	330.00	Cor. No. 4, identical with Cor. No. 4 of the NJZ #2 mill site of this survey and with a cor. of the location.
		Thence S.68°02'24" W.
	160.	Center of wash, 4 ft. wide, course S.50° E.
	415.	Center of wash, 6 ft. wide, course S. 5° E.
	505.	Center of road, 10 ft. wide, course N.20° W. and S.20° E.
	615.	Center of wash, 2 ft. wide, course due N.
	660.00	Cor. No. 1, and place of beginning.
	-	t and all Mart B to Bes vir bill the second to
		G+W #1 mill site
	1 0	Beginning at Cor. No. 1, identical with a cor. of the location.
		Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 3 ft. high, NE. of cor., marked the aluminum cap 1-GW1 MS 4323B; from which
		The S. 1/4 cor. of sec. 25, T.3 S., R.23 W., G.& S.R.M., bears N. 3°35'51" E., 3204.64 ft. dist., heretofore described.
	6 b	No local bearing objects or bearing trees available.
	-	Thence S.21°57'36" E.
	330.00	Cor. No. 2, identical with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 13 ins. in the ground, surrounded by a 4 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-GW1 MS 4823B; from which
		The NE. face of a steep ledge, 15 ft. above the general surface, bears S.12°36' W., 25.11 ft. dist., marked X BO 2-GW1 MS 4823B.
	-	
		- 20

	FEET		_
		The S. face of a ledge, 4 ft. above the general surface, bears N.39°26' W., 52.56 ft. dist., marked X BO 2-GW1 MS 4823B.	
		Thence N.68°02'24" E.	
	430.00	Cor. No. 2 of the G+W #2 mill site of this survey.	
	595.	Center of wash, 6 ft. wide, course S.45° E.	
	660.00	Cor. No. 3, identical with Cor. No. 2 of the POP #16 lode of this survey and with a cor. of the location, on line 2-3 G+W #2 mill site.	
		Thence N.21°57'36" W.	
	330.00	Cor. No. 4, identical with a cor. of the location, on line 1-2 of the POP #16 lode of this survey.	
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 17 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-GWl M.S. 4823B; from which	
		The S. end of a rock ledge, 4 ft. above the general surface, bears S.23°22' E., 42.59 ft. dist., marked X BO 4-GW1 MS 4823B.	
	= 1, 11 ¥ J	The top of a 3 ft. X 2 ft. boulder, 1 ft. high, bears N.33°01' W., 56.90 ft. dist., marked X BO 4-GW1 MS 4823B.	
141	1 1	Thence S.68°02'24" W.	
	660.00	Cor. No. 1, and place of beginning.	
		G+W #2 mill site	
		Beginning at Cor. No. 1 G+W #2 mill site, identical with Cor. No. 2 of the G+W #3 mill site of this survey and with a cor. of the location.	
		Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, on a ledge, 4 ft. above general surface, raised a mound of stone, 3 ft. base, 2 ft. high, SW. of cor., marked the alumimnum cap 1-GW2 2-GW3 MS 4823B; from which	
		The S. 1/4 cor. of sec. 25, T.3 S., R.23 W., G.&S.R.M., bears N. 6°07'21"W., 3490.32 ft. dist., heretofore described.	
	50 . F	No local bearing objects or bearing trees available.	
		Thence N.21°57'36" W.	
	136.75	Cor. No. 2, identical with a cor. of the location, on line 2-3 of the G+W #1 mill site of this survey.	
		<u> </u>	

	FEET	Set an aluminum cap 2 ins. diam., 2 1/2 in. stem, in concrete, on the edge of a 100 ft. high cliff, raised a mound of stone, 3 ft. base, 3 ft. high, SW. of cor., marked the aluminum cap 2-GW2 MS 4823B. No local bearing objects or bearing trees available. Thence N.68°02'24" E.
	165.	Center of wash, 6 ft. wide, course S.45° E.
	230.00	Cor. No. 2 of the POP #16 lode, identical with Cor. No. 3 of the G+W #1 mill site, both of this survey.
	570.	Center of road, 10 ft. wide, course N.25° W. and S.25° E.
	600.	Center of wash, 8 ft. wide, course S.20° E.
44	660.00	Cor. No. 3, identical with a cor. of the location, on line 2-3 of the POP #16 lode of this survey.
		Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface raised a mound of stone, 3 ft. base, 2 ft. high, W. of cor., marked the aluminum cap 3-GW2 MS 4823B.
	*	No local bearing objects or bearing trees available.
		Thence S.21°57'36" E.
-	136.75	Cor. No. 4, identical with Cor. No. 3 of the G+W #3 mill site of this survey and with a cor. of the location.
<u>\$</u>	, ==	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, encircled by a 5 ft. diam., 1 ft. high mound of stone, marked the aluminum cap 4-GW2 3-GW3 MS 4823B; from which
	0	The N. face of a massive rock ledge, 4 ft. above the general surface, bears S.83°00' E., 28.91 ft. dist., marked X BO 4-GW2 3-GW3 MS 4823B.
		The W. face of a massive rock ledge, 4 ft. above the general surface, bears S.44°18' E., 61.59 ft. dist., marked X BO 4-GW2 3-GW3 MS 4823B.
		Thence S.68°02'24" W.
	45.	Center of wash, 15 ft. wide, course S.35° E.
	85.	Center of road, 10 ft. wide, course N.25° W. and S.25° E.
	120.	Center of wash, 6 ft. wide, course S.25° E.
	660.00	Cor. No. 1, and place of beginning.

FEET	
AND THE STREET	177
	G+W #3 mill site
	Beginning at Cor. No. 1 G+W #3 mill site, identical with Cor. No. 1 of the G+W #4 mill site of this survey and with a cor. of the location.
	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 2 ft. high, NE. of cor., marked the alumimnum cap 1-GW3 1-GW4 MS 4823B; from which
A	The S. 1/4 cor. of sec. 25, T.3 S., R.23 W., G.& S.R.M., bears N. 7°28'39" W., 3808.86 ft. dist., heretofore described.
	No local bearing objects or bearing trees available.
	Thence N.21°57'36" W.
330.00	Cor. No. 2, identical with Cor. No. 1 of the G+W #2 mill site of this survey and with a cor. of the location.
	Thence N.68°02'24" E.
540.	Center of wash, 6 ft. wide, course S.25° E.
575.	Center of road, 10 ft. wide, course N.25° W. and S.25° E.
615.	Center of wash, 15 ft. wide, course S.35° E.
660.00	Cor. No. 3, identical with Cor. No. 4 of the $G+W$ #2 mill site of this survey and with a cor. of the location.
	Thence S.21°57'36" E.
330.00	Cor. No. 4, identical with Cor. No. 5 of the G+W #4 mill site of this survey and with a cor. of the location.
- 12. 2	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 2 ft. high, W. of cor. marked the aluminum cap 4-GW3 5-GW4 MS 4823B.
	No local bearing objects or bearing trees available.
	Thence S.68°02'24" W.
155.	Center of wash, 12 ft. wide, course S.30° E., and center of road, 10 ft. wide, course N.30° W. and S.30° E.
660.00	Cor. No. 1, and place of beginning.
	Andrew I de l'Ade La

– 21)	
FEET	
	G+W #4 mill site
ř.	Beginning at Cor. No. 1 G+W #4 mill site, identical with Cor. No. 1 of the G+W #3 mill site of this survey and with a cor. of the location.
	Thence S.21°57'36" E.
326.83	Cor. No. 2, identical with a cor. of the location.
	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 2 ft. high, W. of cor., marked the aluminum cap 2-GW4 MS 4323B; from which
	The E. face of a rock ledge, 3 ft. above the general surface, bears S.71°55' W., 20.17 ft. dist., marked X BO 2-GW4 MS 4823B.
	The S. face of a massive rock ledge, 6 ft. above the general surface, bears N.26°17' E., 23.48 ft. dist., marked X BO 2-GW4 MS 4823B.
1 31 1	Thence N.68°24'30" E.
204.23	NW. Cor. M.S. 279 Mendivil lode.
475.	Center of wash, 14 ft. wide, course S.50° E.
492.57	Cor. No. 3, identical with NC. Cor. MS 279 Mendivil lode and with a cor. of the location.
	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 2 ft. high, E. of cor., marked the aluminum cap 3-GW4 MS 4823B M.N.C.U.S.S.
	No local bearing objects or bearing trees available.
	Thence N.68°10'40" E.
30.	Center of wash, 20 ft. wide, course S.10° W., and center of road, 10 ft. wide, course N.10° E. and S.10° W.
167.45	Cor. No. 4, identical with a cor. of the location, on line NCNE. M.S. 279 Mendivil lode.
	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 2 ft. high, SW. of cor., marked the aluminum cap 4-GW4 MS 4823B.
	ga 2 Anglin ga gayan Aras
	1 J

	BBBB	
	FEET	No local bearing objects or bearing trees available.
		Thence N.21°57'36" W.
	330.40	Cor. No. 5, identical with Cor. No. 4 of the G+W #3 mill site of this survey and with a cor. of the location.
E		Thence S.68°02'24" W.
	155.	Center of wash, 12 ft. wide, course S.30° E., and center of road, 10 ft. wide, course N.30° W. and S.30° E.
	660.00	Cor. No. 1, and place of beginning.
	L	
		RUF #1 mill site
	2 112 14 15 15 15 15 15 15 15 15 15 15 15 15 15	Beginning at Cor. No. 1 RUF #1 mill site, identical with Cor. No. 1 of the RUF #2, Cor. No. 1 of the RUF #12, and Cor. No. 1 of the RUF #13, all mill sites of this survey, and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R1 1-R2 1-R12 1-R13 MS 4323B; from which
		The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M. bears N.62°23'14"E., 1432.56 ft. dist., monumented with an iron post, 2 1/2 ins. in diam., 20 ins. above the ground, firmly set, with the brass cap properly marked.
10		No local bearing objects or bearing trees available.
		Thence S.89°49'14" W.
	100.	Center of wash, 14 ft. wide, course S.45° E.
	135.	Center of road, 8 ft. wide, course N.40° W. and S.40° E.
	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #13 mill site of this survey and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-R1 2-R13 MS 4823B.
	11	No local bearing objects or bearing trees available.
		Thence N. 0°10'46" W.

 FEET	
440.	Center of wash, 3 ft. wide, course S.20° E.
535.	Center of wash, 3 ft. wide, course S.45° W.
660.00	Cor. No. 3, on the S. line of sec. 2, from which cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N.89°49'14"E., 1601.47 ft. dist., heretofore described.
PI A PE	This Cor. falls in the center of a road, 12 ft. wide, course N.60° W. and S.60° E., where a permanent monument cannot be established.
n ng Jing	Thence N.89°49'14" E.
30.00	A point for witness cor., set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 12 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum
8 11	cap marked W.C. 3-R1 M.S. 4823B.
240.	Center of wash, 4 ft. wide, course S.45° W.
330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #2 mill site of this survey and with a cor. of the location, on the S. line of sec. 2, T.4 S., R.23 W., G.& S.R.M.
	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 9 ins. in the ground, surrounded by a 3 ft. diam. mound of earth and stone to top, with a 2 ins. diam. aluminum cap marked 4-Rl 4-R2 MS 4823B.
a in di loss num n	No local bearing objects or bearing trees available.
	Thence S. 0°10'46" E.
200.	Center of wash, 12 ft. wide, course S.45° W.
245.	Center of road, 12 ft. wide, course N.50° W. and S.50° E.
535.	Center of wash, 2 ft. wide, course due W.
660.00	Cor. No. 1, and place of beginning.
	RUF #2 mill site
agg.	Beginning at Cor. No. 1 RUF #2 mill site, identical with Cor. No. 1 of the RUF #1, Cor. No. 1 of the RUF #12, and Cor. No. 1 of the RUF #13, all mill sites of this survey, and with a cor. of the location.
	Thence N.89°49'14" E.
105.	Center of road, 14 ft. wide, course N. 5° E. and S. 5° W.
:	

	FEET		
	240.	Center of wash, 12 ft. wide, course S.15° W.	
	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #3, Cor. No. 2 of the RUF #11, and Cor. No. 2 of the RUF #12, all mill sites of this	
		survey, and with a cor. of the location.	
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-R2 2-R3 2-R11 2-R12 MS 4823B.	
		No local bearing objects or bearing trees available.	
	in the l	Thence N. 0°10'46" W.	
	100.	Center of wash, 10 ft. wide, course N.80° W.	
	145.	Center of wash, 10 ft. wide, course due. S.	
	495.	Center of wash, 8 ft. wide, course S.30° W.	
	590.	Center of road, 10 ft. wide, course N.50° E. and S.50° W.	
	660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #3 mill site of this survey and with a cor. of the location, on the S. line of sec. 2, T.4 S., R.23 W., G.& S.R.M.	
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 10 ins. in the ground, surrounded by a 3 ft. diam. mound of earth and stone to top, with a 2 ins. diam. aluminum cap marked 3-R2 3-R3 MS 4823B.	
		No local bearing objects or bearing trees available.	
	ter,	Thence S.89°49'14" W.	
	160.	Center of wash, 4 ft. wide, course S.65° W.	
	330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #1 mill site of this survey and with a cor. of the location.	
		Thence S. 0°10'46" E.	
	200.	Center of wash, 12 ft. wide, course S.45° W.	
4	245.	Center of road, 12 ft. wide, course N.50° W. and S.50° E.	
	535.	Center of wash, 2 ft. wide, course due W.	
	660.00	Cor. No. 1, and place of beginning.	
		a service of the serv	
-	<u> </u>		

180-		
	FEET	
		RUF #3 mill site
	7 01	Beginning at Cor. No. 1 RUF #3 mill site, identical with Cor. No. 1 of the RUF #4, Cor. No. 1 of the RUF #10, and Cor. No. 1 of the RUF #11, all mill sites of this survey, and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 18 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R3 1-R4 1-R10 1-R11 MS 4823B; from which
		The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N. 42°38'02"E., 899.71 ft. dist., heretofore described.
	-	No local bearing objects or bearing trees available.
	e -	Thence S.89°49'14" W.
	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #2, Cor. No. 2 of the RUF #11, and Cor. No. 2 of the RUF #12, all mill sites of this survey, and with a cor. of the location.
		Thence N. 0°10'46" W.
	100.	Center of wash, 10 ft. wide, course N.80° W.
	145.	Center of wash, 10 ft. wide, course due. S.
	495.	Center of wash, 8 ft. wide, course S.30° W.
	590.	Center of road, 10 ft. wide, course N.50° E. and S.50° W.
	660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #2 mill site of this survey and with a cor. of the location, on the S. line of sec. 2, T.4 S., R.23 W., G.& S.R.M.
		Thence N. 89°49'14" E.
	90.	Center of road, 10 ft. wide, course N.50° E. and S.50° W.
	195.	Center of wash, 6 ft. wide, course S. 5° E.
	330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #4 mill site of this survey and with a cor.
25		of the location, on the S. line of sec 2, T.4 S., R.23 W., G.& S.R.M.
	-11 4	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 10 ins. in the ground, surrounded by a 4 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-R3 4-R4 M.S. 4823B.
	a ^a	

	FFFF	
	FEET	No local bearing objects or bearing trees available.
		Thence S. 0°10'46" E.
	60.	Center of wash, 5 ft. wide, course S.75° W.
	660.00	Cor. No. 1, and place of beginning.
	Stage 1	RUF #4 mill site
		Beginning at Cor. No. 1 RUF #4 mill site, identical with Cor. No. 1 of the RUF #3, Cor. No. 1 of the RUF #10, and Cor. No. 1 of the RUF #11, all mill sites of this survey, and with a cor. of the location.
		Thence N.89°49'14" E.
T	10.	Center of wash, 6 ft. wide, course S. 5° E.
ш	145.	Center of wash, 6 ft. wide, course S.10° E.
9E	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #5, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 11 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-R4 2-R5 2-R9 2-R10 MS 4823B;.
	100	No local bearing objects or bearing trees available.
		Thence N. 0°10'46" W.
-4	185.	Center of wash, 6 ft. wide, course S.60° W.
	350.	Center of wash, 4 ft. wide, course S.70° W.
	660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #5 mill site of this survey and with a cor. of the location, on the S. line of sec. 2, T.4 S., R.23 W., G.& S.R.M.
	15 % J	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 11 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 3-R4 3-R5 MS 4823B.
	.5 .74	No local bearing objects or bearing trees available.
		Thence S.89°49'14" W
	85.	Center of wash, 6 ft. wide, course S.35° W.

Cor. No. 4, identical with Cor. No. 4 of the RUF #3 mill site of this survey and with a cor. of the location. Thence S. 0°10'46" E. Center of wash, 5 ft. wide, course S.75° W. Cor. No. 1, and place of beginning. RUF #5 mill site Beginning at Cor. No. 1 RUF #5 mill site, identical with Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #9. Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9 MS 4823B; from which The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.65.R.M., bears N.4°23'06'W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears S.34°47' E., 49.02 ft. dist., marked X B0 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. Center of wash, 4 ft. wide, course S.40° W. The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.85.R.M., heretofore described.	_			
RUF #3 mill site of this survey and with a cor. of the location. Thence S. 0°10'46" E. 60. Center of wash, 5 ft. wide, course S.75° W. 660.00 Cor. No. 1, and place of beginning. RUF #5 mill site Beginning at Cor. No. 1 RUF #5 mill site, identical with Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #9, both mill sites of this survey, and with a cor. of the location. Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9 MS 4823B; from which The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.8S.R.M., bears N.4°23'06'W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears S.34°47' E., 49.02 ft. dist., marked X B0 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W.		FEET		
Genter of wash, 5 ft. wide, course S.75° W. Gon. No. 1, and place of beginning. RUF #5 mill site Beginning at Cor. No. 1 RUF #5 mill site, identical with Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #9, both mill sites of this survey, and with a cor. of the location. Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9 MS 4823B; from which The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.8S.R.M., bears N.4°23'06'W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears S.34°47' E., 49.02 ft. dist., marked X EO 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N. 89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. Thence N. 89°49'14" E.		330.00	RUF #3 mill site of this survey and with a cor.	
RUF #5 mill site Beginning at Cor. No. 1 RUF #5 mill site, identical with Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #8 and this survey, and with a cor. of the location. Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9 MS 4823B; from which The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N.4°23'06"W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears s.34°47' E., 49.02 ft. dist., marked X B0 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 285. Center of wash, 6 ft. wide, course S.60° W. 350. Center of wash, 4 ft. wide, course S.70° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. Center of wash, 4 ft. wide, course S.40° W. Thence N.89°49'14" E.			Thence S. 0°10'46" E.	
RUF #5 mill site Beginning at Cor. No. 1 RUF #5 mill site, identical with Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #9, both mill sites of this survey, and with a cor. of the location. Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9 MS 4823B; from which The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N.4°23'06"W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears S.34°47' E., 49.02 ft. dist., marked X BO 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 4 ft. wide, course S.60° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		60.	Center of wash, 5 ft. wide, course S.75° W.	
Beginning at Cor. No. 1 RUF #5 mill site, identical with Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #9, both mill sites of this survey, and with a cor. of the location. Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9 MS 4823B; from which The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N.4°23'06"W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears S.34°47' E., 49.02 ft. dist., marked X BO 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. 350. Center of wash, 4 ft. wide, course S.70° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		660.00	Cor. No. 1, and place of beginning.	
Beginning at Cor. No. 1 RUF #5 mill site, identical with Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #9, both mill sites of this survey, and with a cor. of the location. Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9 MS 4823B; from which The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N.4°23'06"W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears S.34°47' E., 49.02 ft. dist., marked X BO 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. 350. Center of wash, 4 ft. wide, course S.70° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23				
identical with Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #9, both mill sites of this survey, and with a cor. of the location. Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9 MS 4823B; from which The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N.4'23'06'W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears S.34°47' E., 49.02 ft. dist., marked X BO 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		10-10-	RUF #5 mill site	
ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9 MS 4823B; from which The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N.4°23'06"W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears S.34°47' E., 49.02 ft. dist., marked X EO 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23			identical with Cor. No. 1 of the RUF #8 and Cor. No. 1 of the RUF #9, both mill sites of	
R.23 W., G.&S.R.M., bears N.4°23'06"W., 661.79 ft. dist., heretofore described. The W. face of a 3 ft. diam. boulder bears S.34°47' E., 49.02 ft. dist., marked X BO 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. 350. Center of wash, 4 ft. wide, course S.70° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		- T	ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R5 1-R8 1-R9	
S.34°47' E., 49.02 ft. dist., marked X BO 1-R5 1-R8 1-R9 MS 4823B. No other local bearing objects or bearing trees available. Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. 350. Center of wash, 4 ft. wide, course S.70° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23			R.23 W., G.&S.R.M., bears N.4°23'06"W.,	
Thence S.89°49'14" W. 275. Center of wash, 1 ft. wide, course due S. 330.00 Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. 350. Center of wash, 4 ft. wide, course S.70° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23			S.34°47' E., 49.02 ft. dist., marked X BO	
Center of wash, 1 ft. wide, course due S. Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. Center of wash, 6 ft. wide, course S.60° W. Center of wash, 4 ft. wide, course S.70° W. Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. Center of wash, 4 ft. wide, course S.40° W. Thence N.89°49'14" E.				
Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. Center of wash, 6 ft. wide, course S.60° W. Center of wash, 4 ft. wide, course S.70° W. Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. Center of wash, 4 ft. wide, course S.40° W. The cor. of secs. 1,2,11, and 12, T.4 S., R.23			Thence S.89°49'14" W.	
RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location. Thence N. 0°10'46" W. 185. Center of wash, 6 ft. wide, course S.60° W. 350. Center of wash, 4 ft. wide, course S.70° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		275.	Center of wash, 1 ft. wide, course due S.	
Center of wash, 6 ft. wide, course S.60° W. Center of wash, 4 ft. wide, course S.70° W. Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. Center of wash, 4 ft. wide, course S.40° W. The cor. of secs. 1,2,11, and 12, T.4 S., R.23		330.00	RUF #4, Cor. No. 2 of the RUF #9, and Cor. No. 2 of the RUF #10, all mill sites of this	
350. Center of wash, 4 ft. wide, course S.70° W. 660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23			Thence N. 0°10'46" W.	
660.00 Cor. No. 3, identical with Cor. No. 3 of the RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		185.	Center of wash, 6 ft. wide, course S.60° W.	
RUF #4 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		350.	Center of wash, 4 ft. wide, course S.70° W.	
Thence N.89°49'14" E. 185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		660.00		
185. Center of wash, 4 ft. wide, course S.40° W. 281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		h at	ner refer to the late of the late of the late of	
281.47 The cor. of secs. 1,2,11, and 12, T.4 S., R.23		10-	. ma nece estida je	
			AND BORD OF THE PARTY OF THE PA	
		281.47		

_		
	FEET	
	330.00	Cor. No. 4, identical with a cor. of the location, on the S. line of sec. 1, T.4 S., R.23 W., G.& S.R.M.
	1	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 11 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-R5 MS 4823B; from which
		Cor. No. 2 of the POP #14 lode of this survey bears N.17°25'21" E., 8886.91 ft. dist.
		The W. face of a rock ledge bears S.68°42' E., 24.85 ft. dist., marked X BO 4-R5 MS 4823B.
		The top of the N. end of a rock ledge bears S. 4°48' W., 19.93 ft. dist., X BO 4-R5 MS 4823B.
	, 1911	Thence S. 0°10'46" E.
	215.	Center of wash, 6 ft. wide, course S.75° W.
	660.00	Cor. No. 1, and place of beginning.
		RUF #6 mill site
		Beginning at Cor. No. 1 RUF #6 mill site, identical with Cor. No. 1 of the RUF #7, Cor. No. 1 of the RUF #20, and Cor. No. 1 of the RUF #21, all mill sites of this survey, and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 16 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R6 1-R7 1-R20 1-R21 MS 4823B; from which
		The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N.28°24'17"W., 1498.14 ft. dist., heretofore described.
		No local bearing objects or bearing trees available.
		Thence N. 0°10'46" W.
	120.	Center of wash, 8 ft. wide, course S.60° W
	660.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #7 mill site of this survey and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 10 ins. in the ground, surrounded by a 4 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-R6 2-R7 MS 4823B.

		No local bearing chicate or bearing troop
1		No local bearing objects or bearing trees available.
		Thence N.89°49'14" E.
	65.	Center of wash, 6 ft. wide, course due N.
	220.	Center of wash, 6 ft. wide, course S.40° W.
	330.00	Cor. No. 3, identical with a cor. of the location.
134		3010 102
	7	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 13 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 3-R6 MS 4823B; from which
		The W. face of a 5 ft. high rock ledge bears N.24°35' W., 8.26 ft. dist., marked X BO 3-R6 MS 4823B.
		The W. face of a 6 ft. high rock ledge bears S.49°55' E., 35.43 ft. dist., marked X BO 3-R6 MS 4823B.
		Thence S. 0°10'46" E.
	520.	Center of wash, 5 ft. wide, course N.85° W.
ш	660.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #21 mill site of this survey and with a cor. of the location.
	Ţ.	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 15 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-R6 4-R21 MS 4823B.
9	пт	No local bearing objects or bearing trees available.
		Thence S.89°49'14" W.
	105.	Center of wash, 25 ft. wide, course N.25° E.
9	330.00	Cor. No. 1, and place of beginning.
		RUF #7 mill site
		Beginning at Cor. No. 1 RUF #7 mill site, identical with Cor. No. 1 of the RUF #6, Cor. No. 1 of the RUF #20, and Cor. No. 1 of the RUF #21, all mill sites of this survey, and with a
-		cor. of the location.
		Thence N. 0°10'46" W.
1	120.	Center of wash, 8 ft. wide, course S.60° W.

	FEET	
	660.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #6 mill site of this survey and with a cor. of the location.
		Thence S.89°49'14" W.
	55.	Center of wash, 8 ft. wide, course S.40° W.
	330.00	Cor. No. 3, identical with Cor. No. 2 of the RUF #8 mill site of this survey and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 11 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 3-R7 2-R8 MS 4823B.
		No local bearing objects or bearing trees available.
	78 - 6	Thence S. 0°10'46" E.
	350.	Center of wash, 10 ft. wide, course N.85° W.
	495.	Center of wash, 2 ft. wide, course N.80° W.
	660.00	Cor. No. 4, identical with Cor. No. 3 of the RUF #8, Cor. No. 3 of the RUF #19, and Cor. No. 4 of the RUF #20, all mill sites of this survey, and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 12 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-R7 3-R8 3-R19 4-R20 MS 4823B.
-	par et.	No local bearing objects or bearing trees available.
		Thence N.89°49'14" E.
	205.	Center of wash, 12 ft. wide, course due S.
	330.00	Cor. No. 1, and place of beginning.
	4	
		RUF #8 mill site
		Beginning at Cor. No. 1 RUF #8 mill site, identical with Cor. No. 1 of the RUF #5 and Cor. No. 1 of the RUF #9, both mill sites of this survey, and with a cor. of the location.
		Thence N.89°49'14" E.
	330.00	Cor. No. 2, identical with Cor. No. 3 of the RUF #7 mill site of this survey and with a cor. of the location.
		Thence S. 0°10'46" E.

Form 9600-19 (May 1978) (formerly 9180-21)

(Ionnerry 9100		
	FEET	s the of lare to respect that
	350.	Center of wash, 10 ft. wide, course N.85° W.
	495.	Center of wash, 2 ft. wide, course N.80° W.
	660.00	Cor. No. 3, identical with Cor. No. 4 of the
	w 6 .m	RUF #7, Cor. No. 3 of the RUF #19, and Cor. No. 4 of the RUF #20, all mill sites of this
		survey, and with a cor. of the location.
	Eu ¹	Thence S.89°49'14" W.
	330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #9, Cor. No. 4 of the RUF #18, and Cor. No. 4 of the RUF #19, all mill sites of this survey, and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 13 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-R8 4-R9 4-R18 4-R19 MS 4823B.
		No local bearing objects or bearing trees available.
		Thence N. 0°10'46" W.
	55.	Center of wash, 5 ft. wide, course N.85° W.
	260.	Center of wash, 30 ft. wide, course N.80° W.
	385.	Center of wash, 3 ft. wide, course N.75° W.
	660.00	Cor. No. 1, and place of beginning.
	177	n nyakis .20 f., drawis ne earlis
		RUF #9 mill site
		Beginning at Cor. No. 1 RUF #9 mill site, identical with Cor. No. 1 of the RUF #5 and Cor. No. 1 of the RUF #8, both mill sites of this survey, and with a cor. of the location.
		Thence S.89°49'14" W.
	275.	Center of wash, l ft. wide, course due S.
	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #5, and Cor. No. 2 of the RUF #10, all mill sites of this survey, and with a cor. of the location.
	1101=	Thence S. 0°10'46" E.
	80.	Center of road, 10 ft. wide, course N.10° W. and S.80° E.
	90.	Center of wash, 2 ft. wide, course S.40° W.
	120.	Center of wash, 1 ft. wide, course S.40° W.
	150.	Center of wash, 3 ft. wide, course N.80° W.

FEET	
170.	Center of road, 10 ft. wide, course N.85° W. and S.85° E.
250.	Center of wash, 35 ft. wide, course N.85° W.
495.	Center of wash, 15 ft. wide, course N.65° W.
660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #10, Cor. No. 3 of the RUF #17, and Cor. No. 3 of the RUF #18, all mill sites of this survey, and with a cor. of the location.
76 P. S. P.	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 2 ft. high, N. of cor., marked the aluminum cap 3-R9 3-R10 3-R17 3-R18 MS 4823B.
to the property	No local bearing objects or bearing trees available.
	Thence N.89°49'14" E.
270.	Center of wash, 10 ft. wide, course N.25° W.
330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #8, Cor. No. 4 of the RUF #18, and Cor. No. 4 of the RUF #19, all mill sites of this survey, and with a cor. of the location.
	Thence N. 0°10'46" W.
55.	Center of wash, 5 ft. wide, course N.85° W.
260.	Center of wash, 30 ft. wide, course N.80° W.
385.	Center of wash, 3 ft. wide, course N.75° W.
660.00	Cor. No. 1, and place of beginning.
	RUF #10 mill site
	Beginning at Cor. No. 1 RUF #10 mill site, identical with Cor. No. 1 of the RUF #3, Cor. No. 1 of the RUF #4, and Cor. No. 1 of the RUF #11, all mill sites of this survey, and with a cor. of the location.
100	Thence N.89°49'14" E.
10.	Center of wash, 6 ft. wide, course S. 5° E.
145.	Center of wash, 6 ft. wide, course S.10° E.
330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #4, Cor. No. 2 of the RUF #5, and Cor. No. 2 of the RUF #9, all mill sites of this survey, and with a cor. of the location.
	Thence S. 0°10'46" E.
80.	Center of road, 10 ft. wide, course N.10° W. and S.80° E.

		
	90.	Center of wash, 2 ft. wide, course S.40° W.
	120.	Center of wash, 1 ft. wide, course S.40° W.
	150.	Center of wash, 3 ft. wide, course N.80° W.
	170.	Center of road, 10 ft. wide, course N.85° W. and S.85° E.
	250.	Center of wash, 35 ft. wide, course N.85° W.
	495.	Center of wash, 15 ft. wide, course N.65° W.
	660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #9, Cor. No. 3 of the RUF #17, and Cor. No. 3 of the RUF #18, all mill sites of this survey, and with a cor. of the location.
	1 11	Thence S.89°49'14" W.
	290.	Center of wash, 4 ft. wide, course N.10° W.
	305.	Center of road, 10 ft. wide, course N.25° W. and S.25° E.
	330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #11, Cor. No. 4 of the RUF #16, and Cor. No. 4 of the RUF #17, all mill sites of this survey, and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 12 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-R10 4-R11 4-R16 4-R17 MS 4823B; from which
TIO .	21 T	The NE. face of a 4 ft. high rock ledge bears S.43°07' W., 31.71 ft. dist., marked X BO 4-R10 4-R11 4-R16 4-R17 M.S. 4823B.
		The NE. face of a 12 ft. high rock ledge bears N.53°05' W., 80.14 ft. dist., marked X BO 4-R10 4-R11 4-R16 4-R17 MS 4823B.
		Thence N. 0°10'46" W.
	55.	Center of road, 10 ft. wide, course N.40° W. and S.40° E.
	85.	Center of wash, 4 ft. wide, course N.45° W.
	480.	Center of wash, 30 ft. wide, course N.80° W.
	510.	Center of road, 10 ft. wide, course N.75° W. and S.75° E.
	560.	Center of wash, 4 ft. wide, course S.50° W.
	660.00	Cor. No. 1, and place of beginning.
		727.27
	-	and a second
	1	

FEET	
9.3	<u></u>
. 1	RUF #11 mil1 site
- 10 and	At Cor. No. 1, identical with Cor. No. 1 of the RUF #3, Cor. No. 1 of the RUF #4, and Cor. No. 1 of the RUF #10, all mill sites of this survey, and with a cor. of the location.
. 1995	Thence S.89°49'14" W.
330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #2, Cor. No. 2 of the RUF #3, and Cor. No. 2 of the RUF #12, all mill sites of this survey, and with a cor. of the location.
	Thence S. 0°10'46" E.
70.	Center of wash, 2 ft. wide, course N.85° W.
140.	Center of road, 10 ft. wide, course due W. and E.
340.	Center of wash, 20 ft. wide, course S.70° W.
520.	Center of road, 8 ft. wide, course N.80° E. and S.80° W.
645.	Center of road, 10 ft. wide, course N.65° E. and S.65° W.
660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #12, Cor. No. 3 of the RUF #15, and Cor. No. 3 of the RUF #16, all mill sites of this survey, and with a cor. of the location.
	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 15 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 3-R11 3-R12 3-R15 3-R16 M.S. 4823B.
	No local bearing objects or bearing trees available.
	Thence N.89°49'14" E.
330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #10, Cor. No. 4 of the RUF #16, and Cor. No. 4 of the RUF #17, all mill sites of this survey, and with a cor. of the location.
	Thence N. 0°10'46" W.
55.	Center of road, 10 ft. wide, course N.40° W. and S.40° E.
85.	Center of wash, 4 ft. wide, course N.45° W.
480.	Center of wash, 30 ft. wide, course N.80° W.
510.	Center of road, 10 ft. wide, course N.75° W. and S.75° E.
560.	Center of wash, 4 ft. wide, course S.50° W.

	FEET	
	660.00	Cor. No. 1, and place of beginning.
		RUF #12 mill site
		Beginning at Cor. No. 1 RUF #12 mill site, identical with Cor. No. 1 of the RUF #1, Cor. No. 1 of the RUF #2, and Cor. No. 1 of the RUF #13, all mill sites of this survey, and with a cor. of the location.
		Thence N.89°49'14" E.
	105.	Center of road, 14 ft. wide, course N. 5° E. and S. 5° W.
	240.	Center of wash, 12 ft. wide, course S.15° W.
	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #2, Cor. No. 2 of the RUF #3, and Cor. No. 2 of the RUF #11, all mill sites of this survey, and with a cor. of the location.
	- 11	Thence S. 0°10'46" E.
=1	70.	Center of wash, 2 ft. wide, course N.85° W.
9	140.	Center of road, 10 ft. wide, course due W. and E.
	340.	Center of wash, 20 ft. wide, course S.70° W.
	520.	Center of road, 8 ft. wide, course N.80° E. and S.80° W.
	645.	Center of road, 10 ft. wide, course N.65° E. and S.65° W.
:	660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #11, Cor. No. 3 of the RUF #15, and Cor. No. 3 of the RUF #16, all mill sites of this survey, and with a cor. of the location.
		Thence S.89°49'14" W.
11	30.	Center of road, 10 ft. wide, course N.60° E. and S.60° W.
180	330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #13, Cor. No. 4 of the RUF #14, and Cor. No. 4 of the RUF #15, all mill sites of this survey, and with a cor. of the location.
-		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-R12 4-R13 4-R14 4-R15 M.S. 4823B.
		No local bearing objects or bearing trees available.
		Thence N. 0°10'46" W.

г еет 55.	Center of road, 14 ft. wide, course N.35° E. and S.35° W.
230.	Left bank wash, 15 ft. wide, course due S.
285.	Left bank wash, 15 ft. wide, course S.10° E.
350.	Junction of two washes, 30 ft. wide from the E., 10 ft. wide from the N., course of outlet S.10° W.
450.	Center of wash, 10 ft. wide, course S.45° W.
485.	Center of road, 8 ft. wide, course N.45° W. and S.45° E.
510.	Center of wash, 14 ft. wide, course S.20° E.
660.00	Cor. No. 1, and place of beginning.
10.00	gat form a fire of
	RUF #13 mill site
	Beginning at Cor. No. 1 RUF #13 mill site, identical with Cor. No. 1 of the RUF #1, Cor. No. 1 of the RUF #2, and Cor. No. 1 of the RUF #12, all mill sites of this survey, and with a cor. of the location.
	Thence S.89°49'14" W.
100.	Center of wash, 14 ft. wide, course S.45° E.
135.	Center of road, 8 ft. wide, course N.40° W. and S.40° E.
330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #1 mill site of this survey and with a cor. of the location.
100	Thence S. 0°10'46" E.
335.	Right bank of sand wash, 35 ft. wide, course due S.
400.	Right bank of sand wash, 25 ft. wide, course due S.
495.	Right bank of sand wash, 40 ft. wide, course S.15° W.
660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #14 mill site of this survey and with a cor. of the location.
	This Cor. falls on the left bank of a sand wash, 100 ft. wide, course S.15° W., where a permanent monument cannot be established; from which

F	ET	
	A	point for witness cor. No. 3, bears S.°10'46"E., 30 ft. dist., set a 3/4 ins. diam. galvanized iron pipe, 26 ins. long, 13 ins. in the ground surrounded by a 3 ft. diam. mound of stone to the top, with a 2 ins. aluminum cap marked W.C. 3-R13 3-R14 M.S. 4823B.
220	. Cen	Thence N.89°49'14" E. ter of road, 10 ft. wide, course N.35° W. S.35° E.
290		ter of road, 14 ft. wide, course N.35° E. S.35° W.
330	RUF No.	**No. 4, identical with Cor. No. 4 of the #12, Cor. No. 4 of the RUF #14, and Cor. 4 of the RUF #15, all mill sites of this vey, and with a cor. of the location.
		Thence N. 0°10'46" W.
55		ter of road, 14 ft. wide, course N.35° E. S.35° W.
230	Left	t bank wash, 15 ft. wide, course due S.
285	. Left	t bank wash, 15 ft. wide, course S.10° E.
350	Ε.,	ction of two washes, 30 ft. wide from the 10 ft. wide from the N., course of outlet)° W.
450	. Cent	ter of wash, 10 ft. wide, course S.45° W.
485		ter of road, 8 ft. wide, course N.45° W. S.45° E.
510	. Cent	ter of wash, 14 ft. wide, course S.20° E.
660	.00 Cor.	No. 1, and place of beginning.
		1.5 1.5
9		RUF #14 mill site
	ide Cor	inning at Cor. No. 1 RUF #14 mill site, ntical with Cor. No. 1 of the RUF #15 and . No. 1 of the RUF #24, both mill sites of survey, and with a cor. of the location.
	ins a 3 ins	a 3/4 in. diam. galvanized iron pipe, 26. long, 10 ins. in the ground, surrounded by ft. diam. mound of stone to top, with a 2. diam. aluminum cap marked 1-R14 1-R15. 44 M.S. 4823B.
	Ti	ne cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N.32°31'38"E., 2353.08 ft. dist., heretofore described.
		local bearing objects or bearing trees
		Thence S.89°49'14" W.

	FEET	
	155.	Center of wash, 10 ft. wide, course due S.
		100 miles
	225.	Center of road, 14 ft. wide, course N.30° E.
		and S.30° W.
	295.	Center of wash, 6 ft. wide, course due S.
	330.00	Cor. No. 2, identical with Cor. No. 5 of the
		RUF #24 mill site of this survey and with a
		cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26
		ins. long, 13 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2
		ins. diam. aluminum cap marked 2-R14 5-R24 M.S.
		4823B.
		No local bearing objects or bearing trees
		available.
		Thence N. 0°10'46" W.
	185.	Center of road, 14 ft. wide, course N.30° E.
		and S.30° W.
Ì	395.	Center of wash, 2 ft. wide, course S.50° W.
	560.	Center of wash, 6 ft. wide, course N.85° W.
	500.	Center of wash, o it. wide, course w.o.
	630.00	Witness Cor. No. 3, identical with witness Cor. No. 3 of the RUF #13 mill site of this survey.
		No. 3 of the Kor #13 mill site of this survey.
	660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #13 mill site of this survey and with a
	,	cor. of the location.
		Thence N.89°49'14" E.
ļ		
	220.	Center of road, 10 ft. wide, course N.35° W. and S.35° E.
		y fin a second s
	290.	Center of road, 14 ft. wide, course N.35° E. and S.35° W.
I	330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #12, Cor. No. 4 of the RUF #13, and Cor.
		No. 4 of the RUF $\#15$, all mill sites of this
	163 . 4	survey, and with a cor. of the location.
		Thence S. 0°10'46" E.
	85.	Center of road, 8 ft. wide, course N.85° W.
		and S.85° E.
	145.	Center of road, 10 ft. wide, course N.65° E.
	2,00	and S.65° W.
	290.	Center of wash, 2 ft. wide, course S.65° W.
		35150 0 12
	350.	Center of wash, 3 ft. wide, course due W.
	575.	Center of wash, 8 ft. wide, course S.65° W.

	FEET	T T
	660.00	Cor. No. 1, and place of beginning.
		RUF #15 mill site
		Beginning at Cor. No. 1 RUF #15 mill site, identical with Cor. No. 1 of the RUF #14 and Cor. No. 1 of the RUF #24, both mill sites of this survey, and with a cor. of the location.
		Thence N.89°49'14" E.
	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #16 mill site of this survey and with a cor. of the location.
	ar es a	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 3 ft. high, W. of cor., marked the aluminum cap 2-R15 2-R16 M.S. 4823B.
	· · · · ·	No local bearing objects or bearing trees available.
		Thence N. 0°10'46" W.
	100.	Center of wash, 5 ft. wide, course N.60° W.
	660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #11, Cor. No. 3 of the RUF #12, and Cor. No. 3 of the RUF #16, all mill sites of this
	1	survey, and with a cor. of the location.
		Thence S.89°49'14" W.
	30.	Center of road, 10 ft. wide, course N.60° E. and S.60° W.
10 g	330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #12, Cor. No. 4 of the RUF #13, and Cor. No. 4 of the RUF #14, all mill sites of this survey, and with a cor. of the location.
		Thence S. 0°10'46" E.
	85.	Center of road, 8 ft. wide, course N.85° W. and S.85° E.
	145.	Center of road, 10 ft. wide, course N.65° E. and S.65° W.
	290.	Center of wash, 2 ft. wide, course S.65° W.
	350.	Center of wash, 3 ft. wide, course due W.
=	575.	Center of wash, 8 ft. wide, course S.65° W.
	660.00	Cor. No. 1, and place of beginning.
		and the second s
L		
1	1	

FEET			
	RUF #16 mill site		
	Beginning at Cor. No. 1 RUF #16 mill site, identical with Cor. No. 1 of the RUF #17 mill site of this survey and with a cor. of the location.		
	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 15 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R16 1-R17 M.S. 4823B; from which		
	The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N. 16°58'55"E., 2072.26 ft. dist., heretofore described.		
	No local bearing objects or bearing trees available.		
	Thence S.89°49'14"W.		
330.00	No. 2, identical with Cor. No. 2 of the RUF #15 mill site of this survey and with a cor. of the location.		
N of the	Thence N. 0°10'46" W.		
100.	Center of wash, 5 ft. wide, course N.60° W.		
660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #11, Cor. No. 3 of the RUF #12, and Cor. No. 3 of the RUF #15, all mill sites of this survey, and with a cor. of the location.		
717.P (may)	Thence N.89°49'14" E.		
330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #10, Cor. No. 4 of the RUF #11, and Cor. No. 4 of the RUF #17, all mill sites of this survey, and with a cor. of the location.		
	Thence S. 0°10'46" E.		
610.	Center of wash, 3 ft. wide, course N.85° W.		
660.00	Cor. No. 1, and place of beginning.		
Page II of page II			
	RUF #17 mill site		
U :40 L :42 4	Beginning at Cor. No. 1 RUF #17 mill site, identical with Cor. No. 1 of the RUF #16 mill site of this survey and with a cor. of the location.		
	Thence N.89°49'14" E.		
205.	Center of wash, 2 ft. wide, course N.55° W.		

(·	
9	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #18 and Cor. No. 6 of the RUF #23, both mill sites of this survey, and with a cor. of the location.
	2	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 2 ft. high, N. of cor., marked the aluminum cap 2-R17 2-R18 6-R23 M.S. 4823B.
	,	No local bearing objects or bearing trees available.
	1	Thence N. 0°10'46" W.
	115.	Center of road, 10 ft. wide, course N.15° W. and S.15° E.
	270.	Center of wash, 4 ft. wide, course N.35° W.
	375.	Center of wash, 2 ft. wide, course N.70° W.
	660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #9, Cor. No. 3 of the RUF #10, and Cor. No. 3 of the RUF #18, all mill sites of this survey, and with a cor. of the location.
- 1		Thence S.89°49'14" W.
	290.	Center of wash, 4 ft. wide, course N.10° W.
:	305.	Center of road, 10 ft. wide, course N.25° W. and S.25° E.
: 1	330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #10, Cor. No. 4 of the RUF #11, and Cor. No. 4 of the RUF #16, all mill sites of this survey, and with a cor. of the location.
		Thence S. 0°10'46" E.
:	610.	Center of wash, 3 ft. wide, course N.85° W.
	660.00	Cor. No. 1, and place of beginning.
		ograndson i resette i st. d. 1 atti 169 i 10.027
		RUF #18 mill site
	1 115 or 1 15 or	Beginning at Cor. No. 1 RUF #18 mill site, identical with Cor. No. 1 of the RUF #19, Cor. No. 1 of the RUF #22, and Cor. No. 1 of the RUF #23, all mill sites of this survey, and with a cor. of the location.
	8 % =	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-R18 1-R19 1-R22 1-R23 M.S. 4823B; from which
	* x _v l	The cor. of secs. 1,2,11, and 12, T.4 S., R.23 W., G.&S.R.M., bears N. 1°35'01"W., 1980.60 ft. dist., heretofore described.

	FEET	No local bearing objects or bearing trees
		available.
		Thence S.89°49'14" W.
	90.	Center of wash, 4 ft. wide, course N.65° W.
1 =	145.	Center of wash, 4 ft. wide, course N.20° W.
	240.	Center of road, 10 ft. wide, course N.60° W. and S.60° E.
	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #17 and Cor. No. 6 of the RUF #23, both mill sites of this survey, and with a cor. of the location
-	-	Thence N. 0°10'46" W.
	115.	Center of road, 10 ft. wide, course N.15° W. and S.15° E.
	270.	Center of wash, 4 ft. wide, course N.35° W.
	375.	Center of wash, 2 ft. wide, course N.70° W.
	660.00	Cor. No. 3, identical with Cor. No. 3 of the RUF #9, Cor. No. 3 of the RUF #10, and Cor. No. 3 of the RUF #17, all mill sites of this survey, and with a cor. of the location.
		Thence N.89°49'14" E.
	270.	Center of wash, 10 ft. wide, course N.25° W.
	330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #8, Cor. No. 4 of the RUF #9, and Cor. No. 4 of the RUF #19, all mill sites of this survey, and with a cor. of the location.
		Thence S. 0°10'46" E.
	75.	Center of wash, 10 ft. wide, course N.60° W.
	575.	Center of wash, 4 ft. wide, course S.65° W.
	660.00	Cor. No. 1, and place of beginning.
	677	RUF #19 mill site
	20 Em	Beginning at Cor. No. 1 RUF #19 mill site, identical with Cor. No. 1 of the RUF #18, Cor. No. 1 of the RUF #22, and Cor. No. 1 of the RUF #23, all mill sites of this survey, and with a cor. of the location.
	-tau	Thence N.89°49'14" E.
	45.	Center of wash, 3 ft. wide, course S.60° W.
	95.	Center of wash, 3 ft. wide, course N.70° W.

FEET	
330.00	Cor. No. 2, identical with Cor. No. 3 of the RUF #20 and Cor. No. 2 of the RUF #22, both mill sites of this survey, and with a cor. of the location.
1	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 11 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-R19 3-R20 2-R22 M.S. 4823B; from which
	The top of a 4 ft. X 6 ft. boulder, 4 ft. high, bears S. 4°02' W., 63.03 ft. dist., marked X BO 2-R19 3-R20 2-R22 M.S. 4823B.
	No other local bearing objects or bearing trees available.
	Thence N. 0°10'46" W.
130.	Center of wash, 2 ft. wide, course N.50° W.
535.	Center of wash, 10 ft. wide, course S.65° W.
660.00	Cor. No. 3, identical with Cor. No. 4 of the RUF #7, Cor. No. 3 of the RUF #8, and Cor. No. 4 of the RUF #20, all mill sites of this survey, and with a cor. of the location.
	Thence S.89°49'14" W.
330.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #8, Cor. No. 4 of the RUF #9, and Cor. No. 4 of the RUF #18, all mill sites of this survey, and with a cor. of the location.
110	Thence S. 0°10'46" E.
75.	Center of wash, 10 ft. wide, course N.60° W.
575.	Center of wash, 4 ft. wide, course S.65° W.
660.00	Cor. No. 1, and place of beginning.
	the state of the s
- 1	RUF #20 mill site
* . Y	Beginning at Cor. No. 1 RUF #20 mill site, identical with Cor. No. 1 of the RUF #6, Cor. No. 1 of the RUF #7, and Cor. No. 1 of the RUF #21, all mill sites of this survey, and with a cor. of the location.
	Thence S. 0°10'46" E.
135.	Center of wash, 3 ft. wide, course N.40° W.
660.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #21 mill site of this survey and with a cor. of the location.
	A CONTRACTOR OF THE PROPERTY O
	1125 1 3 3 3 1 1 1

 · · · · · · · · · · · · · · · · · · ·	
FEET	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-R20 2-R21 M.S. 4823B.
. =====================================	No local bearing objects or bearing trees available.
	Thence S.89°49'14" W.
330.00	Cor. No. 3, identical with Cor. No. 2 of the RUF #19 and Cor. No. 2 of the RUF #22, both mill sites of this survey, and with a cor. of the location.
	Thence N. 0°10'46" W.
130.	Center of wash, 2 ft. wide, course N.50° W.
535.	Center of wash, 10 ft. wide, course S.65° W.
660.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #7, Cor. No. 3 of the RUF #8, and Cor. No. 3 of the RUF #19, all mill sites of this survey, and with a cor. of the location.
	Thence N.89°49'14" E.
205.	Center of wash, 12 ft. wide, course due S.
330.00	Cor. No. 1, and place of beginning.
x 112	RUF #21 mill site
	Beginning at Cor. No. 1 RUF #21 mill site, identical with Cor. No. 1 of the RUF #6, Cor. No. 1 of the RUF #7, and Cor. No. 1 of the RUF #20, all mill sites of this survey, and with a cor. of the location.
	Thence S. 0°10'46" E.
135.	Center of wash, 3 ft. wide, course N.40° W.
660.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #20 mill site of this survey and with a cor. of the location. Thence N.89°49'14" E.
330.00	Cor. No. 3, identical with a cor. of the location.
	Set an aluminum cap 2 ins. diam., 2 1/2 ins. stem, in concrete, at ground surface, raised a mound of stone, 3 ft. base, 3 ft. high, W. of cor., marked the aluminum cap 3-R21 M.S. 4823B; from which
	The NE. face of a 4 ft. high rock ledge bears N.54°35' W., 59.86 ft. dist., marked X BO 3-R21 M.S. 4823B.
	. 12

	FEET	The NE. face of a 2 ft. high rock ledge bears N. 0°43' E., 78.95 ft. dist., marked X BO 3-R21 M.S. 4823B.
	11	Thence N. 0°10'46" W.
	110.	Center of wash, 2 ft. wide, course N.25° W.
	590.	Center of wash, 6 ft. wide, course S.80° W.
	660.00	Cor. No. 4, identical with Cor. No. 4 of the RUF #6 mill site of this survey and with a cor. of the location.
	= =	Thence S.89°49'14" W.
	105.	Center of wash, 25 ft. wide, course N.25° E.
	330.00	Cor. No. 1, and place of beginning.
	3 1	renorm for company to a 21 King House
		RUF #22 mill site
	10 00 0	Beginning at Cor. No. 1 RUF #22 mill site, identical with Cor. No. 1 of the RUF #18, Cor. No. 1 of the RUF #19, and Cor. No. 1 of the RUF #23, all mill sites of this survey, and with a cor. of the location.
i		Thence N.89°49'14 E.
	45.	Center of wash, 3 ft. wide, course S.60° W.
	95.	Center of wash, 3 ft. wide, course N.70° W.
	330.00	Cor. No. 2, identical with Cor. No. 2 of the RUF #19 and Cor. No. 3 of the RUF #20, both mill sites of this survey, and with a cor. of the location.
		Thence S. 0°10'46" E.
	466.47	Cor. No. 3, identical with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 17 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 3-R22 M.S. 4823B; from which
		The S. face of a 8 ft. long ledge, 2 ft. high, bears N.31°58' E., 41.94 ft. dist., marked X BO 3-R22 M.S. 4823B.
	_ =	The top of a 4 ft. sq. ledge, 2 ft. high, on the S. bank of wash, bears S.41°04' E., 61.43 ft. dist., marked X BO 3-R22 M.S. 4823B.
		Thence S.46°32'50" W.
	240.	Center of road, 10 ft. wide, course N.30° W. and S.30° E.

_		
	FEET 282.33	Cor. No. 4, identical with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 13 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-R22 M.S. 4823B.
		No local bearing objects or bearing trees available.
		Thence S.89°49'14" W.
	124.43	Cor. No. 5, identical with Cor. No. 2 of the RUF #23 mill site of this survey and with a cor. of the location.
		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 12 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 5-R22 2-R23 M.S. 4823B.
u		No local bearing objects or bearing trees available.
		Thence N. 0°10'46" W.
-	145.	Center of road, 10 ft. wide, course N.50° W. and S.50° E.
ŀ	195.	Center of wash, 1 ft. wide, course N.45° W.
	260.	Center of wash, 2 ft. wide, course due W.
	575.	Center of wash, 2 ft. wide, course N.60° W.
	645.	Center of wash, 3 ft. wide, course due W.
	660.00	Cor. No. 1, and place of beginning.
		The state of the s
		RUF #23 mill site
		Beginning at Cor. No. 1 RUF #23 mill site, identical with Cor. No. 1 of the RUF #18, Cor. No. 1 of the RUF #22, all mill sites of this survey, and with a
		cor. of the location.
	100	Thence S. 0°10'46" E.
	15.	Center of wash, 3 ft. wide, course due W.
	85.	Center of wash, 2 ft. wide, course N.60° W.
	400.	Center of wash, 2 ft. wide, course due W.
	465.	Center of wash, 1 ft. wide, course N.45° W.
	515.	Center of road, 10 ft. wide, course N.50° W. and S.50° E.
		5.

(Ionnerly 9100—1	PROCESS OF THE PROCESS	
191 191	FEET 660.00	Cor. No. 2, identical with Cor. No. 5 of the RUF #22 mill site of this survey and with a cor. of the location.
		Thence S.89°49'14" W.
	91.60	Cor. No. 3, on line SENE., General Number 246 Silver Glance lode Lot No. 38, identical with a cor. of the location.
	Arrivalari	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 3-R23 M.S. 4823B; from which
		The top of a 2 ft. X 3 ft. boulder, 1 ft. high, bears S.40°09'E., 50.65 ft. dist., marked X BO 3-R23 M.S. 4823B.
keri keri		The top of a 1 ft. X 2 ft. boulder, 1 ft. high, bears S.29°28'E., 75.03 ft. dist., marked X BO 3-R23 M.S. 4823B.
- 14-1	1000	Thence N.13°22'01"W.
	350.	Center of road, 10 ft. wide, course N.25° W. and S.25° E.
7.99 7.00	445.	Center of road, 10 ft. wide, course N. 5° E. and S. 5° E.
1 Ac	521.83	Cor. No. 4, identical with NE. Cor. General Number 246, Silver Glance lode Lot No. 38, and with a cor. of the location.
	12 G-226	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 14 ins. in the ground, in the original mound of stone, with a 2 ins. diam. aluminum cap marked 4-R23 U.S.S.37.N.E. M.S. 4823B.
		No local bearing objects or bearing trees available.
		Thence S.76°51'54" W.
	95.	Center of wash, 2 ft. wide, course N.10° E.
	122.46	Cor. No. 5, on line NEN., General Number 246, Silver Glance lode Lot No. 38, identical with a cor. of the location.
	olpear s	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 15 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 5-R23 M.S. 4823B.
		No local bearing objects or bearing trees available.
		Thence N. 0°10'46" W.
	85.	Center of wash, 2 ft. wide, course N.50° W.
	March 1	

	FEET	
	179.38	Cor. No. 6, identical with Cor. No. 2 of the RUF #17 and Cor. No. 2 of the RUF #18, both mill sites of this survey, and with a cor. of the location.
		Thence N.89°49'14" E.
	90.	Center of road, 10 ft. wide, course N.60° W. and S.60° E.
2	185.	Center of wash, 4 ft. wide, course N.20° W.
	240.	Center of wash, 4 ft. wide, course N.65° W.
	330.00	Cor. No. 1, and place of beginning.
		RUF #24 mill site
	1 ,700lin in :7 ,0,	Beginning at Cor. No. 1 RUF #24 mill site, identical with Cor. No. 1 of the RUF #14 and Cor. No. 1 of the RUF #15, both mill sites of this survey, and with a cor. of the location.
		Thence S. 0°'10'46"E.
	140.	Center of wash, 12 ft. wide, course N. 80°W.
	389.19	Cor. No. 2, on line NENW., M.S. No. 292 Pacific lode, identical with a cor. of the location.
	agin Noti	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 13 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 2-R24 M.S. 4823B.
	. 27 m. c.	No local bearing objects or bearing trees available.
		Thence N. 43°34'14"W.
	120.	Center of wash, 5 ft. wide, course S.40°W.
	140.	Center of road, 10 ft. wide, course N.20°E. and S.20°W.
A)	215.	Center of road, 10 ft. wide, course N. 85°E. and S.85°W.
	271.58	Cor. No. 3, identical with NW. cor. M.S. 292 Pacific lode, and with a cor. of the location.
4		Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 15 ins. in the ground, in the original mound of stone, with a 2 ins. diam. aluminum cap marked 3-R24 U.S.S.P.N.W. M.S. 4823B.
		No local bearing objects or bearing trees available.
	A 700 at	Thence S.46°32'11"W.

	ғеет 45.	Center of road, 10 ft. wide, course N.50°W. and S.50°E.
A.	197.01	Cor. No. 4, on line NWWC., M.S. No. 292 Pacific lode, identical with a cor. of the location.
	All a second	Set a 3/4 in. diam. galvanized iron pipe, 26 ins. long, 13 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 4-R24 M.S. 4823B.
		No local bearing objects or bearing trees available.
	N H I	Thence N. 0°10'46"W.
	200.	Center of wash, 15 ft. wide, course due W.
	326.91	Cor. No. 5, identical with Cor. No. 2 of the RUF #14 mill site of this survey and with a cor. of the location.
	d -8 - m	Thence N.89°49'14" E.
	35	Center of wash, 6 ft. wide, course due S.
	105.	Center of road, 14 ft. wide, course N.30° E. and S.30° W.
	175.	Center of wash, 10 ft. wide, course due S.
330.00		Cor. No. 1, and place of beginning.
	== 5.	Mineral Survey No. 4823 A and B
		AREAS Acres
		Total area, POP #9 lode20.661
		Total area, POP #10 lode20.661
		Total area, POP #11 lode20.661
		Total area, POP #13 lode20.661
	8 853	Total area, POP #14 lode20.661
		Total area, POP #15 lode20.661
		Total area, POP #16 lode20.661
		Total area, NJZ #1 mill site 5.000
		Total area, NJZ #2 mill site 5.000
	y _i	Total area, NJZ #3 mill site5.000
		10041 4204, 1104 15 1111
		Total area, G+W #1 mill site5.000

Mineral Survey No. 4823 A and B

	Timeral burvey No. 4025 A and B	
FEET	Total and the state of the stat	
	Total area, G+W #3 mill site5.000	
	Total area, G+W #4 mill site4.983	
	Total area, RUF #1 mill site5.000	
	Total area, RUF #2 mill site5.000	
	Total area, RUF #3 mill site5.000	
	Total area, RUF #4 mill site5.000	
	Total area, RUF #5 mill site5.000	
	Total area, RUF #6 mill site5.000	
	Total area, RUF #7 mill site5.000	
	Total area, RUF #8 mill site5.000	
	Total area, RUF #9 mill site5.000	
	Total area, RUF #10 mill site5.000	
	Total area, RUF #11 mill site5.000	
	Total area, RUF #12 mill site5.000	
	Total area, RUF #13 mill site5.000	
	A 10	
	Total area, RUF #14 mill site5.000	
	Total area, RUF #15 mill site5.000	
	Total area, RUF #16 mill site5.000	
	Total area, RUF #17 mill site5.000	
	Total area, RUF #18 mill site5.000	
	Total area, RUF #19 mill site5.000	
	Total area, RUF #20 mill site5.000	
	Total area, RUF #21 mill site5.000	
	Total area, RUF #22 mill site4.543	
	Total area, RUF #23 mill site2.951	
	Total area, RUF #24 mill site2.098	
	LOCATION	
n, e	This survey is located in the SW 1/4 and SE 1/4 Sec. 25, and the SE 1/4, SW 1/4, NE 1/4 and NW 1/4 Sec. 36, T.3 S., R.23 W., G.&S.R.M. and Secs. 11 and 12 T.4 S., R.23 W. (unsurveyed) G.&S.R.M. and is wholly within the amended locations as marked on the ground.	
- 1	· · · · · · · · · · · · · · · · · · ·	

FEET	
- Januarya Ma	EXPENDITURES
01 241	The improvements and the value of the labor and improvements made upon or for the benefit of each of the lode locations embraced in said mining claim by the claimant or its grantors are as follows:
No. 1	The point of discovery of the POP #9 lode bears N.68°02'24" E., 285.00 ft. dist. from the center of the W. end line. Value, none
No. 2	A drill hole, 2 ins. diam., 55 ft. long, running S.70° W., at an inclination of -45°, the collar of which bears N.11°28' E., 589.6 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$192.50
No. 3	A drill hole, 2 ins. diam., 70 ft. long, running S.70° W., at an inclination of -40°, the collar of which bears N.17°50' E., 507.0 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$245.00
No. 4	A drill hole, 2 ins. diam., 90 ft. long, running S.70° W., at an inclination of -40°, the collar of which bears N.26°37' E., 447.9 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$315.00
No. 5	A drill hole, 4 1/2 ins. diam., 162 ft. long, running due W., at an inclination of -40°, the collar of which bears N.36°36' E., 407.1 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$1825.74
No. 6	A drill hole, 2 ins. diam., 60 ft. long, running S.70° W., at an inclination of -40°, the collar of which bears N.38°41' E., 398.2 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$350.00
No. 7	A drill hole, 4 1/2 ins. diam., 202 ft. long, running S.70° W., at an inclination of -57°, the collar of which bears N.40°44' E., 430.0 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$2276.54
No. 8	A drill hole, 4 1/2 ins. diam., 122 ft. long, running S.71° W., at an inclination of -40°, the collar of which bears N.47°34' E., 379.0 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$1374.94
No. 9	A drill hole, 4 1/2 ins. diam., 202 ft. long, running S.70° W., at an inclination of -58°, the collar of which bears N.50°43' E., 437.4 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$2276.54
No. 10	A drill hole, 2 ins. diam., 110 ft. long, running S.70° W., at an inclination of -40°, the collar of which bears N.52°27' E., 388.4 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$385.00

Mineral Survey No. 4823 A and B

FEET	
No. 11	A drill hole, 4 1/2 ins. diam., 202 ft. long running S.68° W., at an inclination of -60°,
	the collar of which bears N.54°36' E., 423.2 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$2276.54
No. 12	A drill hole, 4 1/2 ins. diam., 142 ft. long, running S.70° W., at an inclination of -45°,
	the collar of which bears N.60°55' E., 382.5 ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$1600.34
No. 13	A drill hole, 4 1/2 ins. diam., 142 ft. long, running S.70° W., at an inclination of -43°, the collar of which bears N.40°35' E., 427.4
	ft. dist. from Cor. No. 1 of the POP #9 lode. Value, \$1600.34
No. 1	The discovery point of the POP #10 lode bears N.68°02'24" E., 475.00 ft. dist. from the
	center of the W. end line. Value, none
No. 2	A drill hole, 4 1/2 ins. diam., 117 ft. long, running S.71° W., at an inclination of -45°, the collar of which bears N.68°41' E., 382.4
main.	ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$1318.59
No. 3	A drill hole, 4 1/2 ins. diam., 177 ft. long, running S.70° W., at an inclination of -45°,
- 12 E61 *84- 30 **CA 1, 2	the collar of which bears N.72°40' E., 438.6 ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$1994.79
No. 4	A drill hole, 2 ins. diam., 60 ft. long, running S.70° W., at an inclination of -45°,
ic mail	the collar of which bears N.67°40' E., 379.5 ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$210.00
No. 5	A drill hole, 2 ins. diam., 110 ft. long, running S.40° W., at an inclination of -60°,
16 202 16 2012 2012	ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$385.00
No. 6	A drill hole, 5 ins. diam., 116 ft. long, running S.58° W., at an inclination of -35°,
15 00171 15 00171	the collar of which bears N.87°52' E., 472.1 ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$1102.00
No. 7	A drill hole, 4 1/2 ins. diam., 207 ft. long, running S.70° W., at an inclination of -85°,
11 BOY	the collar of which bears N.88°02' E., 573.6 ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$2332.89
No. 8	A drill hole, 5 ins. diam., 156 ft. long, running S.52° W., at an inclination of -35°,
to 10.12	the collar of which bears N.88°29' E., 558.7 ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$1482.00

7	No. 9	A drill hole, 2 ins. diam., 130 ft. long, running S.70° W., at an inclination of -40°, the collar of which bears S.83°34' E., 608.6 ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$455.00
+	No. 10	A drill hole, 2 ins. diam., 90 ft. long, running S.70° W., at an inclination of -35°, the collar of which bears S.65°41' E., 734.8 ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$315.00
	No. 11	A drill hole, 2 ins. diam., 60 ft. long, running N.70° E., at an inclination of -35°, the collar of which bears S.66°07' E., 754.3 ft. dist. from Cor. No. 2 of the POP #10 lode. Value, \$210.00
7. (1	No. 1	The discovery point of the POP #11 lode bears N.68°02'24" E., 410.00 ft. dist. from the center of the W. end line. Value, none
7. Et	No. 2	A drill hole, 2 ins. diam., 80 ft. long, running S.70° W., at an inclination of -30°, the collar of which bears N.22°18' E., 726.2 ft. dist. from Cor. No. 2 of the POP #11 lode. Value, \$280.00
7.80	No. 3	A drill hole, 2 ins. diam., 75 ft. long, running due W., at an inclination of -20°, the collar of which bears N.29°47' E., 580.5 ft. dist. from Cor. No. 2 of the POP #11 lode. Value, \$262.50
1.0	No. 4	A drill hole, 2 ins. diam., 120 ft. long, running due E., at an inclination of -55°, the collar of which bears N.32°48' E., 608.4 ft. dist. from Cor. No. 2 of the POP #11 lode. Value, \$420.00
	No. 5	A drill hole, 2 ins. diam., 70 ft. long, running S.70° W., at an inclination of -35°, the collar of which bears N.33°16' E., 515.4 ft. dist. from Cor. No. 2 of the POP #11 lode. Value, \$245.00
	No. 6	A drill hole, 2 ins. diam., 70 ft. long, running due W., at an inclination of -45°, the collar of which bears N.64°19' E., 327.7 ft. dist. from Cor. No. 2 of the POP #11 lode. Value, \$245.00
200	No. 7	A drill hole, 5 ins. diam., 136 ft. long, running due W., at an inclination of -50°, the collar of which bears N.67°29' E., 376.9 ft. dist. from Cor. No. 2 of the POP #11 lode. Value, \$1292.00
	No. 8	A drill hole, 4 1/2 ins. diam., 127 ft. long, running S.70° W., at an inclination of -55°, the collar of which bears N.66°16' E., 419.6 ft. dist. from Cor. No. 2 of the POP #11 lode. Value, \$1431.29

FEET	
No. 1	The discovery point of the POP #13 lode bears N.68°02'24" E., 255.00 ft. dist. from the
ate of the second	center of the W. end line. Value, none
	Value, 2055.00
No. 2	A drill hole, 2 ins. diam., 57 ft. long, running N.74° E., at an inclination of -50°,
10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -	the collar of which bears N.69°30' E., 439.7 ft. dist. from Cor. No. 2 of the POP #13 lode. Value, \$199.50
No. 3	A drill hole, 2 ins. diam., 85 ft. long,
- 10 70 10	running S.70° W., at an inclination of -40°, the collar of which bears N.84°46' E., 358.6
Variable of	ft. dist. from Cor. No. 2 of the POP #13 lode. Value, \$297.50
No. 4	A drill hole, 2 ins. diam., 53 ft. long,
d star in	running S.70° W., at an inclination of -39°,
1000	the collar of which bears N.86°20' E., 313.8 ft. dist. from Cor. No. 2 of the POP #13 lode. Value, \$185.50
No. 5	A drill hole, 2 ins. diam., 60 ft. long,
10 molen	running S.67° W., at an inclination of -32°,
Del 116-90	the collar of which bears S.72°52' E., 336.5 ft. dist. from Cor. No. 2 of the POP #13 lode.
	Value, \$210.00
No. 6	A drill hole, 5 ins. diam., 106 ft. long,
2 782 - 170 8	running S.65° W., at an inclination of -25°, the collar of which bears S.80°22' E., 388.5
also 11	ft. dist. from Cor. No. 2 of the POP #13 lode. Value, \$1007.00
No. 7	A drill hole, 2 ins. diam., 110 ft. long,
722 - 30cm	running S.70° W., at an inclination of -40°,
. 100	the collar of which bears S.69°15' E., 446.0 ft. dist. from Cor. No. 2 of the POP #13 lode.
	Value, \$385.00
No. 8	A drill hole, 2 ins. diam., 60 ft. long,
1 - TO BUILD	running S.87° W., at an inclination of -21°, the collar of which bears S.64°20' E., 430.4
	ft. dist. from Cor. No. 2 of the POP #13 lode.
	Value, \$210.00
	A drill hole, 2 ins. diam., 60 ft. long,
	running S.70° W., at an inclination of -25°, the collar of which bears S.56°59' E., 481.2
	ft. dist. from Cor. No. 2 of the POP #13 lode.
	Value, \$210.00
No. 10	A drill hole, 4 1/2 ins. diam., 177 ft. long,
Plant de n	running S.40° W., at an inclination of -55°, the collar of which bears S.57°07' E., 634.5
. sobuli iti	ft. dist. from Cor. No. 2 of the POP #13 lode. Value, \$1994.79
No. 11	A drill hole, 2 ins. diam., 95 ft. long,
7 - sas moida	running S.70° W., at an inclination of -50°,
1 11 10	the collar of which bears S.53°00' E., 586.7 ft. dist. from Cor. No. 2 of the POP #13 lode. Value, \$332.50

FEET	
No. 12	A drill hole, 2 ins. diam., 100 ft. long, running S.62° W., at an inclination of -45°, the collar of which bears S.52°08' E., 676.7 ft. dist. from Cor. No. 2 of the POP #13 lode. Value, \$350.00
No. 13	A drill hole, 5 ins. diam., 136 ft. long, running S.80° W., at an inclination of -20°, the collar of which bears S.64°08' E., 522.7 ft. dist. from Cor. No. 2 of the POP #13 lode. Value, \$1292.00
No. 1	The discovery point of the POP #14 lode bears N.68°02'24" E., 390.00 ft. dist. from the center of the W. end line. Value, none
No. 2	A drill hole, 5 ins. diam., 146 ft. long, running S.57° W., at an inclination of -18°, the collar of which bears N.15°32' E., 654.1 ft. dist. from Cor. No. 2 of the POP #14 lode. Value, \$1387.00
No. 3	A drill hole, 2 ins. diam., 80 ft. long, running S.76° W., at an inclination of -30°, the collar of which bears N.13°12' E., 578.6 ft. dist. from Cor. No. 2 of the POP #14 lode. Value, \$280.00
No. 1	The discovery point of the POP #15 lode bears N.68°02'24" E., 475.00 ft. dist. from the center of the W. end line. Value, none
No. 2	A drill hole, 2 ins. diam., 100 ft. long, running S.77° W., at an inclination of -45°, the collar of which bears S.62°53' E., 679.0 ft. dist. from Cor. No. 2 of the POP #15 lode. Value, \$514.00
No. 3	A drill hole, 4 1/2 ins. diam., 152 ft. long, running S.77° W., at an inclination of -60°, the collar of which bears S.64°51' E., 715.9 ft. dist. from Cor. No. 2 of the POP #15 lode. Value, \$1713.04
No. 4	A drill hole, 4 1/2 ins. diam., 127 ft. long, running S.77° W., at an inclination of -45°, the collar of which bears S.59°49' E., 744.0 ft. dist. from Cor. No. 2 of the POP #15 lode. Value, \$1431.29
No. 1	The discovery point of the POP #16 lode bears N.68°02'24" E., 385.00 ft. dist. from the center of the W. end line. Value, none
No. 2	A drill hole, 2 ins. diam., 80 ft. long, running S.77° W., at an inclination of -25°, the collar of which bears N.76°18' E., 399.4 ft. dist. from Cor. No. 1 of the POP #16 lode. Value, \$411.20

No. 3

A drill hole, 4 1/2 ins. diam., 162 ft. long, running S.77° W., at an inclination of -60°, the collar of which bears N.76°20' E., 451.5 ft. dist. from Cor. No. 1 of the POP #16 lode. Value, \$1825.74

OTHER IMPROVEMENTS

A trench, 5 ft. wide, 3 ft. to 8 ft. deep, 45 ft. long, running N.75° E. and S.75° W., the center of which bears N.56°05' E., 368. ft. dist. from Cor. No. 1 of the POP #9 lode.

Claimant unknown

An adit, 5 ft. X 6 ft., with approximately 450 ft. of associated workings, running S.10° W., the portal of which bears N.73°53' E., 556. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

An open stope, 6 ft. wide, 100 ft. long, running N.25° W. and S.25° E., which connects with the adit described above, the center of which bears S.85°12' E., 534. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

An open stope, 8 ft. wide, 40 ft. long, running N.40° W. and S.40° E., which connects with the adit described above, the center of which bears N.86°07' E., 370. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

A shaft, 6 ft. sq., approximately 70 ft. deep, which connects with the adit described above, bears N.88°51' E., 503. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

An adit, 5 ft. X 7 ft., with approximately 175 ft. of associated workings, running S.20° W., the portal of which bears N.79°13' E., 397. ft. dist. from Cor. No. 2 of the POP #10 lode. Claimant unknown

A shaft, 8 ft. sq., 10 ft. deep, with a drift of unknown extent at the bottom running NW., bears S.89°01' E., 473. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

A shaft, 5 ft. X 7 ft., 9 ft. deep, bears S.75°19' E., 590. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

A trench, 5 ft. wide, 2 ft. to 8 ft. deep, 30 ft. long, running due N. and S., the center of which bears S.72°36' E., 636. ft. dist. from Cor. No. 2 of the POP #10 lode.

FEET A pit, 6 ft. diam., 5 ft. deep, bears N.34°39' W., 170. ft. dist. from Cor. No. 1 of the RUF

#3 mill site . Claimant unknown

An adit, 5 ft. X 7 ft., 7 ft. long, running SW., the portal of which bears N. 6°00' E., 186. ft. dist. from Cor. No. 4 of the RUF #8 mill site .

Claimant unknown

An open cut, 10 ft. wide, 20 ft. long, 2 ft. deep, the center of which bears S.15°07' W., 31. ft. dist. from Cor. No. 2 of the RUF #10mill site .

Claimant unknown

An open cut, 6 ft. wide, 7 ft. deep, 15 ft. long, running N.20° W. and S.20° E., the center of which bears $S.11^\circ40^\prime$ W., 249. ft. dist. from Cor. No. 1 of the RUF #13 mill site.

Claimant unknown

An open cut, 5 ft. wide, 3 ft. to 6 ft. deep, 8 ft. long, the center of which bears S. 7°44' W., 318. ft. dist. from Cor. No. 1 of the RUF #13 mill site .

Claimant unknown

A pit, 6 ft. wide, 10 ft. long, 2 ft. to 8 ft. deep, the center of which bears S. 2°36' W., 531. ft. dist. from Cor. No. 1 of the RUF #13 mill site .

Claimant unknown

A trench, 12 ft. wide, 4 ft. deep, 25 ft. long, running N.35° E. and S.35° W., the center of which bears S.55°35' W., 315. ft. dist. from Cor. No. 4 of the RUF #14 mill site .

Claimant unknown

A pit, 6 ft. diam., 3 ft. deep, bears N.15°38' W., 195. ft. dist. from Cor. No. 2 of the RUF #15 mill site .

Claimant unknown

A pit, 8 ft. wide, 5 ft. deep, 20 ft. long, running N.25° E. and S.25° W., the center of which bears N.87°53' W., 171. ft. dist. from Cor. No. 1 of the RUF #18 mill site .

Claimant unknown

An open cut, 5 ft. X 8 ft., 3 ft. to 9 ft. deep, bears $N.20^{\circ}16^{\circ}$ W., 218. ft. dist. from Cor. No. 2 of the RUF #19 mill site .

Claimant unknown

A pit, 6 ft. X 9 ft., 6 ft. deep, bears S. 2°02' W., 343. ft. dist. from Cor. No. 1 of the RUF #23 mill site .

Claimant unknown

An inclined shaft, 5 ft. X 7 ft., 15 ft. deep, running S.60° E., at an inclination of -45°, bears S. 4°59' W., 516. ft. dist. from Cor. No. 1 of the RUF #23 mill site.

A pit, 5 ft. X 7 ft., 10 ft. deep, bears S. 6°58' W., 594. ft. dist. from Cor. No. 1 of the RUF #23 mill site .

Claimant unknown

OTHER CORNER DESCRIPTIONS AND SUPPLEMENTAL DATA

M.S. No. 279 Mendivil lode: NE. Cor. is a mound of stone, firmly set with the remains of a wood post, in which was set a 1/2 in. diam. steel pin, with a 1 1/2 ins. diam. aluminum cap, marked M.N.E.U.S.S. The NC. Cor. was a mound of stone, firmly set, at which point was set the monument heretofore described. The NW. Cor. is a mound of stone, firmly set, with a 4 ins. sq. wood post, no markings legible. Line NE.-NC. is S.68°10'40" W., instead of S.69° W., as approved. Line NC.-NW. is S.68°24'30"W., 288.34 ft. instead of S.69°W, 300 ft. as approved

M.S. No. 292 Pacific lode: The WC. Cor. is a mound of stone firmly set, with remains of a wood post; set a 1/2 in. diam. steel pin with a 1 1/2 ins. diam. aluminum cap, marked USS. P.WC. The NW. Cor. is a mound of stone, firmly set, with remains of a wood post, in which was set the monument heretofore described. The NE. Cor. is a mound of stone, firmly set, with a 4 ins. sq. wood post, no markings legible. Line WC. -NW. is N.46°32'11" E., instead of N.47° E., as approved. Line NW. - NE. is S.43°34'14" E., instead of S.43° E., as approved.

General Number 246, Silver Glance lode Lot No. 38: The SE. Cor. is a mound of stone, firmly set, with remains of a wood post. The NE. Cor. was a mound of stone, firmly set, in which was set the monument heretofore described. The N. Cor. is a mound of stone, firmly set, with remains of a wood post. Line SE. - NE. is N.13°22'01" W., instead of N.13° W., as approved. Line NE. - N. is S.76°51'54" W., instead of S.77°15' W., as approved.

MEMORANDUM None

FIELD ASSISTANTS

Steven S. Owens......Instrumentman

Jeff Pferdeort.....Rodman

A trench, 3 ft. to 6 ft. deep, 4 ft. wide, 20 ft. long, running N.85° E. and S.85° W., the center of which bears N.79°53' E., 309. ft. dist. from Cor. No. 1 of the POP #14 lode.

Claimant unknown

A trench, 2 ft. to 10 ft. deep, 5 ft. wide, 15 ft. long, running N.85° E. and S.85° W., the center of which bears N.77°39' E., 353. ft. dist. from Cor. No. 1 of the POP #14 lode.

Claimant unknown

A trench, 1 ft. to 4 ft. deep, 5 ft. wide, 50 ft. long, running N.75° E. and S.75° W., the center of which bears N.82°37' E., 430. ft. dist. from Cor. No. 1 of the POP #14 lode.

Claimant unknown

A trench, 2 ft. to 10 ft. deep, 4 ft. to 6 ft. wide, 100 ft. long, running N.75° E. and S.75° W., the center of which bears N.85°27' E., 347. ft. dist. from Cor. No. 1 of the POP #14 lode.

Claimant unknown

A pit, 4 ft. deep, 5 ft. wide, 10 ft. long, the long dimension of which runs N.30° W. and S.30° E., the center of which bears S.73°41' E., 403. ft. dist. from Cor. No. 1 of the POP #14 lode.

Claimant unknown

A shaft, 5 ft. X 7 ft., approximately 50 ft. deep, bears N.74°34' E., 373. ft. dist. from Cor. No. 1 of the POP #16 lode.

Claimant unknown

A shaft, 5 ft. X 7 ft., 9 ft. deep, bears N.60°46' E., 540. ft. dist. from Cor. No. 1 of the G+W #3 mill site .

Claimant unknown

A trench, 4 ft. wide, 4 ft. deep, 15 ft. long, running N.65° E., and S.65° W., the center of which bears N.81°39' E., 503. ft. dist. from Cor. No. 1 of the G+W #4 mill site .

Claimant unknown

A pit, 6 ft. X 8 ft, 6 ft. deep, the center of which bears S.87°20' E., 512. ft. dist. from Cor. No. 1 of the G+W #4 mill site .

Claimant unknown

A shaft, 5 ft. X 6 ft., 6 ft. deep, bears S.76°00' E., 484. ft. dist. from Cor. No. 1 of the G+W #4 mill site .

Claimant unknown

A pit, 6 ft. sq., 6 ft. deep, bears N.24°04' E., 238. ft. dist. from Cor. No. 1 of the RUF #2 mill site .

A shaft, 5 ft. X 7 ft., 7 ft. deep, bears $8.68^{\circ}17'$ E., 790.ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

A pit, 10 ft. sq., 4 ft. deep, the center of which bears $5.75^{\circ}28'$ E., 835. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

A trench, 6 ft. wide, 5 ft. deep, 25 ft. long, running N.65° E. and S.65° W., the center of which bears N.84°12' E., 483. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

A pit, 5 ft. wide, 4 ft. deep, 10 ft. long, the long dimension of which runs N.45° W. and S.45° E., the center of which bears N.80°16' E., 491. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

A trench, 6 ft. wide, 2 ft. to 9 ft. deep, 40 ft. long, running $N.65^{\circ}$ E. and $S.65^{\circ}$ W., the center of which bears $N.77^{\circ}17'$ E., 518. ft. dist. from Cor. No. 2 of the POP #10 lode.

Claimant unknown

A trench, 2 ft. to 5 ft. deep, 5 ft. wide, 100 ft. long, running N.65° E. and S.65° W., the E. end of which bears N.64°19' E., 328. ft. dist. from Cor. No. 2 of the POP #11 lode.

Claimant unknown

Two trenches, 2 ft. to 7 ft. deep, 5 ft. wide, each 40 ft. long, one running N.75° E. and S.75° W., the other running N.15° W. and S.15° E., the junction of which bears N. 7°54' E., 526. ft. dist. from Cor. No. 1 of the POP #13 lode.

Claimants of each unknown

A trench, 4 ft. to 8 ft. deep, 5 ft. wide, 25 ft. long, running N.70° E. and S.70° W., in the center of which is a vertical shaft, 15 ft. deep, which bears N. 7°14' E., 481. ft. dist. from Cor. No. 1 of the POP #13 lode.

Claimants of each unknown

A trench, 2 ft. to 10 ft. deep, 5 ft. wide, 25 ft. long, running N.80° E. and S.80° W., the center of which bears N.10°58' E., 442. ft. dist. from Cor. No. 1 of the POP #13 lode.

Claimant unknown

A trench, 2 ft. to 10 ft. deep, 5 ft. wide, 50 ft. long, running N.80° E. and S.80° W., the center of which bears N.26°11' E., 347. ft. dist. from Cor. No. 1 of the POP #13 lode.

Form 3860-7 (November 1976) (formerly 3400-8)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

CERTIFICATE OF SURVEYOR

Name of Mineral Surveyor		Date			
Gordon W. McLain	June 14, 1982				
I HEREBY CERTIFY That in pursuance of an ord	HEREBY CERTIFY That in pursuance of an order received from the Bureau of Land Management at Phoenix, Arizona,				
of THE NEW JERSEY ZINC EXPLORATION COI known as the (lode, placer, or mill site) **see is situated in Secs. 25 and 36, and unsurve	981 , I have carefully MPANY below	executed the survey of the claim , , , , , , , , , , , ,			
This survey, designated as number 4823 A&B been made in strict conformity with said order, the the United States, and in specific manner describe	e Manual of Instructions for	or the Survey of Public Lands of			
I FURTHER CERTIFY That the labor expended (lode or placer) lode	and improvements made	upon and for the benefit of the location(s)			
embraced in the said mining claim by claimant(s) grantors are fully stated in my report. The characteristic full detail. No portion of, or interest in, said labeled in the estimate of expenditures upon any of **POP # 9 lode POP #15 lode POP #10 lode POP #16 lode POP #11 lode NJZ #1 mill site POP #13 lode NJZ #2 mill site	eter, extent, location, and or and improvements so cr	edited to this claim has been in-			
Tucson, Arizona	lala	nw. on a			
(Location)	(Signatu	re of Mineral Surveyor)			
CERTIFICA	TE OF APPROVAL	Office Arizona State Office Location Phoenix, Arizona Date September 6, 1985			
executed by Gordon W. McLain	, surveyed underidian, in the State of leridian, in the State of legal 1981, having been critical surveyor, the field notes				
(Authorized Signature)	Chief, Cadastr	al Surveyor of Arizona (Title)			
(Sanara - Brussa)					
CERTIFICA	TE OF TRANSCRIPT				
I HEREBY CERTIFY That the foregoing transcr number 4823 A&Bis a true copy of the original		above-described mineral survey			
	Chief. Cadastr	al Surveyor of Arizona			
(Authorized Signature)	, , ,	(Title)			
Title 18, U.S.C. section 1001, makes it a crime for any agency of the United States any false, fictitious, or fraits jurisdiction.	y person knowingly and will audulent statements or repre	fully to make to any department or esentations as to any matter within			

GPO 838 - 009

/ Womb of