

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Mineral Survey Number

4876

State
Arizona

Land District
Arizona

FIELD NOTES

Of the Survey of the Mining Claim of *(name and address of claimant)*

Western Building and Mining Co., Inc.
P.O. Box 4066
Reading, PA 19606

Known as the *(name of group, if any)*

None

NAME OF CLAIM(S)

NAME OF LOCATION	DATE			BLM MINING CLAIM SERIAL NUMBER
	LOCATED AND AMENDED	RECORDED WITH COUNTY	RECORDED WITH BLM	
PENNSYLVANIA NO. 1 Amended Amended	6-26-81	6-30-81	7-22-81	AMC 134462
	7-17-90	7-17-90	7-23-90	
	8-22-90	8-23-90	8-29-90	

LOCATION OF CLAIM(S)

Mining district Weaver			County Yavapai	
Section 14 and 15	Township 10 North	Range 5 West	Meridian Gila & Salt River	Survey under order dated 7-31-90 Amd 9-13-90
Survey commenced 9-17-90		Survey completed 7-19-93	Name of Mineral Surveyor Gordon W. McLain	

Mineral Survey No. 4876

FEET

This survey was made with a Kern DKM-2AE directional theodolite, serial number 327596, with a horizontal circle of 80mm. diam. and a vertical circle of 74mm. diam., both circles are read through an optical micrometer which reads both circles directly to 1 arc second.

All azimuths in this record were determined by direction angles, measured to the right, and are referred to the meridian determined by the following observations:

On September 17, 1990, at Corner No. 1 of the PENNSYLVANIA NO. 1 lode, in latitude $34^{\circ}12'25''N.$, and longitude $112^{\circ}45'07''W.$, barometric pressure, 26.5 ins/Hg, and temperature $90^{\circ}F.$, we made a series of six altitude observations on the sun for azimuth, at approximately equal time intervals, three each, with the telescope in direct and reverse positions, observing the center of the sun, and reading the horizontal angle to the right from Cor. No. 2, PENNSYLVANIA NO. 1 lode, southwest towards the sun.

Mean time of observation, 105th meridian standard time	= $2^h 55^m 45^s$ p.m.
Declination of sun at mean time of observation	= $2^{\circ}05'16''$
Mean observed vertical angle to sun's center	= $42^{\circ}30'49''$
Mean horizontal angle from Cor. No. 2 clockwise to sun's center	= $349^{\circ}51'33''$
True bearing to Cor. No. 2	= $S.65^{\circ}50'49''W.$

The lines were measured with a Kern DM-503 electronic distance meter, Serial No. 325565 and with a Lufkin 100 ft. steel tape, graduated every foot for 99 ft. and the remainder in tenths and hundredths of a foot; The tape and electronic distance meter were compared with the Tucson Calibration Base Line at the beginning of the survey.

Mineral Survey No. 4876

FEET

All lines and connections of this survey were run by direct methods where the lines are accessible; the inaccessible lines were run by traverse methods, as shown by the calculation sheets herewith submitted.

The magnetic declination observed at each corner of the survey gave a uniform value of $14^{\circ}30'$ E.

Mineral Survey No. 4876

PENNSYLVANIA NO. 1

At Cor. No. 1 of the Pennsylvania No. 1 lode.

Set a $3/4$ ins. diam. galvanized iron post 26 ins. long, 16 ins. in the ground, surrounded by a 4 ft. diam. mound of stone to top, with a 2 ins. diam. aluminum cap marked 1-P1 M.S. 4876; from which

The $1/4$ sec. cor. between secs. 14 and 15, T.10 N., R.5 W., Gila and Salt River Meridian, bears $N.31^{\circ}47'51''W.$, 892.07 ft. dist.; monumented with an iron post, 1 ins. diam., 10 ins. above the ground firmly set and properly marked, surrounded by a $3\ 1/2$ ft. diam. mound of stone to the top.

Cor. No. 1, M.S. No. 1114 Edmond lode, bears $S.36^{\circ}24'30''E.$ 364.21 ft. dist.

A granite outcrop, 6x4 ft., 24 ins. above the ground, bears $S.32^{\circ}13'32''W.$, 76.24 ft. dist., marked X B0-1P1 M.S. 4876.

A granite outcrop, 24x18 ins., 9 ins. above the ground, bears $S.7^{\circ}26'58''W.$, 50.00 ft. dist., marked X B0-1P1 M.S. 4876.

A highway right-of-way marker, monumented with a 3 ins. diam. brass cap, marked R/W, 1973, with a 4X4 ins. angle iron, 2.5 ft. above ground, 2 ft. south, marked Section line Hwy. R. of W., bears $S.73^{\circ}12'46''W.$, 490.90 ft. dist.

4
Mineral Survey No. 4876

FEET	
	<p>A highway right-of-way marker, monumented with a 3 ins. diam. brass cap, marked R/W, 1973, with a 4X4 ins. angle iron, 2.5 ft. above ground, 2 ft. south, marked Section line Hwy. R. of W., bears S.64°01'44"W., 522.76 ft. dist.</p> <p>A highway right-of-way marker, monumented with a 1/2 ins. rebar, bears S.55°56'33"W., 703.31 ft. dist.</p> <p style="text-align: center;">Thence S. 65°50'49" W.</p>
8.54	Intersect line 1-4, M.S. No. 1114 Edmond lode, at a point from which Cor. No. 4 bears N.37°-2'50"W., 226.42 ft. dist.
203.60	Center of road, 10 ft. wide, bears N.38°11'16"E. and S.38°11'16"W.
515.06	Intersect the line between secs. 14 and 15 at a point from which cor. of secs. 14, 15, 22, and 23, bears S.0°00'15"E., 1672.65 ft. dist.; monumented with an iron post 2 ins. diam., 12 ins. above the ground, firmly set and properly marked with a mound of stone to the west. Enter patented surface land.
569.71	Overhead electric and telephone line, bears N.27°05'59"E. and S.27°05'59"W.
575.	Crest of drainage ditch, bears N.35°E. and S.35°W.
618.	Center of drainage ditch, 8 ft. wide, course S.40°W.
625.	Toe of U.S. Highway 89 fill slope, bears S.40°W. and N.40°E.
747.	Edge of U.S. Highway 89 pavement, bears N.40°E. and S.45°W.
887.	Center of corrugated metal drainage pipe, 24 ins. in diam., course S.31°E.

Mineral Survey No. 4876

FEET	
1045.	Edge of U.S. Highway 89 pavement, bears N.87°E. and N.87°W.
1130.	Toe of U.S. Highway 89 fill slope, bears S.82°E. and N.82°W.
1264.15	Intersect the southwesterly right-of-way line of U.S. Highway 89, from which point a highway right-of-way marker, bears S.70°21'36"E., 48.23 ft. dist., monumented with a 5X5 ft. boulder, 4 ft. above the ground, marked +R.W.
1464.63	<p>Cor. No. 2.</p> <p>Set a 3/4 ins. diam. galvanized iron post, 26 ins. long, 15 ins. in the ground, surrounded by a 3 ft. diam. mound of stone to the top, with a 2 ins. diam. aluminum cap marked 2-P1 M.S. 4876; from which</p> <p>A granite rock in place, 5x5 ft., 3 ft. above the ground, bears N.37°52'19"W., 83.17 ft. dist., marked X BO-2P1 M.S. 4876.</p> <p>A granite rock in place, 4x4 ft., 2 ft. above the ground, bears S.45°48'48"W., 109.23 ft. dist., marked X BO-2P1 M.S. 4876.</p> <p>A highway right-of-way marker, monumented with a 3 ins. diam. brass cap, marked, PT 216 + 50.81, 1973, with a 4X4 ins. angle iron, 2 ft. above ground, 1.5 ft. east, marked, PT 216 + 50.81 HWY. R. of W., bears N.54°55'24"E., 169.97 ft. dist.</p> <p>Center of a creek, 10 ft. wide, bears N.42°W., 35 ft. dist.</p> <p>Thence S.42°44'41"E.</p>
309.65	Lode line; discovery monument bears N.65°50'30"E., 570 ft. dist.
596.65	Overhead electrical and telephone line, bears S.27°05'59"W. and N.27°05'59"E.

Mineral Survey No. 4876

FEET	
619.29	<p>Cor. No. 3, identical with Cor. No. 4, M.S. 1113 Edgar lode, monumented with aluminum post 3/4 ins. diam., 6 ins. above the ground, with a 3 ins. aluminum cap, firmly set and properly marked, surrounded by a 3 ft. diam. mound of stone to the top.</p> <p>Stamped the 3 ins. aluminum cap 3-P1 M.S. 4876; from which</p> <p>A granite rock in place, 18x12 ins., 10 ins. above the ground, bears S.84°49'43"E., 81.05 ft. dist., marked XBO.</p> <p>A granite outcrop, 4X4 ft., 3 ft. above the ground, bears N.87°33'36"E., 83.18 ft. dist. marked +BR E 4 1113.</p> <p>The center of a creek, 12 ft. wide bears S.42°E., 42 ft. dist.</p> <p style="text-align: center;">Thence N.65°50'11"E.</p>
155.	Center of a creek, 12 ft. wide, course S.38°W.
185.	Center of a creek, 12 ft. wide, course N.69°W.
301.	Center of a creek, 12 ft. wide, course S.5°E.
488.99	Intersect the sec. line between secs.14 and 15 at a point from which cor. of secs. 14, 15, 22 and 23, bears S.0°00'15"E., 1029.47 ft. dist., hereinbefore described. Leave patented surface land.
836.67	Center of road, 10ft. wide, bears N.6°37'52"W. and S.6°37'52"E.
962.	Center of a road, 25 ft. wide, bears S.10°E. and N.22°W.
1225.	Center of a road, 8 ft. wide, bears N.7°E. and S.7°W.
1270.	Center of a road, 10 ft. wide, bears S.9°W. and N.2°E.

7
Mineral Survey No. 4876

FEET	
1335.	Center of a road, 12 ft. wide, bears N.73°W. and S.73°E.
1463.36	Intersect line 1-5, M.S. No.1115, Triangle lode, at a point from which Cor. No. 5 bears N.45°15'10"W., 261.37 ft. dist.
1464.54	<p>Cor. No. 4, identical with Cor. No. 3, M.S. 1113 Edgar lode, monumented with aluminum post 3/4 ins. diam., 10 ins. above the ground, with a 3 ins. aluminum cap firmly set and properly marked, surrounded by a 3 ft. diam. mound of stone to the top.</p> <p>Stamped the 3 ins. aluminum cap 3-P1 M.S. 4876; from which</p> <p style="padding-left: 40px;">Cor. No. 5, M.S. 1115 Triangle lode, bears N.45°24'38"W., 261.80 ft. dist.</p> <p>An iron pipe 1 ins. diam. 10 ins. above the ground, bears S.86°04' E., 1.34 ft. dist.</p> <p>A granite outcrop, 11x1.5 ft., 6 ins. above the ground, bears S.89°27'46"E., 175.44 ft. dist., marked +BRE 3 1113.</p> <p>A granite rock in place, 4x4 ft., 4 ft. above the ground, bears S.87°28'03"W., 266.21 ft. dist., marked +B0.</p> <p>A granite rock in place, 4x4 ft., 3 ft. above the ground, bears N.88°58'40"W., 300.29 ft. dist., marked +B0.</p> <p style="text-align: center;">Thence N.42°44'41"W.</p>
63.	Center of a road, 10 ft. wide, bears S.62°E. and N.52°W.
221.	Center of a road, 15 ft. wide, bears N.69°W. and S.69°E.
263.53	Intersect the common line 1-2, M.S. No. 1114, Edmond lode and line 4-5, M.S. No. 1115, Triangle lode, at a point from which Cor.No.5, M.S. 1115 Triangle lode, bears S.38°03'49"W., 12.72 ft. dist., and Cor. No. 1, M.S. 1114 Edmond lode, bears S.38°03'49"W., 40.72 ft. dist.

8
Mineral Survey No. 4876

FEET	
287.	Center of a road, 15 ft. wide, bears N.74°W. and S.74°E.
309.51	Lode line; discovery monument bears S.65°50'30"W., 894.58 ft. dist.
388.	Center of a road, 15 ft. wide, bears S.3°E. and N.3°W.
440.	Center of a road, 10 ft. wide, bears N.22°E. and S.22°W.
619.01	Cor. No. 1, and place of beginning.

Mineral Survey No. 4876

AREAS	ACRES
Total area, PENNSYLVANIA NO.1 lode.....	19.731
Area in conflict with -	
M.S. No. 1114 Edmond lode.....	0.199
M.S. No. 1115 Triangle lode.....	0.041
SE 1/4 Sec.15. lying southerly of U.S.Hwy.89.....	7.741
U.S. Hwy.89.....	1.950

LOCATION

This survey is located in the SW 1/4 sec. 14, and the SE 1/4 sec. 15, T.10 N., R.5 W., Gila and Salt River Meridian, and is wholly within the amended location as marked on the ground. Cors. No. 2, 3 and 4 are identical with cors. of the original location and Cor. No. 1 is identical with all subsequent amended locations.

Mineral Survey No. 4876

FEET	EXPENDITURES
	<p>The improvements and the value of the labor and improvements made upon or for the benefit of the lode location embraced in said mining claim by the claimant or its grantors are as follows:</p>
No. 1	<p>A drill hole 5 1/2 ins. in diam., 300 ft. in depth, vertical, the collar of which bears N.50°20'24"W., 180.67 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YM-10)</p> <p style="text-align: center;">Value, \$5,233.00</p>
No. 2	<p>A drill hole 5 1/2 ins. in diam., 260 ft. in depth, vertical, the collar of which bears S.78°58'02"W., 332.75 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YM-11)</p> <p style="text-align: center;">Value, \$2,817.00</p>
No. 3	<p>A drill hole 5 1/2 ins. in diam., 380 ft. in depth, vertical, the collar of which bears N.68°34'11"W., 303.84 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YM-22)</p> <p style="text-align: center;">Value \$3,874.00</p>
No. 4	<p>A drill hole 5 1/2 ins. in diam., 140 ft. in depth, vertical, the collar of which bears S.76°39'56"W., 148.57 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YM-23)</p> <p style="text-align: center;">Value, \$2,111.00</p>
No. 5	<p>A drill hole 5 1/2 ins. in diam., 280 ft. in depth, vertical, the collar of which bears N.83°11'40"W., 480.76 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YM-29)</p> <p style="text-align: center;">Value \$3,136.00</p>
No. 6	<p>A drill hole 5 1/2 ins. in diam., 315 ft. in depth, vertical, the collar of which bears N.46°46'23"W., 394.68 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YM-30)</p> <p style="text-align: center;">Value \$3,050.00</p>

FEET	
No. 7	<p>A drill hole 5 1/2 ins. in diam., 300ft. in depth, vertical, the collar of which bears S.89°25'56"W., 388.92 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YM-47)</p> <p>Value \$2,909.00</p>
No. 8	<p>A drill hole 5 1/2 ins. in diam., 320 ft. in depth, vertical, the collar of which bears N.78°32'48"W., 216.93 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. WY-47)</p> <p>Value \$3,089.00</p>
No. 9	<p>A drill hole 5 1/2 ins. in diam., 240 ft. in depth, vertical, the collar of which bears S.83°47'27"W., 619.36 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YM-51)</p> <p>Value \$2,320.00</p>
No. 10	<p>A drill hole 5 1/2 ins. in diam., 220 ft. in depth, vertical, the collar of which bears N.65°28'33"W., 83.83 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YM-75)</p> <p>Value \$2,642.00</p>
No. 11	<p>A core hole 4 ins. in diam., 185 ft. in depth, vertical, the collar of which bears N.65°28'33"W., 88.0 ft. dist. from Cor. No. 4 of the PENNSYLVANIA NO. 1 lode. (Claimant No. YMD-7, twin hole to hole No.10)</p> <p>Value \$6,200.00</p>
OTHER IMPROVEMENTS	
<p>A trench, 8ft. wide, 6 ft. deep, 30 ft. long, running N.25°W. and S.25°E., the center of which bears, N.35°15'E., 568 ft. dist. from Cor. No.3 of the PENNSYLVANIA NO.1 lode.</p> <p>Claimant unknown</p>	

FEET

An adit, entrance partly caved, 7 ft. by 7 ft. in size, the portal of which bears $N.62^{\circ}49'20''E.$, 603.0 ft. dist. from Cor. No. 3 of the PENNSYLVANIA NO.1 lode, running $N.80^{\circ}E.$, 35 ft. dist., in estimated length.

Claimant unknown

Overhead electric and telephone lines traverses the PENNSYLVANIA NO.1 lode as previously described herein.

Claimant, Arizona Public Service Co.,
and U.S. West

A dirt road which varies in width from 10 ft. to 15 ft., which is used for ingress and egress to a radio station tower, which bears, $S.3^{\circ}18'E.$, 4335.0 ft. dist., from Cor. No. 3 of the PENNSYLVANIA NO.1 lode. The approximate center line beginning more particularly described as follows; Beginning at a point on line 1-2 of the PENNSYLVANIA NO. 1 lode, from which Cor. No. 1 of the PENNSYLVANIA NO.1 lode bears, $N.65^{\circ}50'49''E.$, 203.60 ft. dist.; thence, $S.38^{\circ}11'16''W.$, 241.55 ft. dist. to a point of curve; thence, along the arc of curve to the left, having a radius of 75.0 ft. through a central angle of $90^{\circ}00'$, an arc dist. of 117.81 ft. to the end of curve, from which the radius point of said curve bears $N.38^{\circ}11'16''E.$, 75.0 ft. dist.; thence, $S.63^{\circ}46'44''E.$, 77.57 ft. dist. to an angle point; thence $S.36^{\circ}18'20''E.$, 38.26 ft. dist. to an angle point; thence, $S.22^{\circ}59'01''E.$, 89.01 ft. dist. to an angle point; thence, $S.17^{\circ}31'54''E.$, 83.86 ft. dist. to an angle point; thence, $S.11^{\circ}12'02''E.$, 65.17 ft. dist. to an angle point; thence, $S.6^{\circ}37'52''E.$, 42.47 ft. dist. to the point of terminus on line 3-4 of the PENNSYLVANIA NO.1 lode, from which Cor. No.4 of the PENNSYLVANIA NO.1 lode bears $N.65^{\circ}50'11''E.$, 627.87 ft. dist.

Claimant unknown

FEET

An inclined shaft identified as the "Human Shaft", the center of which bears $N.77^{\circ}50'E.$, 961.0 ft. dist. from Cor. No. 3 of the PENNSYLVANIA NO.1 lode. The shaft cannot be entered, the extent of underground workings were taken from the claimant's records and are shown on the plat.

Claimant unknown

A portion of U.S. Highway 89, which is now in use and is improved with roadway cuts, roadway fills, drainage structures, drainage ditches, asphalt paving and road guard. The area within the PENNSYLVANIA NO.1 lode claim is more particularly described as follows: Beginning at the point of intersection of line 1-2 of the PENNSYLVANIA NO.1 lode and the sec. line between sec's. 14 and 15, from which point the Cor. of sec's. 14, 15, 22 and 23 bears $S.0^{\circ}00'15"E.$, 1672.65 ft. dist.; thence, $S.65^{\circ}50'49"W.$, 749.09 ft. dist. along line 1-2 of the PENNSYLVANIA NO.1 lode, to a point on the southerly right-of-way line of U.S. Highway 89; thence, along the southerly right-of-way line, $S.70^{\circ}21'36"E.$, 48.23 ft. dist., to a point of curve to the left; thence, continuing along said southerly right-of-way line, along the arc of said curve, having a radius of 479.62 ft., through a central angle of $69^{\circ}02'27"$ an arc dist. of 577.94 ft. to a point of non-tangent curve, from which the radius point bears $N.49^{\circ}24'03"W.$, 479.62 ft. dist.; thence continuing along said southerly right-of-way line, $N.34^{\circ}20'42"E.$, 199.78 ft. dist. to a point on the line between said sec's. 14 and 15; thence $N.0^{\circ}00'15"W.$, 18.17 ft. dist. along the line between sec's. 14 and 15 to the point of beginning.

Claimant, Arizona Dept. of Transportation

OTHER CORNER DESCRIPTIONS
AND SUPPLEMENTAL DATA

M.S. No. 1113 Edgar lode: Line 3-4 was found to be $S.65^{\circ}50'11"W.$, 1464.54 ft., instead of $S.65^{\circ}30'W.$, 1487 ft. as approved.

FEET

M.S. No. 1114 Edmond lode: Cor. No. 1 was monumented with an aluminum post 3/4 ins. diam., 6 ins. below the fill slope of a road, with 3 ins. aluminum cap, firmly set and properly marked; Cor. No. 4 was monumented with an aluminum post 3/4 ins. diam., 6 ins. above the ground, with a 3 ins. aluminum cap, firmly set and properly marked; Cor. No. 2 was monumented with an aluminum post 3/4 ins. in diam., 6 ins. above the ground, with a 3 ins. aluminum cap, firmly set and properly marked. Line 1-2 was found to be N.38°03'49"E., 1475.41 ft., instead of N.37°52'E., 1500 ft., as approved. Line 1-4 was found to be N.37°42'50"W., 592.46 ft., instead of N.36°56'E., 600 ft., as approved.

M.S. No. 1115 Triangle lode: Cor. No. 1 was monumented with an aluminum post 3/4 ins. diam., 10 ins. above the ground with a 3 ins. aluminum cap, firmly set and properly marked; Cor. No. 4 was monumented with an aluminum post 3/4 ins. diam., 10 ins. above the ground, with a 3 ins. aluminum cap, firmly set and properly marked; Cor. No. 5 was monumented with a 1/2 ins. rebar with a tag marked L.S. 21768. Line 1-5 was found to be N.45°15'10"W., 427.49 ft., instead of N.44°30'W., 425 ft. as approved. Line 4-5 was found to be S.38°03'49"W., 1475.40 ft., instead of S.37°52'W., 1500 ft. as approved.

MEMORANDUM

None

FIELD ASSISTANTS

Name	Capacity
Stephen W. McLain	Instrumentman
C.L. Smith	Rodman

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CERTIFICATE OF SURVEYOR

Name of Mineral Surveyor	Date
Gordon W. McLain	July, 19, 1993


I HEREBY CERTIFY That in pursuance of an order received from the Arizona State Office, Bureau of Land Management, at Phoenix, Arizona, dated July 31, 1990 and amended September 13, 1990, I have carefully executed the survey of the claim of Western Building and Mining Co., Inc., known as the Pennsylvania No. 1 lode, situated in surveyed sections 14 and 15, Township 10 North, Range 5 West, Gila and Salt River Meridian, in the State of Arizona.

This survey, designated as number 4876, has been executed by me and under my direction and has been made in strict conformity with said order, the Manual of Instructions for the Survey of Public Lands of the United States, and in specific manner described in the foregoing field notes.

I FURTHER CERTIFY That the labor expended and improvements made upon and for the benefit of the Pennsylvania No. 1 lode location embraced in the said mining claim by claimant(s) or its grantors are fully stated in my report. The character, extent, location, and itemized value are specified in full detail. No portion of, or interest in, said labor and improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

Tucson, Arizona

(Location)

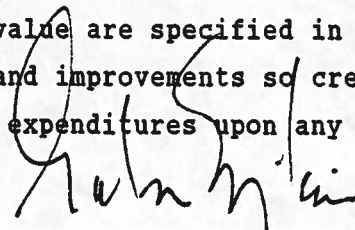

(Signature of Mineral Surveyor)

Title 18, U.S.C. section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction.

CERTIFICATE OF APPROVAL

Arizona State Office
Phoenix, Arizona
October 26, 1993

The foregoing field notes of mineral survey number 4876, in surveyed sections 14 and 15, Township 10 North, Range 5 West, Gila and Salt River Meridian, in the State of Arizona, executed by Gordon W. McLain, Mineral Surveyor, under order dated July 31, 1990 and amended September 13, 1990, having been critically examined and the necessary corrections made prior to their certification by the surveyor, the field notes and the survey therein described are hereby approved.

James P. Kelley
(Authorized Signature)

Chief Cadastral Surveyor of Arizona
(Title)

~~CERTIFICATE OF TRANSCRIPT~~

~~I HEREBY CERTIFY That the foregoing transcript of field notes of the above-described mineral survey number 4876 is a true copy of the original field notes.~~

~~_____
(Authorized Signature)~~

~~Chief Cadastral Surveyor of Arizona
(Title)~~