

3226

Book "D"

4-679

BOOK 3226

(Subdivisions)

FIELD NOTES

OF THE SURVEY OF THE

SUBDIVISION LINES

of

TOWNSHIP 9 NORTH, RANGE 9 WEST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona,

EXECUTED BY

H. N. Bradstreet,

In the capacity of U. S. Transitman under instructions dated July 23, 1914,
issued by the United States Surveyor General to govern surveys included in
Group No. 36, which were approved by the Commissioner of the General Land
Office, August 15, 1914.

Survey commenced November 12, 1914

Survey completed December 1, 1914
Executed under Assignment
Instructions dated

3226

3226

1A
242


BOOK 3226

3226
Book "D"

Group 36--- Arizona.

Township 9 North, Range 9 West.

INDEX DIAGRAM.

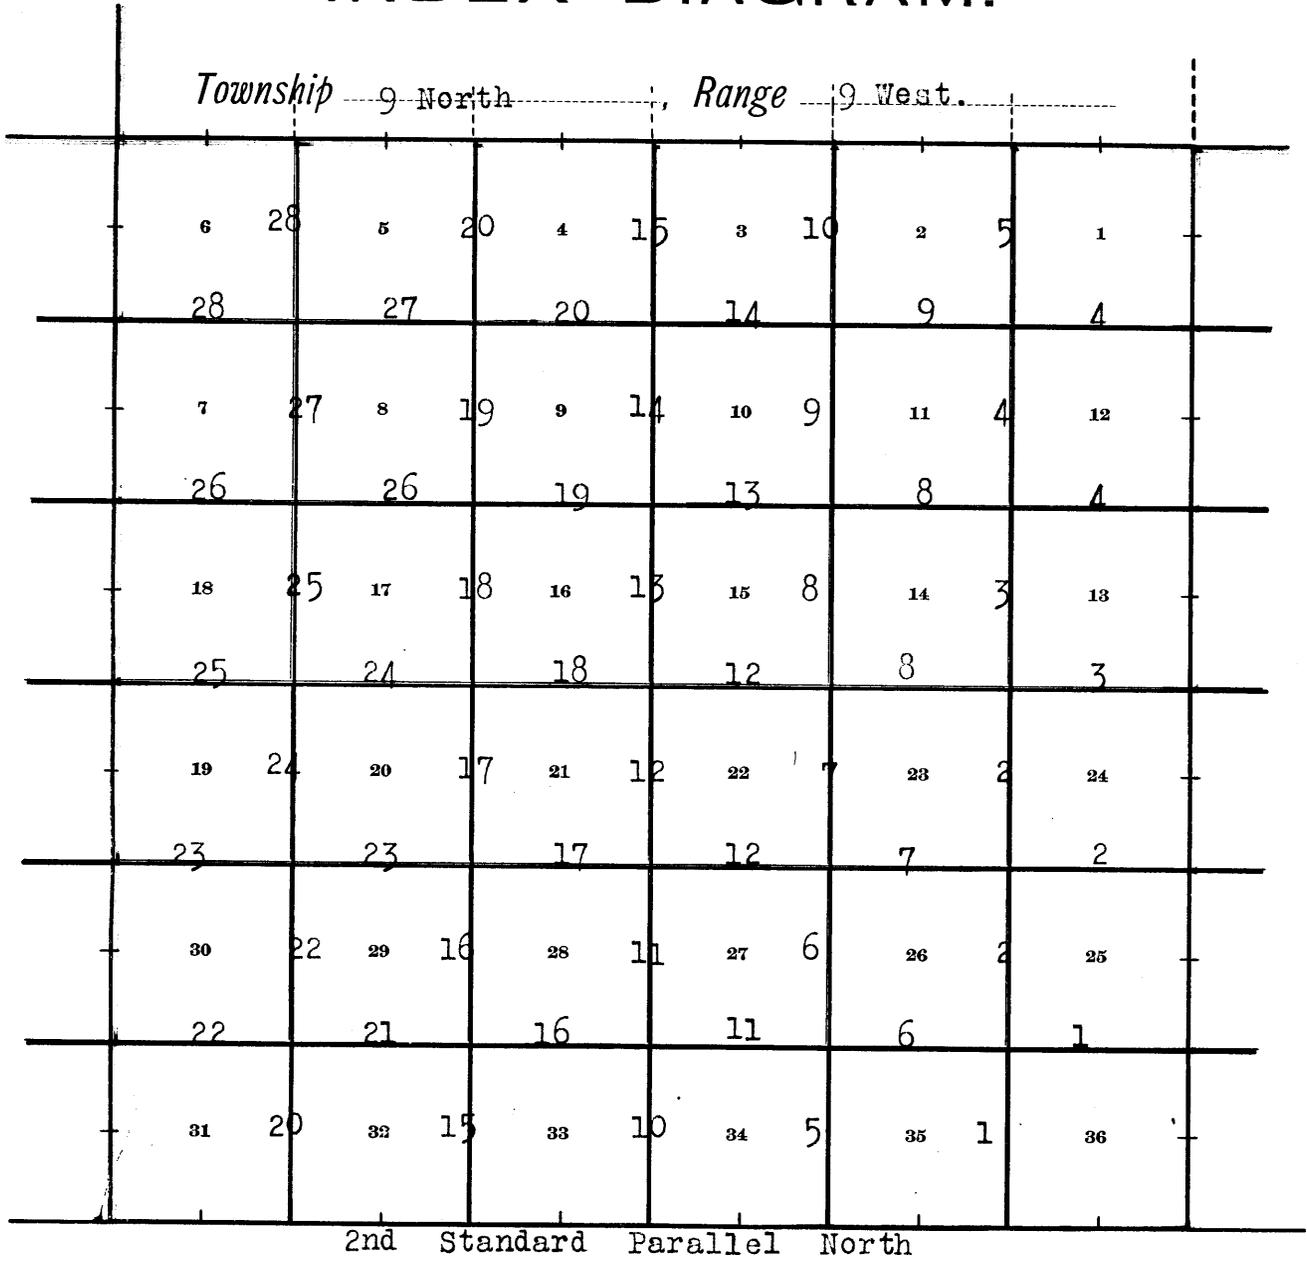

———— Subdivision lines surveyed under this group.

———— Township boundaries surveyed under this group.
Notes in Book "A." 3223

———— Accepted surveys.


- - - - - Unsurveyed.

Subdivision of Township 9 North, Range 9 West. 1. B


Chains.

Surveys hereinafter described were executed by H. N. Bradstreet, U. S. Transitman, on dates shown on diagram on page 31 hereof, using a Young and Son's transit No. 7084, fitted with Smith's solar attachment, description, approval and tests of which are described in Book "A." From the original standard cor. of secs. 35 and 36 on S. bdy. of Tp. (2nd. Std. Par. N.), an iron post with brass cap, firmly set, marked and witnessed as described by the surveyor general,

- N. 0° 1' W., bet. secs. 35 and 36.
- Over gradual N. slope, thru. medium undergrowth.
- 10.50 Road brs. NE. to Congress Junction and SW. to Aguila.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,




- Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- 70.35 Bullard Wash, 5 ft. deep, 40 lks. wide, course W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 25, 26, 35 and 36, marked on brass cap,



Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Land, level and gently rolling. Soil, sandy loam, 8 ins. to 12 ins. deep, with firm subsoil, 2nd rate. Undergrowth, greasewood, cactus, catclaw and mesquite. No timber.

- East, on a random line, bet. secs. 25 and 36.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.08 Intersect E. bdy. of Tp., at the cor. of secs. 25, 30, 31 and 36, described in Book "A."
- Thence,
- West, on a true line, bet. secs. 25 and 36.
- Over gently rolling land, through scattering undergrowth.
- 7.29 Wagon road, brs. SW. to Aguila and NE. to Congress Junction.
- 40.04 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,



- Dig pits 18x18x12 ins., E. and W. of cor. 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 80.08 The cor. of secs. 25, 26, 35 and 36. Land, gently rolling. Soil, sandy loam with firm subsoil, 1st rate. Undergrowth, greasewood, cactus, mesquite and catclaw. No timber.

2. Subdivision of Township 9 North, Range 9 West.

Chains.

40.00 N.0° 1'W., bet. secs. 25 and 26.
Over gently rolling land, thru. scattering undergrowth.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S26 | S25

1914

80.00 Dig pits 18x18x12 ins., N. and S. of cor. 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 23, 24, 25 and 26, marked on brass cap,

T9N R9W
S23 | S24

S26 | S25

1914

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.
Land, gently rolling.
Soil, sandy loam, with firm subsoil, 1st rate.
Undergrowth, greasewood, cactus and mesquite.
No timber.

40.00 East, on a random line, bet. secs. 24 and 25.
Set temp. $\frac{1}{4}$ sec. cor.
80.26 Intersect E. bdy. of Tp., 4 lks. N. of the cor. of secs. 19, 24, 25 and 30, described in Book "A."

Thence,
N.89°58'W., on a true line, bet. secs. 24 and 25.
Over gently rolling land, through scattering undergrowth.
40.13 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 24

S 25

1914

80.26 Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
The cor. of secs. 23, 24, 25 and 26.
Land, gently rolling.
Soil, sandy loam, about 12 ins. deep, with firm subsoil; 1st rate.
Undergrowth, greasewood, cactus and mesquite.
No timber.

40.00 N.0° 1'W., bet. secs. 23 and 24.
Over rolling land, thru. scattering undergrowth.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S23 | S24


1914

Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Subdivision of Township 9 North, Range 9 West. 3.

Chains.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 13, 14, 23 and 24, marked on brass cap,




Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, gently rolling. Soil, sandy loam, 12 ins. to 15 ins. deep, with firm subsoil, 1st rate. Undergrowth, greasewood, cactus, and mesquite. No timber.

40.00 S. 89° 58' E., on a random line, bet. secs. 13 and 24. Set temp. 1/4 sec. cor.

80.24 Intersect the E. bdy. of Tp., 4 lks. S. of the cor. of secs. 13, 18, 19 and 24, described in book "A."

Thence, West, on a true line, bet. secs. 13 and 24.

40.12 Over gently rolling land, thru. scattering undergrowth. Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,



Dig pits 18x18x12 ins., E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.


80.24 The cor. of secs. 13, 14, 23 and 24. Land, gently rolling.

Soil, light loam, 10 to 12 ins. deep, with firm subsoil, 2nd rate.

Undergrowth, greasewood, mesquite and cactus. No timber.


40.00 N. 0° 1' W., bet. secs. 13 and 14. Over gently rolling land, through scattering undergrowth.

Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground, for 1/4 sec. cor., marked on brass cap,



Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 11, 12, 13 and 14, marked on brass cap,



Dig pits 18x18x12 ins. in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, rolling. Soil, sandy loam, with firm subsoil, 1st rate.

4. Subdivision of Township 9 North, Range 9 West.

Chains.

Undergrowth, greasewood, mesquite, cactus and Joshua trees.
No timber.

East, on a random line, bet. secs.12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec.cor.

80.26 Intersect E bdy. of Tp., 16 lks.S.of the cor.of secs.7,
12, 13 and 18, described in Book "A."

Thence,

S.89°53'W., on a true line, bet. secs.12 and 13.

Over rolling land, thru.scattering undergrowth.

4.70 Flat wash,15 lks.wide, course SW.

40.13 Set an iron post, 3 ft.long, 1 in. in diam.,26 ins. in
the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 12

S 13
1914

Dig pits 18x18x12 ins., E.and W.of cor., 3 ft. dist.,and
raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,N.of
cor.

80.26 The cor.of secs.11,12,13 and 14.

Land, gently rolling.

Soil, sandy loam about 18 ins. deep, with firm subsoil;
1st rate.

Undergrowth, greasewood, cactus, mesquite, catclaw and
Joshua trees.

No timber.

N.0°1'W., bet. secs.11 and 12.

Over gently rolling land, thru.medium undergrowth.

40.00 Set an iron 3 ft.long, 1 in. in diam., 26 ins. in the
ground,for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S11 | S12

1914

Dig pits 18x18x12 ins., N.and S.of cor., 3 ft. dist., and
raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft.high,W. of
cor.

80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
the ground for cor.of secs. 1,2,11 and 12, marked on
brass cap,

T9N R9W
S 2 | S 1

S11 | S12

1914

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and
raise a mound of earth 4 ft. base, 2 ft.high,W.of cor.

Land, gently rolling.

Soil, sandy loam, with firm subsoil, 1st to 2nd rate.

Undergrowth, greasewood, cactus, mesquite and Joshua trees.
No timber.

N.89°53'E., on a random line, bet. secs.1 and 12.

40.00 Set temp. $\frac{1}{4}$ sec.cor.

80.26 Intersect E. bdy.of Tp., 14 lks.S.of the cor.of secs.1,6,
7 and 12, described in Book "A."

Thence,

S.89°47'W., on a true line, bet. secs.1 and 12.

Over gently rolling land, thru. medium undergrowth.

40.13 Set an iron post 3 ft.long, 1 in. in diam.,26 ins. in

Chains.

the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

$$\frac{1}{4}S \ 1$$

$$S \ 12$$

$$1914$$

Dig pits 18x18x12 ins., E.and W.of cor. 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,N.of cor.

- 80.26 The cor.of secs.1,2,11 and 12.
Land, gently rolling.
Soil, sandy loam and gravelly, 2nd rate.
Undergrowth, low greasewood, cactus, mesquite and Joshua trees.
No timber.

- N.0° 1' W., on a random line, bet. secs.1 and 2.
40.00 Set temp. $\frac{1}{4}$ sec.cor.
80.33 Intersect N. bdy. of Tp., 11 lks.W. of the cor.of secs.1, 2,35 and 36, described in Book "A."
Thence,
S.0° 4' W., on a true line, bet. secs.1 and 2.
Over gently rolling land,through scattering undergrowth.
14.15 Wagon road brs.ENE. and WSW.
27.45 Wash, 3 ft. deep, 25 lks.wide, course SW.
40.33 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

$$\frac{1}{4}S \ 2 \ | \ S \ 1$$

$$1914$$

Dig pits 18x18x12 ins., N.and S.of cor.3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,W.of cor.

- 76.90 Wagon road, brs.NE. and SW.
80.33 The cor.of secs.1,2,11 and 12.
Land, gently rolling.
Soil, sandy loam, about 12 ins. deep, with firm subsoil; 1st rate.
Undergrowth,greasewood, mesquite, cactus,cactlaw and Joshua trees.
No timber.

- From the original standard cor.of secs. 34 and 35 on S. bdy.of Tp., (2nd.Std. Parallel N.) which is an iron post 3 ins.in diam., 12ins. above ground, marked and witnessed as described by the surveyor general,
N.0° 1' W., bet. secs. 34 and 35.
Over gently rolling land, thru. medium undergrowth.
2.80 Intersection of small,flat washes from SE. to SW.,course NE.
5.05 Enter wash,1 ft. deep, 5 lks.wide, from SE.
7.10 Leave same, course NW.
10.25 Wash, 1 ft. deep, 35 lks.wide, course NW.
13.80 Same wash, course NE.
14.48 Wash, 25 lks.wide, course NW.
15.30 Enter wash, from SW.
16.85 Leave same, course NE.
40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins.in the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

$$\frac{1}{4}S34 \ | \ S35$$


$$1914$$

Dig pits 18x18x12 ins., N.and S.of cor., 3 ft. dist., and

6. Subdivision of Township 9 North, Range 9 West.

Chains.


80.00 raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 26, 27, 34 and 35, marked on brass cap,



Dig pits 18x18x12 ins. in each sec. $5\frac{1}{8}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, rolling.
Soil, sandy loam, with gravelly subsoil, 1st rate.
Undergrowth, greasewood, cactus, mesquite and Joshua trees.
No timber.


40.00 East, on a random line, bet. secs. 26 and 35.
Set temp. $\frac{1}{4}$ sec. cor.
80.26 Intersect N. and S. line, 9 lks. S. of the cor. of secs. 25, 26, 35 and 36.

Thence, S. $89^{\circ}56'$ W., on a true line, bet. secs. 26 and 35.
Over gently rolling land, through scattering undergrowth.
15.06 Bullard wash, 5 ft. deep, 60 lks. wide, course WNW.
40.13 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,




Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
52.50 Wash, 4 ft. deep, 50 lks. wide, course NE.
80.26 The cor. of secs. 26, 27, 34 and 35.
Land, rolling.
Soil, sandy loam, 12 to 18 ins. deep, with firm subsoil; 1st rate.
Undergrowth, greasewood, mesquite and cactus.
No timber.

N. $0^{\circ}1'$ W., bet. secs. 26 and 27.
Over rolling land, through scattering undergrowth.
22.12 Bullard wash, 4 ft. deep, 50 lks. wide, course NW.
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,



Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
48.45 Wash, 8 lks. wide, course SW.
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 22, 23, 26 and 27, marked on brass cap,




Subdivision of Township 9 North, Range 9 West. 7.

Chains.

Dig pits 18x18x12 ins. in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, rolling. Soil, sandy loam, 12 to 18 ins. deep, with firm subsoil, 1st rate. Undergrowth, greasewood, cactus, mesquite, and catclaw. No timber.


40.00 N. 89° 56' E., on a random line, bet. secs. 23 and 26. Set temp. 1/4 sec. cor. 80.18 Intersect N. and S. line, 11 lks. N. of the cor. of secs. 23, 24, 25 and 26.

Thence N. 89° 59' W., on a true line, bet. secs. 23 and 26. Over rolling land, thru. medium undergrowth. 40.09 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,




dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor. 54.48 Wash, 8 lks. wide, course SW. 80.18 The cor. of secs. 22, 23, 26 and 27. Land, rolling. Soil, sandy loam, with firm subsoil; 1st and 2nd rate. Undergrowth, greasewood, cactus, mesquite and Joshua trees. No timber.

N. 0° 1' W. bet. secs. 22 and 23. Over rolling land, thru. medium undergrowth. 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,



Dig pits 18x18x12 ins., N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor. 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 14, 15, 22 and 23, marked on brass cap,



Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, rolling. Soil, sandy loam, with firm subsoil, 1st to 2nd rate. Undergrowth, greasewood, mesquite, cactus and Joshua trees. No timber.

Chains.

40.00 S. 89° 59' E., on a random line, bet. secs. 14 and 23.
Set temp. 1/4 sec. cor.
80.06 Intersect N. and S. line, 26 lks. S. of the cor. of secs. 13, 14, 23 and 24.

Thence,
S. 89° 50' W., on a true line, bet. secs. 14 and 23.
Over gently rolling land, thru. scattering undergrowth.
22.50 Wash, course SW.
40.03 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 14

S 23

1914

Dig pits 18x18x12 ins. E. and W. of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

50.60 Wash, course SW.
80.06 The cor. of secs. 14, 15, 22 and 23.

Land, rolling.
Soil, sandy loam, with firm subsoil, 1st rate.
Undergrowth, greasewood, mesquite, catclaw, cactus and Joshua trees.
No timber.

N. 0° 1' W., bet. secs. 14 and 15.
Over rolling land, through scattering undergrowth.
33.60 Wash, course SW.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 15 | S 14

1914

Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 10, 11, 14 and 15, marked on brass cap,

T9N R9W
S10 | S11

S15 | S14

1914

Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. base, W. of cor.
Land, rolling.
Soil, sandy, with firm subsoil, 1st rate.
Undergrowth, greasewood, mesquite, cactus and Joshua trees.
No timber.

N. 89° 50' E., on a random line, bet. secs. 11 and 14.
40.00 Set temp. 1/4 sec. cor.

80.14 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 11, 12, 13 and 14.

Thence,
S. 89° 54' W., on a true line, bet. secs. 11 and 14.
Over rolling land, thru. scattering undergrowth.

Subdivision of Township 9 North, Range 9 West. 9.

Chains.

40.07 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 11

S 14

1914

Dig pits 18x18x12 ins., E. and W.of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N.of cor.

80.14 The cor.of secs. 10, 11, 14 and 15.

Land, rolling.

Soil, sandy loam, with firm subsoil; 1st rate.

Undergrowth, greasewood, cactus, mesquite and Joshua trees.

No timber.

N.0° 1' W. bet.secs. 10 and 11.

Over rolling land, thru. scattering undergrowth.

11.90 Wash, course SW.

13.60 Wash, course SW.

32.00 Wagon road, brs. SW. and NE.

40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S10 | S11

1914

Dig pits 18x18x12 ins., N.and S.of cor., 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W.of cor.

52.50 Wash, 10 lks.wide, course SW.

58.50 Wash, course SW.

80.00 Set an iron post 3 ft.long, 2 ins. in diam., 24 ins. in the ground for cor.of secs. 2, 3, 10 and 11, marked on brass cap,

T9N R9W
S 3 | S 2

S10 | S11

1914

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W.of cor. Land, rolling.

Soil, sandy loam, 10 to 15 ins. deep, with firm subsoil; 1st to 2nd rate.

Undergrowth, greasewood, mesquite, cactus and Joshua trees.

No timber.

40.00 N.89° 54' E., on a random line, bet. secs. 2 and 11.

Set temp. $\frac{1}{4}$ sec.cor.

80.08 Intersect N. and S1 line, 5 lks.S. of the cor.of secs. 1, 2, 11 and 12.

Thence,

S.89° 52' W., on a true line, bet. secs. 2 and 11.

Over gently rolling land, thru. scattering undergrowth.

4.78 Wagon road, brs. NE. and SW.

40.04 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

BOOK 3226

10. Subdivision of Township 9 North, Range 9 West.

Chains.

1/4 S 2

S 11

1914

Dig pits 18x18x12 ins., E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

50.30 Wash, 2 ft. deep, 5 lks. wide, course SW.

80.08 The cor. of secs. 2, 3, 10 and 11.

Land, rolling.

Soil, sandy loam, with firm subsoil, 1st rate.

Undergrowth, greasewood, cactus, mesquite and Joshua trees.

No timber.

N. 0° 4' E., on a random line, bet. secs. 2 and 3.

40.00 Set temp. 1/4 sec. cor.

80.35 Intersect N. bdy. of Tp., 4 lks. E. of the cor. of secs. 2, 3, 34 and 35, described in Book "A."

Thence,

S. 0° 2' W., on a true line, bet. secs. 2 and 3.

Over rolling land, through scattering undergrowth.

5.85 Wagon road brs. W. to Alamo and E. to Congress Junction.

28.65 Wash, 20 lks. wide, course SW.

40.35 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S3 | S2

1914

Dig pits 18x18x12 ins., N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

67.25 Wash, 2 ft. deep, 70 lks. wide, course SW.

80.35 The cor. of secs. 2, 3, 10 and 11.

Land, rolling.

Soil, sandy loam with some gravel, 2nd rate.

Undergrowth, greasewood, cactus, ocotillo and Joshua trees.

No timber.

From the standard cor. of secs. 33 and 34 on S bdy. of Tp., (2nd. Std. Par. N.), which is an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked and witnessed, as described by the surveyor general, N. 0° 2' W., bet. secs. 33 and 34.

Over rolling land, thru. scattering undergrowth.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S33 | S34

1914

Dig pits 18x18x12 ins. N. and S. of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

46.60 Wagon road brs. SE. and NW.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 26, 28, 33 and 34, marked on brass cap,

T9N R9W
S28 | S27

S33 | S34

1914

Subdivision of Township 9 North, Range 9 West. 11.

Chains.

Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, rolling. Soil, sandy and gravelly loam, 2nd rate. Undergrowth, greasewood, cactus and Joshua trees. No timber.

- 40.00 East, on a random line, bet. secs. 27 and 34.
- 80.22 Set temp. 1/4 sec. cor.
- 80.22 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 26, 27, 34 and 35.
- Thence,
- N. 89° 50' W. on a true line, bet. secs. 27 and 34.
- Over gently rolling land, thru. scattering undergrowth.
- 7.50 Wash, course NE.
- 40.11 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 27

S 34

1914

- 80.22 Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor. The cor. of secs. 27, 28, 33 and 34. Land, gently rolling. Soil, sandy loam, with firm subsoil, 2nd rate. Undergrowth, greasewood, mesquite and catclaw. No timber.

- 40.00 N. 0° 2' W., bet. secs. 27 and 28. Over gently rolling land, thru. scattering undergrowth. Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 28 | S 27

S 27

1914

- 64.00 Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.
- 65.65 Enter Bullard Wash, 4 ft. deep, course NW.
- 80.00 Leave same, same course.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, marked on brass cap,

T9N R9W
S21 | S22

S28 | S27

1914

- Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, rolling. Soil, sandy loam, with firm subsoil, 1st and 2nd rate. Undergrowth, mesquite, catclaw, and greasewood. No timber.

BOOK 3226

12. Subdivision of Township 9 North, Range 9 West.

Chains

S. 89° 56' E., on a random line, bet. secs. 22 and 27.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.34 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 22, 23, 26 and 27.

Thence,
 N. 89° 52' W., on a true line, bet. secs. 22 and 27.
 Over rolling land, thru scattering undergrowth.
 40.17 Set an iron post $\frac{3}{4}$ ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4}S 22$$

$$S 27$$

$$1914$$

Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

80.34 The cor. of secs. 21, 22, 27 and 28.

Land, rolling.

Soil, sandy loam, with firm subsoil, 2nd rate.

Undergrowth, greasewood, mesquite, catclaw, cactus and Joshua trees.

No timber.

N. 0° 2' W., bet. secs. 21 and 22.

Over rolling land, thru scattering undergrowth.

17.40 Wash, 5 lks. wide, course SW.

40.00 Set an iron post $\frac{3}{4}$ ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4}S21 | S22$$

$$1914$$

Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post $\frac{3}{4}$ ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 15, 16, 21 and 22, marked on brass cap,

$$\begin{array}{c} T9N R9W \\ S16 | S15 \end{array}$$

$$S21 | S22$$

$$1914$$

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, sandy loam, 12 to 24 ins. deep, with firm subsoil, 1st rate.

Undergrowth, greasewood, mesquite, cactus and Joshua trees.

No timber.

S. 89° 52' E. on a random line, bet. secs. 15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.36 Intersect N. and S. line, 14 lks. S. of the cor. of secs. 14, 15, 22 and 23.

Thence,

N. 89° 58' W., on a true line, bet. secs. 15 and 22.

Over rolling land, thru scattering undergrowth.

15.17 Wash, 10 lks. wide, course SW.

18.37 Wash, 6 lks. wide, course SW.

Subdivision of Township 9 North, Range 9 West. 13

Chains.

40.18 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 15

S 22

1914

Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

80.36 The cor. of secs. 15, 16, 21 and 22.

Land, gently rolling.
Soil, sandy loam, with firm subsoil; 1st to 2nd rate.
Undergrowth, greasewood, mesquite, cactus and Joshua trees.
No timber.

N. 0° 2' W., bet. secs. 15 and 16.

Over gently rolling land, thru scattering undergrowth.

20.35 Wash, 12 lks. wide, course SW.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 16 | S 15

1914

Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

59.80 Wagon road, brs. SW. and NE.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 9, 10, 15 and 16, marked on brass cap,

T9N, R9W
S 9 | S 10

S 16 | S 15

1914

Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
Soil, sandy loam, 2nd rate.
Undergrowth, greasewood, mesquite, catclaw, cactus and Joshua trees.
No timber.

S. 89° 58' E., on a random line, bet. secs. 10 and 15.

40.00 Set temp. 1/4 sec. cor.

80.32 Intersect N. and S. line, 11 lks. N. of the cor. of secs. 10, 11, 14 and 15.

Thence,
N. 89° 53' W., on a true line, bet. secs. 10 and 15.
Over rolling land, thru scattering undergrowth.

6.50 Wash, 10 lks. wide, course SW.

40.16 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 10

S 15

1914

BOOK 3226

14. Subdivision of Township 9 North, Range 9 West.

Chains

Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

50.30 Wagon road brs. NE. and SW.

80.32 The cor. of secs. 9, 10, 15 and 16.

Land, gently rolling.

Soil, sandy loam, with firm subsoil, 2nd rate.

Undergrowth, greasewood, mesquite, catclaw and cactus.

No timber.

N. $0^{\circ}2'W.$, bet. secs. 9 and 10.

Over rolling land, thru scattering undergrowth.

10.00 Wash, course W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 9	S 10
-----	------

1914

Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

59.85 Wash, 2 ft. deep, 35 lks. wide, course NW.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, marked on brass cap,

T9N R9W	
S 4	S 3

S 9	S 10
-----	------

1914

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, sandy loam, 2nd rate.

Undergrowth, greasewood, cactus, mesquite, catclaw and Joshua trees.

No timber.

S. $89^{\circ}53'E.$, on a random line, bet. secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.36 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 2, 3, 10 and 11.

Thence

N. $89^{\circ}49'W.$, on a true line, bet. secs. 3 and 10.

Over rolling land, thru scattering undergrowth.

14.72 Wash, 2 ft. deep, 110 lks. wide, course SW.

29.72 Enter wash, 3 ft. deep, course NNW.

31.87 Leave same, same course.

38.37 Wash, 2 ft. deep, 12 lks. wide, course NW.

40.18 Set an iron post 3 ft. long, 1 in., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 3	
-----	--

S 10	
------	--

1914

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Chains.

41.28 Wash, 2 ft. deep, 20 lks.wide, course SW.
 63.80 Wash, 5 lks.wide, course SW.
 80.36 The cor.of secs.3,4,9 and 10.
 Land, rolling.
 Soil, sandy loam, and gravelly, 2nd rate.
 Undergrowth, greasewood, mesquite, cactus and Joshua trees.
 No timber.

N.0° 1'E., on a random line, bet. secs.3 and 4.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 79.97 Intersect N. bdy.of Tp. 33 lks.W. of the cor.of secs.3,4,
 33 and 34, described in Book "A."
 Thence,
 S.0° 15' W., on a true line, bet. secs. 3 and 4.
 Over rolling land, thru scattering undergrowth.
 4.70 Wash, 1 ft. deep, 8 lks.wide, course SW.
 33.50 Wash, 2 ft. deep, 10 lks.wide, course SW.
 39.97 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

S4 | S3

1914

Dig pits 18x18x12 ins.; N.and S.of cor. 3 ft. dist.,and
 raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft.high,W.of cor.
 44.50 Wash, 2 ft. deep, 12 lks.wide, course NW.
 48.50 Wash, 2 ft. deep, 6 lks.wide, course NW.
 49.00 Wash, 2 ft. deep, 10 lks.wide, course NW.
 79.97 The cor.of secs.3,4,9 and 10.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Undergrowth, greasewood, mesquite, cactus and Joshua
 trees:
 No timber.

From the original standard cor.of secs. 32 and 33 on S.bdy.
 of Tp. (2nd.Std.Par.N.),an iron post, firmly set,12
 ins. above ground, marked and witnessed as described
 by the surveyor general,

N.0° 2' W., bet: secs.32 and 33.
 Over broken N.slope, thru. scattering undergrowth.
 Ascend 30 ft.
 3.00 Top of ridge, brs,NW. and SE. Descend 45 ft.
 12.25 Draw, drains SE. Ascend 100 ft.
 20.80 Top of ridge, brs.NE. and SW.
 Descend 70 ft.
 28.00 Draw, drains W. Ascend 55 ft.
 34.50 Top of spur, slopes W. Descend.
 40.00 Set an iron post 1 in. in diam., 3 ft.long, 26 ins. in
 the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

S32 | S33


1914

Raise a mound of stone 2 ft.base, $1\frac{1}{2}$ ft.high,W.of cor.
 Ascend.
 43.25 Top of spur, extends 5 chs.W. Descend 80 ft.
 48.00 Draw, drains NE. Ascend 40 ft.
 52.00 Top of ridge, brs.NE.and SW. Descend 40 ft.
 55.50 Draw, drains NE. Ascend 20 ft.
 59.00 Top of spur,slopes E. Descend 60 ft.to
 68.00 Wash, course NE.
 76.95 Wash, 15 lks.wide, course E.
 80.00 Set an ironpost 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground, for cor.of secs. 28,29,32 and 33,marked

16. Subdivision of Township 9 North, Range 9 West.

Chains


on brass cap,



Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, heavily rolling and broken.
 Soil, rocky, 4th rate.
 Undergrowth, mesquite, catclaw and greasewood.
 No timber.


40.00 East, on a random line, bet. secs. 28 and 33.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.76 Intersect, N. and S. line, 9 lks. S. of the cor. of secs. 27,
 28, 33 and 34.

Thence,
 S. $89^{\circ}56'$ W., on a true line, bet. secs. 28 and 33.
 Over rolling land, thru. scattering undergrowth.
 6.25 Wagon road brs. SE. and NW.
 23.65 Wash, 12 lks. wide, course NW.
 29.00 Wash, 15 lks. wide, course NE.
 39.88 Set an iron post $\frac{3}{4}$ ft. long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



Dig pits, 18x18x12 ins., E. and W. of cor., 3 ft. dist., and
 raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of
 cor.
 42.10 Wash, 4 ft. deep, 45 lks. wide, course NE.
 65.10 Wash, 15 lks. wide, course NE.
 72.32 Wash, 10 lks. wide, course NE.
 79.76 The cor. of secs. 28, 29, 32 and 33.
 Land, rolling.
 Soil, sandy and rocky, 2nd and 3rd rate.
 Undergrowth, greasewood, mesquite, catclaw, and cactus.
 No timber.

N. $0^{\circ}2'$ W., bet. secs. 28 and 29.
 Over heavily rolling land, thru. scattering undergrowth.
 1.35 Wash, 15 lks. wide, course SE. Ascend.
 10.50 Top of ridge, brs. SE. and SW. Descend 48 ft.
 12.25 Draw, drains SE. Ascend 50 ft.
 14.00 Top of spur, brs. SE. and NW. Descend 70 ft. to
 25.20 Wash, 15 lks. wide, course NE.
 38.20 Wash, 15 lks. wide, course NE.
 40.00 Set an iron post $\frac{3}{4}$ ft. long, 1 in. in diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,



and raise a mound of stone 3 ft. base, 2 ft. high, W. of
 cor.

44.00 Wash, 20 lks. wide, course NW.
 56.10 Same wash, 55 lks. wide, course NE.
 60.40 Wash, 10 lks. wide, course NE.
 80.00 Set an iron post $\frac{3}{4}$ ft. long, 2 ins. in diam., 24 ins. in

Chains.

the ground for cor. of secs. 20, 21, 28 and 29, marked on brass cap,

T9N	R9W
S20	S21
+	
S29	S28
1914	

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, heavily rolling.
Soil, rocky, 4th rate.
Undergrowth, greasewood, mesquite and catclaw, and cactus.
No timber.

- N. $89^{\circ}56'$ E. on a random line, bet. secs. 21 and 28.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.62 Intersect N. and S. line, 4 lks. S. of the cor. of secs. 21, 22, 27 and 28.
Thence,
S. $89^{\circ}54'$ W., on a true line, bet. secs. 21 and 28.
Over rolling land, thru. scattering undergrowth.
14.00 Wash, 10 lks. wide, course NW.
25.75 Bullard Wash, 6 ft. deep, 175 lks. wide, course NW.
39.81 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 21
+
S 28
1914

- Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
43.60 Wash, 5 lks. wide, course N.
52.30 Wash, 15 lks. wide, course NE.
65.20 Wash, 5 lks. wide, course N.
75.75 Wash, $2\frac{1}{2}$ ft. deep, 15 lks. wide, course NE.
79.62 The cor. of secs. 20, 21, 28 and 29.
Land, rolling.
Soil, sandy and gravelly, 2nd rate.
Undergrowth, greasewood, mesquite and catclaw.
No timber.

- N. $0^{\circ}2'$ W. bet. secs. 20 and 21.
Over rolling land, thru. scattering undergrowth.
24.00 Wash, 8 lks. wide, course NW.
28.40 Center of Bullard Wash, 6 ft. deep, 150 lks. wide, course NW.
39.35 Wash, 4 ft. deep, 50 lks. wide, course WNW.
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 20	S 21
+	
1914	


from which,

- A catclaw, 5 ins. diam., brs. S. 30° W., 100 lks. dist., marked $\frac{1}{4}$ S 20 B T.
A mesquite, 8 ins. in diam., brs. S. 55° E., 35 lks. dist., marked $\frac{1}{4}$ S 21 B T.
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21,

18. Subdivision of Township 9 North, Range 9 West.

Chains.


marked on brass cap,



Dig pits 18x18x12 ins., in each sec. 5 $\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, rolling.
 Soil, sandy and gravelly, 2nd rate.
 Undergrowth, greasewood, mesquite and catclaw.
 No timber.


40.00 N.89°54'E., on a random line, bet. secs. 16 and 21.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.72 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 15, 16, 21 and 22.

Thence,
 S.89°55'W., on a true line, bet. secs. 16 and 21.
 Over rolling land, thru scattering undergrowth.
 39.86 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 50.56 Wash, 10 lks. wide, course SW.
 79.72 The cor. of secs. 16, 17, 20 and 21.
 Land, gently rolling.
 Soil, sandy and gravelly, 2nd rate.
 Undergrowth, greasewood, mesquite, catclaw and cactus.
 No timber.


7.35 N.0° 2'W., bet. secs. 16 and 17.
 Over gently rolling land, thru scattering undergrowth.
 Wagon road brs. ENE. and WSW.
 22.50 Wash, 5 lks. wide, course NW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,

- A mesquite, 5 ins. in diam., brs. S. 58 $\frac{1}{2}$ °W., 17 lks. dist., marked $\frac{1}{4}$ S 17 B T.
- A mesquite, 5 ins. in diam., brs. S. 56°W., 44 lks. dist., marked $\frac{1}{4}$ S 17 B T.

40.45 Wash, course W.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 8, 9, 16 and 17, marked on brass cap,



Chains.

dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, sandy loam, 2nd rate.

Undergrowth, greasewood, mesquite, catclaw, cactus and Joshua trees.

No timber.

- 40.00 N. 89° 55' E., on a random line, bet. secs. 9 and 16. Set temp. 1/4 sec. cor.
- 79.86 Intersect N. and S. line, 4 lks. N. of the cor. of secs. 9, 10, 15 and 16. Thence, S. 89° 57' W., on a true line, bet. secs. 9 and 16. Over rolling land, thru. scattering undergrowth.
- 39.93 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 9

S 16
1914

Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

- 79.86 The cor. of secs. 8, 9, 16 and 17. Land, gently rolling. Soil, sandy loam with firm subsoil; 2nd rate. Undergrowth, greasewood, mesquite, cactus and Joshua trees. No timber.

- 11.15 N. 0° 2' W., bet. secs. 8 and 9. Over gently rolling land, thru. scattering undergrowth. Wash, 55 lks. wide, course NW.
- 32.75 Old wagon road brs. NE. and SW.
- 40.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 8 | S 9

1914

Dig pits 18x18x12 ins., N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

- 71.45 Wash, 6 lks. wide, course SW.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 4, 5, 8 and 9, marked on brass cap,

T9N R9W
S 5 | S 4

S 8 | S 9

1914

Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.

Soil, sandy loam, with firm subsoil, 2nd rate.

Undergrowth, greasewood, mesquite, cactus and Joshua trees.

No timber.

BOOK 3226

20 Subdivision of Township 9 North, Range 9 West.

Chains
 40.00 N. 89° 57' E., on a random line, bet. secs. 4 and 9.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.88 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 3,
 4, 9 and 10.
 Thence,
 West, on a true line, bet. secs. 4 and 9.
 Over gently rolling land, thru. scattering undergrowth.
 12.80 Wash, 5 lks. wide, course SW.
 39.94 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

 $\frac{1}{4}$ S 4

S 9

1914

79.88 Dig pits 18x18x12 ins., E. and W. of cor. 3 ft. dist., and
 raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of
 cor.
 The cor. of secs. 4, 5, 8 and 9.
 Land, rolling.
 Soil, sandy loam, with firm subsoil; 2nd rate.
 Undergrowth, greasewood, mesquite, cactus and Joshua
 trees.
 No timber.

40.00 N. 0° 9' E., on a random line, bet. secs. 4 and 5.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. bdy. of Tp., 4 lks. W. of the cor. of secs. 4, 5,
 32 and 33, described in Book "A."
 Thence,
 S. 0° 11' W., on a true line, bet. secs. 4 and 5.
 Over gently rolling land, thru. scattering undergrowth.
 3.70 Wagon road brs. W. to Alamo and E. to Congress Junction.
 6.00 Wash, 5 lks. wide, course SW.
 35.90 Wash, 12 lks. wide, course SW.
 38.40 Wash, $2\frac{1}{2}$ ft. deep, 30 lks. wide, course SW.
 40.00 Set an iron 3 ft. long, 1 in. in diam., 26 ins. in the
 ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 4

1914

Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and
 raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of
 cor.
 57.25 Wash, 12 lks. wide, course SW.
 58.00 Wash, 10 lks. wide, course NW.
 59.55 Wash, 10 lks. wide, course NW.
 80.00 The cor. of secs. 4, 5, 8 and 9.
 Land, gently rolling.
 Soil, sandy loam; 2nd rate.
 Undergrowth, greasewood, mesquite, catclaw. cactus and
 Joshua trees.
 No timber.

From the original standard cor. of secs. 31 and 32 on S.
 bdy. of Tp., (2nd. Std. Par. N.), which is an iron post,
 with brass cap, firmly set, marked and witnessed as
 described by the surveyor general,
 N. 0° 3' W., bet. secs. 31 and 32.
 Over rolling land, thru. scattering brush.
 12.00 Wash, 12 lks. wide, course SE.
 Enter broken land, bearing SE. and NW. Ascend 174 ft.
 23.80 Top of ridge, brs. WNW. and SE. Descend 80 ft.
 28.25 Gulch, course W. Ascend 100 ft.
 33.25 Top of ridge, brs. NE. and SW. Descend 100 ft.

Subdivision of Township 9 North, Range 9 West. 21.

Chains.

38.70 Gulch, course SW. Ascend 20 ft. to
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S31 | S32

1914

and raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.

Ascend 25 ft.

42.60 Top of spur, slopes SW. Descend.
45.00 Head of gulch, course SW. Ascend 100 ft.
50.30 Top of main ridge, brs. ESE. and WSW. Descend 45 ft.
53.20 Head of gulch, course NW. Ascend 36 ft.
56.50 Top of spur, brs. E. and W.
Old mine shaft brs. N. 35 1/2° W.
Descend 225 ft. to gulch,
71.40 Old mine shaft above noted, brs. N. 75 1/2° W. about 12 chs. dist.
78.10 Gulch, course NW. Ascend.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 29, 30, 31, and 32, marked on brass cap,

T9N R9W
S30 | S29

S31 | S32

1914

and raise a mound of stone 3 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Undergrowth, greasewood, cactus, palo verde and mesquite. No timber.

East, on a random line, bet. secs. 29 and 32.

40.00 Set temp. 1/4 sec. cor.
80.12 Intersect N. and S. line, 4 lks. N. of the cor. of secs. 28, 29, 32 and 33.
Thence,
N. 89° 58' W. on a true line, bet. secs. 29 and 32.
Over heavily rolling land, thru. scattering undergrowth.
7.35 Wash, 12 lks. wide, course SE. Ascend.
17.07 Top of rocky spur; brs. N. and S.
Mine shaft brs. S. 44 1/2° W. about 50 chs. dist. Descend.
19.00 Ascend.
22.00 Top of spur, brs. NW. and SE. Descend SW. slope, 56 ft.
29.20 Wash, 3 ft. deep, 40 lks. wide, course NW.
32.00 Wash, 50 lks. wide, course NE.
34.85 Old wagon road brs. NE. and SW.
35.60 Wash 3 ft. deep, 35 lks. wide, course NE.
39.80 Wash, 10 lks. wide, course SE.
40.06 Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 29

S 32

1914

and raise a mound of stone 3 ft. base, 2 ft. high, N. of cor.

Ascend 46 ft.

45.60 Top of spur, brs. NE. and SW. Descend 30 ft.
50.40 Gulch, course NE. Ascend 70 ft.
58.00 Top of ridge in saddle of same, brs. NE. and SW.

BOOK 3226

22. Subdivision of Township 9 North Range 9 West

Chains.
 60.00 Descend 30 ft. to
 Head of draw, course N.
 Continue over broken land to cor.
 74.00 Gulch, course NW.
 76.00 Gulch, course NE. Ascend.
 78.65 Top of spur, brs. NE. and SW.
 Frame cabin brs. N. $31\frac{1}{2}^{\circ}$ E., about 18.00 chs. dist.
 Shaft brs. N. $29\frac{1}{2}^{\circ}$ E., about 18.00 chs. dist.
 Ascend.
 80.12 The cor. of secs. 29, 30, 31 and 32.
 Land, broken.
 Soil, rocky, 4th rate.
 Undergrowth, mesquite, greasewood, cactus and palo verde.
 No timber.

 West, on a random line, bet. secs. 30 and 31.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.02 Intersect W. bdy. of Tp. 2 lks. N. of the cor. of secs. 25, 30,
 31 and 36, described in Book "A."
 Thence,
 N. $89^{\circ}59'$ E., on a true line, bet. secs. 30 and 31.
 Over mountainous land, thru scattering undergrowth.
 2.00 Wash, 10 lks. wide, course NE.
 20.00 Wagon road, brs. NW. and SE.
 20.80 Wash, 50 lks. wide, course NW.
 30.00 Wash, 5 lks. wide, course NW.
 35.50 Wash, 12 lks. wide, course NW.
 40.02 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 30

S 31

1914

and raise a mound of stone 3 ft. base, 2 ft. high, N.
 of cor.
 43.50 Gulch, course NW.
 46.00 Wash, 10 lks. wide, course NW.
 52.70 Gulch, course NW. Ascend 84 ft.
 66.10 Top of ridge, brs. NE. and SW. Wagon road on top of same.
 Descend 37 ft. to
 76.75 Gulch, course NE.
 78.70 Gulch, course NW.
 80.02 The cor. of secs. 29, 30, 31 and 32.
 Land, broken.
 Soil, rocky, 4th rate.
 Undergrowth, greasewood, mesquite, catclaw and cactus/
 No timber.

 N. $0^{\circ} 3'$ W., bet. secs. 29 and 30.
 Over broken land, thru scattering undergrowth.
 1.50 Top of low spur, brs. NE. and SW. Descend 12 ft.
 A frame cabin brs. N. $38\frac{1}{2}^{\circ}$ E., about 18.00 chs. dist.
 A mine shaft brs. N. 30° E., about 18.00 chs. dist.
 2.70 Draw, drains NE. Ascend.
 4.00 Top of ridge, brs. NE. and SW. Descend 28 ft. to
 7.25 Gulch, course NE. Ascend.
 10.40 Top of spur, slopes NE. Descend 32 ft. to
 16.00 Wash, 10 lks. wide, course NE.
 30.70 Gulch, course NE. Ascend.
 38.00 Top of spur, slopes NE. Descend.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S30 | S29

1914

Chains

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

- 40.75 Wash, 8 lks. wide, course NE.
- 45.90 Wash, 20 lks. wide, course NE.
- 49.50 Old road, brs. NE. and SW.
- 49.60 Wash, 10 lks. wide, course N. from SE.
- 51.00 Leave same, course NW.
- 68.25 Wash, 20 lks. wide, course NE.
- 69.20 Wash, 12 lks. wide, course NE.
- 80.00 Set an iron post 3 ft. long, 2 ins. indiam., 24 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, marked on brass cap,

T9N	R9W
S19	S20
—+—	
S30	S29
1914	

and raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and broken.
 Soil, rocky of no apparent value.
 Undergrowth, greasewood, mesquite, palo verde, cactus and Joshua trees.
 No timber.

- 40.00 S. 89° 58' E., on a random line, bet. secs. 20 and 29. Set temp. $\frac{1}{4}$ sec. cor.
- 80.12 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 20, 21, 28 and 29.
 Thence,
 N. 89° 57' W., on a true line, bet. secs. 20 and 29.
 Over rolling land, thru. scattering undergrowth.
- 3.25 Wash, 6 lks. wide, course NE.
- 24.20 Wash, 30 lks. wide, course NW.
- 32.65 Wash, 8 lks. wide, course NW.
- 40.06 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S	20
—+—	
S	29
1914	

and raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

- 44.10 Wash, 15 lks. wide, course NE. Ascend 100 ft.
- 58.00 Top of ridge, brs. NW. and SE. Descend 100 ft. to
- 68.00 Wash, 6 lks. wide, course NW.
- 70.70 Wash, 2 ft. deep, 40 lks. wide, course NE.
- 77.70 Wash, 10 lks. wide, course NE.
- 80.12 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.
 Soil, rocky, with scanty loam, of no apparent value.
 Undergrowth, greasewood, mesquite and catclaw.
 No timber.

- 40.00 S. 89° 59' W., on a random line, bet. secs. 19 and 30. Set temp. $\frac{1}{4}$ sec. cor.
- 79.94 Intersect W. bdy. of Tp., 11 lks. N. of the cor. of secs. 19, 24, 25 and 30, described in Book "A."
 Thence,
 N. 89° 54' E., on a true line, bet. secs. 19 and 30.
 Over rolling land, thru. scattering undergrowth.
- 7.80 Wash, 10 lks. wide, course NE.

24 Subdivision of Township 9 North, Range 9 West.

Chains.

- 23.80 Wash, 12 lks.wide, course NE.
- 38.40 Wash, 6 lks.wide, course NE.
- 39.94 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 19

S 30
1914

and raise a mound of stone 3 ft.base, 2 ft. high, N.of cor.

- 40.50 Wash, 8 lks.wide, course NE.
- 57.55 Road course NE and SW.
- 53.50 Wash, 10 lks.wide, course NE.
- 62.45 Wash, 4 lks.wide, course NE.
- 73.65 Head of wash, course NW.
- 79.94 The cor.of secs.19,20,29 and 30.

Land, rolling.
Soil, rocky, with scanty loam, 4th rate.
Undergrowth, greasewood, mesquite, catclaw and cactus.
No timber.

N.0° 3' W., bet. secs.19 and 20.
Over rolling land, thru.scattering undergrowth.

- 12.00 Wash, 5 lks.wide, course NE.
- 24.45 Wagon road brs. NE. and SW.
- 40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S19 | S20

1914

Dig pits 18x18x12 ins., N.and S. of cor. 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W.of cor.

- 72.40 Wagon road brs.NW. and SE.
- 80.00 Set an iron post 3 ft.long, 2 ins. in diam., 24 ins. in the ground for cor.of secs.17,18,19 and 20, marked on brass cap,

T9N R9W
S18 | S17

S19 | S20
1914

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft.base, 2 ft. high, W.of cor.
Land, rolling.
Soil, rocky, with scanty loam, 3rd rate.
Undergrowth, greasewood, mesquite, and catclaw.
No timber.

- 40.00 S.89° 57' E., on a random line, bet. secs.17 and 20/
Set temp. $\frac{1}{4}$ sec.cor.
- 80.04 Intersect N. and S. line, 12 lks.N. of the cor.of secs.16, 17, 20 and 21.

Thence,
N.89°52' W., on a true line, betl secs. 17 and 20.
Over rolling land, thru. scattering undergrowth.

- 10.30 Wagon road, brs.NE. to Congress Junction and SW. to Golden.
- 40.02 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

Subdivision of Township 9 North Range 9 West 25

Chains.

1/4 S 17

S 20
1914

Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

- 55.70 Wash, 2 ft. deep, 10 lks. wide, course NW.
- 57.60 Center of Bullard Wash, 60 lks. wide, 3 ft. deep, course NW.
- 66.50 Wash, 6 lks. wide, course NW.
- 80.04 The cor. of secs. 17, 18, 19 and 20.
Land, gently rolling.
Soil, sandy loam, 1st and 2nd rate.
Undergrowth, greasewood, mesquite and catclaw.
No timber.

-
- 40.00 S. 89° 54' W., on a random line, bet. secs. 18 and 19.
Set temp. 1/4 sec. cor.
 - 79.85 Intersect W. bdy. of Tp., 14 lks. S. of the cor. of secs. 13, 18, 19 and 24, described in Book "A."
Thence,
East, on a true line, bet. secs. 18 and 19.
Over gently rolling land, thru. scattering undergrowth.
 - 12.55 Wash, 15 lks. wide, course NE.
 - 20.00 Wash, 5 lks. wide, course NE.
 - 22.55 Old wagon road, brs. NE. and SW.
 - 37.15 Wash, 2 ft. deep, 15 lks. wide, course N.
 - 39.85 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 18

S 19
1914

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

- 41.00 Wash, 2 ft. deep, 12 lks. wide, course NE.
- 41.85 Wash, 2 1/2 ft. deep, 25 lks. wide, course NW.
- 65.15 Wagon road brs. NW. and SE.
- 67.50 Wash, 10 lks. wide, course NE.
- 79.85 The cor. of secs. 17, 18, 19 and 20.
Land, gently rolling.
Soil, rocky and gravelly, 4th rate.
Undergrowth, greasewood, mesquite and catclaw.
No timber.

-
- N. 0° 3' W., bet. secs. 17 and 18.
Over rolling land, thru. scattering undergrowth.
 - 14.75 Old wagon road brs. NW. and SE.
 - 18.30 Bullard Wash, 3 ft. deep, 105 lks. wide, course NW.
 - 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 18 | S 17

1914


Dig pits 18x18x12 ins., N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

- 48.00 Wash, 2 ft. deep, 20 lks. wide, course NW.
- 71.90 Wash, 6 lks. wide, course NW.

Chains.

76.35
80.00

Old wagon road, brs. NE. and SW.
Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 7, 8, 17 and 18, marked on brasscap,




Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, gently rolling.
Soil, sandy and gravelly loam, 2nd rate.
Undergrowth, greasewood, mesquite and catclaw.
No timber.

40.00
80.16

S. 89°52' E. on a random line, bet. secs. 8 and 17.
Set temp. 1/4 sec. cor.
Intersect N. and S. line, 4 lks. S. of the cor. of secs. 8, 9, 16 and 17.

17.90
30.10
40.08

Thence,
N. 89°54' W., on a true line, bet. secs. 8 and 17.
Over gently rolling land, thru scattering undergrowth.
Wash, 2 1/2 ft. deep, 35 lks. wide, course SE.
Wash, 2 ft. deep, 20 lks. wide, course SE.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,



Dig pits 18x18x12 ins., E. and W of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

69.95
80.16


Old wagon road, brs. NE. and SW.
The cor. of secs. 7, 8, 17 and 18.
Land, rolling.
Soil, sandy loam, 2nd rate.
Undergrowth, greasewood, mesquite, and catclaw.
No timber.

40.00
79.75

West, on a random line, bet. secs. 7 and 18.
Set temp. 1/4 sec. cor.
Intersect W. bdy. of Tpt., 8 lks. N. of the cor. of secs. 7, 12, 13 and 18, described in Book "A."

6.65
8.60
12.15
39.75

Thence,
N. 89°56' E., on a true line, bet. secs. 7 and 18.
Over gently rolling land, thru scattering undergrowth.
Wash, 80 lks. wide, course N. 25° E.
Wash, 30 lks. wide, course NE.
Wash, 8 lks. wide, course NE.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,




Dig pits 18x18x12 ins., E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

Subdivision of Township 9 North, Range 9 West 27.


Chains.

43.35 Bullard Wash, 2 ft. deep, 145 lks. wide, course NW.
 79.75 The cor. of secs. 7, 8, 17 and 18.
 Land, gently rolling.
 Soil, sandy loam, about 12 ins. deep, with firm subsoil;
 2nd rate.
 Undergrowth, greasewood, mesquite, catclaw and cactus.
 No timber.

N.0°3' W. bet. secs. 7 and 8.
 Over gently rolling land, thru. scattering undergrowth.
 39.00 Wash, 8 lks. wide, course SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,




Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist., and
 raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of
 cor.
 73.10 Wash, 10 lks. wide, course SE.
 78.50 Wash, 6 lks. wide, course SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground for cor. of secs. 5, 6, 7 and 8, marked on
 brass cap,



Dig pits 18x18x12 ins., in each sec. 5 ft. dist., and
 raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.
 Land, gently rolling.
 Soil, sandy loam, with firm subsoil, 2nd rate.
 Undergrowth, greasewood, mesquite, catclaw, cactus and
 Joshua trees.
 No timber.

S.89°54' E., on a random line, bet. secs. 5 and 8.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.12 Intersect N. and S. line, 11 lks. S. of the cor. of secs. 4,
 5, 8 and 9.
 Thence,
 N.89° 59' W., on a true line, bet. secs. 5 and 8.
 Over gently rolling land, thru. scattering undergrowth.
 40.06 Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,



Dig pits 18x18x12 ins., E. and W. of cor., 3 ft. dist., and
 raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of
 cor.
 71.90 Wash, 2 ft. deep, 30 lks. wide, course SW.
 80.12 The cor. of secs. 5, 6, 7 and 8.
 Land, gently rolling.
 Soil, sandy loam, with firm subsoil, good 2nd rate.
 Undergrowth, greasewood, mesquite, catclaw, cactus and
 Joshua trees.
 No timber.

Chains.

- s.89° 56' W., on a random line, bet. secs.6 and 7.
- 40.00 Set temp. $\frac{1}{4}$ sec.cor.
- 79.72 Intersect W. bdy, of Tp., 4 lks.S. of the cor.of secs.1, 6, 7 and 12, described in Book "A."
- Thence,
- N.89°58' E., on a true line, bet. secs. 6 and 7.
- Over gently rolling land, thru. scattering undergrowth.
- 39.72 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

186

S 7
1914

Dig pits 18x18x12 ins., E.and W. of cor., 3 ft. dist., and raise a mound of earth 3 ft. base, 1 $\frac{1}{2}$ ft. high, N.of cor.

- 57.70 Wagon road, brs.NE. and SW.
- 74.00 Wash, 2 ft. deep, 6 lks.wide, course SE.
- 78.70 Wash, 1 ft. deep, 5 lks.wide, course SE.
- 79.72 The cor.of secs.5,6,7 and 8.
- Land, gently rolling.
- Soil, sandy loam, 2nd rate.
- Undergrowth, greasewood, mesquite, catclaw, cactus, and Joshua trees.
- No timber.

-
- N.0°9'E., on a random line, bet. secs.5 and 6.
 - 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 - 80.07 Intersect N. bdy. of Tp., 4 lks.W. of the cor. of secs.5, 6, 31 and 32, described in Book "A."
 - Thence,
 - S.0°11'W., on a true line, bet. secs.5 and 6.
 - Over gently rolling land, thru. scattering undergrowth.
 - 9.00 Wagon road brs.W to Alamo and E to Congress Junction.
 - 13.77 Wash, 2 ft. deep, 10 lks.wide, course SW.
 - 28.00 Wash, 2 ft. deep, 18 lks.wide, course SW.
 - 35.00 Wash, 8 lks.wide, course NW.
 - 40.07 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

186 | S5

1914

- Dig pits 18x18x12 ins., N. and S. of cor. 3 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W.of
- 54.70 Wash, 1 $\frac{1}{2}$ ft. deep, 15 lks.wide, course NW.
- 56.00 Wagon road, brs.NE. and SW.
- 79.37 Wash, 1 ft. deep, 6 lks.wide, course SW.
- 80.07 The cor.of secs. 5,6,7 and 8.
- Land, gently rolling.
- Soil, sandy loam, good 2nd rate.
- Undergrowth, greasewood, mesquite, catclaw, cactus and Joshua trees.
- No timber.

GENERAL DESCRIPTION.

This township is mostly rolling land, drained by Bullard Wash, which enters in sec.5b, and leaves the Tp.thru. sec.7. No other watercourse in the Tp. A range of hills occupies the greater part of the land south of Bullard Wash. The soil consists of fine sand, with little gravel, and with sufficient irrigation, will produce profitable

Chains.

crops, where the surface is sufficiently nearly level. The hilly portions have no apparent value. No adequate supply of water is readily available for any purpose.

Undergrowth consists of low, scattering greasewood, from 4 to 6 ft. high; cactus of various kinds and heights; mesquite and catclaw from 6 to 10 ft. high along the water-courses, and in the higher portions of the northern part, of ocotillo and Joshua trees, from 8 to 20 ft. high.

A coarse grass is found in the lower lands along the water-courses and in basins.



BOOK 3226

Book "D"
Group 36 - - Arizona.

Township 9 North, Range 9 West.

DATE DIAGRAM

	11-24-14	11-24-14	11-24-14	11-24-14	11-24-14	11-13-14
11-24-14	6	5	4	3	2	1
11-24-14	11-30-14	12-1-14	12-1-14	11-24-14	11-16-14	11-16-14
11-24-14	7	8	9	10	11	12
11-24-14	11-30-14	11-30-14	11-27-14	11-24-14	11-14-14	11-13-14
11-23-14	18	17	16	15	14	13
11-23-14	11-30-14	11-30-14	11-27-14	11-24-14	11-24-14	11-13-14
11-23-14	19	20	21	22	23	24
11-23-14	11-30-14	11-28-14	11-25-14	11-23-14	11-14-14	11-13-14
11-23-14	30	29	28	27	26	25
11-23-14	11-28-14	11-28-14	11-25-14	11-23-14	11-14-14	11-12-14
11-23-14	31	32	33	34	35	36
11-23-14	11-28-14	11-25-14	11-23-14	11-14-14	11-12-14	11-12-14

2nd. Standard Parallel North.

Lines dated in black were executed by W.L.E. Wilkes, U.S. Surveyor.

Lines dated in red were executed by H.W. Bradstreet, U.S. Transitman.

For list of field assistants see Book "A".

See Book "C."

I, _____, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for _____ bearing date of the _____ day of _____, 191____, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____ of the _____ Meridian, in the State of _____, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for _____ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, Jan. 20, 1919. ~~1918.~~

The foregoing field notes of the survey of _____ the _____
subdivision lines of _____

TOWNSHIP 9 NORTH, RANGE 9 WEST.

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by H. N. Bradstreet, U. S. Transitman,

under ~~his~~ special instructions dated July 23, 1914, for Group 36, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.



U. S. Surveyor General.

~~I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.~~

U. S. Surveyor General.