·Book B


FIELD NOTES

OF THE RESURVEY OF

A portion of the N. bdy. of T. 1 N., R. 2 W.; the
North boundary of T. 1 N., R. 3 W., and the
West boundary of T. 2 N., R. 2 W.,
AND OF THE SURVEY OF THE
North boundary and
Subdivisions of
Township 2 North, Range 3 West
Of the Gila and Salt River Meridian,
In the State ofArizona
EXECUTED BY
Francis E. Joy, U. S. Cadastral Engineer, and
Theodore Vander Meer, and
Benjamin J. Mollette, U. S. Transitmen
Under special instructions dated October 4 , 1933 , which provided
for the surveys included under Group No. 187, bearing the approval of the
Commissioner of the General Land Office under date of October 30, 1933.
and assignment instructions datedOctober 24, 1933; and
March 24, 1934.
Survey commenced November 11, 19 33.
Survey completed April 23 , 19 34.

BCOX 4033

INDEX DIAGRAM.

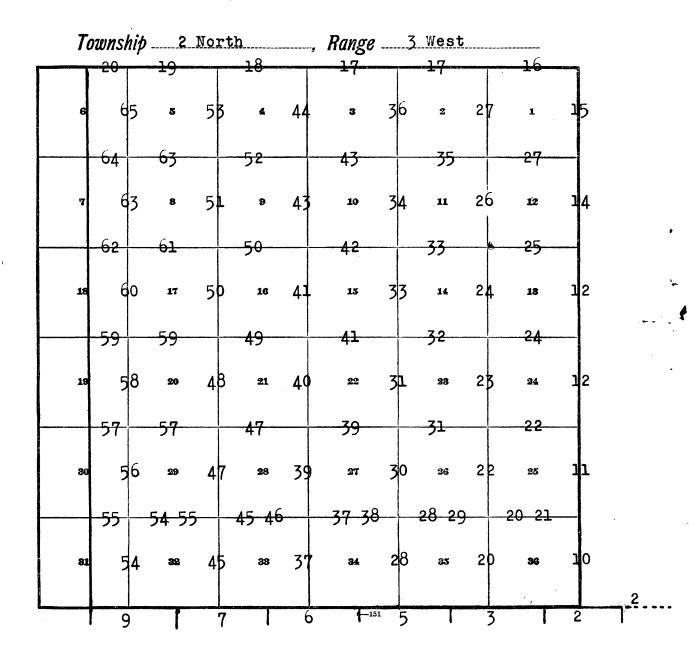

1 B

The resurvey and survey was executed with Buff and Buff transits Nos. 16723, 9223 and 9977, property of the General Land Office. The horizontal circles have diameters of 4½ ins., with two double verniers, placed opposite each other, reading to single minutes of arc. The vertical circles have diameters of 4 ins., with one double vernier reading to single minutes. The instruments were equipped with Smith solar attachments, radius of latitude arcs, 3½ ins., and of declination arcs, 3 ins., each with verniers reading to single minutes. The instruments were in good condition, having been placed in satisfactory adjustment prior to beginning the survey. Transit No. 16723 was approved by the district cadastral engineer, on October 24, 1933, and transits Nos. 9223 and 9977, on March 24, 1934. All of the instrumental adjustments were examined before mak-

ing the field tests, hereinafter recorded.

The direction of the lines were determined by solar transit method. The measurement were made with Lallie and Lufkin steel tapes, 5 chs. in length, graduated every link, for the first 100 lks., and thereafter at intervals of 10 lks. The tapes were tested by comparison with both the Lufkin and the Keuffel and Esser standard steel tapes, and found correct. The measurements were made on the slope, the vertical angle of each interval ascertained with a clinometer in good adjustment, and the horizontal equiv-

The data furnished with the special instructions gives the geographic position for the SE. cor. of T. 2 N., R. 3 W. as follows: latitude, 33°27'46"N., and longitude 112° 30'48"W.

alents entered in the field note record.

Nov. 11, 1933; at camp, near the SW. cor. of sec. 36, T. 2 N., R. 3 W., using transit No. 16723, at 5h 10m 30s p.m., 1.m.t., I make an hour angle observation on Polaris, east of the meridian, three each, with the telescope in the direct and the reversed positions, reading the horizontal deflection angles from a reference mark, which is a cactus on the sky-line, to the northeast of observating station, about one mile. The horizontal angles are left deflections from the reference mark to Polaris.

Mean horizontal angle from cactus to Polaris

Azimuth of Polaris
True bearing of cactus

Mean observed vertical angle
Reduced latitude

7° 39' 30"
1° 13' 48"
N. 2° 25' 42"E.

April 3, 1934, in camp, near the SE. cor. of sec. 16, T. 1 N., R. 3 W., latitude, 33°25'N., longitude, 112°33'05"W. using instrument No. 9977, we observe Polaris at western elongation, at 6h 49m p.m., l.m.t., making two observations, each with the telescope in the direct and the reversed positions, and mark the mean point with a tack in a stake, about 5 chs. north. We read the angle to a sky-line point about 4 miles northeasterly, which by reduced repetition, is 39°37'04". Subtracting the azimuth of Polaris; 1°15'24", the true bearing of the point is N.38°21'40"E. April 4, 1934, at intervals of 30 minutes from 7:30 to 10:30 a.m., and from 1:30 to 4:30 p.m., we make proper settings on the arcs of the solar attachments, and ascertain that the resulting orientation of the instruments, when compared with the meridian established by polaris observation, have a maximum error of less than 1'30".

compared with the meridian established by polaris observation, have a maximum error of less than 1.30". We verify the meridional indications at frequent intervals during the period of the survey and make daily noon tests of the vernier positions.

Observed magnetic declination, 14°45'E.

8. GOVERNMENT PRINTING OFFICE: 1231 G-8155

RESURVEY OF THE NORTH BOUNDARY OF T. 1 N., R. 3 W.

Ch	ains	
	• • •	by R.C. Powers, U.S.D.S. The NW. cor. of T. 1 N., R. 2 W., was reconstructed in 1907 by J. F. Hesse, U.S.D.S. No
	* *.	other surveys of the line are of record.
		The following notes describe a resurvey of the entire N. bdy., the restoration and reestablishment of the original
		corner monuments for T. 1 N., only, and the establishment
		of a new set of corners for T. 2 N., R. 3 W.
		Beginning at the cor. of Tps. 1 and 2 N., Rs. 3 and 4 W.
	in the second	East, on a random line, on the N. bdy. of T. 1 N. R. 3 W.
√ 39	9.56	A point 15 lks. S. of the \frac{1}{4} sec. cor. of secs. 6 and 31.
	9-79	A point 21 lks. S. of the cor. of secs. 5, 6, 31 and 32.
	9.76	A point 38 lks. S. of the 4 sec. cor. of secs. 5 and 32.
	9•44	A point 31 lks. S. of the cor. of secs. 4, 5, 32 and 33.
	9.02	A point 27 lks. S. of the 4 sec. cor. of secs. 4 and 33.
1	9-47	A point 63 lks. S. of the cor. of secs. 3, 4, 33 and 34.
279	9•47	Fail to find any trace of the ½ sec. cor. of secs. 3 and 34. Set temp. cor.
321	1.32	A point 87 lks. N. of the cor. of secs. 2, 3, 34 and 35.
361	1.32	Fail to find any trace of the ½ sec. cor. of secs. 2 and 35. Set temp. cor.
401	1.32	Fail to find any trace of the cor. of secs. 1, 2, 35 and 36. Set temp. cor.
441	32	Fail to find any trace of the \(\frac{1}{4}\) sec. cor. of secs. 1 and 36. Set temp. cor.
481	L•04	A point 119 lks. S. of the cor. of Tps. 1 and 2 N., Rs. 2 and 3 W.
. 1		Thence, from cor.
:		G 90057173
2		S.89°57'E., on random and true line. on N. bdy. of sec 6 of T. 1 N., R. 2 W.
37	7.71	Intersect the cor. of secs. 5, 6, 31 and 32; a granite stone, 8 x 6 x 6 ins. above ground, firmly set, mkd. and witnessed as described in the official record.
	•	Return to the cor. of Tps. 1 and 2 N., Rs. 2 and 3 W.,
		which is a granite stone, 8 x 6 x 6 ins. above ground, firmly set, and mkd. and witnessed as described in the
	1 4	official record. This cor. now refers to T. 1 N., 2 and 3 W. only.
		Thence the state of the state o
		S.89°16'W., on true line, on N. bdy. of sec. 1.
10	35	Shallow wash, 15 lks. wide, course S.
39	93	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 4 sec. cor. of secs. 1 only, with brass cap marked.

41

Chains of conta ing a real of **ing. this** , been a particle in the contraction . Tal 933 dig pits. . Trans disme. Dance T. 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist. Record dist. (80.23 chs.) in departure from the cor. of secs. 5, 6, 31 and 32, Tps. 1 and 2 N., R. 2 W., 42.53 Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, for cor. of T. 2 N., Rs. 2 and 3 W., only, with brass cap marked S36 S31 1 1 1 1 1 1 Sl TIN R3W the distance of the distance of 1933 os marce india . His o o .com Co from which A palo verde, 12 ins. diam., bears N.782 E., 1.40 chs. dist., mkd. T2N R2W S31 BT. An iron wood, 8 ins. diam., bears N.822 W., 2.33 chs. dist., mkd. T2N R3W S36 BT. A vacant cabin bears N.51°25'W., about 25 chs. dist. Enter cleared land, N. of line and 60 lks. S. 68.40 Desert road, bears NE. and SW. 70.00 Leave cleared land, N. of line and 60 lks. S. of line. 72.40 Dim road, bears NW. and SE. 77.00 Proportional distance, 79.87 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 1 and 2, only, with brass cap - 9310000 .901. S2 S1 TIN R3W 1933 equad , dig pits/0.19 18 x 18 x 12 ins., SE. and SW. of post, 3 ft. dist. Land: gently rolling. Soilr sand and gravel, lst rate. Undergrowth; palo verde, ironwood, mesquite, catclaw, cactus, cholla. ର୍ବ ବି ଓଡ଼ିଆ କିଲ୍ଲାର ବର୍ଷ ଓଡ଼ିଆ ଅବସ୍ଥା *ପ୍*ଷ୍ୟ କ୍ର of the early gon the society s.89.16.W., on true line, on N. bdy Lof sec. 2. with old caste again wide, for ear. Over gently rolling land, through average desert growth. At this point, which is 40 chs. in departure from the SE. 2.67 cor. of sec. 36,44 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for # sec. oor of sec. 36 only. of T. 2 N., with brass cap marked 13.5 **- 3.6** - 10 -

RESURVEY OF THE NORTH BOUNDARY OF T. 1 N., R. 3 W.

	1
· · · · · · · · · · · · · · · · · · ·	
An ironwood, 6 ins. diam., bears N292°E., 1.66 chs. dist., mkd. 4 \$36 BT.	
An ironwood, 4 ins. diam., bears $N.67\frac{1}{4}$ W., 106 chs. dist., mkd. $\frac{1}{4}$ S36 BT.	
A vacant cabin, bears N.40°W., about 3 chs. dist.	-
A vacant cabin, bears N.412°E., about 20 chs. dist.	
Shallow wash, 10 lks. wide, course SE. macro	
Proportional distance,	
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for \(\frac{1}{4} \) sec. cor. of sec. 2 only, with brass cap marked	***************************************
1933 raise a mound	
of stone, 3 ft. base, 2 ft. high, N. of cor.	
At this point, which is 80.00 chs. in departure from the SE. cor. of sec. 36,	
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 35 and 36 only. of T. 2 N. with brass cap marked	
\$35 \ \$36 \	-
of stone, 3 ft. base, 2 ft. high, N. of cor.	
ins. square, rotted off at top of mound of earth and rocks, 4 ins. high.	
ground, with old stake along side, for cor. of secs. 2	
TIN R3W box for a constant of the constant of	
of stone, 3 ft. base, 2 ft. high, S. of cor.	
Land: gently rolling. Soil: gravel, rocky, 2nd rate. Undergrowth: palo verde, ironwood, greasewood, sage,	
	An ironwood, 6 ins. diam., bears N292°E., 1.66 chs. dist., mkd. \$ \$36 BT. An ironwood, 4 ins. diam., bears N.672°W., 106 chs. dist., mkd. \$ \$36 BT. A vacant cabin, bears N.40°W., about 3 chs. dist. A vacant cabin, bears N.40°W., about 20 chs. dist. Shallow wash, 10 lks. wide, course SE. Shallow wash, 40 lks. wide, course SE. Proportional distance, Set an iron post, 5 ft. long, 1 in. diam., 30 ins. in the ground, for \$ \$50. cor. of sec. 2 only, with brass cap marked \$\frac{1}{2}\$ S 2 \\ \$1935\$ raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. At this point, which is 80.00 chs. in departure from the SE. cor. of sec. 36. Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 35 and 36 only, of T. 2 N with brass cap marked \$\frac{72N R3W}{355 \s36}\$ \$\frac{1}{2}\$44 raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Wood road, bears NW. and SE. Shallow wash, 25 lks. wide, course SE. Shallow wash, 40 lks. wide, course SE. Shallow wash, 50 lks. wide, course SE. Shallow wash, 50 lks. wide, course SE. The cor. of secs. 2, 3, 34 and 35; a palo verde stake, 4 ins. square, rotted off at top of mound of earth and rocks, 4 ins. high. As this cor. now refers to secs. 2 and 3 only, in place of the stake, Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with old stake along side, for cor. of secs. 2 and 3 only, with brass cap marked \$3 \section{3 SE} \$\frac{11 \text{R3W}}{1937} raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor. Land: gently rolling.

5

Chains N.88°57'W., on true line, on N. bdy. of sec. 3.

Over rolling desert, through average desert growth.

2.40 Shallow wash, 10 lks. wide, course S.10°E.

2.81 At this point which is 40 chs. in departure from the SE. cor. of sec. 35,

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 35 only, with brass cap marked

1934

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

14.10 Desert road, bears NW. and SE.

40.93 Proportional distance,

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for \(\frac{1}{4} \) sec. cor. of sec. 3 only, with brass cap marked

½ S 3 1933

raise a mound

of stone, 3 ft. base, 2 ft. high, S. of cor.

42.82 At this point, which is 80 chs. in departure from the SE. cor. of sec. 35,

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 34 and 35 only, with brass cap marked

T2N R3W S34 S35

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

71.00 | Shallow sandy wash, 2 chs. wide, course S.

81.86 The original cor. of secs. 3, 4, 33 and 34; a palo verde stake, rotted off at ground, marks weathered off, lying beside a mound of earth, 3 ft. wide by 6 ins. high, with 12 ins. of sharpened end of this stake in middle of the mound.

As this cor. now refers to secs. 3 and 4 only, in place of stake in old mound,

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with top part of stake along side, for cor. of secs. 3 and 4, only, with brass cap marked

S4 S3 T1N R3W 1933

raise a mound

of stone, 3 ft. base, 2 ft. high, S. of cor.

Land: gently rolling. Soil: gravel, 2nd rate.

Undergrowth: palo verde, cactus, ironwood, catclaw

mesquite, greasewood.

RESURVEY OF THE NORTH BOUNDARY OF T. 1 N., R. 3 W.

Chains	S.89°29'W., on true line, on N. bdy. of sec. 4.
. : .	Over rolling land, through average desert growth.
0.97	At this point, which is 40 chs. in departure from the SE. cor. of sec. 34,
	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \(\frac{1}{4} \) sec. cor. of sec. 34, only, with brass cap marked.
	1934 raise a mound
*	of stone, 3 ft. base, 2 ft. high, N. of cor.
	Cor. stands in small wash, course S.15°E.
6.20	Wash, 70 lks. wide, 1 ft. deep, course SW.
8.90	Wash, 8 lks. wide, 6 ins. deep, course SE.; asc. 30 ft. up small ravine, course E.
15.30	Leave ravine, from NW.; asc. 172 ft. over NE. slope.
21.70	Spur, slopes SE.; desc. 60 ft. along S. slope.
26.80	Small ravine, course S.; asc. 28 ft. along S. slope.
32.60	Slopes changes; desc. 75 ft. over SW. slope.
40.45	The original $\frac{1}{4}$ sec. cor. of secs. 4 and 33; a granite stone, 14 x 6 x 12 ins. above ground, mkd. $\frac{1}{4}$ on N. face, and witnessed by a small mound of stone N. of cor.
	As this cor. now refers to sec. 4 only, in place of the stone, which is set along side,
	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 4 sec. cor. of sec. 4, only, with brass cap marked
	1933 raise a mound
	of stone, 4 ft. base, 3 ft. high, S. of cor.
	Thence
	N.89°57'W., on true line, on N. bdy. of sec. 4.
0.52	At this point, which is 80 chs. in departure from the SE. cor. of sec. 34,
	Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground, in a mound of stone to top, for cor. of secs. 33 and 34, only, with brass cap marked
	T2N R3W S33 S34
	1934 raise a mound
	of stone, 3 ft. base, 2 ft. high, N. of cor.
	Desc. 60 ft. over SW. slope.
5.70	Gulch, 15 1ks. wide, 15 ft. deep, course SE.
9.10	Draw, 10 lks. wide, 5 ft. deep, course SE.; asc. 181 ft. over E. slope.

- 4.1.11.41	
Chains 17.70	Spur, slopes SE.; along S. slope.
25.80	Rocky ravine, course SE.; asc. 51 ft.
28.00	Same ravine, course NE.; asc. 296 ft. over E. and NE. slopes.
39•58	The original cor. of secs. 4, 5, 32 and 33: a granite stone, 24 x 12 x 8 ins., properly grooved, lying on a small mound of stone.
	As this cor. now refers to secs. 4 and 5, only, in the center of mound,
	Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with original cor. stone along side, for cor. of secs. 4 and 5 only, with brass cap marked
	S5 S4 TIN R3W 1933 raise a mound
	of stone, 4 ft. base, 3 ft. high, S. of cor.
	Land: rolling and mountainous. Soil: gravel and rocky loam, 3rd rate. Undergrowth: palo verde, catclaw. cactus. greasewood, ironwood, pala christa.
	N.89°54'W., on true line, on N. bdy. of sec. 5.
	Over mountainous land, through desert growth.
	Asc. 10 ft. over NE. slope.
0.94	At this point, which is 40 chs. in departure from the SE. cor. of sec. 33,
•	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 4 sec. cor. of sec. 33 only, with brass cap marked
·	1934 raise a mound
	of stone, 3 ft. base, 2 ft. high, N. of cor.
1.30	Spur, slopes SE.; hill about 3 chs. SE.; desc. 277 ft. over SW. slope.
12.70	Small ravine, course SW.; asc. 53 ft. over E. slope.
14.80	Small spur, slopes S.; desc. 25 ft.
19.10	Small spur, slopes SW.; desc. 91 ft. over W. slope.
25.80	Gulch, 1 ch. wide, 20 ft. deep, course S.
30.30	Small ravine, course S.; asc. 57 ft. over SE. slope.
35•45	Low spur, slopes SE.; desc. 101 ft. over SW. slope.
39.68	The original \$\frac{1}{4}\$ sec. cor. of sec. 5 and 32; a granite stone. 12 x 8 x 12 ins. above ground, firmly set and witnessed by a small mound of stone N. of cor.
	As this cor. now refers to sec. 5 only, remove the mound and in place of the stone, which is set along side,

RESURVEY OF THE NORTH BOUNDARY OF T. 1 N., R. 3 W.

Chains	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 4 sec. cor. of sec. 5 only, with brass cap marked	
		
:	$\frac{1}{4}$ S 5 1933 raise a mound	
	of stone, 3 ft. base, 2 ft. high, S. of cor.	
	Thence	
	S.89°45'W., on true line, on N. bdy. of sec. 5.	
	Desc. 15 ft. over SW. slope.	
1.26	At this point, which is 80 chs. in departure from the SE. cor. of sec. 33,	
	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 32 and 33 only. with brass cap marked	
	T2N R3W S32 S33	
	1934 raise a mound	
	of stone, 4 ft. base, 3 ft. high, N. of cor.	
	Descend 28 ft. over SW. slope.	
2.60	Ravine, course S., for short dist., thence Sw.; continue over broken S. slope.	
5.80	Gulch, 20 lks. wide, b ft. deep, course S.30°W.	
10.40	Rocky wash, 50 lks. wide, course S.	
15.30	Gulch, 25 lks. wide, 10 ft. deep, course S.	
22.30	Gulch, 15 lks. wide, 10 ft. deep, course SE.; asc. 74 ft. over NE. slope.	
28.30	Spur of hill, slopes NW.; desc. 100 ft. over W. slope.	
32.60	Gulch, 20 lks. wide, 12 ft. deep, course S.	
33.50	Gulch, 25 lks. wide, 12 ft. deep, course S.	
39•97	The original cor. of secs. 5, 6, 31 and 32; a granite stone, 16 x 10 x 14 ins. above ground, firmly set, properly grooved, and witnessed by a small mound of stone N. of cor.	
	As this cor. now refers to secs. 5 and 6 only, I remove the mound, and in place of stone, which is set along side,	
, .	Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 5 and 6 only, with brass cap marked	
	S6 S5 T1N R3W	,
	1933 raise a mound	
	of stone, 3 ft. base, 2 ft. high, S. of cor.	
	Land: mountainous and broken. Soil: rocky loam, 3rd rate.	
	Undergrowth: palo verde, catclaw, cactus, greasewood, pala christa, mesquite.	

		RESURVEY OF THE NORTH BOUNDARY OF T. 1 N., R. 3 W.
Ī	Chains	S.89°55'W., on true line, on N. bdy. of sec. 6.
		Over rolling broken land, through desert growth.
	1.29	At this point, which is 40 chs. in departure from the SE. cor. of sec. 32,
	•	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \(\frac{1}{4} \) sec. cor. of sec. 32 only, with brass cap marked
		$\frac{\frac{1}{4}}{1934}$
	Table we di	raise a mound
•		of stone, 3 ft. base, 2 ft. high, N. of cor.
	6.30	Gulch, 20 lks. wide, 6 ft. deep, course SW.
	21.00	Gulch, 20 lks. wide, 15 ft. deep, course SE.
1	26.70	Gulch, 10 lks. wide, 12 ft. deep, course S.
-	33.90	Gulch, 20 lks. wide, 12 ft. deep, course SW.
	40.23	The original \$\frac{1}{4}\$ sec. cor. of secs. 6 and 31; a gray stone, 8 x 6 x 6 ins. above ground, firmly set, mkd. \$\frac{1}{4}\$ on N. face, with remains of small witness mound N. of cor.
		As this cor. now refers to sec. 6 only, in place of stone, which is set along side,
	en e	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for \(\frac{1}{4} \) sec. cor. of sec. 6 only, with brass cap marked
		1077
		1933 raise a mound
		of stone, 3 ft. base, 2 ft. high, S. of cor.
		Thence
	jaran etek	S.89°47'W., on true line, on N. bdy. of sec. 6.
	1.06	At this point, which is 80 chs. in departure from the SE. cor. of sec. 32,
		Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 31 and 32, only, with brass cap marked
	.	T2N R3W S31 S32
		1934 raise a mound
		of stone, 3 ft. base, 3 ft. high, N. of cor.
	6.40	Gulch, 25 lks. wide, 15 ft. deep, course S.
	7.60	Gulch, 30 lks. wide, 6 ft. deep, course S.; asc. 40 ft. over SE. slope.
	15.40	Crest of low divide, bears NE. and SW.; desc. 46 ft. over NW. slope.
	39. 56	The cor. of Tps. 1 and 2 N., Rs. 3 and 4 W.; an iron post, 3 ins. diam., projecting 8 ins. above ground, firmly set, mkd. and witnessed as described in the official record.

Land: rolling and broken.

Chains	Soil: adobe loam, gravel, 2nd and 3rd rate.
-	Undergrowth; palo verde, catclaw, greasewood, cactus, mesquite, ironwood, pala christa.
	RESURVEY OF THE WEST BOUNDARY OF T. 2 N., R. 2 W.
	The west boundary of T. 2 N., R. 2 W., was surveyed in 1883, by R. C. Powers, U.S.D.S. No resurveys are of record.
	The following notes describe the resurvey of the whole of the line, The re-establishment of the original cor. monuments and the establishment of a second set of cors. for T. 2 N., R. 3 W., only, for the N. 4 miles of the line.
	Beginning at the cor. of Tps. 2 and 3 N., Rs. 2 and 3 W.
	S.0°06'E., on a random line, setting temp. 4 sec. and sec. cors. at record intervals, after failing to find any cors., until at
478.86	Intersect E. and W. line, 3 lks. W. of the cor. of T. 2 N., Rs. 2 and 3 W., only, hereinbefore described.
	Thence
	N.0°06'W., on true line, bet. secs. 31 and 36.
	Over gently rolling desert, through average desert growth.
33.40	Desert road, bears NW. and SE.
38.20	Dim road, bears NW. and SE.
39•90	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 4 sec. cor. with brass cap marked.
	s36 s31
	1934 raise a mound
:	of stone, 3 ft. base, 2 ft. high, W. of cor.
42.50	Wash, 20 lks. wide, $1\frac{1}{2}$ ft. deep, course SE.
59.40	Wash, 10 lks. wide, 5 ft. deep, course SW.
65.00	A rocky knoll, 50 ft. high, bears W. 6 chs. dist.
73.80	Wash, 14 lks. wide, 8 ft. deep, course SW.
79.81	Proportional distance,
	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap marked.
	T2N R3W R2W S25 S30

of stone, 3 ft. base, 2 ft. high, W. of cor.

11

Chains	Land: gently rolling. Soil: gravel loam, 2nd rate. Undergrowth: palo verde, greasewood, ironwood, catclaw, mesquite, cactus.
	N.0°06'W., on a true line, on the W. bdy. of sec. 30.
	Over rolling land, through average desert growth.
27.00	Enter foothills; asc. 165 ft. over SE. slope.
39.90	Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground, with a stone mkd. X. deposited at base, and in a mound of stone, 6 ft. base, to top, for \(\frac{1}{4}\) sec. cor, with brass cap marked
	4
	S25 S30
	1934
	Asc. 60 ft. over SE. slope.
40.60	Spur, slopes E.; desc. 163 ft. over NE. slope.
52.60	Wash, 50 lks. wide, course SE.; over broken desert.
53.30	Wood road, bears NW. and SE.
61.70	Wood road, bears E. and W.
63.20	Wash, 25 lks. wide, 4 ft. deep, course E.
79.81	Proportional distance,
1	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 19 and 30, only, with brass cap marked
	T2N R2W S19 S30
	1934 raise a mound
	of stone, 3 ft. base, 2 ft. high, E. of cor.
	Land: broken and rolling. Soil: gravel loam and adobe, 3rd rate. Undergrowth: palo verde, mesquite, catclaw, greasewood, ironwood, cactus.
	N.0°06'W., on a true line, on the W. bdy. of sec. 19.
	Over broken desert, through scattering undergrowth.
0.19	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 24 and 25, of R. 3 W., with brass cap marked
	T2N R3W S24 S25

RESURVEY OF THE WEST BOUNDARY OF T. 2 N., R. 2 W.

Chains	raise a mound
e e e e e e e e e e e e e e e e e e e	of stone, 3 ft. base, 2 ft. high, W. of cor.
9.50	Gulch, 25 lks. wide, 20 ft. deep, course E.
26.50	Gulch, 10 lks. wide, 12 ft. deep, course E.
35.80	Gulch, 20 lks. wide, 10 ft. deep, course E.
39.90	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 4 sec. cor. of sec. 19, only, with brass cap marked

	1934 raise a mound
	of stone, 3 ft. base, 2 ft. high, E. of cor.
40.19	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 4 sec. cor. of sec. 24, only of R. 3 W., with brass cap marked
	4
	S24
	1934 raise a mound
	of stone, 3 ft. base, 2 ft. high, W. of cor.
48.60	Rocky gulch, 15 lks. wide, 10 ft. deep, course E.
69.40	Rocky gulch, 30 lks. wide, 8 ft. deep, course E.; enter foothills; asc. 131 ft. over S. slope.
77.80	Spur, slopes SE.; desc. 42 ft. over NE. slope.
79.81	Proportional distance,
	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 18 and 19, with brass cap marked
	T2N R2W S18 S19 1934 raise a mound
S	of stone, 4 ft. base, 2 ft. high, E. of cor.
	Land: rolling and broken. Soil: gravel loam, 3rd rate. Undergrowth: palo verde, mesquite, cactus, catclaw, greasewood, ironwood, sage.

	N.0°06'W., on a true line, on the W. bdy. of sec. 18.
	Over rolling and broken land, through scattering undergrowth; desc. 65 ft. over NE. slope.
0.38	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13 and 24. only of R. 3 W., with brass cap marked

13

Chains	T2N R3W
	S13 S24
	1934 raise a mound
	of stone, 4 ft. base, 2 ft. high, W. of cor.
5.70	Draw, 10 lks. wide, 4 ft. deep, course E.; asc. 80 ft.
). 10	over gradual SE. slope.
31.50	Saddle; bottom bears 1.50 chs. NE.; desc. 30 ft. over NW. slope.
36.10	Enter rocky wash, course E.
37-90	Dim road, bears E. and W.
39.90	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \(\frac{1}{4} \) sec. cor. of sec. 18, with brass cap marked
	4
	s18
	1934 raise a mound
	of stone, 3 ft. base, 2 ft. high, E. of cor.
40.10	Leave wash area, bears E. and W.; asc. 6 ft.
40.38	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ½ sec. cor. of sec. 13 only, of R. 3 W., with brass cap marked
	4 C1 Z
	S13
	1934 raise a mound
	of stone, 3 ft. base, 2 ft. high, W. of cor.
49.70	Gulch, 40 lks. wide, 10 ft. deep, course SE.
54.30	Dim road, bears E. and W.
68.20	Gulch, 25 lks. wide, 15 ft. deep, course E.
73.20	Road, bears NW. and SE.
79.81	Proportional distance,
	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, with a stone mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 7 and 18, with brass cap marked
	T2N R2W S7 s18 1934
	Land: rolling and broken. Soil: rocky loam and adobe, 3rd rate. Undergrowth: palo verde, ironwood, greasewood, catclaw, sage, cactus.

4-673 b

RESURVEY OF THE WEST BOUNDARY OF T. 2 N., R. 2 W.

```
Chains N.0°06'W., on true line, on the W. bdy. of sec. 7
         Over mountainous land, through scattering undergrowth; asc. 382 ft. over steep S. slope.
         Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, with a stone mkd. X, deposited at base, and in a
 0.57
            mound of stone to top, for cor. of secs. 12 and 13, only,
           of R. 3 W., with brass cap marked
                                           R3W
                                           S12
                                           S13
                                            1934
        Foot of cliffs, face S.; asc. 276 ft.
16.10
20.60
         Top of cliffs.
         Spur, slopes SE.; desc. 100 ft. along E. slope.
20.90
         Ravine, course SE.; asc. 130 ft. over S. slope.
36.50
         Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for \frac{1}{4} sec. cor. of sec. 7, with brass cap marked
39.90
                                              1934
                                                                    raise a mound
            of stone, 3 ft. base, 2 ft. high. E. of cor.
         Asc. 22 ft. over S. slope.
         Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \frac{1}{4} sec. cor. of sec. 12, only, of R. 3 W.,
40.57
            with brass cap marked
                                                                    raise a mound
            of stone, 3 ft. base, 2 ft. high, W. of cor.
         Asc. 12 ft. over S. slope.
         Spur, slopes E.; desc. 87 ft. over NE. slope.
45.40
         Slope schanges; desc. 690 ft. over N. slope.
54.10
79.81
         Proportional distance,
         Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, with a stone mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 6 and 7, with
            brass cap marked
                                                 T2N
                                                 R2W
                                                 S6
                                                 S7
                                              1934
```

Land: mountainous.

Chains	Soil: rocky loam, 3rd and 4th rate. Undergrowth: greasewood, palo verde, ironwood, mesquite, catclaw, cactus, sage.
1.10% 2.	
	N.0°06'W., on true line, on W. bdy. of sec. 6.
	Over rolling land, through scattering undergrowth.
	Desc. 46 ft. over NE. slope.
0.76	Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground, and in a mound of stone to top, for cor. of secs. 1 and 12, only, of R. 3 W., with brass cap marked
	m o x
	T2N R3W S1
	\$12
	1934 raise a mound
	of stone, 3 ft. base, 2 ft. high, on top of boulder, 6 ft. diam., 5 ft. W. of cor.
9 .2 0	Gulch, 50 lks. wide, 12 ft. deep, course E.; asc. 57 ft. over SE. slope.
17.80	Spur, slopes E.; desc. 76 ft. over NE. slope.
39•90	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \(\frac{1}{4} \) sec. cor. of sec. 6, with brass cap marked
erak e e e e e e e e e e e e e e e e e e e	
	s6
	1934 raise a mound
	of stone, 3 ft. base, 2 ft. high, E. of cor.
40.76	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \(\frac{1}{4} \) sec. cor. of sec. 1, only, of R. 3 W with brass cap marked
	S1
	1934 *** *** *** *** *** **** ****
,	raise a mound
e de la companya de	of stone, 3 ft. base, 2 ft. high, W. of cor.
42.30	Gulch, 20 lks. wide, 10 ft. deep, course E.; asc. 184 ft. over SE. slope.
50.90	Spur, slopes E.; desc. 157 ft. over NE. slope.
73•70	Gulch, 50 lks. wide, 15 ft. deep, course E.; over flat.
79.81	The cor. of Tps. 2 and 3 N., Rs. 2 and 3 W., which is an iron post, 3 ins. diam., in mound of stone, mkd. and witnessed as described in the official record.

RESURVEY OF THE WEST BOUNDARY OF T. 2 N., R. 2 W.

	'	
 Chains	Land; rolling.	
	Soil: rocky adobe and loam, 3rd rate. Undergrowth: palo verde, greasewood, ironwood, mesquite, catclaw, cactus and sage.	
		>
	NORTH BOUNDARY OF T. 2 N., R. 3 W.	
	From the cor. of Tps. 2 and 3 N., Rs. 2 and 3 W.	
	N.89°48'W., on random line, setting \(\frac{1}{4} \) sec. and sec. cors. at intervals of 40.00 chs., and 80.00 chs., until at	
437.68	Intersect N. and S. line, 13 lks. S. of the cor. of Tps. 2 and 3 N., Rs. 3 and 4 W.	
	Returning to the cor. of Tps. 2 and 3 N., Rs. 2 and 3 W.	
	N.89°47'W., on thue line, bet. secs. 1 and 36.	
	Over rolling and mountainous land, through desert growth.	
	Over gradual E. slope.	,
3.70	Wood road, bears SW. and NE.	
15.00	Leave desert; asc. 390 ft. over SE. slope.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, with a stone mkd. X, deposited at base, and in a mound of stone to top, for 4 sec. cor., with brass cap marked	***
	₁ s 36	
	1 S 36 S 1	
	1934	
	1922	
	Asc. 185 ft. over SE. slope.	
48.30	Low spur, slopes SE.; along E. slope.	
50.30	Small ravine, course SE.; asc. 574 ft. over general SE. slope.	
71.90	Spur, slopes SE.; desc. 73 ft. along S. slope.	
76.60	Hillside drain, course SE.; asc. 24 ft. along E. slope.	•
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, with a stone mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 1, 2, 35 and 36, with brass cap marked	•
	T3N R3W S35 S36	
	S2 S1 T2N	

	indicate poor in the man in the m
Chains	(This post was found set 39 lks. South; no record of same)
	Land: mountainous. Soil: rocky loam and adobe, 3rd rate. Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood, ironwood,
	N.89°47'W., on true line, bet. secs. 2 and 35.
	Over mountainous land; through desert growth.
	Desc.160 ft. over SW. slope.
3.70	Ravine, course SE.; asc. 25 ft.
4.70	Sharp spur, slopes S.; desc. 101 ft. over SW. slope.
10.50	Ravine, course SE.; asc. 353 ft. over SE. slope.
20.80	Short spur, slopes S.; desc. 23 ft.
23.20	Ravine, course SE.; asc. 280 ft. over E. slope.
140.00	Set an iron post, 3 ft. long, 1 in. diam., 2 ins. in the ground, with a stone mkd. X deposited at base, and in a large mound of stone to top, for \(\frac{1}{4} \) sec. cor. with brass cap mkd.
	1934
÷	Asc. 132 ft. over E. slope.
1 = 00	*
4.780	Ridge, bears N. and S., hill 1 ch. S.; desc. 300 ft. over NW. slope.
78.60	Ravine, course N.; asc. 40 ft. over E. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, with a stone, mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 2,3,34 and 35, with brass cap mkd.
	T3N R3W S34 S35 S3 S2 T2N 1934
5	Land: mountainous. Soil: rocky abobe and loam, 3rd rate. Undergrowth: palo verde, catclaw, mesquite, cactus, ocatillo, mescal, chapparal.
	N.89°47'W., on true line, bet. secs. 3 and 34.
	Over mountainous land; through scattering desert growth.
e	Asc. 115 ft. over E. slope.
3.70	Short spur, slopes NE.; desc. 19 ft.
7.30	Ravine, course N.80°E.; asc. 320 ft. over general E. slope.
	\cdot

37.70 Ridge, bears N. and S.; desc. 33 ft. over SW. slope.

	Chains 40.00	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
		1834 s 3 1934
		Desc. 328 ft. over SW. slope.
	53.10	Wash, 15 lks. wide, course NW.
	53.40	A dilapidated shed bears about 12 chs. N.; asc. 241 ft. over E. slope.
	73.00	Short spur, slopes N.; along N. slope.
	78.00	Slope changes; asc. 15 ft. over NE. slope.
	80.00	Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 3,4,33 and 34,
		T3N R3W <u>\$33 \$34</u> \$4 \$3 T2N 1934
		Land: rolling Mts. Soil: adobe and loam, 3rd rate. Undergrowth: palo verde, catclaw, cactus, chapparal, greasewood, sage.
		N.89°47'W., on true line, bet. secs. 4 and 33.
		Over mountainous land; through desert growth.
	•	Asc. 100 ft. over NE. slope.
`	6.40	Ridge, divide, bears SE. and NW.; desc. 980 ft. over SW. slope.
	40.00	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
		1 <u>833</u> *8 4 1934
		Desc. 183 ft. over SW. slope.
	54.00	Ravine, course NW.; asc. 140 ft. over NE. slope.
	63.80	Spur, slopes NW.; desc. 141 ft. over SW. slope.
	73.40	Head of ravine, course SW.; asc. 56 ft. over SE. slope.
	80.00	Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 4,5,32 and 33, with brass cap mkd.

,	
Chains	T3N R3W S32 S33 S5 S4
8,	1934
	Land: mountainous. Soil: rocky loam and adobe, 3rd rate. Undergrowth: palo verde, cactus, catclaw, greasewood, sage, mesquite, chapparal, oak.
	N.89°47'W., on true line, bet. secs. 5 and 32.
	Over rolling and mountainous land; through average desert growth.
	Desc. 19 ft. over SW. slope.
5.50	Short spur, slopes SW.; desc. 92 ft. over NW. slope.
9.10	Ravine, course SW.; asc. 19 ft. over SE. slope.
12.90	Spur, slopes SW.; desc. 108 ft. over rolling SE. slope.
37.20	Wash, 100 lks. wide, course SW.; asc. 22 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	1 <u>532</u> 255 1934 raise a mound of
	stone, 3 ft. base, 2 ft. high, N. of cor.
	Over flat spur, slopes SW.
43.50	Desc. 75 ft. over NW. slope.
48.30	Ravine, course SW.; asc. 75 ft.
•	Spur, slopes SW.; desc. 61 ft.
58.00	Draw, course SW.; asc. 56 ft. over SE. slope.
62.50	Spur, slopes SW.; desc. 35 ft. over SW. slope.
65.10	Small ravine, course SW.; asc. 50 ft.
67.50	Over rolling SW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 5,6,31 and 32. with brass cap mkd.
	T3N R3W S31 S32 S6 S5 T2N 1934
	Land: rolling and mountainous. Soil: adobe loam and gravel, 3rd rate. Undergrowth: palo verde, greasewood, ocatillo, cactus, sage, catclaw, mesquite.

Chains	N.89°47'W., on true line, bet. secs. 6 and 31.
	Over broken desert land; through average desert growth.
	Desc. 53 ft. over SW. slope.
18.40	Drain, course S.; asc. 53 ft.
19.70	Spur, slopes SW.; desc. 45 ft. over NW. slope.
20.70	Ravine, 50 lks. wide, course SW.; asc. 45 ft. over W.slope.
24.60	Over flat, bears N. and S.
37.68	The cor. of Tps. 2 and 3 N., Rs. 3 and 4 W., an iron post, 3 ins. diam., projecting 6 ins. above a mound of stone, firmly set and mkd. on brass cap and witnessed as described in the official record.
+ 44 · · · · · · · · · · · · · · · · · ·	Land: flat and broken. Soil: gravel loam, 3rd rate. Undergrowth: palo verde, catclaw, cactus, ocatillo, ironwood, mesquite.
	SUBDIVISIONS OF T.2 N., R.3 W.
	Beginning at the cor. of secs. 25,30,31 and 36, on the E. bdy. of the Tp.,
	N.89°48'W., on governing section line, bet. secs. 25 and 36.
40.00	Set temp. ½ sec. cor.
80.00	Set temp. cor. of secs. 25,26,35 and 36.
	Thence
	S.0°07'E., on random line, bet. secs. 35 and 36.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
81.19	Intersect S. bdy. of Tp., 2 lks. W. of the cor. of secs. 35 and 36, only, hereinbefore described.
	Thence
	N.0°07'W., on true line, bet. secs. 35 and 36.
	Over rolling land; through average desert growth.
1.90	Shallow wash, course SE.
5.70	Shallow wash, 15 lks. wide, course SE.
7.50	Asc. 33 ft. over S. slope.
12.90	Detached hill, bears SW., and E.; desc. 52 ft.
17.00	Junction of drains from W., course NE.; asc. 69 ft. over SE. slope.
25.80	Spur, slopes E.; desc. 54 ft.
29.40	Drain, course SE.; over E. slope.
36.20	Drain, course SE.
	and the second of the second o

POOK 4033

```
Chains
       Wash, 10 lks. wide, 8 ft. deep, course SE.
 39.50
41.19 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \frac{1}{4} sec. cor., with brass cap mkd.
                               835 836
1934
                                                       raise a mound of
          stone, 3 ft. base, 2 ft. high, W. of cor.
44.90 Drain, course SE.; asc. 37 ft.
 54.30 Slope changes; desc. 15 ft.
 55.90 Drain, course SE.; asc. 305 ft. over broken SW. slope.
 81.19 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, with a stone mkd. X deposited at base, and in a
          mound of stone to top, for cor. of secs. 25,26,35 and 36
         with brass cap mkd.
                                 T2N R3W
          Land: rolling.
Soil: gravel loam, 3rd rate.
          Undergrowth: palo verde, ironwood, catclaw, mesquite,
            greasewood, cactus.
        From the cor. of secs. 25,30,31 and 36, on the E. bdy. of
          the Tp., hereinbefore described,
        N.89°48'W., on governing section line, bet. secs.25 and 36.
        Over rolling, broken land; through average desert growth.
  7.00 Wash, 10 lks. wide, 8 ft. deep, course SW.
 10.60 Wash, 8 lks. wide, 6 ft. deep, course SW.
 16.40 Wash, 20 lks. wide, from NE., course SE.
 16.90 Wash, 20 lks. wide, course SE.
 25.00 S. bank of same wash, from NW., course NE.
 35.00 S. bank of same wash, from NW., course NE.
39.99 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, with a stone mkd. X deposited at base, and in a
          mound of stone to top, for \frac{1}{4} sec. cor., with brass cap
          mkd.
```

Asc. 39 ft. over SE. slope.

48.00 Drain, course SE.; asc. 39 ft.

54.50 Same drain, course N.65°E.; asc. 341 ft. over NE. slope.

4--673 b

BOOK 4033

SUBDIVISIONS OF T.2 N., R.3 W.

	SUBDIVISIONS OF T.2 N., R.3 W.	
Chains 74.80	Spur, slopes SE.; desc. 155 ft. over SW. slope.	
79.98	The cor. of secs. 25,26,35 and 36.	
	Land: rolling. Soil: gravel loam, 2nd and 3rd rates. Undergrowth: palo verde, catclaw, mesquite, cactus, sage, ironwood, ocatillo.	
	N.0°07'W., bet. secs. 25 and 26.	
	Over mountainous land; through average desert growth.	
	Asc. 50 ft. over SW. slope.	
1.90	Head of ravine, course SW.; asc. 171 ft. over S. slope.	
7.20	Spur, slopes SE.; desc. 36 ft. over NE. slope.	
11.00	Ravine, course SE.; asc. 216 ft. over S. slope.	
19.10	Ridge, bears E. and W.; desc. 313 ft. over general NE. slope.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for \(\frac{1}{4} \), sec. cor., with brass cap mkd.	
	S26 S25 1934 raise a mound of	
	stone, 3 ft. base, 2 ft. high, W. of cor.	<u>-</u>
	Cor. stands on short NW. slope.	
İ	Desc. 145 ft. over general N. slope.	
55.40	Wash, 40 lks. wide, course E.; over rocky bottom land.	
57.30	Shallow, rocky wash, 40 lks. wide, course SE.	
77 • 30	Dim wood road, bears SE. and NW.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 23,24,25 and 26, with brass cap mkd.	
	T2N R3W S23 S24 S26 S25 1934	
	raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.	
4.7 19	Land: mountainous and desert. Soil: rocky loam, 3rd rate. Undergrowth: palo verde, catclaw, greasewood, mesquite, cactus,	•
	S.89°48'E., on random line, bet. secs. 24 and 25.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
79.88	Intersect E. bdy. of Tp., 2 lks. S. of the cor. of secs. 21 and 25, only, hereinbefore described.	

 $\left(\frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{2} \right) \right) - \frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{2} \right) \right) \right) \right)$

Chains	Thence
	N.89°49'W., on true line, bet. secs. 24 and 25.
	Over gently rolling land; through average desert growth.
23.30	Wood road, NW. and S.20°E.
29.20	Wood road, bears NW. and SE.
39.40	Gulch, 50 lks. wide, 12 ft. deep, course SE.
39•94	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 4 sec. cor., with brass cap marked
	S24 S25
	raise a mound
	of stone, 3 ft. base, 2 ft. high, N. of cor.
j	Over gentle SE. slope.
79.88	The cor. of secs. 23, 24, 25 and 26.
	Land: gently rolling. Soil: rocky adobe and loam, 3rd rate. Undergrowth: palo verde, ironwood, catclaw, mesquite, greasewood, cactus.
	N.0°07'W., bet. secs. 23 and 24.
	Over rolling land; through desert growth.
	Asc. 25 ft. over gradual SE. slope.
20.00	Slope changes; asc. 92 ft. over SW. slope.
24.50	Hill, bears E. and W.; desc. 35 ft. over NW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, with a stone mkd. X, deposited at base, and in a large mound of stone to top, for ‡ sec. cor., with brass cap marked
	S23 S24
**	1934
	Desc. 15 ft. over N. slope.
41.80	Drain, 20 lks. wide, course E.
47.80	Drain, 80 lks. wide, 10 ft. deep, course E.
63.70	Wood road, bears E. and W.
71.50	Drain, 30 lks. wide, 6 ft. deep, course SE.; asc. 80 ft. over SE. slope.
76.60	Spur, slopes E.; desc. 45 ft. over NE. slope.
80.00	True point for cor. of secs. 13, 14, 23 and 24 falls on eroding face of small cliff. Witness cor. established 10 lks. dist., N. 0°07'W., hereinafter described.

m. s. government printing office: 1931 6—8155

Subdivision of T. 2 N., R. 3 W.

Chains	Land: rolling.
Unatho	Soil: rocky adobe and loam, 3rd rate.
	Undergrowth: palo verde, catclaw, cactus, greasewood, mesquite and ironwood.
	S.89°49'E., on random line, bet. secs. 13 and 24.
40.00	Set temp. ½ sec. cor.
79.87	Intersect E. bdy. of Tp., 2 lks. N. of the cor. of secs. 13 and 24 only, hereinbefore described.
	Thence
	N.89°48'W., on true line, bet. secs. 13 and 24.
	Over rolling land; through desert growth.
	Asc. 66 ft. over NE. slope.
4.00	Spur, slopes SE.; hill bears 3 chains SE.; desc. 180 ft. over general SW. slope.
30.00	Small ravine, course S.
36.00	Enter rocky wash, 30 lks. wide, course S.85°E.
38.20	Leave same; along falling gravel bank, bears E. and W.
39.93	The true point for \(\frac{1}{4} \) sec. cor. falls on insecure ground.
40.40	Top of gravel bank, 12 ft. high, bears N.85°W. and S85°E.
40.73	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness 4 sec. cor., with brass cap marked
	S13
	\frac{1}{4} \frac{\text{S13}}{\text{S24}} \text{ WC} \text{raise a mound}
	of stone, 3 ft. base, 2 ft. high, N. of cor.
	Asc. 40 ft. over gradual E. slope.
76.00	Base of hills, bears NW. and SE.; asc. 45 ft. over NE. slope.
79.87	The true point for cor. of secs. 13, 14, 23 and 24.
	Land: rolling.
	Soil: rocky loam, 3rd rate. Undergrowth: palo verde, mesquite, ironwood, catclaw.
	greasewood and cactus.
	N.0°07'W., on true line, bet. secs. 13 and 14.
	Over rolling land; through desert growth.
0.10	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for witness cor. of secs. 13, 14, 23 and 24, with brass cap marked
	T2N R3W S14 S13
	S23 S24 WC
	1934

	7011 1000
Chains	and raise a mound of stone, 3 ft. base, 2 ft. high, W. of post.
	Desc. 38 ft. over NE. slope.
5.00	Head of ravine, course N.75°E.; over broken E. slope.
13.00	Slope changes; asc. 68 ft. over SE. slope.
22.70	Point of spur, slopes E.; desc. 37 ft. over NE. slope.
25.10	Gulch, 25 lks. wide, 12 ft. deep, course SE.
34.80	Gulch, 20 lks. wide, 4 ft. deep, course E.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
	S14 S13 1934
44.50	Rocky wash, 25 lks. wide, 1 ft. deep, course SE.
48.20	Small rocky wash, course S.70°E.
56.50	Edge of rocky flat, bears E. and W.; asc. 300 ft. over rugged S. slope.
67.70	Rocky point, slopes SE.; desc. 86 ft. over NE. slope.
71.00	Ravine, course SE.; asc. 98 ft. over SE. slope.
76.20	Short spur, slopes SE.; desc. 48 ft. over NE. slope.
79.20	Ravine, course SE.; asc. 22 ft. over S. slope.
00.08	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 11,12,13 and 14, with brass cap mkd.
	T2N R3W S11 S12 S14 S13 1934 raise a mound of
	stone, 4 ft. base, 2 ft. high, W. of post.
	Land: rolling and mountainous. Soil: rocky loam, 3rd rate. Undergrowth: palo verde, mesquite, greasewood, catclaw, cactus, ironwood.
	S.89°48'E., on random line, bet. secs. 12 and 13.
	Set temp. \(\frac{1}{4}\) sec. cor.
79.86	Intersect E. bdy. of Tp., 5 lks. N. of the cor. of secs. 12 and 13, only, hereinbefore described.
	Thence
	N.89°46'W., on true line, bet. secs. 12 and 13.
	Along rolling S. slope; through average desert growth.

4-673 b

SUBDIVISIONS OF T.2 N., R.3 W

	SUBDIVISIONS OF T.2 N., R.3 W	
Chains	Road, bears NW. and SE.	
16.00	Rocky wash, 15 lks. wide, in channel 8 ft. deep, course SE.	
33.60	Rocky wash, 20 lks. wide, course S.75°E.; asc. 17 ft.	
39993	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.	
	1 <u>512</u> 513 1934	
	raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.	
46.00	Enter wash, course SE.	
47.80	Leave same; asc. 12 ft.	
51.00	Foot of hill, bears NW. and SE.; asc. 416 ft. over NE. slope.	
67.40	Spur, slopes SE.; desc. 132 ft. over SW. slope.	
79.86	The cor. of secs. 11,12,13 and 14.	
	Land: rolling and mountainous. Soil: gravel loam, 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, mesquite, ironwood, ocatillo.	

	N.0°07'W., bet. secs. 11 and 12.	>-
	Over mountainous land; through desert growth.	
	Asc. 112 ft. over SSW. slope.	
3.30	Spur, slopes S.75°E.; desc. 267 ft. over N. slope.	
13.40	Ravine, course NE.; over rocky valley, slopes NE.	
27.50	Enter channel of rocky wash, course SE.	
32.20	Leave same; asc. 50 ft. over S. slope.	
36.70	Road, bears NW. and SE.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, supported by a mound of stone, for \(\frac{1}{4} \) sec. cor., with brass cap marked	
	sıı sız	
-	1934 raise a mound of	
•	stone, 3 ft. base, 2-ft. high, W. of cor.	
	Asc. 1230 ft. over rugged SW. slope.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with a stone mkd. X deposited beside, and in a mound of stone to top, for cor. of secs. 1,2,11 and 12, with brass cap mkd.	
	T2N R3W S2 S1 S11 S12 . 1934	

	Chains	Cor. stands on W. slope of hill on top of ridge, bears NW. and SE.
		Land: mountainous. Soil: rocky loam, 3rd and 4th rates. Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood, ocatillo.
		S.89°46'E., on random line, bet. secs. 1 and 12.
	40.00	Set temp. ½ sec. cor.
	79.82	Intersect E. bdy. of Tp., 5 lks. S. of the cor. of secs. 1 and 12, only, hereinbefore described.
		Thence
		N.89°48'W., on true line, bet. secs. 1 and 12.
		Over mountainous land; through desert growth.
		Asc. 177 ft. over rocky NE. slope.
	26.30	Rocky wash, 25 lks. wide, course N.75°E.; asc. 326 ft. over SE. slope.
	37.60	Knoll, on spur, slopes E.; desc. 98 ft. over top of same.
•	39.91	Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground and in a mound of stone to top, for \(\frac{1}{4}\) sec. cor., with brass cap mkd.
		1 <u>81</u> *s12 1934
		raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.
	140.00	Saddle in spur, slopes E.; asc. 1030 ft. over general E. slope.
	65.00	Beginning of spur to NE.
	74.00	Top of cliff, 200 ft. high, faces E.
	76.70	Hill, on ridge, bears NW. and SE.; desc. 60 ft. over W. slope.
,	79.82	The cor. of secs. 1,2,11 and 12.
		Land: mountainous. Soil: rocky loam, 3rd and 4th rates. Undergrowth: palo verde, greasewood, mesquite, yucca, catclaw, cactus, chapparal, ocatillo, etc.
		N.0°07'W., on random line, bet. secs. 1 and 2.
	40.00	Set semp. \(\frac{1}{4}\) sec. cor.
	78.78	Intersect N. bdy. of Tp., 25 lks. E. of the cor. of secs. 1,2,35 and 36, hereinbefore described.
		Thence
()		S.0°18'W., on true line, bet. secs. 1 and 2.
		, I

4-673 b

SUBDIVISIONS OF T.2 N., R.3 W.

Chains	Over mountainous land; through scattering undergrowth.
	Desc. 540 ft. over SW. slope.
16.10	Ravine, course SE.; continue descent 150 ft.
27.10	Rocky wash, 50 lks. wide, course E.; asc. 370 ft. over N. slope.
38.78	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, supported in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
N 1	s2 s1 1934
	and mark cross (X) on boulder, 2 ft. diam., 1 lk. W. of post.
·	Asc. 20 ft. over small cliff, faces N.
39.20	Spur, slopes E.; desc.132 ft. over S. slope.
47.30	Rocky wash, course NE.; asc. 815 ft. over N. slope.
78.50	Ridge, bears NW. and SE.; over W. slope.
78.78	The cor. of secs. 1,2,11 and 12.
	Land: mountainous. Soil: rocky, 3rd and 4th rates. Undergrowth: palo verde, catclaw, cactus, greasewood, chapparal, oak, ocatillo.
	Beginning at the cor. of secs. 25,26,35 and 36, N.89°48'W., on governing section line, bet. secs.26 and 35.
	Set temp. $\frac{1}{4}$ sec. cor.
	Set temp. cor. of secs. 26,27,34 and 35.
00.00	Thence
•	S.0°07'E., on random line, bet. secs. 34 and 35.
	Set temp. 4 sec. cor. Intersect S. bdy. of Tp., 10 lks. E. of the cor. of secs.
0.1.09	34 and 35, only, hereinbefore described.
• •	Thence
	N.0°07'W., on true line, bet. secs. 34 and 35.
	Over gradual SE. slope; through average desert growth.
13.90	Shallow wash, 15 lks. wide, course SE.
29.00	Enter shallow wash, course SE.
30.60	Leave same.
34.90	Wash, 10 lks. wide, course SE.
41.09	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.

	Chains	S34 S35	
		1934	
•		raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.	
	41.50	Wash, 50 lks. wide, 3 ft. deep, course S.60°E.	
	46.20	Wash, 20 lks. wide, 6 ft. deep, course SE.	
	56.00	Slope changes gradually; asc. 292 ft. over general S.slope.	
•	73.70	Spur, slopes ESE.; desc. 75 ft. over broken NE. slope.	
	81.09	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 26,27,34 and 35, with brass cap mkd.	
		T2N R3W S27 S26 S34 S35	
		raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.	
		Land: gently rolling and broken. Soil: granite loam, sandy, 2nd and 3rd rates. Undergrowth: palo verde, catclaw, cactus, greasewood, mesquite, ironwood.	

		Beginning at the cor. of secs. 25,26,35 and 36,	
	. 1	N.89°48'W., on governing section line, bet. secs. 26 and 35.	
•	•	Over mountainous land; through desert growth.	
		Desc. 26 ft. over SW. slope.	
	1.65	Drain, course S.; asc. 41 ft. over SE. slope.	er.
	6.70	Spur, slopes SW.; desc. 81 ft. over steep S. slope.	
	15.40	Ravine, course S.; over S. slope.	
	23.40	Drain, course S.; asc. 46 ft. over SE. slope.	
	27.20	Spur, slopes SW.; desc. 101 ft, over SW. slope.	
	34.30	Small draw, course S.; asc. 30 ft. over E. slope.	
	36.90	Spur, slopes SW.; desc. 30 ft. dver gradual SW. slope.	
	40.05	Set an iron post, 3 ft. long, in. diam., 28 ins. in the ground, for ½ sec. cor., with brass cap mkd.	
		1934	
		raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.	
		Desc. 76 ft. over SW. slope.	
	47.30	Draw, course SSW.; asc. 22 ft.	
	49.20	Draw, 30 lks. wide, 12 ft. deep, course S.25°E.; asc. 42	

SUBDIVISIONS OF T.2 N., R.3 W.

```
Chains
          ft. over E. slope.
51.60 Short spur, slopes S.; desc. 32 ft.
52.60 Ravine, course SE.; asc. 119 ft. over NE. slope.
61.40 Rocky spur, slopes SE.; desc. 47 ft. over SW. slope.
73.30 Wash, 30 lks. wide, course SE.; asc. 104 ft. over SE.slope.
80.10 The cor. of secs. 26,27,34 and 35.
          Land: rolling and mountainous.
         Soil: rocky loam, 3rd rate.
Undergrowth: palo verde, catclaw, cactus, greasewood,
            ironwood, mesquite, ocatillo.
       N.0°07'W., bet. secs. 26 and 27.
       Over rolling broken land; through desert growth.
  1.10 Low spur, slopes E.; over E. slope.
 12.00 Ravine, course E.; asc. 176 ft. over SE. slope.
20.11 Spur, slopes E.; desc.113 ft. over NE. slope.
27.90 Ravine, course S.70°E.
29.90 Ravine, course SE.; asc. 183 ft. over S. slope.
 35.90 Spur, slopes E.; prospect hole bears 12 chs. E.; desc. 54
         ft. over NE. slope.
                                   align ergy
40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the
          ground, supported in a mound of stone, for \frac{1}{4} sec. cor.,
          with brass cap mkd.
                               $27 | $26
1934
                                                  raise a mound of
         stone, 3 ft. base, 2 ft. high, W. of cor.
         Cor. stands on short SE. slope.
       Asc. 40 ft. over SE. slope.
41.30 Spur, slopes E.; desc. 147 ft. over NE. slope.
52.00 Ravine, course NE.; desc. 95 ft. over NE. slope.
 64.40 Gulch, 1 ch. wide, 15 ft. deep, course SE.
67.20 Gulch, 60 lks. wide, 12 ft. deep, course S.30 E.; asc. 70
         ft. over broken S. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, supported in a mound of stone, for cor. of secs. 22,23,26 and 27, with brass cap mkd.
```

T2N R3W <u>\$22</u> <u>\$23</u> <u>\$27</u> <u>\$26</u> 1934

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

SUBDIVISIONS OF T.2 N., R.3 W.

BOOK 4088

Chains	Land: rolling broken. Soil: rocky loam adobe, 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, mesquite, ironwood.
•	
	S.89°48'E., on random line, bet. secs. 23 and 26.
40.00	Set temp. \(\frac{1}{4}\) sec. cor.
80.14	Intersect N. and S. line, 2 lks. N. of the cor. of secs. 23,24,25 and 26.
	Thence
	N.89°47'W., on true line, bet. secs. 23 and 26.
	Over gentle SE. slope; through desert growth.
6.60	Enter wash, small drainage, course S.20°E.
8.70	Leave same; in channel 6 ft. deep.
14.40	Wash, 50 lks. wide, in channel 8 ft. deep, course SSE.; desc. 30 ft. over S. slope.
36.60	Double wash, each channel 25 lks. wide, course SE.
40.07	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
	1 <u>S23</u> *S26
	1934 raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
58.70	Wash, 15 lks. wide, 1 ft. deep, course SE.; asc. 176 ft. over E. slope.
72.10	Spur, slopes SE.; desc. 43 ft. along S. slope.
80.14	The cor. of secs. 22,23,26 and 27.
2. SI	Land: rolling. Soil: rocky adobe and loam, 2nd and 3rd rates. Undergrowth: palo verde, catclaw, cactus, greasewood, ironwood, mesquite, sage.
	N.0°07'W., bet. secs. 22 and 23.
	Over mountainous land; through desert growth.
	Asc. 350 ft. over S. slope.
10.80	Hill, bears NW. and SE.; desc. 283 ft. over NE. slope.
27.00	Ravine, course NE.; asc. 250 ft. over broken SE. slope
	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
	S22 S23
	raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

4-673 b

SUBDIVISIONS OF T.2 N., R.3 W.

	SUBDIVISIONS OF T.2 N., R.3 W.	
Chains	Asc. 15 ft. over E. slope.	-
42.40	Ravine, course SE.; asc. 155 ft. over SW. slope.	
46.40	Sharp spur, slopes E.; desc. 152 ft. over NE. slope.	
51.00	Ravine, course E.	
55.50	Canyon, course E.; asc. 316 ft. over SW. slope.	
65.30	Spur, slopes SE.; desc. 280 ft. over broken NE. slope.	
79.90	Small ravine, course NE.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 14,15,22 and 23, with brass cap mkd.	
	T2N R3W <u>S15 S14</u> S22 S23 1934	
	Land: mountainous. Soil: rocky, 4th rate. Undergrowth: palo verde, greasewood, cactus, catclaw.	
	S.89°47'E., on random line, bet. secs. 14 and 23.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
80.26	Intersect N. and S. line, 2 lks. N. of the true point for cor. of secs. 13,14,23 and 24.	_
ar .	Thence	l
	N.89°46'W., on true line, bet. secs. 14 and 23.	
: :	Over mountainous land; through desert growth.	l
	Asc. 165 ft. over NE. slope.	
5.80	Spur, slopes SE.; desc. 114 ft., over W. slope.	
14.20	Ravine, course SE.; asc. 509 ft. over general E. slope.	
36.00	Spur, slopes SE.; desc. 90 ft. over SW. slope.	:
40.13	Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, supported by a mound of stone, for \(\frac{1}{4}\) sec. cor., with brass cap mkd.	
	1814 1823 1934	
	raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.	
•	Desc. 325 ft. over SW. slope.	
57.80	Rocky wash, 50 lks. wide, course SE.; asc. 270 ft. over NE. slope.	
80.00	Small ravine, course NE.	1
80.26	The cor. of secs. 14,15,22 and 23.	

SUBDIVISION OF T. 2 N., R. 3 W.

Chains	Land: mountainous. Soil: rocky adobe and loam. 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, ironwood, mesquite, sage.
	N.0°07'W., bet. secs. 14 and 15.
·	Over mountainous land; through desert growth.
11	Over broken E. slope.
2.25	Drain, course E.
8.20	Drain, course E.
14.30	Drain, course E.
24.70	Drain, course S.70°E., in ravine 30 ft. deep.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, with a stone mkd. X. deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap marked
	s15 s14
	1934
40.10	Enter main wash, course S.20°E.
	Leave same; asc. 795 ft. over SW. slope.
	Spur, ridge, bears SE. and NW.; desc. 281 ft. over NE.
	slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground, with a stone mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 10, 11, 14 and 15, with brass cap marked
	T2N R3W S10 S11
	S15 S14 1934
	Land: mountainous.
	Soil: rocky loam, adobe, 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, ocatillo.
	S.89°46'E., on random line, bet. secs. 11 and 14.
40.00	Set temp. 4 sec. cor.
80.24	Intersect N. and S. line, 9 lks. N. of the cor. of secs. 11, 12, 13 and 14.
	Thence
	N.89°42'W., on true line, bet. secs. 11 and 14.
	Over mountainous land; through desert growth.
	Along S. slope.
1.60	Head of ravine, course SE.; asc. 317 ft. over NE. slope.

SUBDIVISION OF T. 2 N., R. 3 W.

Chains 9.20	Spur, slopes SE.; over SE. slope.
11.20	Spur, slopes S.; desc. 511 ft. over SW. slope.
35.00	Rocky wash, 25 lks. wide, 3 ft. deep, course SE.; asc. 60 ft. over gradual NE. slope.
40.12	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, with a stone mkd. X, deposited at base, and in a mound of stone to top, for 4 sec. cor., with brass cap marked
	<u>\$11</u>
	\$14 1934
	Ascend 525 ft. over NE. slope.
63.20	Short spur, slopes N.; desc. 20 ft.
65.20	Ravine, course N. 30°E.; asc. 92 ft.
69.00	Spur, slopes N.; desc. 70 ft. over NW. slope.
72.60	Ravine, course N.; asc. 185 ft. over broken NE. slope.
80.24	The cor. of secs. 10, 11, 14 and 15.
	Land: mountainous. Soil: rocky loam, 3rd rate. Undergrowth, palo verde, catclaw, cactus, greasewood, ocatillo, mesquite.
	N.0°07'W., bet. secs. 10 and 11.
	Over mountainous land; through desert growth.
	To obtain measurement over the broken land on this mile, triangulate as follows: Designate a point forward as
	cor. of secs. 10,11,14 and 15 bears S.59°55'E. Vertical angle: plus 1°
	From point "A" another point: "C", 38.95 chs. N.89°44'W. of the cor. of secs. 1,2,11 and 12 bears N.45°46'E. From a point, "D", ahead on line, point "C" bears S.89°44'E.,41.35 chs. Vertical angle "A" to "D" is plus 4½°. All bearings checked
	by deflection. Reducing, point "A" is 39.63 chs. forward, and point "D" is 80.00 chs. forward.
2.50	(Approximate) Ravine, course NE.; over broken E. slope.
31.00	(Approximate) Ravine, course SE.; over S. slope.
39.63	Triangulation point "A", on spur, slopes E.; over N.slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a stone mkd. X deposited at base

	Chains	and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap marked.
		S10 S11
	e z <u>a</u> a ž	1934 1934 1956 19
	58.00	(Approximate) Ravine, course E.
	63.00	(Approximate) Ravine, course SE.
	80.00	(Triangulation point "D") Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bedrock, with a stone mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 2, 3, 10 and 11, with brass cap marked T2N R3W S3 S2
		\$10 \$11 1934
		Land: mountainous.
The second secon		Soil: adobe and granite loam, 3rd rate. Undergrowth: palo verde, catclaw, cactus, ocatillo, greasewood, sage.
		S.89ª42'E., on random line, bet. secs. 2 and 11.
	40.00	Set temp. 4 sec. cor.
	80.30	Intersect N. and S. line, 5 lks. S. of the cor. of secs. 1, 2, 11 and 12.
		Thence
		N.89°44'W., on true line, bet. secs. 2 and 11.
		Over mountainous land; through desert growth.
	en e	Over small bench on top of ridge.
	1.40	Short spur, slopes S.; desc. 732 ft. over broken SW. slope.
	21.50	Small ravine, course S.25°W.
	27.90	Short ravine, course SE.; asc. 210 ft. over broken E.slope.
	38.95	Triangulation point "C", used bet. secs. 10 and 11; on spur, slopes S.; desc. 40 ft. over W. slope.
	40.15	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
		$ \begin{array}{c} \frac{1}{4} \begin{array}{c} \text{S 2} \\ \text{S11} \\ \text{1934} \end{array} $
		raise a mound
	1. i	of stone, 3 ft. base, 2 ft. high, N. of cor.
	*	Desc. 74 ft. over SW. slope.
	53.70	Ravine, course S.25°E.; asc. 116 ft. over SE. slope.
	57.10	Spur, slopes SE.; desc. 50 ft. over SW. slope.
	61.10	Ravine, course SE.; asc. 262 ft. over broken SE. slope.

	Chains 74.00	Spur, slopes SE.; desc. 12 ft. over S. slope.
	80.30	The cor. of secs. 2, 3, 10 and 11.
		Land: mountainous. Soil: loam, 3rd and 4th rates. Undergrowth: palo verde, cactus, catclaw, greasewood, chaparral, ocatillo.
		N.0°18'W., on random line, bet. secs. 2 and 3.
		To obtain measurement over cliffs forward, triangulate as follows: Designate the sec. cor. as point "D"; the point 41.35 chs. S.89°44'E., thereof, as point"C" Carrying the line foreward with intermediate bearings to point "C" for topography; designate the final point as "E", from which point "C" bears S.47°19'E. Bearings checked by deflections at "D" and "E". Vertical angle S.20 chs.is plus 34°; next 4 chs. D" 4/35 Chc 26°; remaining 13 chs 2°. Base
	38.13	Triangulation point "E"; thence by chaining.
	40.00	Set temp. 4 sec. cor.
,	78.99	Intersect N. bdy. of Tp., 18 lks. W. of the cor. of secs. 2, 3, 34 and 35, hereinbefore described.
		Thence
		S.0°10'E., on true line, bet. secs. 2 and 3.
		Over mountainous land; through desert growth.
		Asc. 77 ft. along steep E. slope.
	6.70	Ravine, course N.20°E.; asc. 465 ft. over NW. slope.
	28.90	Spur, slopes NE.; desc. 92 ft. over SE. slope.
	34.60	Ravine, course NE.; asc. 160 ft. over NW. slope.
	38.99	Set an iron post, 3 ft. long, 1 in. diam., on broken bedrock, with a stone mkd. X, deposited at base, and in a large mound of stone to top, for \(\frac{1}{4} \) sec. cor. with brass cap marked
		S3 S2
		1934
		Asc. 30 ft. over NW. slope.
	40.70	Ridge, bears E. and W.
	41.60	Discontinue chaining; desc. about 25 ft. over S. slope.
	43.00	(Approximate) Head of ravine, course SE.; asc. 70 ft. over rugged E. slope.
	55.00	Rocky butte, projects SE; desc. 850 ft. over SW. slope.
	,	

78,99	The cor. of secs. 2,3,10 and 11.
	Land: mountainous. Soil: rocky, 4th rate. Timber: a few scrub cedars in sec. 3. Undergrowth: palo verde, greasewood, ocatillo, cactus, catclaw, chapparal, desert willow.
	Beginning at the cor. of secs. 26,27,34 and 35,
47 40 404 1 100	N.89°48'W., on governing section line, bet. secs.27 and 34.
40.00	Set temp. 1/4 sec. cor.
80.00	Set temp. cor. of secs. 27,28,33 and 34.
	Thence
	S.0°08'E., on random line, bet. secs. 33 and 34.
40.00	Set temp. 1/4 sec. cor.
81.17	Intersect S. bdy. of tp., 14 lks. E. of the cor. of secs. 33 and 34, only, hereinbefore described.
	Thence
	N.0°08'W., on true line, bet. secs. 33 and 34.
	Over rolling and mountainous land; through desert growth.
	Asc. 136 ft. over SW. slope.
6.70	Spur, slopes NW.; desc. 158 ft. over N. slope.
18.70	Ravine, course E., soon NE.
25.10	Gully, course SE.; asc. 77 ft. over SW. slope.
30.90	Spur, slopes SE.; desc. 22 ft.
32.40	Drain, course NE.; asc. 125 ft. over SE. slope.
36.40	Spur, slopes N.70°E.; desc. 97 ft. over NE. slope.
41.17	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4}\) sec. cor., with brass cap mkd.
	\$33 \ \$34 1934
	Desc. 72 ft. over NE. slope.
46.40	Drain, 10 ft. deep, course SE.; over broken, rocky flat.
53.30	Drain, 6 ft. deep, course SE.
58.60	Dim wood road, bears SE. and NW.
65.80	Sandy wash, 50 lks. wide, course SE.; asc. 25 ft.
81.17	Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 27,28,33 and 34, with brass cap mkd.

-	Chains		
		T2N R3W S28 S27 S33 S34 1934	
		raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.	_
		Land: rolling and mountainous. Soil: gravel and loam, 3rd rate. Undergrowth: palo verde, ironwood, catclaw, greasewood, mesquite, cactus, sage.	
		Beginning at the cor. of secs. 26,27,34 and 35,	
		N.89°48'W., on governing section line, bet. secs.27 and 34.	
		Over mountainous land; through desert growth.	
		Asc. 54 ft. over SE. slope.	
	2.30	Spur, slopes NE.; asc. 164 ft. over NE. slope.	
	7.90	Spur, slopes SE.; desc. 136 ft. over SW. slope.	
	12.70	Ravine, course S.; asc. 97 ft. over E. slope.	,
	14.90	Spur, slopes S.; over S. slope.	
	18.00	Head of ravine, course S.	
	19.60	Short spur, slopes S.30°W.; desc. 200 ft. over broken SW. slope.	_
	27.50	Rocky ravine, course S.; continue descent 82 ft.	
	33.00	Draw, course SW.	
	40.07	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, supported by a mound of stone, for \(\frac{1}{4} \) sec. cor., with a brass cap mkd.	
	•	1934 1934	
		raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.	
	42.90	Drain, 10 ft. deep, course SE.; asc. 204 ft. over SE. slope	•
•	50.40	Spur, slopes SW.; desc. 152 ft. over NW. slope.	
	58.20	Wash, 15 lks. wide, course SE.; over flat.	
	71.30	Drain, 10 lks. wide, 8 ft. deep, course S.	
	73.60	Low spur, slopes S.; desc. 53 ft. over SW. slope.	•
	75.70	Sandy wash, 90 lks. wide, course S.	
	78.60	Small ravine, course SE.; asc. 12 ft.	
	80.14	The cor. of secs. 27,28,33 and 34.	
	en de la companya de	Land: flat, rolling and mountainous. Soil: rocky, sandy loam and gravel, 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, mesquite, ironwood, sage.	

	Chains	N.0°08'W., bet. secs. 27 and 28.
		Over broken land; through desert growth.
	1.80	Ravine, course SE.
	11.00	Ravine, course SE.
	14.30	Ravine, course SE.
	16.50	Gulch, 30 lks. wide, 10 ft. deep, course SE.; asc. 350 ft. over broken SW. slope.
	40.00	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
		\$28 \(\begin{align*} \frac{1}{2} \\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
	• ** **	raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
		Asc. 237 ft. over SW. slope.
	49.50	Sharp spur, slopes SE.; desc. 221 ft. over NE. slope.
	74.10	Ravine, course S.30°E.; asc. 84 ft. over SW. slope.
	80.00	Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, with a stone, mkd. X, deposited at base, and in
	• \$ 15 f \$	a mound of stone to top, for cor. of secs. 21,22,27 and 28, with brass cap mkd.
	14	T2N R3W S21 S22 S28 S27 1934
	11 × 11 ×	Land: broken and mountainous. Soil: loam, rocky, 3rd rate. Undergrowth: palo verde, catclaw, greasewood, cactus, sage, ocatillo.
-		S.89°48'E., on random line, bet. secs. 22 and 27.
	·	Set temp. \(\frac{1}{4}\) sec. cor.
	80.16	Intersect N. and S. line, 5 lks. N. of the cor. of secs. 22,23,26 and 27.
		Thence
-	• •	N.89°46'W., on true line, bet. secs. 22 and 27.
		Over broken S. slope; through desert growth.
	9.70	Small ravine, course S.
	25.00	Rocky wash, 30 lks. wide, course S.75°E.; asc. 320 ft. over NE. slope.
	40.08	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
•	art silver	<u>1</u> S22 2S27

		SUBDIVISIONS OF T.2 N., R.3 W.	
C	hains	Asc. 270 ft. over NE. slope.	
	55.00	Ridge, bears NW. and SE.; slopes SE.; desc. 133 ft. over SW. slope.	
	62.70	Ravine, course S.; asc. 22 ft.	
	64.00	Spur, slopes S.;desc. 50 ft. over SW. slope.	
-	65.70	Ravine, course S.; asc. 40 ft. over SE. slope.	
	68.00	Short spur, slopes S. desc. 40 ft. over SW. slope.	
	72.90	Ravine, course SE.; asc. 98 ft. over NE. slope.	
	77.10	Spur, slopes S.; desc. 80 ft. over SW. slope.	
	80.16	The cor. of secs. 21,22,27 and 28.	
		Land: broken and mountainous. Soil: rocky adobe, 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, sage.	
		N.0°08'W., bet. secs. 21 and 22.	
		Over mountainous land; through desert growth.	
	* * * * * * * * * * * * * * * * * * *	Asc. 633 ft. over general S. slope.	
	22.90	Ridge, bears NW. and SE.; desc. 311 ft. over NE. slope.	
	37.50	Gulch, course E.; asc. 36 ft. over SE. slope.	,₩
	40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.	
		\$21 \$22 1934	
		raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.	
		Asc. 60 ft. over SE. slope.	
	44.90	Short spur, slopes E.	
	46.80	Ravine, course SE.; asc. 462 ft. over SW. slope.	
	64.60	Spur, slopes SE.; desc. 323 ft. over NE. slope.	
	79.20	Ravine, course NE.; asc. 13 ft.	
	80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground and supported by a mound of stone, for cor. of secs. 15,16,21 and 22, with brass cap mkd.	
	•••	T2N R3W <u>\$16 \$15</u> <u>\$21 \$22</u> 1934	
	10 m	raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.	
		Land: mountainous. Soil: rocky loam, 3rd rate. Undergrowth: palo verde, mesquite, catclaw, greasewood, cactus, sage.	

SUBDIVISIONS OF T.2 N., R.3 W. Chains S.89°46'E., on random line, bet. secs. 15 and 22. 40.00 Set temp. $\frac{1}{4}$ sec. cor. 80.32 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 14,15,22 and 23. Thence N.89°45'W., on true line, bet. secs. 15 and 22. Over mountainous land; through desert growth. Asc. 705 ft. over NE. slope. 23.90 Spur, slopes SE.; desc. 45 ft. over SW, slope. 29.20 Head of ravine, course SE.; asc. 110 ft. over SE. slope. 32.60 Spur, slopes SE.; desc. \$27 ft. over SW. slope. 40.16 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a stone mkd. X deposited beside, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd. Desc. 425 ft. over SW. slope. 57.10 Rocky wash, 40 lks. wide, course SE.; asc. 51 ft. 60.20 Short spur, slopes SE.; desc. 50 ft. 61.80 Rocky wash, 30 lks. wide, course SE.; asc. 310 ft. over broken SE. slope. 80.32 The cor. of secs. 15,16,21 and 22. Land: mountainous.
Soil: rocky loam, 3rd rate.
Undergrowth: palo verde, mesquite, catclaw, greasewood, cactus, sage, chapparal, ocatillo. N.0°08'W., bet. secs. 15 and 16. Over mountainous land; through average desert growth. Asc. 117 ft. over SE. slope. 5.20 Spur, slopes E.; desc. 108 ft. over NE. slope. 11.30 Drain, course E.; asc. 152 ft. over SE. slope. 15.70 Spur, slopes E.; desc. 50 ft. over NE. slope. 18.30 Drain, course SE.; asc. 172 ft. over SE. slope. 25.80 Ridge, divide, bears NE. and SW.; desc. 162 ft. over NW. slope.

34.50 Draw, course Sw.; asc. 192 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with

	SUBDIVICIONS OF 1.2 N., R., W.
Chains	brass cap mkd. 1
	\$16\s15 1934
	Asc. 274 ft. over general S. slope.
47.00	Over spur, from N.20°E., slopes S.30°E.
58.00	Same spur, from NE., slopes SE.
64.20	High spur, slopes W., soon S.; desc. 454 ft. over NE.slope.
77.50	Drain, course W.; over W. slope.
80.00	Set an iron post, 3 ft. long, 2.ins. diam., 8 ins. in the ground to bedrock, with a stone mkd. X deposited at basem and in a mound of stone to top, for cor. of secs. 9,10, 15 and 16, with brass cap mkd.
	T2N R3W S9 S10 S16 S15 1934
	Land: mountainous. Soil: rocky loam, adobe, 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, ocatillo, sage.
	S.89°45'E., on random line, bet. secs. 10 and 15.
40.00	Set temp. \frac{1}{4} sec. cor.
80.36	Intersect N. and S. line, 2 lks. S. of the cor. of secs. 10,11,14 and 15.
	Thence
	N.89°46'W., on true line, bet. secs. 10 and 15.
	Over mountainous land; through desert growth.
	Asc. 245 ft. over NE. slope.
6.80	Spur ridge, bears SE. and NW.; desc. 472 ft. over SW.slope.
27.90	Ravine, course SE.; asc. 166 ft. over NE. slope.
40.18	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
	1 <u>\$10</u> 1934
41.30	Drain, course NW.
42.80	Ravine, course NW.; asc. 732 ft. over E. slope.
62.80	Ridge, divide, bears N.20°E. and S.20°W.; desc. 571 ft. over general W. slope.
80.36	The cor. of secs. 9,10,15 and 16.
. ;	Land: mountainous.

```
Chains
           Soil: rocky loam and adobe, 3rd rate.
           Undergrowth: palo verde, cactus, greasewood, catclaw,
             ocatillo, sage.
        N.0,08'W., bet. secs. 9 and 10.
         Over mountainous land; through desert growth.
        Asc. 320 ft. over SW. slope.
  15.80 Spur, slopes NW.; desc. 394 ft. over NW. slope.
  29.00 Ravine, course SW.; asc. 30 ft. over SW. slope.
  30.80 Over top of spur, slopes SW.
  35.00 Leave same; asc. 121 ft. over SW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, with a stone mkd. X deposited at base, and in a
           mound of stone to top, for \frac{1}{4} sec. cor., with brass cap
                                 S9 S10
                                   1934
        Asc. 84 ft. over SW. slope.
 45.20 Spur, slopes NW.; desc. 152 ft. over NW. slope.
  49.50 Ravine, course W.; asc. 109 ft. over SW. slope.
  56.50 Over spur, slopes W.
  60.00 Leave same; desc. 298 ft. over NW. slope.
  71.00 Ravine, course irregularly W.; asc. 57 ft. over SE. slope.
  73.50 Spur, slopes SW.; desc. 69 ft. over NE. slope.
  80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3,4,9 and 10, with brass cap
                                  T2N R3W
                                                    raise a mound of
           stone, 3 ft. base, 3 ft. high, W. of cor.
          Land: mountainous.
          Soil: rocky loam and adobe, 3rd rate.
          Undergrowth: palo verde, cactus, catclaw, greasewood,
             ocatillo,
        $.89°46'E., on random line, bet. secs. 3 and 10.
 40.00 $et temp. \frac{1}{4} sec. cor.
 80.44 Intersect N. and S. line, 28 lks. S. of the cor. of secs. 2,3,10 and 11.
        N.89^{\circ}58^{\circ}W., on true line, bet. secs. 3 and 10.
```

		SUBDIVISIONS OF T.2 N., R.3 W.	
-	Chains	Over mountainous land; through average desert growth.	
		Desc. 160 ft. over SW. slope.	
	3.90	Ravine, course S.; asc. 60 ft. over E. slope.	
	5.80	Short spur, slopes S.; desc. 130 ft. over SW. slope.	
	9.00	Canyon, course SE.; asc. 440 ft. over E. slope.	
	20.00	Spur, slopes SE.; desc. 120 ft. over SW. slope.	
	27.00	Head of ravine, course S.; ase. 370 ft. over E. slope.	
	39.30	Ridge, bears S.20°W. and N.20°E.; desc. 25 ft. over W. slope.	
	40.22	Set an iron post, 3 ft. long, 1 in. diam., on cross (X) on exposed bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.	
		1 <u>183</u> *\$10 1934	
		Desc. 674 ft. over broken W. slope.	
	69.40	Ravine, course N., soon NW.; asc. 72 ft.over NE. slope.	
	75.30	Spur, slopes N.; desc. 124 ft. over W. slope.	
	141.08	The cor. of secs. 3,4,9 and 10.	
		Land: mountainous. Soil: rocky loam and adobe, 3rd rate. Undergrowth: palo verde, cactus, greasewood, ocatillo, catclaw.	
		N.0°10'W., on random line, bet. secs. 3 and 4.	
		Set temp. 1/2 sec. cor.	
		Intersect N. bdy. of Tp., 37 lks. W. of the cor. of secs. 3,4,33 and 34, hereinbefore described.	
		Thence	
		S.0°06'W., on true line, bet. secs. 3 and 4.	
	. '	Over mountainous land; through desert growth.	
		Asc. 145 ft. over NE. slope.	
	6.60	Ridge, divide, bears NW. and SE.; desc. 530 ft. over S. slope.	
	26.10	Hillside drain, course SW.; desc. 250 ft. along rocky W. slope.	
	39.14	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4}\) sec. cor., with brass cap mkd.	
		sl4 ts3 193l4	

45 BOOK 4(88

SUBDIVISIONS OF T.2 N., R.3 W.

	Chains	Desc. 50 ft. along broken W. slope.
	48.10	Drain, course W.
	50.80	Gulch, 20 lks. wide, 10 ft. deep, course W.
	53.10	Drain, course NW.; asc. 146 ft. over NE. slope.
	59.80	Spur of hill, slopes E.; desc. 184 ft. over SE. slope.
	65.80	Drain, course SE.
3.1 J	72.40	Rocky ravine, course SW.; asc. 30 ft.
	76.90	Short spur, slopes NW.; desc. 10 ft.
	79.14	The cor. of secs. 3,4,9 and 10.
		Land: mountainous and broken. Soil: rocky adobe and loam, 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, ocatillo, chapparal, sage, mesquite.
	•	
		Beginning at the cor. of secs. 27, 28, 33 and 34,
		N.89°48'W., on governing section line, bet. secs.28 and 33.
	40.00	Set temp. ½ sec. cor.
	80.00	Set temp. cor. of secs. 28,29,32 and 33.
		Thence
		S.0°08'E., on random line, bet. secs. 32 and 33.
	40.00	Set temp. ½ sec. cor.
	44.18	Intersect S. bdy. of Tp., 4 lks. W. of the cor. of secs. 32 and 33, only, hereinbefore described.
		Thence
		N.0°08'W., on true line, bet. secs. 32 and 33.
		Over mountainous land; through desert growth.
	2.40	Ravine, course SW.; asc. 292 ft. over general SW. slope.
	14.50	Spur, slopes SW.; desc. 67 ft. over NW. slope.
	18.50	Ravine, course SW.; asc. 15 ft. over SW. slope.
	20.30	Spur, slopes W.; asc. 210 ft. over SSW. slope.
	27.70	Spur, slopes SW.; desc. 38 ft. over NW. slope.
	30.10	Drain, course SW.; asc. 313 ft. over broken SW. slope.
	41.44	Set an iron post, 3 ft. long, 1 in. diam., on cross (X) on exposed bedrock, and in a mound of stone to top, for \(\frac{1}{4}\) sec. cor., with brass cap mkd.
		932 1933
		S32 S33
	gradient Commence	Asc. 177 ft. over SW. slope.

44.50 Ridge, bears NW. and SE.; desc. 171 ft. over NE. slope.

4-673 b

```
50.20 Ravine, course NE.; asc. 10 ft.
52.10 Point of spur, slopes NE.; desc. 159 ft. over NE. slope.
56.70 Ravine, course NE.; asc. 60 ft.
59.10 Spur, slopes NE.; desc. 240 ft. over NE. slope.
73.60 Ravine, course NE.
81.44 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 28,29,32 and 33, with brass cap
                                  T2N R3W€
S29 S28
                                                   raise a mound of
         stone, 3 ft. base, 3 ft. high, W. of cor.
         Land: mountainous.
         Soil: rocky adobe and loam, 3rd rate.
         Undergrowth: palo verde, cactus, greasewood, mesquite,
            catclaw, ocatillo,
       Beginning at the cor. of secs. 27,28,33 and 34,
       N.89°48'W., on governing section line, bet. secs. 28 and 33
       Over gradual S. slope; through average desert growth.
 6.40 Wash, 10 1ks. wide, course S.
25.70 Wash, 30 lks. wide, in arroyo, 20 ft. deep, course SE.
30.00 Drain, 5 ft. deep, course S.
31.30 Drain, 8 ft. deep, course S.
33.50 Drain, 10 lks. wide, 8 ft. deep, course SSE.
39.98 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \( \frac{1}{4} \) sec. cor., with brass cap
         mkd.
40.20 Drain, course NE.; asc. 100 ft. over SE. slope.
46.50 Spur, slopes NE.; desc. 72 ft. over NW. slope.
56.60 Ravine, course NE.; asc. 142 ft. over SE. slope.
62.20 Spur, slopes NE.; desc. 75 ft. over NW. slope.
67.70 Ravine, course NE.; asc. 110 ft. over broken NE. slope.
79.96 The cor. of secs. 28,29,32 and 33.
          Land: broken and mountainous. Soil: adobe and loam, rocky, 3rd rate.
          Undergrowth: palo verde, cactus, greasewood, catclaw,
```

BOOK 4033

Chains N.0°08'W., bet. secs. 28 and 29.

Over rolling broken land; through desert growth.

Desc. 34 ft. over NE. slope.

6.30 Ravine, course SE.; asc. 277 ft. over broken SE. slope.

23.60 Spur slopes SE.; desc. 80 ft. over NW. slope.

30.20 Spur, slopes N.10°E.; desc. 192 ft. over NW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for 1 sec. cor., with brass cap

S29 S28

Desc. 14 ft.

41.30 Ravine, course NE.; desc. 16 ft.

44.80 Draw, course NE.; desc. 38 ft.

52.42 Wash, 50 lks. wide, course E.

62.10 Draw, course E.

63.70 Draw, course E.

69.50 Draw, course SE.; asc. 142 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, with a stone, mkd. X deposited beside, and in a mound of stone to top, for cor. of secs.20,21,28 and 29, with brass cap mkd.

> T2N R3W **S**29 |**S**28

Land: rolling and broken.

Soil: adobe loam, 3rd rate.
Undergrowth: palo verde, cactus, greasewood.

S.89°48'E., on random line, bet. secs. 21 and 28.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect N. and S. line at the cor. of secs. 21,22,27 and 28.

Thence

N.89°48'W., on true line, bet. secs. 21 and 28.

Over mountainous land; through desert growth.

Over broken S. slope.

4.10 Drain, course SE.

7.60 Prain, course SE.; asc. 166 ft. over E. slope.

48

 Chains	Ridge, bears NE. and SW.; desc. 330 ft. over NW. slope.	
21.00	Ravine, course SW.; asc. 35 ft.	
28.50	Spur, slopes S.; desc. 35 ft.	
30.40	Ravine, course SE.; asc. 15 ft. over S. slope.	٠.,
140.02	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.	
	1821 \$28 1934 raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.	
41.60	Slope changes; desc. 252 ft. over SW. slope.	
	Wash, from NE., course SSE.; asc. 25 ft.	
	End of spur, slopes S.; desc. 25 ft.	
65.50	Wash, 40 lks. wide, course SE.	
71.50	Wash, 10 lks. wide, course SE.; asc. 75 ft. over SE.slope.	
78.20	Short spur, slopes S.; desc. 16 ft.	
80.0L	The cor. of secs. 20,21,28 and 29.	
	Land: rolling and mountainous. Soil: rocky adobe and loam, 3rd rate. Undergrowth: palo verde, ironwood, greasewood, cactus, catclaw, mesquite, sage.	~
·	N.0°08'W., bet. secs. 20 and 21.	
	Over mountainous land; through desert growth.	
	Asc. 180 ft. over SW. slope.	
6.80	Spur, slopes SE.; desc. 104 ft. over NE. slope.	
13.70	Ravine, course E.; asc. 108 ft. over SE. slope.	
18.60	Spur, slopes SE.; desc. 47 ft. over N. slope.	
20.50	Drain, course E.; asc. 97 ft. over SE. slope.	
23.60	Spur, slopes E.; over broken E. slope.	
28.60	Drain, course E.	
35.40	Ravine, course SE.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.	
	S20 S21 1934 raise a mound of	
	stone, 3 ft. base, 2 ft. high, W. of cor.	
42.10	Drain, course SSE.; asc. 138 ft. over S. slope.	

BOOK 4033

```
Chains
54.30 Head of ravine, course SW.; asc. 245 ft. over SW. slope.
```

- 64.50 Ridge, bears NE. and SW.; asc. 23 ft.
- 66.20 Head of ravine, course NW.
- 69.20 Short spur, slopes NW.; desc. 270 ft. over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 16,17,20 and 21, with brass cap mkd.

T2N R3W <u>\$17 | \$16</u> <u>\$20 | \$21</u> 1934

Land: rolling and mountainous.
Soil: rocky adobe and loam, 3rd rate.
Undergrowth: palo verde, catclaw, cactus, greasewood, ocatillo, sage.

S.89°48'E., on random line, bet. secs. 16 and 21.

- 40.00 Set temp. \(\frac{1}{4}\) sec. cor.
- 80.02 Intersect N. and S. line at the cor. of secs. 15,16,21 and 22.

Thence

 $N.89^{\circ}48^{\circ}W.$, on true line, bet. secs. 16 and 21.

Over mountainous land; through desert growth.

Over S. slope.

- 2.30 Ravine, course S.75°E.; asc. 370 ft. over NE. slope.
- 11.90 Spur, slopes SE.; desc. 92 ft. over SW. slope.
- 21.90 Ridge bears NE. and SW.; asc. 233 ft. over NE. slope.
- 31.60 Slope changes; desc. 99 ft. over NW. slope.
- 37.80 Ravine, course N.; over N. slope.
- 40.01 Set an iron post, 3 ft. long, 1 in. diam., on cross (X) on exposed bedrock, supported in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

1934

Asc. 25 ft. over N. slope.

- 42.40 Spur, slopes N.; desc. 421 ft. over NW. slope.
- 60.70 Head of ravine, course NW.; asc. 23 ft.
- 69.60 Spur, slopes NW.; desc. 357 ft. over SW. slope.
- 80.02 The cor. of secs. 16,17,20 and 21.

	Chains	Land: mountainous. Soil: rocky adobe and loam, 3rd rate. Undergrowth: palo verde, greasewood, cactus, ocatillo.
	. 1	N.0°08'W., bet. secs. 16 and 17.
	• • • •	Over rolling and mountainous land; through desert growth.
		Desc. 120 ft. over broken NW. slope.
	14.50	Wash, 60 lks. wide, course NW.; asc. 250 ft. over SW. slope.
	23.30	Spur, slopes SE.; asc. 40 ft. over SE. slope.
	26.20	Head of ravine, course SE.; over E. slope.
	30.50	Drain, course SE.; asc. 49 ft. over SE. slope.
	34.20	Spur, slopes E.; desc. 100 ft. over N. slope.
- , -	40.00	Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
		\$17\s16 1934
		Desc. 240 ft. over NW. slope.
	48.90	Ravine, course NW.; asc. 45 ft. over W. slope.
	50.50	Short spur, slopes NW.; desc. 30 ft. over E. slope.
	53.90	Drain, course NW.; over broken W. slope.
	61.60	Head of ravine, course SW.
	65.00	Spur, slopes SW.
	66.40	Drain, course NW.; asc. 140 ft. along W. slope.
	80.00	Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 8,9,16 and 17, with brass cap mkd.
		T2N R3W <u>\$8 89</u> \$17 \$16 193 ₊
		Land: mountainous. Soil: rocky adobe and loam, 3rd rate. Undergrowth: palo verde, cactus, catclaw, greasewood, ocatillo.
		S.89°48'E., on random line, bet. secs. 9 and 16.
		Set temp. 1 sec. cor.
	80.08	Intersect N. and S. line, 5 lks. S. of the cor. of secs. 9,10,15 and 16.
		Thence

Chains	N.89°50'W., on true line, bet. secs. 9 and 16.
	Over rolling and broken land; through desert growth.
	Desc. 40 ft. over SW. slope.
1.80	Ravine, course NW.; asc. 60 ft.
7.10	Short spur, slopes W.; desc. 31 ft.
8.40	Drain, course N.; asc. 54 ft.
16.70	Spur, slopes NW.; desc. 235 ft. over SW. slope.
25.80	Ravine, course NW.; asc. 25 ft.
30.20	Spur, slopes NW.; desc. 131 ft. over SW. slope.
35.40	Ravine, course NW.; asc. 10 ft.
37.10	Spur, slopes NW.; deso. 21 ft.
140.014	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for 2 sec. cor., with brass cap mkd.
	1 <u>39</u> 2 516 1934
40.50	Drain, course NW.; asc. 42 ft.
45.50	Spur, slopes NW.; desc. 52 ft.
48.70	Drain, course NW.; asc. 30 ft.
51.60	Spur, slopes NW.; desc. 138 ft. over NW. slope.
58.00	Wash, from SE.; course W.
59.20	Same wash, course NW.; asc. 32 ft.
60.50	Spur, slopes NW.; desc. 20 ft.
61.50	Ravine, course NW.; asc. 270 ft. over NE. slope.
74.00	Sharp spur, slopes NW.; desc. 213 ft. over SW. slope.
80.08	The cor. of secs. 8,9,16 and 17.
	Land: broken and mountainous. Soil: rocky adobe and loam, 3rd rate. Undergrowth: palo verde, cactus, greasewood, catclaw, sage, ocatillo, mesquite.
	N.0°08'W., bet. secs. 8 and 9.
	Over rolling land; through desert growth.
	Asc. 85 ft. over SW. slope.
10.90	Spur, slopes NW.: desc. 204 ft. over NE. slope.
27.30	Drain, course SE.; asc. 46 ft.
29.50	Short spur, slopes SE.
34.50	Slope changes; desc. 23 ft. over NE. slope.
	1.80 7.10 8.40 16.70 25.80 30.20 35.40 37.10 40.04 40.50 45.50 48.70 51.60 58.00 59.20 60.50 61.50 74.00 80.08

4--673 b

	Comparison of the way way	
Chains 40.00	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.	
	\$8 \$9 1934	
	Desc. 97 ft. over NE. slope.	
45.60	Drain, course NE.; desc. 80 ft. over NE. slope.	
53.70	Rocky wash, 50 lks. wide, course NW.; asc. 60 ft. over SW. slope.	
57.60	Wood road, bears SE. and NW.; asc. 80 ft. over SW. slope.	
60.10	Drain, 6 ft. deep, course NW.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 4,5,8 and 9, with brass cap mkd.	
•	T2N R3W S5 S4	
	38 59 1934	
	raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.	
	Land: rolling.	
	Soil: gravel loam, 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, ironwood, mesquite, sage.	~
	S.89°50'E., on random line, bet. secs. 4 and 9.	
40.00	Set temp. 1/4 sec. cor.	
80.10	Intersect N. and S. line, 16 lks. S. of the cor. of secs. 3,4,9 and 10,	
	Thence	
3.	N.89°57'W., on true line, bet. secs. 4 and 9.	
	Over mountainous land; through desert growth.	
0.60	Drain, course NW.; asc. 11 ft.	
2.20	Spur, slopes NW.; desc. 81 ft.over NW. slope.	
8.40	Wash, 30 lks. wide, course SW.; asc. 48 ft. over E. slope.	
9.50	Spur, slopes SE.; desc. 55 ft.	
11.20	Ravine, course SE.; asc. 155 ft.over NE. slope.	
	Spur, slopes SE.; desc. 134 ft. over SW. slope.	
22.10	Ravine, course SE.; asc. 305 ft. over NE. slope.	
28.80	Spur, slopes S.; desc. 370 ft. over SW. slope.	
40.05	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.	

	Chains	1 <u>2</u> S4 259 1934	
		Desc. 81 ft. over SW. slope.	
	44.60	Drain, course S.; asc. 33 ft. over SE. slope.	
	47.80	Over flat top of spur, slopes S.	
	51.60	Leave same; desc. 247 ft. over SW. slope.	
	63.80	Ravine, course NW.; asc. 160 ft. over broken NE. slope.	
	74.90	Spur, slopes NW.; desc. 93 ft. over SW. slope.	
	80.10	The cor. of secs. 4,5,8 and 9.	
	- 5 ° € (Land: mountainous. Soil: rocky adobe and loam, 3rd rate. Undergrowth: palo verde, greasewood, catclaw, cactus, ocatillo, chapparal, ocatillo, chapparal, ocatillo, chapparal, ocatillo, chapparal, ocatillo, chapparal, ocat	
		N.0°06'E., on random line, bet. secs. 4 and 5.	
	40.00	Set temp. 4 sec. cor.	
	79.22	Intersect N. bdy. of Tp., 5 lks. E. of the cor. of secs. 4,5,32 and 33, hereinbefore described.	
		Thence	
		S.0°04'W., on true line, bet. secs. 4 and 5.	
		Over rolling-broken land; through desert growth.	
		Desc. 186 ft. over SW. slope.	
	13.10	Wash, 15 lks. wide, course W.; over broken W. slope.	
	17.30	Drain, course NW.	
	36.00	Junction of ravines from SE. and NE.; course W.	
	39.22	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd. S5 S4 1934	
		Asc. 183 ft. over NE. slope	
	46.70	Spur, slopes NW.; desc. 206 ft. over SW. slope.	
	53.80	Spur, slopes SW.	
-	63.80	Gulch, 20 ft. deep, course NW.; over W. slopé.	
	69.80	Wash, 10 lks. wide, course SW.	
	71.40	Wash, 15 lks. wide, course NW.; asc. 113 ft. over NW. slope	,
	79.22	The cor. of secs. 4,5,8 and 9.	

4-673 b

54

Chains	Land: rolling and broken. Soil: gravel loam, 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, ironwood, sage.	
	Beginning at the cor. of secs. 28,29,32 and 33,	
	N.89°48'W., on governing section line, bet. secs.29 and 32.	
40.00	Set temp. ½ sec. cor.	
80.00	Set temp. cor. of secs. 29,30,31 and 32.	
	Thence	
	S.0°09'E., on random line, bet. secs. 31 and 32.	
40.00	Set temp. \frac{1}{4} sec. cor.	
81.92	Intersect S. bdy. of Tp., 4 lks. W. of the cor. of secs. 31 and 32, only, hereinbefore described.	
	Thence	ı
	N.0°09'W., on true line, bet. secs. 31 and 32.	i
	Over rolling SW. slope; through desert growth.	ı
11.05	Gulch, 20 lks. wide, 25 ft. deep, course SW.	
25.80	Prospect hole, 4 ft. deep, on line.	
27.30	Wash, 6 lks. wide, 3 ft. deep, course SW.	
32.40	Wood road, bears NE. and SW.	
33.00	Shallow wash, 8 lks. wide, course Sw.	
36.20	Draw, 10 lks. wide, 6 ft. deep, course S.25°W.	
41.92	Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.	
	s31 s32 1934	
48.30	Wash, 40 lks. wide, course SW.; asc. 126 ft. over rolling SE. slope.	
65.70	Spur, slopes SW.; desc. 47 ft. over NE. slope.	
71.20	Small ravine, course NE.; asc. 63 ft. over SE. slope.	ı
79.60	Spur, slopes SW.; over flat top of same.	
81.92	Set an iron post, 3 ft. long, 2 ins. diam., on cross (X) on exposed bedrock, supported in a large mound of stone, for cor. of secs. 29,30,31 and 32, with brass cap mkd.	
	T2N R3W <u>\$30 \$29</u> \$31 \$32 1934	
	Land: rolling. Soil: gravel adobe, 3rd rate. Undergrowth: palo verde, cactus, catclaw, greasewood.	

```
Chains
        Beginning at the cor. of secs. 28,29,32 and 33,
        N.89°48'W., on governing section line, bet. secs.29 and 32.
        Over mountainous land; through desert growth.
        Asc. 360 ft. over broken NE. slope.
 18.90 Ridge, bears N. and S.; desc. 175 ft. over SW. slope.
 29.80 Head of ravine, course N.; continue descent 68 ft.
 34.30 Drain, course NE.; continue descent 153 ft.
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \( \frac{1}{4} \) sec. cor., with brass cap
          mkd.
        Desc. 85 ft. over SW. slope.
 44.60 Over gentle W. slope.
 54.60 Gulch, 35 ft. deep, course SW.
 63.80 Wash, 10 lks. wide, 8 ft. deep, course S.; asc. 135 ft.
           over SE. slope.
 73.20 Spur, slopes S.; desc. 76 ft. over SW. slope.
 79.9% The cor. of secs. 29,30,31 and 32.
           Land: mountainous and broken.
           Soil: rocky adobe, 3rd rate.
Undergrowth: palo verde, catclaw, cactus, greasewood,
             mesquite, ocațillo.
        N.89°48'W., on random line, bet. secs. 30 and 31.
 37.08 Intersect W. bdy. of Tp. at cor. of secs. 25,30,31 and 36,
          which is an iron post, 2 ins. diam., projecting 4 ins. above a mound of stone, mkd. on brass cap and witnessed as described in the official record, with old mkd.stone
           adjoining post.
        Thence
        S.89°48'E., on true line, bet. secs. 30 and 31.
        Over broken desert land; through desert growth.
  2.60 Dim wood road, bears NE. and SW:
  5.30 Dim wood road, bears N. and S.
        Gulch, 20 lks. wide, 13 ft. deep, course SE.
 10.50 Drain, 4 ft. deep, course S.
 19.80 Gulch, 25 ft. deep, course SW.
 25.40 Enter foothills; asc. 37 ft. over NW. slope.
 30.20 Spur, slopes NW.; desc. 15 ft.
```

	SUBDIVISIONS OF T. 2 N., R.3 W.
Chains	Head of ravine, course NW.; asc. 80 ft. over SW. slope.
	The con. of secs. 29,30,31 and 32.
	Land: broken. Soil: gravel adobe, 2nd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, ironwood.
	N.0 09'W., bet. secs. 29 and 30.
	Over broken land; through desert growth.
0.10	Leave spur, slopes SW.; desc. 31 ft. over NW. slope.
	Short drain, course NW.; over W. slope.
	Ravine, course SW.; asc. 160 ft. over SW. slope.
	Spur. slopes SW.; desc. 108 ft. over NW. slope.
	Draw, course SW.; asc. 51 ft.
	Spur, slopes SW.; desc. 24 ft.
	Ravine, course SW.; asc. 53 ft.
	Spur, slopes SW.; over W. slope.
	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap mkd.
	\$30 \ \$29 1934
	Cor.stands on short spur, slopes NW.
	Desc. 61 ft. over NW. slope.
42.50	Ravine, course NW.; over broken W. slope.
58.10	Gulch, 30 lks. wide at bottom, 35 ft. deep, course SW. Asc. 140 ft. over SE. slope.
65.30	Spur, slopes SE.; desc. 23 ft.
71.40	Ravine, course E.; asc. 105 ft. over SE. slope.
76.20	Rocky spur, slopes E.; over rugged E. slope.
79.50	Drain, course SE.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 19,20,29 and 30, with brass cap mkd.
	T2N R3W S19 S20 S30 S29 1934
	Land: broken. Soil: adobe loam, 3rd rate. Undergrowth: palo verde, cactus, greasewood, catclaw.

```
Chains
       S.89948 E., on random line, bet, secs. 20 and 29.
40.00 Set temp. \(\frac{1}{4}\) sec. core
 79.84 Intersect N. and S. line, at cor. of secs. 20,21,28 and 29.
       Thence
      N.89°48'W., on true line, bet. secs. 20 and 29.
       Over broken land; through desert growth.
       Desc. 32 ft. over SW. slope.
 4.40 Drain, course SE.; asc. 54 ft. over NE. slope.
 13.30 Low spur, slopes SE.; desc. 31 ft.
 15.10 Ravine, course SE.; asc. 65 ft. over SE. slope.
 19.70 Slope changes; desc. 54 ft. over SW. slope.
 31.00 Wash, 30 lks. wide, course SSW.; over S. slope.
 39.92 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the
         ground, for \( \frac{1}{4} \) sec. cor., with brass cap mkd.
                                             raise a mound of stone,
         3 ft. base, 2 ft. high, N. of cor.
40.90 Drain, course SE.
 48.30 Wash, 30 lks. wide, course SE.; asc. 47 ft.
53.00 Spur, slopes N.; desc. 124 ft. over W. slope.
 60.00 Drain, course NE.
 61.80 Same drain, course SW.
 65.20 Gulch, 26 ft. deep, course S.; asc. 162 ft. over E. slope.
 71.70 Spur, slopes SE.; desc. 110 ft. over SW. slope.
 75.10 Ravine, course S.; asc. 50 ft. over E. slope.
 79.84 The cor. of secs. 19,20,29 and 30.
         Land: broken.
         Soil: rocky adobe, 3rd rate.
         Undergrowth: palo verde, cactus, catclaw, greasewood, mesquite, ironwood, ocatillo, sage.
       N.89°48'W., on random line, bet. secs. 19 and 30.
 37.35 Intersect W. bdy. of Tp. 13 lks. N. of the cor. of secs. 19,24,25 and 30.
       Thence
       East, on true line, bet. secs. 19 and 30.
       Over rolling land; through desert growth.
       Asc. 46 ft. over SW. slope.
```

4-673 b

SUBDIVISIONS OF T.2 N., R.3 W. 7.00 Spur, slopes SE.; desc. 120 ft. over SE. slope. 18.40 A wide draw, course SW.; asc. 300 ft. over SW. slope. 32.00 Spur, slopes Sw.; desc. 132 ft. over NE. slope. 37.35 The cor. of secs. 19,20,29 and 30. Land: rolling. Soil: adobe gravel, 3rd rate. Undergrowth: palo verde, catclaw, mesquite, cactus, greasewood, ocatillo, sage. $N.0^{\circ}09!$ W., bet. secs. 19 and 20. Over mountainous land; through desert growth. Asc. 25 ft. over S. slope. 1.00 Spur, slopes SE.; desc. 10 ft. 3.00 Drain, course SE.; asc. 40 ft. over S. slope. 6.00 Spur, slopes E.; desc. 26 ft. 7.90 Drain, course SE.; asc. 180 ft. over SW. slope. 11.70 Spur, slopes SE.; desc. 250 ft. over N. slope. 23.60 Ravine, course NW. 24.60 Drain, course NW.; asc. 264 ft. over SW. slope. 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd. \$19 \$20 1934 Asc. 90 ft. over SSW. slope. 42.30 Spur, slopes SW.; desc. 18 ft. 46.20 Ravine, course SW.; asc. 164 ft. over S. slope. 51.10 Sharp spur, slopes W.; desc. 388 ft. over N. slope.

65.30 Draw, course W.; asc. 70 ft. over SW. slope.

71.60 Spur, slopes SW.; desc. 107 ft. over gradual NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 17,18,19 and 20, with brass cap mkd.

T2N R3W S18 S17 S19 S20 1934

Land: mountainous.
Soil: adobe loam, 3rd rate.
Undergrowth: palo verde, greasewood, cactus, catclaw.

Chains	S.89°48'E., on random line. bet. secs. 17 and 20.
40.00	Set temp. 4 sec. cor.
79•98	Intersect N. and S. line, 2 lks. N. of the cor. of secs. 16, 17, 20 and 21.
	Thence
	N.89°47'W., on true line, bet. secs. 17 and 20.
	Over rolling broken land; through desert growth.
	Desc. 35 ft. over SW. slope.
0.95	Drain, course NW.; asc. 30 ft. over NE. slope.
9•90	Spur, slopes N.; desc. 133 ft. over SW. slope.
19.70	Drain, course NW.; asc. 52 ft. over NE. slope.
27.40	Low spur, slopes N.; desc. 171 ft. over NW. slope.
36.20	A wide draw, course SW.
38.50	Same draw, course now irregularly W.
39•99	Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground, with a stone mkd. X. deposited at base. and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor., with brass cap marked
	$\frac{1}{4} \frac{\text{S17}}{\text{S20}}$
55.00	Leave draw, course N.75°W.
67.00	Re-enter same.
72.00	Leave same.
75.00	Spur, slopes N.; desc. 34 ft.
79•98	The cor. of secs. 17, 18, 19 and 20.
	Land: rolling and broken. Soil: gravelly loam and adobe, 3rd rate. Undergrowth: palo verde, catclaw. cactus. greasewood, ocatillo, sage.
	West, on true line, bet. secs. 18 and 19.
	Over broken land; through desert growth.
	Desc. 23 ft. over NW. slope.
1.40	Wash, course SW.; asc. 57 ft.
6.80	Short spur, slopes
14.60	Same wash, course NW.
18.90	Wash, 30 lks. wide, course N.30°W.
30.60	Drain, course NW.; asc. 83 ft. over NE. slope.
36.68	Intersect the E. bdy. of T. 2 N., R. 4 W.

m. s. government printing office: 1931 6-8155

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground, and in a mound of stone to top, for closing cor. of secs. 18 and 19, with brass cap marked

raise a mound

of stone, 3 ft. base, 2 ft. high, E. of cor.

From point of intersection, the cor. of secs. 13, 18, 19 and 24, bears S.0°34'E., 84 lks. dist.; an iron post, 2 ins. diam., projecting 4 ins. above a mound of stone, with brass cap marked

T2N R4W R3W S13 S18 S24 S19 1931

As this cor. now refers to secs. 13 and 24, only, of R. 4 W.; alter the marks on the brass cap to read as follows:

T2N R4W R3W S13 S24 1934 1931

Land: broken.

Soil: rocky adobe and loam, 3rd rate.
Undergrowth: palo verde, catclaw, cactus, greasewood,

ocatillo, sage.

From the cor. of secs. 17, 18, 19 and 20.

N.0°09'W., bet. secs. 17 and 18.

Over rolling and broken land; through desert growth.

Desc. 21 ft. over NW. slope.

1.60 Wash, 50 lks. wide, course SW.; asc. 126 ft. over SE. slope.

Spur, slopes NW.; desc. 170 ft. over NE. slope. 7.20

15.90 Drain, course NW.; over rolling W. slope.

23.90 Drain, course W., in ravine 22 ft. deep.

26.40 Drain, course NW.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, with a stone mkd. X. deposited at base, and in 40.00 a mound of stone to top, for \frac{1}{4} sec. cor., with brass cap marked

> S18|S17 1934

	6	1
*	K	4033

Chains 40.50	Drain, course NW.
47.60	Drain, course SW.; asc. 286 ft. over SW. slope.
58.90	Spur, slopes NW.; desc. 109 ft. over NE. slope.
63.80	Drain, course NE.
65.00	Small spur, slopes NE.; desc. 160 ft. over NE. slope.
75.00	Wash, 30 lks. wide, course NW.; asc. 23 ft. over gentle SW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, with a stone mkd. X. deposited at base, and in a mound of stone to top, for cor. of secs. 7, 8, 17 and 18, with brass cap marked
	T2N R3W
	<u>\$7 \$8</u> \$18 \$17 1934
	Land: broken. Soil: adobe loam, rocky, 3rd rate. Undergrowth: palo verde, cactus, catclaw, greasewood.
	S.89°47'E., on random line, bet. secs. 8 and 17.
40.00	Set temp. 4 sec. cor.
79.90	Intersect N. and S. line, 7 lks. S. of the cor. of secs.
	8, 9, 16 and 17.
	Thence
	N.89°50'W., on true line, bet. secs. 8 and 17.
	Over rolling land; through desert growth.
	Desc. 272 ft. over SW. slope.
12.90	Ravine, course NW.; over flat, slopes N.
27.20	Gulch, 30 lks. wide, 15 ft. deep, course NW.
34.60	Gulch, 10 lks. wide, 8 ft. deep, course NW.
36.70	Drain, course N.; asc. 37 ft. over NE. slope.
39•95	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with a stone mkd. X, deposited at base, and in a mound of stone to top, for \(\frac{1}{4} \) sec. cor. with brass cap marked
	$\begin{array}{c} \frac{1}{4} \frac{88}{\$17} \\ 1934 \end{array}$
41.30	Drain, 8 ft. deep, course NE.; asc. 90 ft. over NE. slope.
49.30	Spur, slopes NW.; desc. 157 ft. over SW. slope.
63.30	Drain course SW.; asc. 45 ft.
66.70	Spur, slopes SE.; desc. 85 ft. over SW. slope.
75.50	Drain, course NW.; over flat.
1.	

	SODDE MESTAGE TO L. C. N. V. D. M.
Chains 79.90	The cor. of secs. 7, 8, 17 and 18.
	Land; rolling. Soil: gravel and adobe loam, rocky, 3rd rate. Undergrowth: palo verde, cactus, catclaw. greasewood. sage ocatillo, ironwood.
	West, on true line, bet. secs. 7 and 18.
	Over flat; through desert growth.
20.70	Wash, 30 lks. wide, in channel 40 ft. deep. course SW.
30.70	Wood road, bears NE. and SW.
37.04	Intersect the E. bdy. of T. 2 N., R. 4 W.
	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of secs. 7 and 18, with brass cap marked
	T2N R3W S7 S18 1934
	raise a mound
	of stone, 3 ft. base, 2 ft. high, E. of cor.
	From point of intersection, the cor. of secs. 7, 12, 13 and 18, bears S.0°26'E., 82 lks. dist.; an iron post, 2 ins. diam., 6 ins. above ground, along side of a marked stone, with brass cap marked
	T2N R4W R3W S12 S7 S13 S18 1931
	from which
	An ironwood, 6 ins. diam., bears N.42°E., 202 lks. dist., mkd. T2N R3W S7 BT.
	A paloverde, 8 ins. diam., bears S.89 E., 274 lks. dist., mkd. T2N R3W S18 BT.
	A paloverde, 6 ins. diam., bears S.27½ W., 221 lks. dist., mkd. T2N R4W S13 BT.
	A paloverde, 8 ins. diam., bears N.764°W., 146 lks.

dist., mkd. T2N R4W S12 BT.

As this cor. now refers to secs. 12 and 13 only, of R. 4 W., alter the marks on the brass cap to read as follows:

R4W S12 S13

Land: flat.

Soil: gravel loam, 2nd rate. Undergrowth: palo verde. cactus, catclaw. greasewood.

		a land
	Chains	From the cor. of secs. 7, 8, 17 and 18.
		N.0°09'W., bet. secs. 7 and 8.
		Over rolling broken land; through desert growth.
	1.40	Gulch, 12 ft. deep, course W.
	12.00	Wash, 20 lks. wide, course SW.
	16.20	Gulch, 20 ft. deep, course SW.
	24.90	Wash, 60 lks. wide, course SW. Asc. 46 ft. over SE. slope.
-	34.40	Spur, slopes SW.; wood road, bears NE. and SW.
	38.50	Drain, course SW.
	40.00	Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, with a stone mkd. X, deposited at base, and in a mound of stone to top, for \(\frac{1}{4}\) sec. cor., with brass cap marked
		\$7 \$8 1934
	46.00	Gulch, 15 ft. deep, course SW.
	50.20	Head of gulch, 15 ft. deep, course SW.
	61.30	Wash, 10 lks. wide, in ravine, 20 ft. deep, course NW.
	66.60	Dim road, bears E. and W.
	74•30	Low spur, slopes SW.; desc. 46 ft. over N. slope.
	80.00	Set an iron post, 3 ft. long, 2 ins. diam., 32 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap marked
		T2N R3W
	• #	of stone, 3 ft. base, 3 ft. high, W. of cor.
	1	Land; rolling. Soil: rocky adobe and loam, 3rd rate. Undergrowth: palo verde, mesquite, greasewood, catclaw. cactus, sage.
		S.89°50'E., on random line, bet. secs. 5 and 8.
	40.00	Set temp. 4 sec. cor.
	79.80	Intersect N. and S. line, 7 lks. N. of the cor. of secs. 4, 5, 8 and 9.
		Thence
		N.89°47'W., on true line, bet. secs. 5 and 8.
		Over rolling land; through desert growth.

s. government printing office: 1981 6—8155

	Chains	Desc. 80 ft. over W. slope.
	3.80	Drain, course N.; asc. 20 ft.
	5.10	Short spur, slopes NE.; desc. 70 ft.
	10.80	Ravine, course NE.
	17.80	Gulch, 10 lks. wide, 15 ft. deep, course N.
	25.00	Low spur, slopes NE.; a low circular hill bears 10 chs. N. Desc. 55 ft. over W. slope.
	37-40	Drain, course NE.
	39.90	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for ½ sec. cor., with brass cap marked
		\frac{1}{4} \frac{S 5}{S 8} \\ 1934 \qquad \text{raise a mound}
		of stone, 3 ft. base, 2 ft. high, N. of cor.
	46.50	Gulch, 15 lks. wide, 20 ft. deep, course NW.
	50.60	Gulch, course NW.
	53.90	Gulch, course N.
	70.10	Wash, 50 lks. wide, in gulch, 20 ft. deep, course SW.
	78.10	Same wash, course NW.
	79.80	The cor. of secs. 5, 6, 7 and 8.
		Land: rolling. Soil: gravel and adobe loam, 2nd and 3rd rate. Undergrowth: palo verde, catclaw, cactus, greasewood, sage, mesquite and ironwood.
		West, on true line, bet. secs. 6 and 7.
		Over broken flat; through desert growth.
	5•50	Wash, 60 lks. wide, course S.65°W., in channel 15 ft. deep.
	10.20	Wash, 30 lks. wide, in channel 12 ft. deep, course SW.
	22.50	Wood road, bears NE. and SW.
	29•40	Drain, 10 lks. wide, 4 ft. deep, course SW.
	37.66	Intersect E. bdy. of T. 2 N., R. 4 W.
		Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, with a stone mkd. X, deposited at base, and in a mound of stone to top, for closing cor. of secs. 6 and 7, with brass cap marked
		T2N R3W S6 S7 1934
- 1		

From point of intersection the cor. of secs. 1, 6. 7 and

65

· OK 40% Chains 12, bears S.0°05'E., 80 lks. dist.; an iron post. 2 ins. diam.. 8 ins. above ground. alongside of a marked stone. with brass cap marked T2N R4W R3W S1 | S6 S12 S 7 1931 from which An ironwood, 4 ins. diam., bears N.32°E.. 43 lks. dist. mkd. T2N R3W S6 BT An ironwood, 6 ins. diam., bears $N.57\frac{1}{4}$ °W..48 lks. dist. mkd. T2N R4W S1 BT With a mound of stone, 2 ft. base, l_{2}^{1} ft. high. W. of cor. As this cor. now refers to secs. 1 and 12 only. of R.4 W. alter the marks on the brass cap to read T2N R4W S 1 S12 1934 1931 Land: flat, with gulches. Soil: gravel loam, 2nd rate. Undergrowth: paloverde. catclaw. cactus. greasewood. mesquite. ironwood, sage. From the cor. of secs. 5. 6. 7 and 8. N.0°04'E., on random line, bet.secs. 5 and 6. 40.00 Set temp. $\frac{1}{4}$ sec. cor. Intersect N. bdy. of Tp., 16 lks. E. of the cor. of secs. 5, 6. 31 and 32. hereinbefore described. 79.35 Thence S.0°03'E., on true line. bet. secs. 5 and 6. Over rolling land; through desert growth. Desc. 80 ft. over SE. slope. 9.20 Wash, 20 lks. wide. course SW.; asc. 44 ft. Short spur. slopes SW.; desc. 47 ft. 12.60 Drain. course SW.; asc. 60 ft. over NW. slope. 15.50 Short spur, slopes SW.; desc. 53 ft. 20.60 27.40 Drain. course SW.; asc. 30 ft. 29.50 Over flat, bears SW. and NE. Set an iron post, 3 ft. long. 1 in. diam.. 12 ins. in the ground. with a stone mkd. X. deposited at base. and in 39.35

U. S. GOVERNMENT PRINTING OFFICE: 1984 6-8155

cap mkd.

a mound of stone to top, for $\frac{1}{4}$ sec. cor.. with brass

Chains	
	$\frac{1}{4}$
	S6 S5
	1934
44.80	Dim road, bears NE. and SW.; desc. 23 ft.
46.90	Same road, bears SE. and NW.; desc. 23 ft.
53.40	Same road. bears NE. and SW.
62.20	Gulch, 35 ft. deep. 60 lks. wide, course SW.
76.60	Bank of gulch. bears E. and W.; desc. 25 ft. over S.slope.
78.40	Wash. 50 lks. wide, course SW.
79.35	The cor. of secs. 5, 6, 7 and 8.
,	Land: rolling. Soil: gravel loam. 2nd and 3rd rate. Undergrowth: paloverde. cactus. greasewood. catclaw. sage. mesquite. ironwood.

FINAL TESTS OF SOLAR ATTACHMENTS

Transit No. 16723

Dec. 3: On the meridian near the SW. cor. of sec. 36. at 8h Om a.m., app. t.. I set off 33°27'N.. on the lat. arc; 22°04'S.. on the decl. arc; and orient the instrument with the solar; the line of sight agrees with the meridian established by Polaris observation.

At 4h. 0m. p.m., app.t. with the lat. arc unchanged. I set off 22°07'S., on the decl. arc; and repeat the test of the solar; the line of sight agrees with the meridian established by Polaris observation.

Transit No. 9223

April 24, 1934: On the meridian near the SE. cor. of sec. 16, T.1 N..R.3 W.. at 7h. 30m a.m.. app.t., I set off 33° 24'N.. on the lat. arc; 12°47'N., on the decl arc; and orient the instrument with the solar; the line of sight agrees with the meridian established by Polaris observation.

At 4h 0m p.m., app.t.. with the lat arc unchanged, I set off 12°54'N.. on the decl arc; and repeat the test of the solar; the line of sight agrees within 1' of the meridian established by Polaris observation.

The solar attachment of Buff and Buff transit, serial No. 9977. was injured on April 14, and transit lines, checked by direct solar observations. were run after that date with this instrument.

GENERAL DESCRIPTION

This township comprises the S. half of the White Tank mountains, and lies about 10 miles N. of the town of Buckeye, Arizona, and about 35 miles W. of the city of Phoenix Arizona.

The drainage is S.. E. and W.. from a ridge which extends northerly from the center of the township. All of the water courses are dry. and there is no possibility of

67

-(-

water development. except in the extreme NE. $\frac{1}{4}$ of sec. 3. About two-thirds of the township is mountainous. The highest point is about 2400 ft. above the surrounding flats, and is located in the SE. $\frac{1}{4}$ of sec. 3. There are a few scrub cedar trees at that point. which is the only timber in the township. The ground cover of the remainder of the township consists of scattering growths of palo verde. catclaw. cactus, greasewood. sage. ironwood. ocatillo. chaparral and mesquite.

The formation is generally granite, with a volcanic capping on the higher hills. The evidences of mineral are meager. A few prospect holes have been dug, with gold and mica the attractions.

There are no permanent residents. A stone cabin has been recently built in sec. 11, evidently in connection with the resort hotel in the nearby town of Litchfield. There are some homestead cabins in the W. half of sec. 36. probably located on the presumption of being in sec. 35. A partly fallen cabin is located just outside of the township. N. of sec. 3.

There is no evidence of the township having been used for grazing, and none is possible except in favorable seasons. A few deer were observed.

S. GOVERNMENT PRINTING OFFICE: 1931 6-8155

800% 4683

4—680 (Revised May 1934)

FIELD ASSISTANTS

names Joy	CAPACITY
Herman Shafer	1st chainman
Arthur Porter	2nd chainman
Nalter Harbold	Flagman
George H. Lindberg	Axman
Vand	er Me e r 's assistants.
Raymond S. Davis	lst chaimman
Claude A. Lulkey	2nd chainnan
David C. Bryant	Flagnan
Robert R. Riesgo	Axman
Gilden Redewill	Axman
Walter Harbold	Axman
Molle	tte's assistants.
Stanley Palmer	lst chainman
Clifton Lewis	2nd chainman
Glenn Greenhaw	Flagm e n
Shamus O'brien	Axman
Orland Parks	Axman
Claude Burk	Loundsman
·	

BOOK 1,033

CERTIFICATE OF UNITED STATES SURVEYER

Theodore Vander Meer, U.S. Transitman, Benjamin J. Mollette, M.S. Transitman, HEREBY CERTIFY upon honor that, in	
pursuance of special instructions bearing date of the 4th day of october 1933,	
received from the district cadastral engineer for <u>Arizona</u> , with assignment Oct. 24, 1933 and	•
instructions dated March 24, 1934 Wehave surveyed resurveyed a portion of the	~
T. 1 N. R. 3 V.; and the West bay. Of T. 2 No. R. 2 V. F and bur vo, vog but	
north bdy. and subdivisional lines of T. 2 N., R. 3 W.,	
of the Gila & Salt Rive Meridian, in the State of Arizona, which are	
represented in the foregoing field notes as having been executed by as and under and direction; and that said	
and resurvey survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey	
of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.	
Glendale, Calif., Dec. 7. 1934. Francis Con U.S. Cadastral Enginee	r
Phoenix, Ariz., Auc. 12, 1934 Con Well.S. Transitman	
Phoenix, Ariz., Wee 12, 1934 Regaring Mallette U.S. Transitman	
CERTIFICATE OF APPROVAL	
Office of U.S. Supervisor of Surveys,	
Denver, Colorado, February 23, 1935.	-
The foregoing field notes of the the the resurvey of a portion of the North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 2 W.; and the survey	
The foregoing field notes of the ***********************************	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Meridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Meer and Benjamin J. Mollette, U.S. Transitmen,	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Meridian, in the State of Arizona,	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Meridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Meer and Benjamin J. Mollette, U.S. Transitmen,	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Heridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Heer and Benjamin J. Mollette, U.S. Transitmen, under special instructions dated October 4, 1933, , and assignment instructions dated Oct. 24, 1933 and March 24, 1934, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey and resurvey	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Heridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Heer and Benjamin J. Mollette, U.S. Transitmen, under special instructions dated October 4, 1933,, and assignment instructions dated Oct. 24, 1933 and March 24, 1934, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Heridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Heer and Benjamin J. Mollette, U.S. Transitmen, under special instructions dated October 4, 1933, , and assignment instructions dated Oct. 24, 1933 and March 24, 1934, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey and resurvey	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Leridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Heer and Benjamin J. Hollette, U.S. Transitmen, under special instructions dated October 4, 1933,, and assignment instructions dated October 4, 1933,, and assignment instructions dated October 4, 1933 and March 24, 1934, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey and resurvey Atherein described, are hereby approved.	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Leridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Heer and Benjamin J. Hollette, U.S. Transitmen, under special instructions dated October 4, 1933,, and assignment instructions dated October 4, 1933,, and assignment instructions dated October 4, 1933 and March 24, 1934, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey and resurvey Atherein described, are hereby approved.	
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Leridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Heer and Benjamin J. Mollette, U.S. Transitmen, under special instructions dated October 4, 1933,, and assignment instructions dated Oct. 24, 1933 and March 24, 1934, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey and resurvey Atherein described, are hereby approved. W.S. Supervisor of Surveys.	į
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W., and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Leridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Heer and Benjamin J. Hollette, U.S. Transitmen, under special instructions dated October 4, 1933, and Harch 24, 1934, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey and resurvey therein described, are hereby approved. CERTIFICATE OF TRANSCRIPT	į
North boundary of T. 1 N., R. 2 W.; the North boundary of T. 1 N., R. 3 W. and the west bdy. of T. 2 N., R. 2 W.; and the survey of the north bdy. and subdivisional lines of T. 2 N., R. 3 W., of the Gila and Salt River Leridian, in the State of Arizona, Francis E. Joy, U.S. Cadastral Engineer, and executed by Theodore Vander Heer and Benjamin J. Hollette, U.S. Transitmen, under special instructions dated October 4, 1933, and Harch 24, 1934, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey and resurvey therein described, are hereby approved. CERTIFICATE OF TRANSCRIPT Lebertry that the foregoing transcript of the field notes of the above-described surveys in	į