## ORIGINAL BOOK 5276

# UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT


FIELD NOTES

OF THE	
DEPENDENT RESURVEY OF A PORTION OF	THE
SUBDIVISIONAL LINES AND	
A PORTION OF THE SUBDIVISION LIN	ES,
THE SURVEY OF A PORTION OF THE SUBDIVISION	N LINES AND
A METES-AND-BOUNDS SURVEY	
IN SECTION 22,	
TOWNSHIP 6 NORTH, RANGE 5 EAST	
Of the Gila and Salt River In the State of Arizona	Meridian,
EXECUTED BY	
Paul L. Reeves, Cadastral	Surveyor,
Under special instructions dated <u>February 29</u> , 1988,	approved <u>February 29, 1988</u>
, which provided for the surveys 704, and assignment instructions dated	included under Group Number ary 29 , 1988.
Survey commenced March 1,	
Survey completed <u>March 7</u> ,	1300

2

### INDEX DIAGRAM

TOWNSHIP 6 NORTH , RANGE 5 EAST , SECTION 22 ,

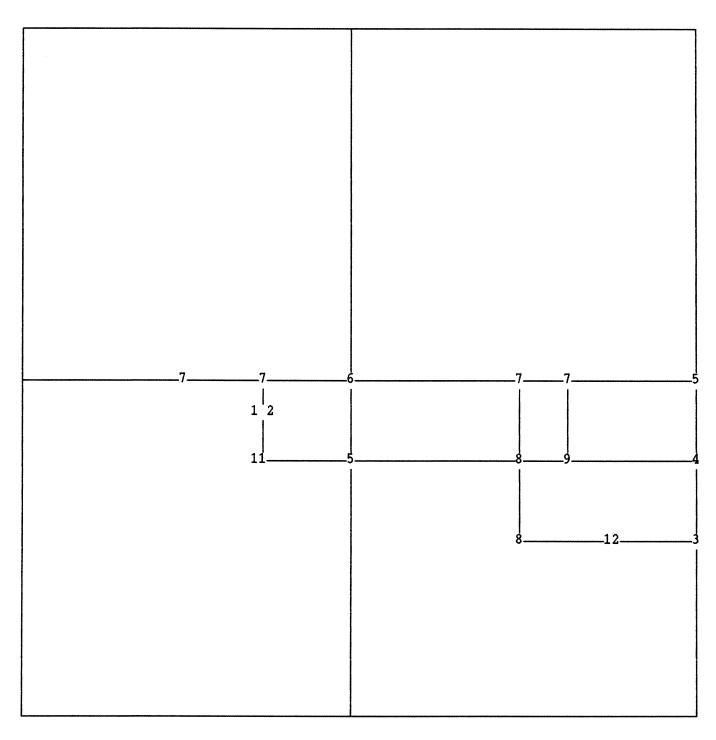

Metes-and-Bounds Survey in section 22, pp. 13-17.

### T 6 N, R 5 E, Gila and Salt River Mer., Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines and a portion of the subdivision lines, and the survey of a portion of the subdivision lines and a metes-and-bounds survey in section 22, Township 6 North, Range 5 East, Gila and Salt River Meridian, Arizona.

In 1959, Horace G. Parker surveyed a portion of the subdivisional lines. Boyd S. Owens and Gary W. Rutledge surveyed a portion of the subdivisional lines in 1963. Ray Harpin resurveyed a portion of the subdivisional lines, surveyed a portion of the subdivisional lines, and subdivided sec. 22, in 1973.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated February 29, 1988, for Group No. 704, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct solar observations and refer to the true meridian. Distances and angles were measured using a Zeiss Elta 46 electronic instrument.

The geographic position of the south 1/16 section corner of sections 22 and 23, as determined from a tie made to U.S. Coast and Geodetic Survey triangulation station "WILDCAT 1946", located in the SW quarter of section 22, Township 6 North, Range 5 East, is as follows:

NAD 27: Latitude: 33°50'47.35" N Longitude: 111°49'15.63" W

The magnetic declination from U.S. Geological Survey quadrangle map "WILDCAT HILL, ARIZ.", published in 1965, is 14° E.

Dependent Resurvey of a Portion of the Subdivisional Lines, T 6 N, R 5 E, Gila and Salt River Mer., Arizona

Restoring the survey executed by Ray Harpin in 1973

	T 6 N, R 5 E, Gila and Salt River Mer., Arizona
CHAINS	
	Beginning at the S 1/16 sec. cor. of secs. 22 and 23, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 9 ins. above ground, with brass cap mkd.
	S 1/16 S22   S23 1973
	A steel fence post is near the cor.
	North, bet. secs. 22 and 23.
	Over rolling land through medium to dense undergrowth.
9.30	Drainage, 5 lks. wide, 2 1/2 ft. deep, drains N 85° E.
10.00	Point for the N-S 1/64 sec. cor. of secs. 22 and 23, identical with cor. 9, lot 7, sec. 22.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.
	N-S 1/64 S22 S23 1988
	Deposit a magnet in a 1 $\times$ 1 $\times$ 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
14.41	Point for cor. 1, lot 7, identical with cor. 7, lot 5, sec. 22, in Horseshoe Dam/Bartlett Dam Road, at the center of the existing pavement.
	Set a railroad spike, flush with the pavement, with top mkd.
	T6N R5E  COR 7   LOT 5   S23
	COR 1 LOT 7 1988

CHAINS

from which

An aluminum post, 36 ins. long, 3/4 in. diam., set 27 ins. in the ground, for a reference monument, bears N 37°36' E, 88.8 ft. dist., with aluminum cap mkd. T6N R5E S23 RM 88.8 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.

An aluminum post, 36 ins. long, 3/4 in. diam., set 28 ins. in the ground, for a reference monument, bears N 46°25' W, 68.3 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 68.3 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.

20.00

The 1/4 sec. cor. of secs. 22 and 23, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd.

T6N R5E 1/4 S22|S23 1973

A steel fence post is near the cor.

This cor. now also functions as cor. 1, lot 5, sec. 22.

Dependent Resurvey, a Portion of the Subdivision Lines, Sec. 22, T 6 N, R 5 E, Gila and Salt River Mer., Arizona

Restoring the survey executed by Ray Harpin in 1973

From the center N-S 1/64 sec. cor. of sec. 22, monumented with a copperweld, 1/2 in. diam., firmly set, projecting 4 ins. above ground, with cap mkd.

C-N-S 1/64 S22 1973

This cor. now also functions as cor. 4, lot 9, and cor. 5, lot 11, sec. 22.

CHAINS

N 0°01' E, on a portion of the N and S center line, identical with line 4-3, lot 9, and line 5-1, lot 11, of sec. 22.

2.655

Point for cor. 3, lot 8, identical with cor. 3, lot 9, cor. 1, lot 11, and cor. 5, lot 10, sec. 22, in Horseshoe Dam/Bartlett Dam Road.

Set a railroad spike, flush with the pavement, with top mkd.

T6N R5E
COR 5 COR 3
LOT 10 LOT 8

COR 1 COR 3
LOT 11 LOT 9
1988

from which

An aluminum post, 36 ins. long, 3/4 in. diam., set 29 ins. in the ground, for a reference monument, bears N 62°32' E, 82.7 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 82.7 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.

An aluminum post, 36 ins. long, 3/4 in. diam., set 28 ins. in the ground, for a reference monument, bears N 12°01' W, 67.0 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 67.0 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.

Thence continue measurement on line 3-2, lot 8, identical with line 5-1, lot 10, sec. 22.

10.005

The center 1/4 sec. cor. of sec. 22, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd.

T6N R5W C 1/4 S22 1973

A steel fence post is near the cor.

This cor. now also functions as cor. 2, lot 8, and cor. 1, lot 10, sec. 22.

CHAINS	From the center W-E-E 1/256 sec. cor. of sec. 22, monumented with a copperweld, 1/2 in. diam., firmly set, projecting 9 ins. above ground, with cap mkd.
	C-W-E-E 1/256 S22 1973
	This cor. now also functions as cor. 2, lot 5, and cor. 1, lot 6, sec. 22.
	S 89°55' W, on a portion of the E and W center line, identical with line 1-2, lot 6, of sec. 22.
5.005	Point for the center E 1/16 sec. cor. of sec. 22 at proportionate dist.; there is no remaining evidence of the original cor., not monumented.
	This point now also functions as cor. 2, lot 6, and cor. 1, lot 8, sec. 22.
	Thence continue measurement, now identical with line 1-2, lot 8, sec. 22.
25.030	The center 1/4 sec. cor., identical with cor. 2, lot 8, and cor. 1, lot 10, of sec. 22.
	S 89°55' W, beginning new measurement, now identical with line 1-2, lot 10 sec. 22.
10.015	Point for the center E-W 1/64 sec. cor., identical with cor. 2, lot 10, of sec. 22.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.
	C—————————————————————————————————————
	Deposit a magnet in a 1 $\times$ 1 $\times$ 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located 25 lks. N of a fence, bears S 70° E and N 70° W.
20.03	The center W 1/16 sec. cor. of sec. 22, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd.

CHAINS	
	C-W 1/16
	S22
	1973
	1575
	A steel fence post is near the cor.
	SE 1/4, Section 22
	From the SE 1/16 sec. cor. of sec. 22, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd.
	SE 1/16
	S22
	1973
	N 0°02' W, on a portion of the N and S center line of the SE 1/4 of sec. 22.
10.00	Point for the center N-SE 1/64 sec. cor. of sec. 22, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	S 22 C-N-SE 1/64
	1988
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located 44 lks. E of a power line road, bears N 10° E and S 10° W.
	This cor. now also functions as cor. 7, lot 7 and cor. 5, lot 9, sec. 22.
	Thence continue measurement, now identical with line 7-6, lot 7, and line 5-1, lot 9, sec. 22.
11.35	Point for cor. 3, lot 6, identical with cor. 6, lot 7, cor. 1, lot 9, and cor. 5, lot 8, sec. 22, in Horseshoe Dam/Bartlett Dam Road.

СН	A	IN	c
СΠ	Λ.	IIA	c

Set a railroad spike, flush with the pavement, with top mkd.

T6N R5E
COR 5 COR 3
LOT 8 LOT 6

COR 1 COR 6
LOT 9 LOT 7
1988

#### from which

An aluminum post, 36 ins. long, 3/4 in. diam., set 26 ins. in the ground, for a reference monument, bears N 44°41' E, 77.9 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 77.9 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.

An aluminum post, 36 ins. long, 3/4 in. diam., set 25 ins. in the ground, for a reference monument, bears N 40°43' W, 73.2 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 73.2 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.

20.00

Point for the center E 1/16 sec. cor., identical with cor. 2, lot 6, and cor. 1, lot 8, of sec. 22.

From the center W-NE-SE 1/256 sec. cor. of sec. 22, monumented with a copperweld, 1/2 in. diam., firmly set, projecting 11 ins. above ground, with cap mkd.

C-W-NE-SE 1/256 S22 1973

A steel fence post is near the cor.

This cor. now also functions as cor. 8, lot 7, sec. 22.

S 89°54' W, on a portion of the E and W center line of the NE 1/4 of the SE 1/4, identical with line 8-7, lot 7, of sec. 22.

2.70

Power line, bears N 20° E and S 20° W.

CHAINS	
5.005	The center N-SE 1/64 sec. cor., identical with cor. 7, lot 7, and cor. 5, lot 9, of sec. 22.
	From the center W-NE-SE 1/256 sec. cor., identical with cor. 8, lot 7, of sec. 22.
	N 0°01' W, on the N and S center line of the NW 1/4 of the NE 1/4 of the SE 1/4 of sec. 22.
1.355	Point for cor. 3, lot 5, identical with cor. 5, lot 6, on line 4-5, lot 7, sec. 22, in Horseshoe Dam/Bartlett Dam Road.
	Set a railroad spike, flush with the pavement, with top mkd.
	T6N R5E
	COR 5 COR 3
	LOT 6 LOT 5
	LOT 7 1988
	1700
	from which
	An aluminum post, 36 in. long, 3/4 in. diam., set 28 ins. in the ground, for a reference monument, bears N 39°03' E, 81.5 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 81.5 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	An aluminum post, 36 ins. long, 3/4 in. diam., set 27 ins. in the ground, for a reference monument, bears N 40°50' W, 72.0 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 72.0 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	Thence continue measurement, now identical with line 3-2, lot 5, and with line 5-1, lot 6, sec. 22.
10.00	The center W-E-E 1/256 sec. cor., identical with cor. 2, lot 5, and cor. 1, lot 6, of sec. 22.
	From the center N-SE 1/64 sec. cor., identical with cor. 7, lot 7, and cor. 5, lot 9, of sec. 22.
	S 89°55' W, on the E and W center line of the NW 1/4 of the SE 1/4, identical with line 5-4, lot 9, of sec. 22.

CHAINS	
20.03	The center N-S 1/64 sec. cor., identical with cor. 4, lot 9, and cor. 5, lot 11, of sec. 22.
	SW 1/4, Section 22
	From the center N-S 1/64 sec. cor., identical with cor. 4, lot 9, and cor. 5, lot 11, of sec. 22.
	S 89°55' W, on a portion of the E and W center line of the NE 1/4 of the SW 1/4, identical with line 5-4, lot 11, of sec. 22.
10.015	The NE-SW 1/64 sec. cor. of sec. 22, monumented with a copperweld, 1/2 in. diam., firmly set, projecting 11 ins. above ground, with cap mkd.
	NE-SW
	1/64 S22
	1973
	This cor. now also functions as cor. 4, lot 11, sec. 22.
	The 1973 record tie to the southeast corner of a concrete building could not be confirmed because of locked gates.
	From this cor. U.S.C.& G.S. triangulation station "WILDCAT 1946", bears N 86°28'41" W, (forward bearing), 15.521 chs. dist., monumented with a brass tablet, 3 ins. diam., set flush in a granite outcropping, 2 ft. x 2 ft. x 1/2 ft. above the ground, with top mkd. WILDCAT 1946, and a triangle in the center.
	North, on a portion of the N and S center line of the NE 1/4 of the SW 1/4, identical with a portion of line 4-3, lot 11, of sec. 22.
5.000	The center N-NE-SW 1/256 sec. cor. of sec. 22, monumented with a copperweld, 1/2 in. diam., firmly set, projecting 10 ins. above ground, with cap mkd.
	C-N-NE-SW
	1/256
	S22 1973
	A steel fence post is near the cor.

CHAINS	
	SE 1/4, Section 22
	From the N-S 1/64 sec. cor. of secs. 22 and 23, identical with cor. 9, lot 7, sec. 22.
	S 89°55' W, on a portion of the E and W center line of the NE 1/4 of the SE 1/4, identical with line 9-8, lot 7, of sec. 22.
15.02	The center W-NE-SE 1/256 sec. cor., identical with cor. 8, lot 7, of sec. 22.
	SW 1/4, Section 22
	From the center N-NE-SW 1/256 sec. cor. of sec. 22.
	North, on a portion of the N and S center line of the NE 1/4 of the SW 1/4, identical with a portion of line 4-3, lot 11, of sec. 22.
1.26	Point for cor. 3, lot 10, identical with cor. 3, lot 11, sec. 22, in Horseshoe Dam/Bartlett Dam Road, at the center of existing pavement.
	Set a railroad spike, flush with the pavement, with top mkd.
	T6N R5E
	ICOR 3
	S22_ LOT 10
	522 101 10
	COR 3
	LOT 11
l	1988
	from which
	An aluminum post, 36 ins. long, 3/4 in. diam., set 26 ins. in the ground, for a reference monument, bears N 61°45' E, 84.2 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 84.2 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	An aluminum post, 36 ins. long, 3/4 in. diam., set 28 ins. in the ground, for a reference monument, bears N 26°55' W, 71.8 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 71.8 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.

CHAINS	
	Thence continue measurement, now identical with line 3-2, lot 10, sec. 22.
5.005	The center E-W 1/64 sec. cor., identical with cor. 2, lot 10, of sec. 22.
	Metes-and-Bounds Survey in Section 22, T 6 N, R 5 E, Gila and Salt River Mer., Arizona
	From cor. 7, lot 5, identical with cor. 1, lot 7, sec. 22, on the line bet. secs. 22 and 23.
	Thence on line 1-2, lot 7, identical with line 7-6, lot 5, sec. 22, along the arc of a 26°44'05" circular curve to the right, having a radius of 214.31 ft., along Horseshoe Dam/Bartlett Dam Road, the chord of said arc bears S 85°14'24" W, 1.289 chs. dist.
1.298	Point for cor. 6, lot 5, identical with cor. 2, lot 7, sec. 22, at point of reverse curvature, in Horseshoe Dam/Bartlett Dam Road.
	Set a railroad spike, flush with the pavement, with top mkd.
	T6N R5E
	COR 6 LOT 5
	COR 2
	LOT 7 1988
	from which
	An aluminum post, 36 ins. long, 3/4 in. diam., set 29 ins. in the ground, for a reference monument, bears S 44°31' W, 77.5 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 77.5 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	•
	An aluminum post, 36 ins. long, 3/4 in. diam., set 31 ins. in the ground, for a reference monument, bears N 30°17' W, 55.1 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 55.1 FT. TO COR. 1988 and an arrow pointing to the cor.
	Set a steel fence post near the reference monument.

Metes-and-Bounds Survey in Section 22, T 6 N, R 5 E, Gila and Salt River Mer., Arizona

## **CHAINS** Thence on line 2-3, lot 7, identical with line 6-5, lot 5, sec. 22, along the arc of a 6°05'05" circular curve to the left, having a radius of 941.63 ft., along Horseshoe Dam/Bartlett Dam Road, the chord of said arc bears S 79°36'15" W, 8.385 chs. dist. 8.510 Point for cor. 5, lot 5, identical with cor. 3, lot 7, sec. 22, at point of reverse curvature in Horseshoe Dam/Bartlett Dam Road. Set a railroad spike, flush with the pavement, with top mkd. T6N R5E COR 5 LOT 5 COR 3 LOT 7 1988 from which An aluminum post, 36 ins. long, 3/4 in. diam., set 28 ins. in the ground, for a reference monument, bears N 34°43' E, 78.2 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 78.2 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument. An aluminum post, 36 ins. long, 3/4 in. diam., set 27 ins. in the ground, for a reference monument, bears N 64°18' W, 68.7 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 68.7 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument. Thence on line 3-4, lot 7, identical with line 5-4, lot 5, sec. 22, along the arc of a 6°42'21" circular curve to the right, having a radius of 854.43 ft., along Horseshoe Dam/Bartlett Dam Road, the chord of said arc bears S 73°31'10" W, 4.942 chs. dist. 4.972 Point for cor. 4, lot 5, identical with cor. 4, lot 7, sec. 22, at point of compound curvature in Horseshoe Dam/Bartlett Dam Road. Set a railroad spike, flush with the pavement, with top mkd.

## Metes-and-Bounds Survey in Section 22, T 6 N, R 5 E, Gila and Salt River Mer., Arizona

CITATNO	
CHAINS	
	T6N R5E
	COR 4 LOT 5
	<u> </u>
	COR 4
	LOT 7
	1988
	from which
	An aluminum post, 36 ins. long, 3/4 in. diam., set 28 ins. in the ground, for a reference monument, bears S 52°16' E, 72.6 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 72.6 FT. T0 COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	An aluminum post, 36 ins. long, 3/4 in. diam., set 28 ins. in the ground, for a reference monument, bears S 44°09' W, 78.0 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 78.0 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	Thence on line 4-5, lot 7, identical in part with line 4-3, lot 5, sec. 22, along the arc of a 3°13'12" circular curve to the right, having a radius of 1779.39 ft., along Horseshoe Dam/Bartlett Dam Road, the chord of said arc bears S 88°27'11" W, 3.045 chs. dist.
0.748	Cor. 3, lot 5, identical with cor. 5, lot 6, on line 4-5, lot 7, and on the N and S center line of the NW 1/4 of the NE 1/4 of the SE 1/4 of sec. 22.
	Thence continue measurement on line 4-5, lot 7, now identical with line 5-4, lot 6, sec. 22.
3.046	Point for cor. 4, lot 6, identical with cor. 5, lot 7, sec. 22, at point of tangency in Horseshoe Dam/Bartlett Dam Road.
	Set a railroad spike, flush with the pavement, with top mkd.
	T6N R5E
	COR 4
	LOT 6
	GOD E
	COR 5 LOT 7
	1988
	from which

Metes-and-Bounds Survey in Section 22, T 6 N, R 5 E, Gila and Salt River Mer., Arizona

	T 6 N, R 5 E, Glia and Salt River Mer., Arizona
CHAINS	
	An aluminum post, 36 ins. long, 3/4 in. diam., set 28 ins. in the ground, for a reference monument, bears N 46°42' E, 81.6 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 81.6 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	An aluminum post, 36 ins. long, 3/4 in. diam., set 27 ins. in the ground, for a reference monument, bears N 43°43' W, 74.1 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 74.1 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	N 89°00'13" W, on line 5-6, lot 7, identical with line 4-3, lot 6, sec. 22, along Horseshoe Dam/Bartlett Dam Road.
2.710	Cor. 3, lot 6, identical with cor. 6, lot 7, cor. 1, lot 9, and cor. 5, lot 8, on the N and S center line of the SE 1/4 of sec. 22.
	Thence continue measurement on line 5-4, lot 8, identical with line 1-2, lot 9, sec. 22.
16.332	Point for cor. 4, lot 8, identical with cor. 2, lot 9, sec. 22, at point of curvature in Horseshoe Dam/Bartlett Dam Road.
	Set a railroad spike, flush with the pavement, with top mkd.
	T6N R5E
	COR 4 LOT 8
	COR 2
	LOT 9 1988
	from which
	An aluminum post, 36 ins. long, 3/4 in. diam., set 28 ins. in the ground, for a reference monument, bears N 43°55' E, 77.4 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 77.4 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.

Metes-and-Bounds Survey in Section 22, T 6 N, R 5 E, Gila and Salt River Mer., Arizona

CHAINS	
	An aluminum post, 36 ins. long, 3/4 in. diam., set 27 ins. in the ground, for a reference monument, bears N 41°56' W, 73.0 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 73.0 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	Thence on line 4-3, lot 8, identical with line 2-3, lot 9, sec. 22, along the arc of a 3°40'49" circular curve to the right having a radius of 1556.88 ft., along Horseshoe Dam/Bartlett Dam Road, the chord of said arc bears N 79°17'26" W, 7.754 chs. dist.
6.514	Cor. 3, lot 8, identical with cor. 3, lot 9, cor. 1, lot 11, and cor. 5, lot 10, on the N and S center line of sec. 22, in Horseshoe Dam/Bartlett Dam Road.
	Thence continue measurement on line 5-4, lot 10, identical with line 1-2, lot 11, sec. 22.
7.789	Point for cor. 4, lot 10, identical with cor. 2, lot 11, sec. 22, at point of tangency in Horseshoe Dam/Bartlett Dam Road.
	Set a railroad spike, flush with the pavement, with top mkd.
	T6N R5E COR 4 LOT 10
	COR 2 LOT 11 1988
	from which
	An aluminum post, 36 ins. long, 3/4 in. diam., set 31 ins. in the ground, for a reference monument, bears S 41°17' E, 93.0 ft. dist., with aluminum cap mkd. T6N R5E S22 RM 93.0 FT. TO COR. 1988 and an arrow pointing to the cor. Set a steel fence post near the reference monument.
	A mesquite, 12 ins. diam., bears S 5 3/4° W, 79.5 lks. dist., mkd. COR 2 LOT 11 S22 BT.
	N 70°05'07" W, on line 4-3, lot 10, identical with line 2-3, lot 11, sec. 22, along Horseshoe Dam/Bartlett Dam Road.
9.368	Cor. 3, lot 10, identical with cor. 3, lot 11, on the N and S center line of the NE 1/4 of the SW 1/4 of sec. 22.

#### GENERAL DESCRIPTION

	GENERAL DESCRIPTION
CHAINS	
	The land encompassed in this survey is located about 7 miles east
	of Cave Creek, Arizona. Elevations range from about 3,200 to
	3,280 feet above sea level.
	The land is gently rolling, covered with medium mesquite, cat
	claw, paloverde, and cacti.
	garante and a second
	Access is by way of Horseshoe Dam/Bartlett Dam Road.
1	
·	

# UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

## FIELD ASSISTANTS

NAMES	CAPACITY	
Cheryl A. Baier	Surveying Technician	
Donald B. McClure	Surveying Technician	
Wilmer F. Beyl, Jr.	Surveying Aid	

#### CERTIFICATE OF SURVEY

I, Paul L. Reeves, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 29th day of February, 1988, I have dependently resurveyed a portion of the subdivisional lines and a portion of the subdivision lines, and surveyed a portion of the subdivision lines and a metes-and-bounds survey in section 22, of Township 6 North, Range 5 East, of the Gila and Salt River Meridian, in the State of Arizona which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

SEP 0 8 1988	Paul L Range
(Date)	(Cadastral Surveyor)
(Date)	(Cadastral Surveyor)
(5400)	(044420141 04101)
	CERTIFICATE OF APPROVAL
	BUREAU OF LAND MANAGEMENT Arizona State Office Phoenix, Arizona
subdivisional lines and a poportion of the subdivision Township 6 North, Range 5 E	f the dependent resurvey of a portion of the ortion of the subdivision lines, and the survey of a lines and metes-and-bounds survey in section 22, ast, Gila and Salt River Meridian, Arizona, executed by urveyor, having been critically examined and found d.
OCT 0 3 1988	James P. Kelly
(Date)	(Chief Cadastral Surveyor of Arizona)
	CERTIFICATE OF TRANSCRIPT
	g transcript of the field notes of the above-described la and Salt River Meridian, Arizona, is a true copy of
(Date)	(Chief Cadastral Surveyor of Arizona)