
ORIGINAL UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT BOOK 5293 FIELD NOTES

OF THE

DEPENDENT RESURVE	Y OF PORTIONS OF	THE SAN IGNAC	IO DEL BAR	BOCOMARI F	PRIVATE LANI) GRANT
THROUGH	TOWNSHIPS 20 AND	21 SOUTH, RAN	GES 18 ANI) 19 Eas t,	,	
AND A METES-AND	-BOUNDS SURVEY OF	PARCEL A AND	INFORMATI	VE TRAVEF	RSES WITHIN	THE
	SAN IGNACIO DEL	BABOCOMARI P	RIVATE LAN	ID GRANT		
Of the	Gila and Salt Ri	ver	AND THE RESERVE OF THE PROPERTY OF THE PROPERT		Mei	<u>:idian</u> ,
In the State of	Arizona		·	***************************************		*****
		EXECUTED BY	,			
Paul L. Moss		•	Cadastral	Surveyor		
Richard T. He	lm III	,	Cadastral	Surveyor		
Under special inst						
	, which provide signment instruct:				_	
710 and as	signment institutt.	ions dated <u>r</u>	epidary 5			•••••••
	Survey commence	ed February	6	. 1990		
	Survey complete					

TOWNSHIP 20&21 SOUTH , RANGE 18&19EAST

SAN IGNACIO DEL BABOCOMARI

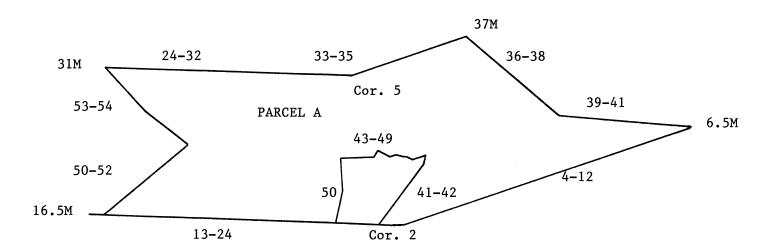

San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of portions of the San Ignacio del Babocomari Private Land Grant through Townships 20 and 21 South, Ranges 18 and 19 East, and a metes-and-bounds survey of Parcel A and informative traverses within the San Ignacio del Babocomari Private Land Grant, Gila and Salt River Meridian, Arizona.

A preliminary survey of Rancho San Ignacio del Babocomari was performed by S. M. Allis in 1879. The San Ignacio del Babocomari Private Land Grant was surveyed by Phillip Contzen, U.S. Deputy Surveyor, in 1902.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated Feburary 16, 1990, for Group No. 718, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein. During the resurvey of approximately 16 miles of Grant bdy., resulting in a high recovery rate of original monuments, a relatively consistent distance error of 14 lks. long per half mile was observed.

The directions of all lines were determined by hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Lietz Set 4a electronic instrument.

The geographic position of the 6 1/2 mile corner of the San Ignacio del Babocomari Land Grant, as determined from a tie made to U.S. Coast and Geodetic Survey triangulation station "BABOCOMARI," located in the NE quarter of section 31, Township 20 South, Range 19 East, is as follows:

NAD 27: Latitude: 31°38'13.822" N Longitude: 110°22'07.573" W

The mean magnetic declination as taken from quadrangle maps MUSTANG MOUNTAINS, ARIZ. and PYEATT RANCH, ARIZ., both published in 1958 and photorevised in 1983 by U.S. Geological Survey, is 12 °E.


Restoring the survey executed by Phillip Contzen, U.S. Deputy Surveyor, in 1902. Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 19 E, Gila and Salt River Meridian, Arizona

CHAINS

Beginning at the 6 1/2 mile cor., monumented with a limestone, 18 X 14 X 7 ins., firmly set, projecting 8 ins. above the ground, mkd. SIDB on N face, PL on S face, and 6 1/2M on W face. This cor. is now identical with AP 3, Parcel A.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 3 ft. base, 3 ft. high, N of cor.


Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.

S 71°00' W, on mile 7 of SIDB private land grant.

Over gently rolling land through white thorn, scattered mesquite, creosote, and cacti.

- 12.00 Fence intersection, 5 strand barbed wire, extending N 71° E and S 71° W, with abandoned fences extending S 45° E and N 10° W.
- 21.50 | Gulch, 50 lks. wide, drains S 45° E.
- 39.22 Point selected for the witness cor. to the 7 mile cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



CHAINS	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
	Bury the original stone alongside the stainless steel post.
	Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N of cor.
	Witness Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.
39.95	E edge of verticle cliff, 25 ft. high, bears N 55° E and S 55° W.
40.22	The 7 mile cor., determined from the remaining original bearing trees
	A dead mesquite stump, 9 in. diam., bears N 24 1/2° E, 207 lks. dist., with partially healed blaze, mkd. SIDB 7M.
	A dead ash stump, 48 ins. diam., bears N 39° W, 55 lks. dist., with healed blaze. (Record N 40 1/2° W)
24 - 45 - 45 - 45 - 45 - 45 - 45 - 45 -	Cor. is located in the Babocomari River drainage and is not monumented due to the liability of destruction by water action.
	S 71°00' W, on mile 8 of SIDB private land grant.
en de la companya de	Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.
9 1015	Babocomari River, 10 lks. wide, course S 75° E.
2.35	Fence, 4 strand barbed wire, extending N 20° E and S 20° W.
15.90	Fence interection, 4 strand barbed wire extending S 10° E, with a 5 strand barbed wire extending N 71° E and S 71° W.
40.14	Point for 7 1/2 mile cor., at proportionate dist.; there is no remaining evidence of the original cor.
10	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	SIDB 7 1/2M
	S2 T21S R19E 1990

B00K 5293

T 21 5, K 19 E, Gila and Salt River Meridian, Arizona
Deposit broken brown glass, and a magnet in a 1 \times 1 \times 2 5/8 in. white plastic case beneath the stainless steel post.
Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N of cor.
Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.
Arroyo, 200 lks. wide, drains N 20° E.
Wash, 20 lks. wide, drains North.
Wash, 30 lks. wide, drains N 30° E.
Point for 8 mile cor., at proportionate dist.; there is no remaining evidence of the original cor.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
SIDB 8M
S3 T21S R19E 1990
Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, N of cor.
Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.
S 71°00' W, on mile 9 of SIDB private land grant.
Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.
Unimproved road, 20 lks. wide, bears S 30° E and N 30° W.
Gas pipeline, bears N 85° E and S 85° W.
Wash, 30 lks. wide, drains North.
Wash, 10 lks. wide, drains N 20° W.

	T 21 3, K 19 E, Glia and Salt River Meridian, Arizona
CHAIN 30.	
37.2	Fence intersection, 4 strand barbed wire extending S 10° W., with a 5 strand barbed wire extending N 71° E and S 71° W
40.1	Point for 8 1/2 mile cor., at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a mound of stone, 2 ft. base to top, with brass cap mkd.
	SIDB 8 1/2M
	S10 T21S R19E 1990
	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
	Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N of cor.
	Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.
47.2	Wash, 20 lks. wide, drains N 35° E.
68.1	Wash, 40 lks. wide, drains N 45° W.
80.2	Point for 9 mile cor., at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, encircled by a mound of stone, 3 ft. base to top, with brass cap mkd.
	SIDB 9M
	S10 T21S R19E
	1990
	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

CHAINS	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.
	Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.
	S 71°00' W, on mile 10 of SIDB private land grant.
	Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.
7.85	Wash, 24 lks. wide, drains N 40° E.
11.75	Wash, 40 lks. wide, drains N 25° E.
40.14	Point for 9 1/2 mile cor., at proportionate dist.; there is no remaining evidence of the original cor.
./ •	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.
:	SIDB 9 1/2M
	S9 T21S R19E 1990
7	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
1.81	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.
2 de	Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.
52.95	Wash, 70 lks. wide, drains N 20° E.
63.60	Unimproved road, 15 lks. wide, bears North and South.
69.55	Wash, 20 lks. wide, drains N 20° E.
77.35	Top of westerly slope, bears North and South.
79.20	Fence intersection, abandoned fence, extending N 25° W, with a 5 strand barbed wire, extending N 71° E and S 71° W.

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 19 E, Gila and Salt River Meridian, Arizona

CHAINS **80.28**

True point for the 10 mile cor., at proportionate dist.; falls in wash and is not monumented due to the liability of destruction by water action.

From this point, the witness cor. to the 10 mile cor., bears S. 71°00' W., 1.00 ch. dist., monumented with a sandstone, 22 x 14 x 7 ins., firmly set, projecting 11 ins. above the ground, mkd. WC and SIDB on the N face, PL on the S face, and 10M on the W face.

At the witness corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, encircled by a mound of stone 2 1/2 ft. base to top, with brass cap mkd.

WC SIDB 10M S9 T21S R19E 1990

Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N of cor.

Witness cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.

From the true point for the 10 mile cor.

S 70°55' W, on mile 11 of SIDB private land grant.

Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.

- 0.05 Wash, 30 lks. wide, drains N 20° E, begin moderate ascent of easterly slope.
- 5.15 Fence intersection, 5 strand barbed wire, extending S 5° E, with a 5 strand barbed wire, extending N 71° E and S 71° W.
- From this point, the closing cor. of secs. 8 and 9, T 21 S, R 19 E, bears North, 1 lk. dist., monumented with a quartzite stone 11 x 8 ins., firmly set, projecting 7 ins. above the ground, mkd. SIDB on N face, and CC on S face, with a scattered mound of stone, S.

		T 21 S, R 19 E, Glia and Salt River Meridian, Arizona
	CHAINS 6.05	Fence intersection, 5 strand barbed wire, extending North, with a 5 strand barbed wire, extending N 71° E and S 71° W.
	16.75	Top of easterly slope, bears North and South.
:	21.35	Powerline, double pole, 5 wire, bears S 15° E and N 15° W.
	22.45	Unimproved road, 20 lks wide, bears N 5° E and S 5° W.
	22.50	Fence intersection, 2 strand electrified wire, extending S 10° W, with a 5 strand barbed wire, extending N 71° E and S 71° W.
	30.45	Wash, 15 lks. wide, drains N 10° E.
	34.10	Powerline, double pole, 5 wire, bears N 5° E and S 5° W.
	37.45	Wash, 30 lks. wide, drains N 15° E.
	40.20	The 10 1/2 mile cor., monumented with a sandstone 26 x 11 x 7 ins., firmly set, projecting 9 ins. above the ground, mkd. SIDB on N face, PL on S face and 10 1/2M on W face.
		At the corner point
	est.	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
		SIDB 10 1/2M ————————————————————————————————————
		from which the original bearing tree
		An oak, 26 ins. diam., bears S 81 1/2° E, 210 lks. dist., with a healed blaze. (Record S 81 1/4° E, 211 1/2 lks.)
		Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
		Bury the original stone alongside the stainless steel post.
		Rebuild the original mound of stone, 3 ft. base, 2 1/2 ft. high, N of cor.
		Cor. is located in a 5 strand barbed wire and a 1 strand electrified wire fence, extending N 71° E and S 71° W.

	T 21 S, R 19 E, Gila and Salt River Meridian, Arizona
CHAINS	S 70°58' W, beginning new measurement, continuing on mile 11.
8.00	Top of NW slope, bears NE and SW, begin descent of northwesterly slope.
11.85	E edge of wash and toe of hill, bears N 10° E and S 10° W, wash drains N 20° E.
13.85	W edge same wash and toe of hill, bears N 30° E and S 10° W, begin ascent of steep northeasterly slope.
19.50	Top of southeasterly slope, bears NE and SW, over rolling land.
27.25	Fence intersection, 4 strand barbed wire, extending S 5° W, with a 5 strand barbed wire and a 1 strand electrified wire, extending N 71° E and S 71° W.
33.00	Top of southeasterly slope, bears N 20° E and S 20° W, begin descent of steep NW slope.
36.20	Arroyo, 10 lks. wide, drains N 10° W, begin ascent of steep SE slope.
37.80	Top of SE slope, bears \$ 20° E and N 20° W, begin descent of NW slope.
40.09	Point for 11 mile cor., at proportionate dist.; original 11 mile monument, a sandstone, 12 X 10 X 8 ins., found out of position lying loose in a mound of stone, 3 ft. base, mkd. SIDB on one side, PL on one side, and 11M on another side,.
19 3 3 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 1 1/2 ft. base to top, with brass cap mkd.
	SIDB 11M
	S8 T21S R19E 1990
2 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
\$ 2 1	
/	

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 19 E, Gila and Salt River Meridian, Arizona

Bury the original stone alongside the stainless steel post.

Rebuild the original mound of stone, 3 ft. base, 2 ft. high, N of cor.

Cor. is located in a 5 strand barbed wire and a 1 strand electrified wire fence, extending N 71° E and S 71° W.

S 70°58' W, on mile 12 of SIDB private land grant.

Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.

- 6.85 Fence intersection, 2 strand electrified wire, extending S 20° E, with a 5 strand barbed wire, extending N 71° E and S 71° W.
- 7.55 E edge of Lyle Valley and toe of hill, bears N 20° E, and S 20° W.
- 21.50 Wash, 50 lks. wide, drains N 20° E.
- 39.75 Point for angle cor. No. 2, at proportionate dist.; original angle cor. No. 2 monument, a granite stone, 24 x 12 x 8 ins., found lying loose on the surface of the ground, mkd. SIDB on a face, PL on a face, and COR 2 on top.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

SIDB ANGLE COR 2

S18 T215 R19E 1990

Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.


Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

	1 21 5, K 19 E, Gila and Salt River Heridian, Arizona
CHAINS	Set a steel fence post near the cor.
	N 88°05' W, beginning new measurement, continuing on mile 12.
*	Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.
0.34	Point for 11 1/2 mile cor., at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
1.14	SIDB 11 1/2H
	64.0
	S18 T21S R19E
	1990
	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
	Bury the original stone alongside the stainless steel post.
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.
	Set a steel fence post near the cor.
	N 88°05' W, beginning new measurement, continuing on mile 12.
6.40	Fence intersection, 2 strand electrified wire, extending S 10° W, with a 5 strand barbed wire, extending S 88° E and N 88° W.
7.50	W edge of Lyle Canyon and toe of slope.
11.00	Fence intersection, 4 strand barbed wire, extending S 40° W, with a 5 strand barbed wire, extending S 88° E and N 88° W.
13.05	Fence intersection, 4 strand barbed wire, extending South, with a 5 strand barbed wire, extending S 88° E and N 88° W.
26.10	An open end pipe, 3 ins. diam., encircled by a mound of stone and concrete, 1 1/2 ft. base, and 1 1/2 ft. high.
27.05	Top of slope, bears North and South.
32.13	Point for AP 4, Parcel A.
L	1

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 19 E, Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 3 1/2 ft. base, 2 ft. high, N of cor.

- 32.15 Fence intersection, abandoned with scattered poles remaining, extending N 40° E, with a 5 strand barbed wire, extending S 88° E and N 88° W.
- 40.09 The 12 mile cor., monumented with a red sandstone 18 x 12 x 4 ins., firmly set, projecting 10 ins. above the ground, mkd. SIDB on N face, PL on S face and 12M on W face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 3 1/2 ft. base, 2 ft. high, N of cor.

CHAINS	W 88°09' W, on mile 13 of SIDB private land grant.
1 H	Over moderately rolling land through grasses, scattered mesquite, and cacti.
4.55	Fence intersection, 5 strand barbed wire, extending N 10° E, with a 5 strand barbed wire, extending S 88° E and N 88° W.
4.75	Improved road at gate, 24 lks. wide, bears North and South.
11.31	The closing cor. of secs. 13 and 18, Tps. 21 S, Rs. 18 and 19 E, monumented with a sandstone 11 x 10 ins., firmly set, projecting 21 ins. above the ground, mkd. CC on S, and 6 notches on E and W faces, with a scattered mound of stone, 3 ft. base, 1 ft. high, S.
ş	Thence through T 21 S, R 18 E.
21.75	Powerline, single pole, extends N 45° E and S 45° W.
28.95	Fence intersection, 2 strand electrified wire, extending S 88° E, with a 5 strand barbed wire, extending S 88° E and N 88° W.
40.15	The 12 1/2 mile cor., monumented with a red sandstone 23 x 11 x 10 ins., firmly set, projecting 12 ins. above the ground, mkd. SIDB on N face, PL on S face and 12 1/2M on W face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.
	SIDB 12 1/2M
	S13 T215 R18E 1990
.0a - *	Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
k é	Bury the original stone alongside the stainless steel post.
gi s	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.
a k ≥ š	Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 18 E, Gila and Salt River Meridian, Arizona

CHAINS N 88°08' W, beginning new measurement, continuing on mile 13. Over moderately rolling land through grasses, scattered mesquite, and cacti. 7.75 Point for AP 20, Parcel A. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, encircled by a mound of stone 3 1/2 ft. base to top, with brass cap mkd. WP SIDB A AP 20 **S**13 T21S R18E 1990 Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post. Cor. is located in a 5 strand barbed wire fence, extending N 88° W and S 88° E. 7.80 Fence intersection, 5 strand barbed wire, extending N 13° E, with a 5 strand barbed wire, extending S 88° E and N 88° W.

- 16.30 Top of ridge, bears N 15° E and S 15° W.
- 21.75 Fence intersection, 2 strand electrified wire, extending South, with a 5 strand barbed wire, extending S 88° E and N 88° W.
- 25.90 | Wash, 40 lks. wide, drains N 10° W.
- 30.90 | Top of ridge, flat and wide, bears N 10° E and S 10° W.
- 38.80 | Wash, 50 lks. wide, drains N 40° W.
- Point for 13 mile cor., at proportionate dist.; original 13 mile monument, a sandstone, 20 x 18 x 9 ins., found out of position buried flush and upside down in a disturbed area, mkd. SIDB on a face, PL on a face, and 13M on another face,.

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 18 E, Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

SIDB 13M

S13 T21S R18E 1990

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.


Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

Cor. is located in a 5 strand barbed wire fence, extending N 88° W and S 88° E.

N 88°08' W, on mile 14 of SIDB private land grant.

Over moderately rolling land through grasses, scattered mesquite, and cacti.

11.15 From this point, the closing cor. of secs. 13 and 14, T 21 S, R 18 E, bears North, 1 lk. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 19 ins. above the ground, with brass cap mkd.



- 22.65 E edge of a valley, bears N 60° E and S 60° W.
- 40.10 The 13 1/2 mile cor., monumented with a sandstone 18 x 9 x 6 ins., firmly set, projecting 8 ins. above the ground, mkd. SIDB on W face, PL on S face and 13 1/2M on W face.

At the corner point

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 18 E, Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

SIDB 13 1/2M

S14 T21S R18E 1990

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, N of cor.

Cor. is located in a 5 strand barbed wire fence, extending N 88° W and S 88° E, and at W edge of valley, bears N 45° E and S 45° W.

N 88°05' W, beginning new measurement, continuing on mile 14.

Over moderately rolling land through grasses, scattered mesquite, and cacti.

- 28.55 Powerline, single pole, 4 wires, bears \$ 50° E and N 50° W.
- 40.16 The 14 mile cor., monumented with a sandstone 20 x 13 x 8 ins., firmly set, projecting 6 ins. above the ground, mkd. SIDB on N face, PL on S face and 14M on W face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

SIDB 14M

S14 T21S R18E 1990

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 18 E, Gila and Salt River Meridian, Arizona

CHAINS


Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

Cor. is located in a 5 strand barbed wire fence, extending N 88° W and \$ 88° E.

N \$8°08' W, on mile 15 of SIDB private land grant.

Over moderately rolling land through grasses, scattered mesquite, and cacti.

10.88 The closing cor. of secs. 14 and 15, T 21 S, R 18 E, monumented with an iron post, 2 ins. diam., bent over to the NW, projecting 17 ins. above the ground, with brass cap incorrectly mkd.



Cor. is located 5 lks. S of a 5 strand barbed wire fence, extending S 88° E and N 88° W.

40.17 The 14 1/2 mile cor., monumented with a sandstone 24 x 12 x 10 ins., firmly set, projecting 12 ins. above the ground, mkd. SIDB on N face, PL on S face and 14 1/2M on W face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

SIDB 14 1/2N S15 T21S R18E 1990

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N of cor.

Cor. is located in a 5 strand barbed wire fence, extending N 88° W and S 88° E.

Dependent Resurvey of Portions of the

San Ignacio del Babocomari Private Land Grant Through T 21 S, R 18 E, Gila and Salt River Meridian, Arizona **CHAINS**

N 88°07' W, beginning new measurement, continuing on mile 15.

Over moderately rolling land through grasses, scattered mesquite, and cacti.

13.80 Unimproved road, 18 lks. wide, bears North and South.

40.13 The 15 mile cor., monumented with a red sandstone $13 \times 12 \times 10$ ins., firmly set, projecting 2 ins. above the ground, mkd. SIDB on N face, PL on S face and M on W face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.

> SIDB 15M

S15 T215 R18E 1990

from which new bearing trees

An oak, 13 ins. diam., bears N 39 1/4° E, 384 lks. dist., mkd. SIDB 15M BT.

An oak, 11 ins. diam., bears N 52 3/4° W, 212 lks. dist., mkd. SIDB 15M BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, N of cor.

Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.

N 88°09' W, on mile 16 of SIDB private land grant.

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 18 E, Gila and Salt River Meridian, Arizona


Over moderately rolling land through grasses, scattered mesquite, and cacti.

The closing cor. of secs. 10 and 15, T 21 S, R 18 E, monumented with an iron post, 2 ins. diam., firmly set, projecting 16 ins. above the ground, with a mound of stone, 2 ft. base, 1 ft. high, W, with brass cap mkd.

\$10 CC \$15 T21S R18E 1912

Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.

From this point, the closing cor. of secs. 9 and 10, T 21 S, R 18 E, bears South, 1 lk. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above the ground, with a buried mound of stone, 2 ft. base, 1 ft. high, S, with brass cap mkd.



Cor. is located 1 lk. W of a 5 strand barbed wire fence, extending S 88° E and N 88° W.

40.12 The 15 1/2 mile cor., monumented with a limestone 13 x 11 x 8 ins., firmly set, projecting 7 ins. above the ground, mkd. illegibly on N face, PL on S face and illegibly on W face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

	s at 5, k to b, Gila and Sait River neridian, Arizona
CHAINS	
	SIDB
	15 1/2M
	S9
	T21S R18E
	1990
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
	Bury the original stone alongside the stainless steel post.
	Rebuild the original mound of stone, 3 ft. base, 2 ft. high, N of cor.
	Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.
	N 88°07' W, beginning new measurement, continuing on mile 16.
8.90	Swail, 190 lks. wide, drains N 40° E.
23.10	Swail, 200 lks. wide, drains N 15° W.
34.70	Wash, 10 lks. wide, drains N 19° E.
36.20	Fence intersection, 5 strand barbed wire, extending South, with a 5 strand barbed wire, extending S 88° E and N 88° W.
40.12	The 16 mile cor., monumented with a sandstone 21 x 12 x 8 ins., firmly set, projecting 7 ins. above the ground, mkd. SIDB on N face, PL on S face and 16M on W face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	SIDB
	16M
	S9
	T21S R18E 1990

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 21 S, R 18 E, Gila and Salt River Meridian, Arizona

CHAINS

Deposit a magnet in a 1 \times 1 \times 2 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.


Rebuild the original mound of stone, 3 1/2 ft. base, 2 ft. high, N of cor.

Cor. is located in an abandonded fence, extending N 88° W and S 88° E.

N 88°09' W, on mile 17 of SIDB private land grant.

Over moderately rolling land through grasses, scattered mesquite, and scattered oak.


- 3.70 Top of ridge, bears N 30° E and S 30° W, begin descent of SW slope.
- 7.80 Wash, 10 lks. wide, drains N 10° E.
- The closing cor. of secs. 8 and 9, T 21 N, R 18 E, monumented with an iron post, 2 ins. diam., firmly set, projecting 15 ins. above the ground, with brass cap mkd.



Cor. is located in an ancient fence with scattered posts, extending N 88° W and S 88° E.

- 20.40 | Sandy wash, 30 lks. wide, drains N 50° E.
- 30.07 | Point for AP 21, Parcel A.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.




	T 21 S, K 18 E, Gila and Salt River Meridian, Arizona
CHAINS	Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
	Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N of cor.
30.10	Fence intersection, an ancient post line, extending S 88° E, with a 5 strand barbed wire, extending South and N 88° W.
40.12	The 16 1/2 mile cor., monumented with a granite stone 21 x 12 x 7 ins., firmly set, projecting 9 ins. above the ground, mkd. SIDB on N face, PL on S face with illegible marks on W face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	SIDB
	16 1/2M
	\$8
	T21S R18E 1990
	from which the original bearing tree
	A twin oak bears N 75 3/4° E, 257 lks. dist.; no visible mks. (Record N 83 3/4 E)
as a thing of the state of the	Bury the original stone alongside the stainless steel post.
	Raise a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, N of cor.
	Cor. is located in a 5 strand barbed wire fence, extending N 88° W and S 88° E.
	From the 31 mile cor., monumented with a volcanic stone, 21 x 16 x 9 ins., firmly set, projecting 8 ins. above the ground, mkd. PL on N face, 31M on E face, and SIDB on S face. This cor. is now identical with AP 24, Parcel A.
	At the corner point

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 20 S, R 18 E, Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.



Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2 = 5/8$ in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Rebuild the original mound of stone, 3 ft. base, 2 ft. high, S of cor.

Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.

S. 88°07' E., on mile 32 of SIDB private land grant, through T 20 S, R 18 E.

Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.

- 18.40 Fence intersection, 5 strand barbed wire, extending N 40° E, with a 5 strand barbed wire, extending S 88° E and N 88° W.
- 18.65 Elgin-Canelo Road, improved dirt, 40 lks. wide, bears N 40° E and S 40° W.
- 19.25 Babocomari Ranch Road, improved dirt, 40 lks. wide, bears N 15° E and S 15° W.
- 19.50 Fence intersection, 5 strand barbed wire, extending N 40° E, with a 5 strand barbed wire, extending S 88° E and N 88° W.
- 32.70 | Draw, 12 lks. wide, drains N 10° E.
- 40.02 The 31 1/2 mile cor., monumented with a sandstone, 21 x 12 x 12 ins., firmly set, projecting 11 ins. above the ground, mkd. PL on N face, 31 1/2M on E face, and SIDB on S face.

At the corner point

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 20 S, R 18 E, Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T20S R18E S32

> 31 1/2M SIDB

1990

Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2 = 5/8$ in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.

Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.

S 88°09' E, beginning new measurement, continuing on mile 32.

The closing cor. of secs. 32 and 33, T 20 S, R 18 E, determined at a ground depression; original closing cor. monument, a limestone, 14 x 11 x 6 ins., found lying loose on the surface of the ground 1.5 lks. from the ground depression, mkd. 4 notches on a face and SIDB on another face, with a mound of stone, 2 ft. base, 1 ft. high, N.

Cor. is located 3 lks. S of a 5 strand barbed wire fence, extending S 88° E and N 88° W.

- 17.40 Fence intersection, 5 strand barbed wire, extending N 10° W, with a 5 strand barbed wire, extending S 88° E and N 88° W.
- 33.45 Babocomari River (dry), 50 lks. wide, drains S 45° E.
- 40.00 Point for 32 mile cor., at proportionate dist.; original 32 mile monument, a granite stone, 17 x 11 x 8 ins., found lying loose on the surface of the ground, mkd. SIDB on a face, PL on a face, and 32M on another face.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

32M SIDB 1990

Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.
Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.
S 88°09' E, on mile 33 of SIDB private land grant.
Over moderatly rolling land through white thorn, scattered mesquite, creosote, and cacti.
Abandoned Southern Pacific railroad grade, 30 lks. wide, bears S 40° E and N 40° W.
Powerline, single pole, 4 wires, bears S 40° E and N 40° W.
Fence intersection, 5 strand barbed wire, extending North, with a 5 strand barbed wire, extending S 88° E and N 88° W.
Fence intersection, 9 strand barbed wire, extending S 20° W, with a 5 strand barbed wire, extending S 88° E and N 88° W.
Draw, 15 lks. wide, drains S 20° W.
Fence intersection, 5 strand barbed wire, extending North, with a 5 strand barbed wire, extending S 88° E and N 88° W.
The 32 1/2 mile cor., monumented with a red sandstone 19 x 10 x 9 ins., firmly set, projecting 8 ins. above the ground, mkd. PL on N face, 32 1/2M on E face, and SIDB on S face,.
At the corner point
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
T20S R18E S33
32 1/2M SIDB 1990
Deposit broken green glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
Bury the original stone alongside the stainless steel post.
Rebuild the original mound of stone, 3 ft. base, 3 ft. high, S of cor.

	1 20 5, K 10 B, GIIA AND BAIL RIVEL RELIGIAN, RIIZONA
CHAINS	Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.
	S 88°09' E, beginning new measurement, continuing on mile 33.
5.80	Draw, 30 lks. wide, drains S 60° W.
11.95	Unimproved road, 15 lks. wide, bears S 20° E and N 20° W.
17.31	From this point, the closing cor. of secs. 33 and 34, T 20 S, R 18 E, bears South, 2 lks. dist, monumented with a red sandstone, 12 x 6 ins., firmly set, projecting 7 ins. above the ground, mkd. PL on N face, and SIDB on S face.
e e	Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.
22.60	Wash, 120 lks. wide, drains S 45° W.
32.95	Wash, 30 lks. wide, drains S 45° W.
37.35	Fence intersection, 5 strand barbed wire, extending North, with a 5 strand barbed wire, extending S 88° E and N 88° W.
40.10	The 33 mile cor., monumented with a red sandstone 17 x 9 x 8 ins., firmly set, projecting 6 ins. above the ground, mkd. PL on N face, 33M on E face, and SIDB on S face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T20S R18E S34
	33M SIDB 1990
	Deposit broken green glass, and a magnet in a 1 \times 1 \times 2 5/8 in. white plastic case beneath the stainless steel post.
,	Bury the original stone alongside the stainless steel post.
5	Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, S of cor.
	Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.
	S 88°04' E, on mile 34 of SIDB private land grant.

CHAINS	Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.
16.10	Wash, 50 lks. wide, drains S 30° W.
17.25	Fence intersection, 5 strand barbed wire, extending North, with a 5 strand barbed wire, extending S 88° E and N 88° W.
22.25	Wash, 60 lks. wide, drains S 5° W.
37.00	Wash, 60 lks. wide, drains South.
40.20	The 33 1/2 mile cor., monumented with a sandstone 17 x 12 x 7 ins., firmly set, projecting 9 ins. above the ground, mkd. PL on N face, 33 1/2M on E face, and SIDB on S face.
	At the corner point
V	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T20S R18E S34
	33 1/2M SIDB 1990
	Deposit broken green glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
	Bury the original stone alongside the stainless steel post.
	Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, S of cor.
†	Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.
)	S 88°05' E, beginning new measurement, continuing on mile 34.
1.15	Fence intersection, 2 strand electrified wire, extending N 45° W, with a 5 strand barbed wire, extending S 88° E and N 88° W.
10.45	Wash, 30 lks. wide, drains S 50° W.
17.13	From this point, the closing cor. of secs. 34 and 35, T 20 S, R 18 E, bears North, 1 lk. dist., monumented with a sandstone 9 x 6 ins., firmly set, projecting 12 ins. above the ground, mkd. 2 notches on E face, and SIDB on S face.

	- I - J A I - J - TILL WINE DELT ALTOL HOLLWARD ALLBORE
CHAINS	Cor. is located at a fence intersection, 5 strand barbed wire, extending North, with a 5 strand barbed wire, extending S 88° E and N 88° W.
19.95	Wash, 50 lks. wide, drains S 10° W.
35.20	Wash, 25 lks. wide, drains S 40° W.
39.98	The 34 mile cor., monumented with a granite stone 22 x 15 x 10 ins., firmly set, projecting 7 ins. above the ground, mkd. PL on N face, 34M on E face, and SIDB on S face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T20S R18E S35
	34H
	SIDB
	1990
	Deposit broken green glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
	Bury the original stone alongside the stainless steel post.
y 4	Rebuild the original mound of stone, 4 ft. base, 2 1/2 ft. high, S of cor.
1.5	Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.
* ;	S 88°03' E, on mile 35 of SIDB private land grant.
0.25	Unimproved road at gate, 15 lks wide, bears S 20° E and N 20° W.
5.75	Wash, 30 lks. wide, drains S 30° W.
9.85	Wash, 20 lks. wide, drains S 50° W.
34.25	Arroyo, 50 lks. wide, drains S 40° W.
40.10	The 34 1/2 mile cor., monumented with a limestone 16 x 11 x 8 ins., firmly set, projecting 6 ins. above the ground, mkd. PL on N face, 34 1/2M on E face, and SIDB on S face.

CHAINS	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T20S R18E S35
	34 1/2M SIDB 1990
	Deposit broken brown glass, and a magnet in a 1 \times 1 \times 2 5/8 in. white plastic case beneath the stainless steel post.
	Bury the original stone alongside the stainless steel post.
	Rebuild the original mound of stone, 4 ft. base, 3 ft. high, S of cor
9 (4) * 	Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.
	S 87°58' E, beginning new measurement, continuing on mile 35.
	Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.
19.45	Wash, 20 lks. wide, drains S 15° E.
25.05	Wash, 20 lks. wide, drains S 50° E.
28.80	Wash, 30 lks. wide, drains S 40° W.
33.00	Wash, 10 lks. wide, drains N 10° E.
39.93	The 35 mile cor., monumented with a limestone 16 x 12 x 6 ins., firmly set, projecting 8 ins. above the ground, mkd. PL on N face, 35M on E face, and SIDB on S face.
	At the corner point

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 20 S, R 18 E, Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, encircled by a mound of stone, 2 1/2 ft. base to top, with brass cap mkd.

35M SIDB 1990

Deposit broken green glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a rock retaining wall 6 x 2 x 1 ft. high, S of cor.

Cor. is located in a 5 strand barbed wire fence, extending S 88° E and N 88° W.

S 88°04' E, on mile 36 of SIDB private land grant.

0.79 Angle cor. No. 5, monumented with a limestone 21 x 12 x 7 ins., firmly set, projecting 11 ins. above the ground, mkd. COR 5 on top face, PL on N face, and SIDB on S face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, encircled by a mound of stone, 3 ft. base to top, with brass cap mkd.

ANGLE COR 5 SIDB 1990

Deposit broken green glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Cor. is located 3 lks. S of a fence intersection, 5 strand barbed wire, extending N 71° E, with a 5 strand barbed wire, extending N 88° W.

	1 20 5, K 10 B, GIIR RING DRIC KIVEI HEIIGIRI, AIIZORA
CHAINS	N 70°54' E, beginning new measurement, continuing on mile 36.
9.05	Wash, 10 lks. wide, drains S 30° E.
39.33	The 35 1/2 mile cor., monumented with a chiseled X and the surrounding rock mkd. PL to the N, 35 1/2M to the E, and SIDB to the S, located on a limestone outcropping 20 x 4 x 2 ft. high extending North and South.
	At the corner point
	Set a brass tablet, 3 1/4 ins. diam., 3 1/2 in. stem, cemented in a drill hole in the limestone outcropping, with top mkd.
	T20S R18E S36
	35 1/2M SIDB 1990
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case, 9 ins. beneath the brass tablet at the bottom of the drill hole.
	Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.
	Cor. is located 4.5 lks. N of a 5 strand barbed wire fence, extending N 71° E and S 71° W.
	N 70°58' E, beginning new measurement, continuing on mile 36.
20.69	From this point, the closing cor. of secs. 36 and 31, Tps. 20 S, Rs. 18 and 19 E, bears South, 2 lks. dist., monumented with a limestone 11 x 8 ins., firmly set, projecting 8 ins. above the ground, mkd. SIDB on S face, with a mound of stone, 3 ft. base, 2 ft. high, N.
* . •	Cor. is located at fence intersection, 5 strand barbed wire, extending North, with a 5 strand barbed wire, extending N 71° E and S 71° W.
	Thence through T 20 S, R 19 E.
23.55	Wash, 65 lks. wide, drains S SO° E.
28.65	Wash, 20 lks. wide, drains S 15° E.
29.70	Wash, 5 lks. wide, drains S 10° E.
:	

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 20 S, R 19 E, Gila and Salt River Meridian, Arizona

CHAINS **40.13**

The 36 mile cor., monumented with a limestone 16 \times 14 \times 7 ins., firmly set, projecting 8 ins. above the ground, mkd. PL on N face, 36M on E face, and SIDB on S face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T20S R19E
S31
36M
SIDB

1990

Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, S of cor.

Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.

From this point, U.S. Coast and Geodetic Survey triangulation station "BABOCOMARI 1938," bears N 69°12'29" E, (forward bearing) 37.525 chs. dist., a bronze disk, 3 ins. diam., seated in concrete in an outcropping bedrock.

N 70°57' E, on mile 37 of SIDB private land grant.

Over moderately rolling land through white thorn, scattered mesquite, creosote, and cacti.

- 17.80 Wash, 20 lks. wide, drains S 5° E., begin steep ascent of westerly slope.
- 36.75 Top of ridge, bears S 10° E and N 10°W, begin steep descent of easterly slope.
- 40.09 The 36 1/2 mile cor., monumented with a sandstone 26 x 17 x 6 ins., firmly set projecting 17 ins. above the ground and in a mound of stone, 4 ft. base, 2 ft. high, mkd. PL on N face, 36 1/2M on E face, and SIDB on S face.

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 20 S, R 19 E, Gila and Salt River Meridian, Arizona

CHAINS

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, encircled by a mound of stone, 5 ft. base to top, with brass cap mkd.

Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Deposit the original stone in the mound of stone.

Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.

N 70°56' E, beginning new measurement, continuing on mile 37.

- 14.50 Powerline, double pole, 5 wire and center of unimproved road, 15 lks. wide, bears S 20° E and N 20° W.
- 16.05 Powerline, double pole, 5 wire, bears \$ 20° E and N 20° W.
- 17.10 Wash, 5 lks. wide, drains S 20° E, and base of descent.
- 25.74 The closing cor. of secs. 30 and 29, T 20 S, R 19 E, monumented with an iron post, 2 ins. diam., firmly set, projecting 16 ins. above ground, encircled by a mound of stone, 2 1/2 ft. base, 1 ft. high, with brass cap mkd.

Cor is located at a fence intersection, 5 strand barbed wire, extending North, with a 5 strand barbed wire, extending N 71° E and S 71° W.


40.09 The 37 mile cor., monumented with a sandstone 12 x 10 x 9 ins., firmly set, projecting 6 ins. above the ground, mkd. PL on N face, 37M on E face, and SIDB on S face. This cor. is now identical with AP 1, Parcel A,

Dependent Resurvey of Portions of the San Ignacio del Babocomari Private Land Grant Through T 20 S, R 19 E, Gila and Salt River Meridian, Arizona

CHAINS

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.

Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona


From AP 1, Parcel A, identical with the 37 mile cor., hereinbefore described.

S 49°11' E, on line 1-2, Parcel A.

Over gently rolling grassy land through moderate to dense white thorn and scattered cacti.

40.10 | Point for witness point 1.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



1990

Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

B00K 5293

	Gild and Salt River Heridian, Arizona			
CHAINS	Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W of cor.			
	Set a steel fence post near the cor.			
55.90	Wash, 5 lks. wide, drains S 80° E.			
64.30	Unimproved road, 15 lks. wide, bears N 80° E and S 80° W.			
80.10	Point for witness point 2.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.			
	WP 2			
	ASIDB			
	1990			
	Deposit broken green glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.			
	Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W of cor.			
	Set a steel fence post near the cor.			
84.25	Wash, 20 lks. wide, drains S 5° E.			
103.30	Wash, 100 lks. wide, drains S 55° W.			
105.15	Unimproved road, 15 lks. wide, bears N 5° W and S 5° E.			
107.70	Unimproved road, 15 lks. wide, bears N 20° E and S 20° W.			
114.90	Unimproved road, 15 lks. wide, bears N 15° E and S 15° W.			
115.10	Wash, 5 lks. wide, drains S 70° E.			
119.65	Steep ravine, 5 lks. wide, drains S 10° E.			
119.90	Steep ravine, 10 lks. wide, drains S 20° W.			
121.60	Point for witness point 3.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.			

	Olle and balt kivel helialan, Alizona		
CHAINS	WP 3		
	Å CTDB		
	SIDB		
	1990		
	Deposit broken green glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.		
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.		
į.	Set a steel fence post near the cor.		
122.25	Top of ridge, bears N 10° E and S 10° W.		
125.35	Wash, 50 lks. wide, drains, S 30° W.		
132.60	Steep ravine, 5 lks. wide, drains S 20° W.		
133.75	Steep ravine, 10 lks. wide, drains S 45° W.		
135.30	Wash, 5 lks. wide, drains S 30° W.		
153.65	Unimproved road, 15 lks. wide, bears N 65° W and West.		
160.00	Point for AP 2, Parcel A.		
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.		
;	SIDB		
	AP 2		
	À		
	1990		
	Deposit broken green glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.		
1:	Raise a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, W of cor.		
	Set a steel fence post near the cor.		

	Gila and Salt River Meridian, Arizona			
CHAINS	S 85°06' E, on line 2-3, Parcel A.			
	Over gently rolling grassy land through moderate to dense white-thorn and scattered cacti.			
5.60	Unimproved road, 15 lks. wide, bears N 15° W and S 15° E.			
36.80	Point for witness point 1.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.			
	WP 1			
	S			
	I D			
	B			
	A 1990			
	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.			
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.			
	Set a steel fence post near the cor.			
41.00	Gulley, 50 lks. wide, drains S 25° E.			
45.05	Ravine, 5 lks. wide, drains South.			
54.20	Ravine, 10 lks. wide, drains S 10° E.			
57.70	Draw, 10 lks. wide, drains S 30° W.			
72.80	Draw, 20 lks. wide, drains S 60° E.			
79.05	Point for witness point 2.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.			
	WP 2			
	s T			
	I			
	В			
	1990			
	Deposit bysken green glass, and a magnet in a 1 m 1 m 2 5/0 in			
	Deposit broken green glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.			

Gila and Salt River Meridian, Arizona				
CHAINS	Raise a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, W of cor.			
	Set a steel fence post near the cor.			
82.50	Draw, 20 lks. wide, drains S 55° E.			
87.70	Draw, 20 lks. wide, drains S 10° E.			
92.60	Draw, 20 lks. wide, drains S 5° W.			
120.00	Point for witness point 3.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.			
	WP 3			
	S I			
	D			
	В			
	1990 ···			
	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.			
5	Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W of cor.			
	Set a steel fence post near the cor.			
129.50	Ravine, 5 lks. wide, drains S 35° E.			
140.25	Draw, 10 lks. wide, drains S 40° E.			
144.65	Point for witness point 4.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.			
	WP 4			
	s I _			
	D .			
	В			
	1990			


	Gila and Sait River Meridian, Arrizona				
CHAINS	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.				
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.				
	Set a steel fence post near the cor.				
160.60	Babocamari Ranch Road, 30 lks. wide, bears N 75° E and S 75° W.				
170.85	Abandonded Southern Pacific railroad grade, 15 lks. wide, bears N 85° E and S 85° W.				
176.29	AP 3, Parcel A, identical with the 6 1/2 mile cor., hereinbefore described.				
	From AP 4, Parcel A, at intersection with the SIDB private land grant, from which the 12 mile cor., bears N 88°05' W, 7.96 chs. dist., both hereinbefore described.				
	N 36°14' E., on line 4-5, Parcel A.				
	Over gently rolling grassy land through mesquite and scattered cacti.				
40.10	Point for witness point 1.				
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.				
	WP 1 SIDB				
	A				
	1990				
÷	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.				
i- ja	Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, E of cor.				
	Set a steel fence post near the cor.				
80.10	Point for witness point 2.				
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.				

CHAINS	WP 2 SIDB			
	A			
	1990			
	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.			
	Raise a mound of stone, 3 ft. base, 2 ft. high, E of cor.			
	Set a steel fence post near the cor.			
83.30	Underground gas pipeline, bears East and West.			
83.55	Unimproved road, 15 lks. wide, bears East and West.			
102.20	Abandonded fence, extends S 80° E and N 80° W.			
102.50	Point for AP 5, Parcel A.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.			
	SIDB AP 5 A			
	1990			
<u> </u>	Deposit broken green glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.			
	Raise a mound of stone, 4 ft. base, 2 ft. high, E of cor.			
	Set a steel fence post near the cor.			
	N 14°12' E, on line 5-6, Parcel A.			
	Begin steep descent.			
7.20	Base of descent, thence over nearly level land.			
8.80	Babocomari Ranch Road, 20 lks. wide, bears N 80° E and S 80° W.			
9.45	Point for AP 6, Parcel A.			

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.



Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 ft. high, E of cor.

Set a steel fence post near the cor.

S 72°35' W, on line 6-7, Parcel A.

0.10 A barbed wire fence, 5 strand, extending N 6° E and S 6° W.

19.35 | Point for AP 7, Parcel A.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

Set a steel fence post near the cor.

N 86°30' W, on line 7-8, Parcel A.

1.25 | Point for AP 8, Parcel A.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below ground, with brass cap mkd.

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS SIDB A AP 8 1990 Deposit broken green glass, and a magnet in a 1 \times 1 \times 2 5/8 in. white plastic case beneath the stainless steel post. Raise a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, N of cor. Set a steel fence post near the cor. Cor. is located on the N shoulder of a road. N 65°50' W, on line 8-9, Parcel A. 7.90 Point for AP 9, Parcel A. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below ground, with brass cap mkd. SIDB A AP 9 1990 Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2 = 5/8$ in. white plastic case beneath the stainless steel post. Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor. Set a steel fence post near the cor. Cor. is located on the N shoulder of a road. N 79°35' W, on line 9-10, Parcel A. 6.08 A powerline, single pole, 2 wire, bears S 10° E and N 10° W. 6.45 | Point for AP 10, Parcel A. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS SIDB A AP 10 1990 from which The most southerly cor. of an adobe building, 30 x 24 ft., bears S 86°05' E, 1.37 chs. dist., long side bears N 50° W. Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2 = 5/8$ in. white plastic case beneath the stainless steel post. Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor. Set a steel fence post near the cor. N 74°20' W, on line 10-11, Parcel A. 6.30 Point for AP 11, Parcel A. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. SIDB A AP 11 1990 Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2 = 5/8$ in. white plastic case beneath the stainless steel post. Raise a mound of stone, 3 ft. base, 3 ft. high, N of cor. Set a steel fence post near the cor. S 75°15' W, on line 11-12, Parcel A. 9.45 | Point for AP 12, Parcel A.

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.



1990

Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.


Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

Set a steel fence post near the cor.

N 63°30' W, on line 12-13, Parcel A.

- 1.85 | Wash, 50 lks. wide, drains N 44° E.
- 11.00 Powerline, single pole, 2 wire, bears N 35° E and S 35° W.
- 13.25 | Improved road, 20 lks. wide, bears S 10° E and N 40° W.
- 14.15 | Point for AP 13, Parcel A.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.



from which

The most southerly cor. of a metal sided shed, 22 x 18 ft., bears N 59°58' W, 1.83 chs. dist., long side bears N 50° E.

The most southerly cor. of a metal trailer, 60 x 14 ft., bears N 42°53' W, 2.64 chs. dist., long side bears N 50° E.

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS

Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2 5/8$ in. white plastic case beneath the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N of cor.

Set a steel fence post near the cor.

N 88°20' W, on line 13-14, Parcel A.

- 2.25 A barbed wire fence, 5 strand, extending N 25° E and S 25° W.
- 3.70 Point for AP 14, Parcel A.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.



from which

The most southerly cor. of a wood and metal sided chicken coop, 15 x 11 ft., bears N 21°43' E, 3.94 chs. dist., long side bears N 45° W.

The most southerly cor. of a metal sided smokehouse, 9 x 8 ft., bears N 30°30' E, 3.05 chs. dist., long side bears N 40° W.

The most southerly cor. of a metal sided wash house, 10 x 10 ft., bears N 33°46' E, 2.97 chs. dist., one side bears N 50° E.

Deposit broken green glass, and a magnet in a 1 \times 1 \times 2 5/8 in. white plastic case beneath the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N of cor.

Set a steel fence post near the cor.


S 21°00' W, on line 14-15, Parcel A.

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS 08

Point for AP 15, Parcel A.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.



from which

A horse corral fence cor., bears S 70° E, 3 lks. dist., fences extending N 20° E and S 75° W.

Deposit broken green glass, and a magnet in a $1 \times 1 \times 2 = 5/8$ in. white plastic case beneath the stainless steel post.


Raise a mound of stone, 3 ft. base, 2 ft. high, NW of cor.

Set a steel fence post near the cor.

S 76°25' W, on line 15-16, Parcel A.

- 1.50 Enter swamp, edge bears N 20° E and S 45° W.
- 2.25 | Point for AP 16, Parcel A.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, encircled by a mound of stone, 2 1/2 ft. base to top, with brass cap mkd.



Deposit broken green glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.

Raise a mound of stone, 3 1/2 ft. base, 3 ft. high, NW of cor.

Set a steel fence post near the cor.

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS S 7°05' E, on line 16-17, Parcel A. 0.15 Horse corral fence, extending N 55° E and S 55° W. 0.20 | Leave swamp, edge bears NE and SW. 1.30 | Horse corral fence, extending N 88° E and S 88° W. 1.45 | Point for AP 17, Parcel A. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. SIDB AP 17 1990 Deposit broken green glass, and a magnet in a $1 \times 1 \times 2 = 5/8$ in. white plastic case beneath the stainless steel post. Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, NW of cor. Set a steel fence post near the cor. S 88°15' W, on line 17-18, Parcel A. 1.15 | Enter swamp, edge bears NE and SW. 21.40 | Leave swamp, enter grassy field. 44.10 | Point for AP 18, Parcel A. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. 1990

Deposit broken green glass, and a magnet in a $1 \times 1 \times 2 = 5/8$ in.

white plastic case beneath the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

CHAINS	S 4°50' E, on line 18-19, Parcel A.		
	Over gently rolling grassy land through scattered cacti.		
1.45	Babocomari Ranch Road, 20 lks. wide, bears N 80° W and S 80° E.		
20.65	Unimproved road, 20 lks. wide, bears N 80° W and S 80° E.		
20.80	Underground gas pipeline, bears N 80° W and S 80° E.		
25.60	Draw, 30 lks. wide, drains N 55° W.		
32.20	Base of hill, bears East and West, begin ascent.		
42.30	Point for AP 19, Parcel A, and top of ascent.		
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.		
	SIDB AP 19		
	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post. Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.		
44.26	S 11°59' W, on line 19-20, Parcel A. Over gently rolling grassy land through scattered cacti. AP 20, Parcel A, at intersection with the SIDB private land grant, from which the 12 1/2 mile cor. bears S 88°08' E, 7.75 chs. dist., both hereinbefore described.		
·	From AP 21, Parcel A, at intersection with the SIDB private land grant, from which the 16 1/2 mile cor. bears S 88°09' W, 10.05 chs. dist., both hereinbefore described. N 49°34' E, on line 21-22, Parcel A. Over gently rolling grassy land through scattered cacti.		
13.50	Wash, 30 lks. wide, drains S 40° E.		
20.05	Wash, 10 lks. wide, drains S 75° E.		
1			

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

WP 1

S

I

A

D

B

1990

Deposit broken brown glass, and a magnet in a 1 \times 1 \times 2 5/8 in. white plastic case beneath the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, E of cor.

Set a steel fence post near the cor.

- 39.30 Unimproved road, 15 lks. wide, bears East and West.
- 44.65 Unimproved road, 15 lks. wide, bears N 40° E and S 40° W.
- 46.40 Unimproved road, 15 lks. wide, bears N 60° E and S 60° W.
- 51.25 Arroyo, 150 lks. wide, drains S 60° E.
- 59.05 Wash, 20 lks. wide, drains \$ 30° E.
- 66.15 Unimproved road, 20 lks. wide, bears S 80° E and N 80° W.
- 76.00 | Point for witness point 2.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



1990

Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2 = 5/8$ in. white plastic case beneath the stainless steel post.

B00K 5293

CHAINS	Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, E of cor.			
	Set a steel fence post near the cor.			
78.95	Underground gas pipeline, bears East and West.			
79.25	Unimproved road, 20 lks. wide, bears East and West.			
117.00	Point for witness point 3.			
**	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.			
	WP 3			
	<u>\$</u>			
	I D			
·	A D B			
	1990			
	Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.			
	Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, E of cor.			
	Set a steel fence post near the cor.			
122.25	Powerline, single pole, 4 wire, bears N 50° W and S 50° E.			
144.70	Point for AP 22, Parcel A.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.			
	SIDB			
	AP 22			
	1990 n			
	Deposit broken brown glass, and a magnet in a $1 \times 1 \times 2$ 5/8 in. white plastic case beneath the stainless steel post.			
	Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, E of cor.			
1				

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS	Set a steel fence post near the cor.			
	N 51°17' W, on line 22-23, Parcel A.			
	Over gently rolling grassy land through scattered cacti.			
34.50	Point for a witness point.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.			
	WP			
	SIDB A			
	1990			
e.	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.			
	Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, E of cor.			
	Set a steel fence post near the cor.			
53.85	Unimproved road, 15 lks. wide, bears N 80° W and S 80° E.			
67.00	Point for AP 23, Parcel A.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.			
	SIDB			
	AP 23			
	1990			
	Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.			
	Raise a mound of stone, 3 ft. base, 2 ft. high, E of cor.			
	Set a steel fence post near the cor.			
	N 42°54' W, on line 23-24, Parcel A.			

<u>.</u>

Metes-and-Bounds Survey of Parcel A Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS	Over gently rolling grassy land through scattered cacti.			
16.70	Improved road, 30 lks. wide, bears East and West.			
41.00	Point for a witness point.			
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.			
	WP			
SIDB				
	1990			
Deposit broken brown glass, and a magnet in a 1 x 1 x 2 5/8 is white plastic case beneath the stainless steel post.				
	Raise a mound of stone, 3 ft. base, 2 ft. high, E of cor.			
	Set a steel fence post near the cor.			
.30	Arroyo, 130 lks. wide, drains N 60° E.			
.15	Improved road, 40 lks. wide, bears N 35° E and S 35° W.			
7.25	Arroyo, 100 lks. wide, drains N 60° E.			
1.55	Unimproved road, 18 lks. wide, bears N 80° W and S 80° E.			
2.41	AP 24, Parcel A, identical with the 31 mile cor., hereinbefore described.			
Informative Traverses Within the San Ignacious del Babocomari Land Grant Gila and Salt River Meridian, Arizona The following field notes are those of an traverse of the apparent centerline of portions of the Babocomari Ranch Roa informational purposes only.				
			From a point at the intersection of line 5-6, Parcel A, from	

From a point at the intersection of line 5-6, Parcel A, from which AP 5, Parcel A, bears S 14°12' W, 8.80 chs. dist., and AP 6, Parcel A, bears N 14°12' W, 0.65 chs. dist., both hereinbefore described.

Thence along the apparent centerline of a graded dirt and gravel road, 20 lks. wide.

ž

Informative Traverse Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS	S 76°35' W, 8.59 chs.
	S 61°25' W, 2.63 chs.
	S 79°11' W, 3.14 chs.
	S 65°58' W, 3.22 chs.
	S 83°51' W, 2.15 chs.
·	N 68°59' W, 7.05 chs.
	N 65°37' W, 3.31 chs.
	S 59°03' W, 1.86 chs.
	S 69°42' W, 1.52 chs.
	N 49°14' W, 1.96 chs.
	N 67°11' W, 1.53 chs.
	N 53°02' W, 1.61 chs.
	N 75°39' W, 3.81 chs.
	S 51°08' W, 3.78 chs.
	S 66°46' W, 6.35 chs. At end of course, unimproved road, 12 lks. wide, bears S 75° E.
	S 86°08' W, 4.84 chs.
	N 75°20' W, 4.01 chs.
	S 49°32' W, 2.71 chs.
	\$ 77°23' W, 10.59 chs.
	S 67°21' W, 7.30 chs. At end of course, unimproved road, 20 lks. wide, bears S 15° W.
	S 76°02' W, 15.75 chs. At end of course, unimproved road, 15 lks. wide, bears S 60° E.
	N 77°40' W, 1.96 chs.
	N 53°22' W, 3.87 chs.
i de la companya de	·

j

Informative Traverse Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS N 62°54' W, 4.59 chs.

N 57°10' W, 6.00 chs.

N 85°15' W, 7.47 chs. At end of course, intersect line 18-19,
Parcel A, from which AP 18, Parcel A,
bears N 4°50' W, 1.45 chs. dist., and
AP 19, Parcel A, bears S 4°50' E,
40.85 chs. dist., hereinbefore described.

From a point at the intersection of line 2-3, Parcel A, from which WP 4, Parcel A, bears N 85°06' W, 15.95 chs. dist., and AP 3, Parcel A, identical with the 6 1/2 mile cor., bears S 85°06' E, 15.69 chs. dist., both hereinbefore described.

Thence along the apparent centerline of a graded dirt and gravel road, 40 lks. wide.

N 75°14' E, 20.58 chs.

N 75°26' E, 6.45 chs.

N 63°00' E, 11.68 chs.

N 56°39' E, 7.36 chs.

N 68°08' E, 17.48 chs.

N 63°13' E, 8.20 chs.

N 55°09' E, 9.39 chs.

N 60°15' E, 6.00 chs.

N 45°35' E, 3.18 chs.

N 71°30' E, 7.38 chs.

N 81°06' E, 4.39 chs. At end of course, enter gravel-pit area, road narrows to 30 lks.

Informative Traverse Within the San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS N 42°56' E, 2.51 chs.

N 28°26' E, 5.44 chs.

N 63°27' E, 10.68 chs. At 3.39 chs. unimproved road, 20 lks. wide, bears N 20° E and S 20° W.

At end of course, T-intersection, bears N 56° W and S 56° E, road widens to 50 lks.

S 56°20' E, 9.49 chs.

S 51°12' E, 10.81 chs. At end of course, unimproved road, 15 lks. wide, bears N 85° W.

S 80°59' E, 6.63 chs. At end of course, unimproved road, 15 lks. wide, bears S 60° E.

S 64°55' E, 4.22 chs. At end of course, intersect the SIDB private land grant bdy.

From this point, the 5 1/2 mile cor., bears S $71^{\circ}06'$ W, 42.95 chs. dist., monumented with a sandstone 10 x 7 ins., firmly set, projecting 7 ins. above the ground, mkd. X on top, PL on N face, 5 1/2M on E face, and SIDB on S face, with a scattered mound of stone, N, and from which the remaining bearing tree

A mesquite, 7 ins. diam., bears S 12 1/2° W, 75 lks. dist., with a healed blaze.

Cor. is located in a 5 strand barbed wire fence, extending S 80° E and N 80° W.

From this same point, the 1 1/2 mile cor., bears N $71^{\circ}06'$ E, 277.96 chs. dist., monumented with a sandstone 16 x 4 ins., firmly set, projecting 8 ins. above the ground, mkd. SIDB on N face, PL on S face, and 1 1/2M on W face.

Cor. is located in a 5 strand barbed wire fence, extending N 71° E and S 71° W.

B 0 0 K 5 2 9 3

San Ignacio del Babocomari Private Land Grant Gila and Salt River Meridian, Arizona

CHAINS

General Description

The land encompassed in this survey is located about 2 miles westerly of Huachuca City. The Babocomari River flows generally southeasterly through the Parcel A. Elevation ranges from 4200 to 5100 feet above sea level.

Access is by way of Arizona State Highway 90 to the east and Arizona State Highway 82 to the north. Numerous improved and unimproved roads are located within the area.

There are scattering stands of timber, including cottonwood, mesquite, and oak. Undergrowth consists of white thorn, black brush, and cacti. Ground cover consists of native grasses.

No mining activity was noted.

The principal use of the area is livestock grazing.

The following GPS positions established on the Grant Bdy are provided for informational purposes only

Point ID	Latitude	Longitude
MP16.5	31°36'57.0172"	110°32'03.2575"
MP31	31°39'04.8886"	110°31'54.2597"
Cor No 3	31°37'06.3323"	110°37'36.4029"
MP6.5	31°38'13.8360"	110°22'07.5770"
Cor No 4	31°39'15.6401"	110°38'28.4132"
MP37	31°39'31.9520"	110°25'54.0931"
MP44.5	31°41'39.8776"	110°18'39.2126"
MP46	31°41'29.5080"	110°17'32.7501"
Cor No 1	31°39'46.4743"	110°16'51.4846"

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

FIELD ASSISTANTS		
NAMES		CAPACITY
Stephen K. Hansen	······································	Land Surveyor
Cheryl A. Baier		Surveying Technician
Rebecca Ramirez		Surveying Technician
	· · · · · · · · · · · · · · · · · · ·	
	· · · · · · · · · · · · · · · · · · ·	
	-	

CERTIFICATE OF SURVEY

We, Paul L. Moss and Richard T. Helm III, Cadastral Surveyors, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of February, 1990, we have dependently resurveyed portions of the San Ignacio del Babocomari Private Land Grant through Townships 20 and 21 South, Ranges 18 and 19 East and surveyed a Metes-and-Bounds Survey of Parcel A and Informative Traverses within the San Ignacio del Babocomari Private Land Grant of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Paul L. Moss and Richard T. Helm III, are not available for signatures.

6/22/90	(James L. Werdel, Field Supervisor)
(Dat∉)	(James L. Werdel, Field Supervisor)
•	CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Arizona State Office Phoenix, Arizona

The foregoing field notes of the dependent resurvey of portions of the San Ignacio del Babocomari Private Land Grant through Townships 20 and 21 South, Ranges 18 and 19 East and a Metes-and-Bounds Survey of Parcel A and Informative Traverses within the San Ignacio del Babocomari Private Land Grant of the Gila and Salt River Meridian, in the State of Arizona, executed by Paul L. Moss and Richard T. Helm III, Cadastral Surveyors, having been critically examined and found correct, are hereby approved.

JUN 2 2 1990	James t. Lelley
(Date)	(Chief Cadastral Surveyor of Arizona)
	ERTIFICATE OF TRANSCRIPT
survey in San Ignacio del Ba	g transcript of the field notes of the above-described abocomari Private Land Grant through Townships 20 and 21 c Gila and Salt River Meridian, Arizona is a true copy of

(Chief Cadastral Surveyor of Arizona)