

BOOK 5311
1

R-5311

ORIGINAL
UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF

DEPENDENT RESURVEY,

PORTION OF THE EAST BOUNDARY, (FIFTH GUIDE MERIDIAN WEST),

THE SOUTH, WEST AND NORTH BOUNDARIES,

PORTIONS OF THE SUBDIVISIONAL LINES,

CERTAIN MINERAL SURVEYS,

THE SUBDIVISION OF SELECTED SECTIONS,

AND METES-AND-BOUNDS SURVEYS IN

TOWNSHIP 19 NORTH, RANGE 19 WEST

Of the Gila and Salt River Meridian,
In the State of Arizona

EXECUTED BY

Dennis K. McKay, Cadastral Surveyor

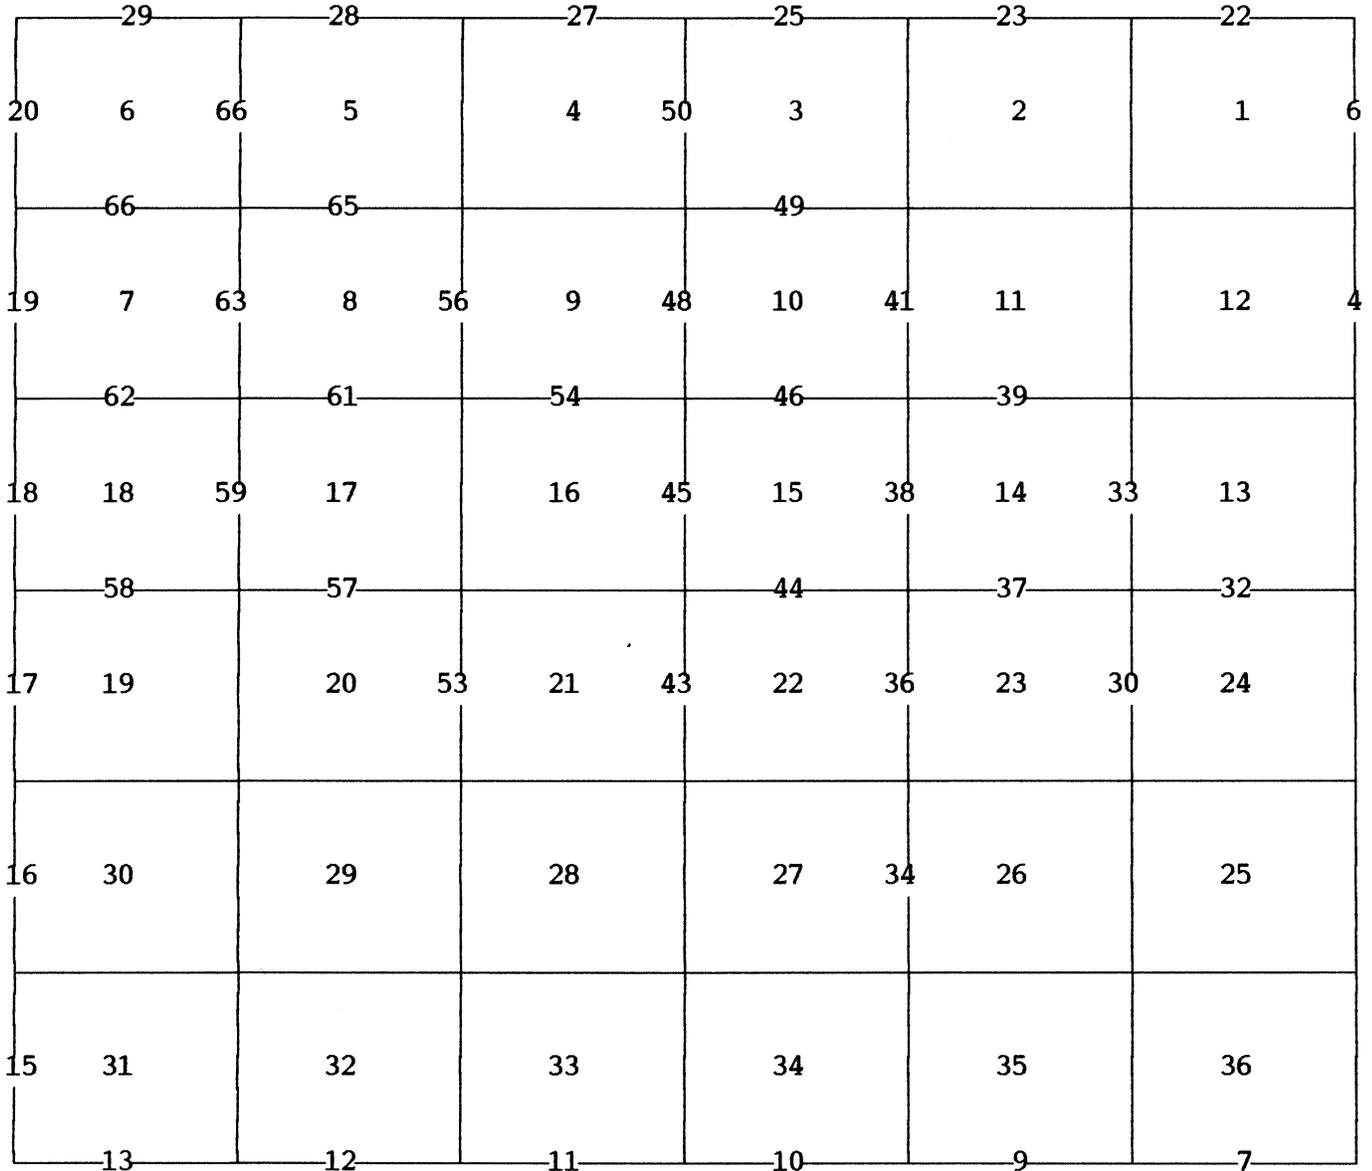
Under special instructions dated January 3, 1984, approved January 3, 1984,
which provided for the surveys included under Group Number
652 and assignment instructions dated January 3, 1984.

Survey commenced January 5, 1984

Survey completed July 19, 1990

INDEX DIAGRAM

TOWNSHIP 19 NORTH, RANGE 19 WEST,



- | | | | |
|-----------------------------------|----------|---------------------------|------------|
| Subdivision Section 7 | pp 93-97 | M.S. 3842 Black Tale lode | pp 87-89 |
| Subdivision Section 8 | pp 97-98 | M.S. 3842 Pilot Knob lode | pp 89-93 |
| M.S. 1699B Billy Brayan Mill Site | pp 67-71 | M & B NE 1/4 SE 1/4 Sec 7 | pp 98-101 |
| M.S. 1699B Gold Road Mill Site | pp 71-76 | Lot 11, Section 7 | pp 102-103 |
| M.S. 1699B Line Road Mill Site | pp 76-78 | Lot 8, Section 18 | pp 103-105 |
| M.S. 3842 Gold Trail Lode | pp 78-82 | | |
| M.S. 3842 South Gold Trail Lode | pp 82-87 | | |

T. 19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the east boundary (Fifth Guide Meridian West), the south, west and north boundaries, a portion of the subdivisional lines and certain mineral surveys, the subdivision of selected sections, and metes-and-bounds surveys in Township 19 North, Range 19 West, Gila and Salt River Meridian, Arizona.

M.S. No. 1699, A and B, was surveyed by H.K. Wheeler, in 1902. The east boundary (Fifth Guide Meridian West) was surveyed by J.J. Fisher, in 1905. A portion of the east boundary was resurveyed by F.W. Rodolf, in 1910. The south and west boundaries, the east three miles and the west mile of the north boundary and the subdivisional lines, except for the line between sections 4 and 5, were surveyed by William Alexander between 1910 and 1912. The west boundary was retraced by Guy H. Richardson, in 1915. The west mile of the north boundary was retraced, and the north boundaries of sections 4 and 5 and the line between sections 4 and 5 were surveyed by Hugo Price, in 1915. M.S. No. 3842 was surveyed by L.H. Foster, in 1922. The south four miles of the east boundary was resurveyed by Harry K. Smith, in 1977.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 652, Arizona, dated January 3, 1984.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record; identified corners were remonumented in their original positions, lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by observations on a U.S. Coast and Geodetic Survey triangulation network, confirmed by altitude observations on the sun, and refer to the true meridian. Distances and angles were measured with a Zeiss Elta 46 total station instrument.

The geographic position of the southeast corner of the township, as determined from a tie to U.S.C.& G.S. triangulation station "FIG SPRING, 1948", is as follows:

NAD 27: Latitude: 34°58'54.47" N Longitude: 114°14'40.91" W

The mean magnetic declination is 15° E.

Dependent Resurvey,
Portion of the East bdy., (Fifth Guide Meridian West),
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS																							
	<p>Restoring the resurvey executed by F.W. Rudolf, in 1910</p> <hr style="width: 20%; margin: auto;"/> <p>Beginning at the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., monumented with an iron post, 2 1/2 ins. diam., projecting 8 ins. from the ground, with brass cap mkd.</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">T19N</td> </tr> <tr> <td style="text-align: center;">R19W</td> <td style="text-align: center;">R18W</td> </tr> <tr> <td style="text-align: center;">S12</td> <td style="text-align: center;">S 7</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td style="text-align: center;">S13</td> <td style="text-align: center;">S18</td> </tr> <tr> <td colspan="2" style="text-align: center;">1977</td> </tr> </table> <p>From this cor. point, a galvanized open end iron pipe, 1 in. diam., projecting 28 ins. from the ground, bears N. 20° W., 9 lks. dist.</p> <p>A mound of stone, 4 ft. base, 2 1/2 ft. high, is set W. of cor.</p> <p>Cor. is located 30 lks. W. of the center of a road, 30 lks. wide, bears N. and S.</p> <p>N. 0°05' W., bet. secs. 7 and 12, on the E. bdy. of the Tp.</p> <p>0.30 Center of a road, 30 lks. wide, bears E.</p> <p>Along road, slightly rolling, through creosote.</p> <p>40.02 The 1/4 sec. cor. of secs. 7 and 12, monumented with a malpais stone, 18 x 10 x 8 ins., projecting 1 in. from the ground, mkd. 1/4 on W. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 2 ft. is set W. of the cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 22 ins. in the ground, with brass cap mkd.</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">T19N</td> </tr> <tr> <td colspan="2" style="text-align: center;">1/4</td> </tr> <tr> <td style="text-align: center;">R19W</td> <td style="text-align: center;">R18W</td> </tr> <tr> <td style="text-align: center;">S12</td> <td style="text-align: center;">S7</td> </tr> <tr> <td colspan="2" style="text-align: center;">1984</td> </tr> </table> <p>Bury the mkd. stone alongside the iron post.</p>	T19N		R19W	R18W	S12	S 7	-----		S13	S18	1977		T19N		1/4		R19W	R18W	S12	S7	1984	
T19N																							
R19W	R18W																						
S12	S 7																						

S13	S18																						
1977																							
T19N																							
1/4																							
R19W	R18W																						
S12	S7																						
1984																							

Dependent Resurvey,
 Portion of the East bdy., (Fifth Guide Meridian West),
 T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Cor. is located 8 lks. W. of a track road, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°12' W., beginning new measurement.</p> <p>Along a track road, through creosote.</p> <p>26.20 Center of pavement, Oatman Highway, bears NE and SW.</p> <p>29.30 Power line, bears NE and SW.</p> <p>40.04 Point for the cor. of secs. 1, 6, 7 and 12, determined at calculated bearing and dist. from the NW cor. of the most northwestern parcel of land shown on the subdivision map of Sacramento Ranchos Unit Five Amended, filed in 1962 in the Mohave County Courthouse, Kingman, AZ.</p> <p style="padding-left: 40px;">A galvanized open end iron pipe, 3/4 ins. diam., buried 7 ins. below the ground, bears S. 45° E., 85.7 lks. dist.</p> <p>This is accepted as the best available evidence of the original cor. position.</p> <p>Set an aluminum post, 23 ins. long, 1 in. diam., 31 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2">T19N</td></tr> <tr><td>R19W</td><td>R18W</td></tr> <tr><td>S1</td><td>S6</td></tr> <tr><td colspan="2"><hr style="width: 50%; margin: 0 auto;"/></td></tr> <tr><td>S12</td><td>S7</td></tr> <tr><td colspan="2">1984</td></tr> </table> </div> <p>from which</p> <p style="padding-left: 40px;">An aluminum post, 28 ins. long, 1 in. diam., set 23 ins. in the ground, for a reference monument, bears N. 45°00' E., 50.00 ft. dist., with aluminum cap mkd. T19N R18W S6 RM 50.00 FT 1984, and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">An aluminum post, 28 ins. long, 1 in. diam., set 22 ins. in the ground, for a reference monument, bears S. 45°00' W., 50.00 ft. dist., with aluminum cap mkd. T19N R19W S12 RM 50.00 FT 1984, and an arrow pointing to the cor.</p>	T19N		R19W	R18W	S1	S6	<hr style="width: 50%; margin: 0 auto;"/>		S12	S7	1984	
T19N													
R19W	R18W												
S1	S6												
<hr style="width: 50%; margin: 0 auto;"/>													
S12	S7												
1984													

Dependent Resurvey,
Portion of the East bdy., (Fifth Guide Meridian West),
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor., U.S.C. and G.S. triangulation station "FIG SPRING", bears N. 74°00.0' E., (forward bearing) 27.530 chs. dist., monumented with a bronze disc, 3 1/2 ins. diam., set flush in a concrete pad, 1 ft. diam., 3 ins. high, mkd. FIG SPRING 1948 with a triangle in the middle.</p> <p>Cor. is located in the center of roads, 40 lks. wide, bears N., E. and S.</p>
	<p>N. 0°03' W., bet. secs. 1 and 6.</p>
	<p>Along a winding road, over slightly rolling land, through creosote.</p>
0.30	<p>Center of road, 40 lks. wide, bears W.</p>
39.98	<p>The 1/4 sec. cor. of secs. 1 and 6, monumented with a malpais stone, 20 x 8 x 8 ins., mkd. 1/4 on W. face, projecting 8 ins. from the ground, in a scattered mound of stone, 2 1/2 x 1 ft.</p>
	<p>A mound of stone, 2 x 2 ft. is set W. of cor.</p>
	<p>At the cor. point</p>
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 24 ins. in the ground with aluminum cap mkd.</p>
	<p style="text-align: center;">T19N 1/4 R19W R18W S1 S6 1984</p>
	<p>Rebuilt mound of stone, 3 ft. base, 1 ft. high, W. of cor.</p>
	<p>Deposit the mkd. stone in the mound of stone.</p>
	<p>Cor. is located 35 lks. E of a wash, 30 lks. wide, drains S.</p>
	<p>N. 0°04' W., beginning new measurement.</p>
	<p>Over slightly rolling land, through creosote.</p>
41.29	<p>The cor. of Tps. 19 and 20 N, Rs. 18 and 19 W, monumented with a lava stone, 18 x 12 x 7 ins., projecting 6 ins. from the ground, mkd. XXN and 6 grooves on the N. face, XVIIIW and 6 grooves on the E. face, XIXN and 6 grooves on the S. face, and XIXW and 6 grooves on the W face.</p>

Dependent Resurvey,
Portion of the East bdy., (Fifth Guide Meridian West),
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>A mound of stone, 3 x 1 ft., is set S. of cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 25 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr><td style="text-align: center;">T20N</td></tr> <tr><td style="text-align: center;">R19W R18W</td></tr> <tr><td style="text-align: center;">S36 S31</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td style="text-align: center;">S1 S6</td></tr> <tr><td style="text-align: center;">T19N</td></tr> <tr><td style="text-align: center;">1984</td></tr> </table> <p>Deposit the mkd. stone in the mound of stone.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of the South Bdy., T.19 N., R.19 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">Restoring the survey executed by William Alexander, in 1910-1912</p> <hr/> <p>From the cor. of Tps. 18 and 19 N., Rs. 18 and 19 W., monumented with an iron post, 2 1/2 ins. diam., projecting 10 ins. from the ground, in a mound of stone, 4 ft. base, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr><td style="text-align: center;">T19N</td></tr> <tr><td style="text-align: center;">R19W R18W</td></tr> <tr><td style="text-align: center;">S36 S31</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td style="text-align: center;">S1 S6</td></tr> <tr><td style="text-align: center;">T18N</td></tr> <tr><td style="text-align: center;">1977</td></tr> </table> <p>Not remonumented</p> <p>N. 89°54' W., bet. secs. 1 and 36, on the S. bdy. of the Tp.</p> <p>Over slightly ascending land, through creosote.</p> <p>40.01 The 1/4 sec. cor. of secs. 1 and 36, monumented with a malpais stone, 25 x 8 x 8 ins., projecting 10 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="text-align: center;">A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p>	T20N	R19W R18W	S36 S31	-----		S1 S6	T19N	1984	T19N	R19W R18W	S36 S31	-----		S1 S6	T18N	1977
T20N																	
R19W R18W																	
S36 S31																	

S1 S6																	
T19N																	
1984																	
T19N																	
R19W R18W																	
S36 S31																	

S1 S6																	
T18N																	
1977																	

Dependent Resurvey of the South Boundary,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S36 1/4— S 1 T18N 1984</p> <p>Bury the mkd. stone alongside the cor.</p> <p>Rebuild the mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, N. of cor.</p> <p>Cor. is located 35 lks. S. of the end of a track road, bears SW only.</p> <p style="text-align: center;">—————</p> <p>N. 89°56' W., beginning new measurement.</p> <p>Ascend slightly, across washes, through creosote.</p>
40.00	<p>The cor. of secs. 1, 2, 35 and 36, monumented with a granite stone, 16 x 13 x 8 ins., projecting 8 ins. from the ground, mkd. with 1 notch on the E edge and 5 grooves on the W face.</p> <p style="text-align: center;">A mound of stone, 3 1/2 x 1 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 23 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S35 S36 — — S2 S1 T18N 1984</p> <p>Bury the mkd. stone alongside the cor.</p> <p>Rebuild the mound of stone 3 1/2 ft. base, 2 ft. high, N. of cor.</p> <p>—————</p>

Dependent Resurvey of the South Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 89°58' W., bet. secs. 2 and 35, on the S. bdy. of the Tp.</p> <p>Over rocky slightly ascending land, through creosote and some ocotillo, palo verde and catclaw.</p>
25.00	<p>Begin steep ascend into rocky, mountainous terrain.</p>
39.99	<p>The 1/4 sec. cor. of secs. 2 and 35, monumented with a granite stone, 21 x 11 x 7 ins., projecting 14 ins. from the ground, mkd. 1/4 on N. face.</p>
	<p>A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p>
	<p>At the cor. point</p>
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 2 1/2 ft. base to top, with aluminum cap mkd.</p>
	<p style="text-align: center;">T19N R19W S35 1/4— S 2 T18N 1984</p>
	<p>Bury the mkd. stone alongside the cor.</p>
	<p>Cor. is located 55 lks. S of a wash, 10 lks. wide, drains NE.</p>
	<p>N. 89°51' W., beginning new measurement.</p>
	<p>Over rugged terrain, through creosote and cholla cacti.</p>
39.99	<p>The cor. of secs. 2, 3, 34 and 35, monumented with a lava stone, 24 x 15 x 10 ins., projecting 22 ins. from the ground, mkd. with 2 grooves on the E. face and 4 grooves on the W. face.</p>
	<p>A mound of stone 3 x 1 1/2 ft. is set W. of cor.</p>
	<p>At the cor. point</p>
	<p>Set an aluminum tablet, 3 1/2 ins. diam., 3 1/2 in. stem, in concrete, into a drill hole in exposed rock, with top mkd.</p>
	<p style="text-align: center;">T19N R19W S34 S35 — — S3 S2 T18N 1984</p>


Dependent Resurvey of the South Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>from which</p> <p style="padding-left: 40px;">A rock outcropping, 15 x 10 x 6 ft., bears N. 29° W., 23 lks. dist., mkd. X BO.</p> <p>Rebuild mound of stone, 3 ft. base, 1 1/2 ft. high., W. of cor.</p> <p>Deposit mkd. stone in the mound of stone.</p>
<p>40.02</p>	<hr/> <p>N. 89°56' W., bet. secs. 3 and 34, on the S. bdy. of the Tp.</p> <p>Over rugged, steep terrain, through creosote and cacti.</p> <p>The 1/4 sec. cor. of secs. 3 and 34, monumented with a lava stone, 21 x 12 x 10 ins., projecting 12 ins. from the ground, mkd. 1/4 on N face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T19N R19W S34 1/4— S 3 T18N 1984</p> </div> <p>Rebuild mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Cor. is located 1 ch. N of a spur, slopes East.</p>
<p>40.03</p>	<hr/> <p>N. 89°50' W., beginning new measurement.</p> <p>Over rugged, mountainous terrain, with rocky soil, through creosote and yucca.</p> <p>The cor. of secs. 3, 4, 33 and 34, monumented with a granite stone, 17 x 7 x 5 ins., projecting 12 ins. from the ground, mkd. with 3 grooves on the E. and 3 grooves on the W. faces.</p> <p>At the cor. point</p>

Dependent Resurvey of the South Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS													
	<p>Set an aluminum tablet, 3 1/2 ins. diam., 3 1/2 in. stem, in concrete, into a drill hole in exposed rock surface, with top mkd.</p>												
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T19N</td> <td>R19W</td> </tr> <tr> <td>S33</td> <td>S34</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>S4</td> <td>S3</td> </tr> <tr> <td colspan="2" style="text-align: center;">T18N</td> </tr> <tr> <td colspan="2" style="text-align: center;">1984</td> </tr> </table>	T19N	R19W	S33	S34			S4	S3	T18N		1984	
T19N	R19W												
S33	S34												
S4	S3												
T18N													
1984													
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>												
	<p>Deposit the mkd. stone in the mound of stone.</p>												
	<hr/> <p>N. 89°58' W., bet. secs. 4 and 33, on the S. bdy. of the Tp.</p>												
	<p>Over rugged terrain, through sparse creosote and yucca cacti.</p>												
0.70	<p>Top of ridge, bears NE and SW.</p>												
39.77	<p>The 1/4 sec. cor. of secs. 4 and 33, monumented with a lava stone, 20 x 10 x 8 ins., projecting 14 ins. from the ground, mkd. 1/4 on N. face.</p>												
	<p style="padding-left: 40px;">A mound of stone, 3 1/2 x 1 1/2 ft. is set N. of cor.</p>												
	<p>At the cor. point</p>												
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base, to top, with aluminum cap mkd.</p>												
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T19N</td> <td>R19W</td> </tr> <tr> <td>S33</td> <td></td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td>S 4</td> <td></td> </tr> <tr> <td colspan="2" style="text-align: center;">T18N</td> </tr> <tr> <td colspan="2" style="text-align: center;">1984</td> </tr> </table>	T19N	R19W	S33		1/4	—	S 4		T18N		1984	
T19N	R19W												
S33													
1/4	—												
S 4													
T18N													
1984													
	<p>Deposit the mkd. stone at the base of the mound of stone.</p>												
	<hr/> <p>N. 89°56' W., beginning new measurement.</p>												
	<p>Across the S. side of a mountain, with loose lava rocks, through sparse vegetation.</p>												

Dependent Resurvey of the South Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
40.03	Point for the cor. of secs. 4, 5, 32 and 33, at proportionate dist.
	Point falls in a wash unsuitable for monumentation.
	N. 89°56' W., bet. secs. 5 and 32, on the S. bdy. of the Tp.
5.13	The witness cor. of secs. 4, 5, 32 and 33, monumented with a granite stone, 23 x 12 x 6 ins., projecting 15 ins. from the ground, mkd. with WC on N. face, 4 grooves on the E. face and 2 grooves on the W. face.
	A mound of stone, 3 x 2 ft., is set W. of cor.
	At the cor. point
	Set an aluminum post, 28 ins. long, 1 in. diam., 24 ins. in the ground, with aluminum cap mkd.
	
	Rebuild mound of stone, 3 1/2 ft. base, 2 ft. high, W. of the cor.
	Deposit the mkd. stone in the mound of stone.
	West, beginning new measurement
	Over rugged terrain, through sparse creosote and yucca cacti.
34.91	The 1/4 sec. cor. of secs. 5 and 32, monumented with a malpais stone, 15 x 12 x 11 ins., projecting 8 ins. from the ground, mkd. 1/4 on N. face.
	A mound of stone, 3 1/2 ft. x 1 ft. is set N. of cor.
	At the cor. point
	Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.

Dependent Resurvey of the South Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R19W S32 1/4— S 5 T18N 1984</p> <p>Rebuilt the mound of stone 3 1/2 ft. base, 2 1/2 ft. N. of cor. Deposit the mkd. stone in the mound of stone.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°57' W., beginning new measurement.</p> <p>Over rugged, mountainous terrain, with sparse creosote, yucca and cacti.</p> <p>39.89 The cor. of secs. 5, 6, 31 and 32, monumented with a malpais stone, 12 x 6 x 5 ins., projecting 6 ins. from the ground, mkd. with 5 grooves on the E. and 1 groove on the W. faces</p> <p style="padding-left: 40px;">A mound of stone, 3 x 2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S31 S32 — — S6 S5 T18N 1984</p> <p>Deposit the mkd. stone in the new mound of stone.</p> <hr style="width: 80%; margin: auto;"/> <p>S. 89°18' W., bet. secs. 6 and 31.</p> <p>Over rugged, mountainous terrain, through sparse yucca, creosote, grasses and cacti.</p> <p>0.80 Top of ridge, bears N. and S.</p>

Dependent Resurvey of the South Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>40.37 The 1/4 sec. cor. of secs. 6 and 31, monumented with a lava stone, 16 x 9 x 7 ins., projecting 8 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="text-align: center;">A mound of stone, 3 x 1 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S31 1/4— S 6 T18N 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°07' W., beginning new measurement.</p> <p>Over rugged mountains, through cacti, yucca and grasses.</p> <p>38.52 The cor. of Tps. 18 and 19 N., Rs. 19 and 20 W., monumented with a porphyry stone, 19 x 14 x 7 ins., projecting 14 ins. from the ground, mkd. XIXN on the N, XIXW on the E, XVIIIN on the S. face and XXW on the W. face and 6 notches on each of the four edges of the stone.</p> <p style="text-align: center;">A mound of stone, 3 x 1 1/2 ft. is set S. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base, to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R20W R19W S36 S31 ----- S1 S6 T18N 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <hr style="width: 20%; margin: 10px auto;"/>
--------	---

Dependent Resurvey of the West Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the survey executed by Guy H. Richardson, in 1915</p> <hr/> <p>From the cor. of Tps. 18 and 19 N., Rs. 19 and 20 W., hereinbefore described.</p> <p>N. 0°03' E., bet. secs. 31 and 36, on the W. bdy. of the Tp.</p> <p>Over rugged, rocky, mountainous terrain, through yucca, cacti and grasses.</p> <p>39.92 The 1/4 sec. cor. of sec. 31 only, monumented with a porphyry stone, 16 x 16 x 8 ins., projecting 9 ins. from the ground, mkd. 1/4 on W. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1/2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> T19N R20W R19W 1/4 S31 1984 </div> <p>Deposit mkd. stone in the mound of stone.</p> <hr/> <p>N. 0°32' E., beginning new measurement.</p> <p>Over rugged, rocky, mountainous terrain, through yucca, cacti and grasses.</p> <p>39.77 The cor. of secs. 25, 30, 31 and 36, monumented with a porphyry stone, 14 x 8 x 6 ins., projecting 10 ins. from the ground, mkd. with 5 grooves on the N. face and 1 groove on the S. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 1/2 x 1 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p>

Dependent Resurvey of the West Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2">T19N</td></tr> <tr><td style="border-right: 1px solid black; padding: 2px;">R20W</td><td style="padding: 2px;">R19W</td></tr> <tr><td style="border-right: 1px solid black; padding: 2px;">S25</td><td style="padding: 2px;">S30</td></tr> <tr><td colspan="2" style="border-top: 1px solid black; padding: 2px;"></td></tr> <tr><td style="border-right: 1px solid black; padding: 2px;">S36</td><td style="padding: 2px;">S31</td></tr> <tr><td colspan="2" style="padding: 2px;">1984</td></tr> </table> <p>Deposit the mkd. stone in the mound of stone.</p> <hr/> <p>N. 0°13' E., bet. secs. 25 and 30, on the W. bdy. of the Tp.</p> <p>General ascend over mountainous land, with rocky soil and outcroppings, through cholla and prickly pear cacti, yucca and grasses.</p> <p>39.39 The 1/4 sec. cor. of sec. 30 only, monumented with a porphyry stone, 17 x 12 x 8 ins., projecting 7 ins. from the ground, mkd. 1/4 on W. face.</p> <p style="padding-left: 40px;">A mound of stone, 2 1/2 x 1/2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2">T19N</td></tr> <tr><td style="border-right: 1px solid black; padding: 2px;">R20W</td><td style="padding: 2px;">R19W</td></tr> <tr><td style="border-right: 1px solid black; padding: 2px;"></td><td style="padding: 2px;">1/4 S30</td></tr> <tr><td colspan="2" style="padding: 2px;">1984</td></tr> </table> <p>Deposit the mkd. stone in the mound of stone.</p> <hr/> <p>N. 2°11' W., beginning new measurement.</p> <p>Ascend steeply over rough, mountainous terrain.</p> <p>5.10 Top of ridge, bears E. and W.</p> <p>40.93 The cor. of secs. 19, 24, 25 and 30, monumented with a lava stone, 21 x 10 x 10 ins., lying loose, mkd. with 4 notches on one edge, and 2 notches on opposite edge.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 ft. is set W. of cor.</p>	T19N		R20W	R19W	S25	S30			S36	S31	1984		T19N		R20W	R19W		1/4 S30	1984	
T19N																					
R20W	R19W																				
S25	S30																				
S36	S31																				
1984																					
T19N																					
R20W	R19W																				
	1/4 S30																				
1984																					

Dependent Resurvey of the West Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2">T19N</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">R20W</td><td style="padding: 0 5px;">R19W</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">S24</td><td style="padding: 0 5px;">S19</td></tr> <tr><td colspan="2" style="border-top: 1px solid black; padding: 5px 0 0 0;">S25 S30</td></tr> <tr><td colspan="2" style="padding: 0 0 0 0;">1984</td></tr> </table> </div> <p>Deposit the mkd. stone in the mound of stone.</p> <hr style="border: 0.5px solid black;"/> <p>N. 0°10' E., bet. secs. 19 and 24, on the W. bdy. of the Tp.</p> <p>Over rough, mountainous terrain, with rocky soil, through yucca and cacti.</p> <p>40.32 The 1/4 sec. cor. of sec. 19 only, monumented with a porphyry stone, 17 x 11 x 8 ins., projecting 6 ins. from the ground, mkd. 1/4 on W. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 1/2 ft. is set W. of cor.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 17 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <p>At the cor. point</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr><td colspan="2">T19N</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">R20W</td><td style="padding: 0 5px;">R19W</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;"></td><td style="padding: 0 5px;">1/4 S19</td></tr> <tr><td colspan="2" style="padding: 0 0 0 0;">1984</td></tr> </table> </div> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Cor. is located 90 lks. N. of a wash, 8 lks. wide, drains SE.</p> <hr style="border: 0.5px solid black; width: 20%; margin: 10px auto;"/> <p>N. 0°08' E., beginning new measurement.</p> <p>Ascend over mountainous land, through cholla cacti, yucca and sparse juniper and catclaw.</p>	T19N		R20W	R19W	S24	S19	S25 S30		1984		T19N		R20W	R19W		1/4 S19	1984	
T19N																			
R20W	R19W																		
S24	S19																		
S25 S30																			
1984																			
T19N																			
R20W	R19W																		
	1/4 S19																		
1984																			

Dependent Resurvey of the West Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS													
3.40	Top of cliff, 150 ft. high, faces SW.												
38.20	Top of rimrock, faces S.												
39.88	The cor. of secs. 13, 18, 19 and 24, monumented with a porphyry stone, 18 x 16 x 10 ins., projecting 12 ins. from the ground, mkd. with 3 grooves on the N. face and 3 grooves on the S face. A mound of stone, 3 x 1 1/2 ft. is set W. of cor. At the cor. point Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, with aluminum cap mkd. <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T19N</td></tr> <tr><td>R20W</td><td>R19W</td></tr> <tr><td>S13</td><td>S18</td></tr> <tr><td colspan="2">-----</td></tr> <tr><td>S24</td><td>S19</td></tr> <tr><td colspan="2">1984</td></tr> </table> Deposit the mkd. stone in the mound of stone. <hr/>	T19N		R20W	R19W	S13	S18	-----		S24	S19	1984	
T19N													
R20W	R19W												
S13	S18												

S24	S19												
1984													
	N. 0°10' E., bet. secs. 13 and 18, on the W. bdy. of the Tp. Across flat ridge, bears SE and NW.												
0.40	Top of rimrock, faces NE, descend sharply into rugged mountain valley, through scattered juniper.												
38.51	The 1/4 sec. cor. of sec. 18 only, monumented with a porphyry stone, 23 x 14 x 12 ins., projecting 10 ins. from the ground, mkd. 1/4 on W. face. A mound of stone, 3 1/2 x 2 1/2 ft. is set W. of cor. At the cor. point Set an aluminum post, 28 ins. long, 1 in. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with aluminum cap mkd. <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T19N</td></tr> <tr><td>R20W</td><td>R19W</td></tr> <tr><td colspan="2"> </td></tr> <tr><td colspan="2">1/4 S18</td></tr> <tr><td colspan="2">1984</td></tr> </table> Deposit the mkd. stone in the mound of stone. <hr/>	T19N		R20W	R19W			1/4 S18		1984			
T19N													
R20W	R19W												
1/4 S18													
1984													

Dependent Resurvey of the West Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>N. 0°27' E., beginning new measurement.</p> <p>Over rolling land.</p> <p>31.50 Center of pavement, Oatman Highway, 35 lks. wide, bears NE on a curve to the left.</p> <p>38.45 Ridge, bears NE and SW.</p> <p>40.00 The cor. of secs. 7, 12, 13 and 18, monumented with a red granite stone, 17 x 9 x 8 ins., laying loose, mkd. with 4 grooves on one face and 2 grooves on the opposite face.</p> <p style="padding-left: 40px;">A mound of stone is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 15 ins. in the ground, in a mound of stone, 4 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td colspan="2">T19N</td></tr> <tr><td>R20W</td><td>R19W</td></tr> <tr><td>S12</td><td>S7</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S13</td><td>S18</td></tr> <tr><td colspan="2">1984</td></tr> </table> </div> <p>Deposit the mkd. stone in the mound of stone.</p> <hr style="border: 0.5px solid black;"/> <p>N. 0°29' W., bet. secs. 7 and 12, on the W. bdy. of the Tp.</p> <p>Over rugged rock formations.</p> <p>1.10 Wash, 10 lks. wide, drains SE.</p> <p>39.81 The 1/4 sec. cor. of secs. 7 and 12, monumented with a malpais stone, 15 x 11 x 9 ins., projecting 10 ins. from the ground, mkd. 1/4 on W. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>	T19N		R20W	R19W	S12	S7			S13	S18	1984	
T19N													
R20W	R19W												
S12	S7												
S13	S18												
1984													

Dependent Resurvey of the West Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N 1/4 R20W R19W S12 S7 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <hr/> <p>N. 0°10' E., beginning new measurement.</p> <p>Over rolling, mountainous land, through creosote, yucca and cholla cacti.</p> <p>38.70 Wash, 20 lks. wide, drains E.</p> <p>41.21 The cor. of secs. 1, 6, 7 and 12, monumented with a malpais stone, 21 x 11 x 9 ins., projecting 8 ins. from the ground, mkd. with 1 groove on the N. face and 5 grooves on the S. face.</p> <p style="text-align: center;">A mound of stone, 3 x 1 1/2 ft. is set W. of cor.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R20W R19W S1 S6 ----- S12 S7 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <hr/> <p>N. 0°08' W., bet. secs. 1 and 6, on the W. bdy. of the Tp.</p> <p>Over mountainous land, through creosote and yucca.</p> <p>39.40 Wash, 4 lks. wide, drains SW.</p> <p>39.90 The 1/4 sec. cor. of secs. 1 and 6, monumented with a malpais stone, 14 x 11 x 8 ins., projecting 4 ins. from the ground, mkd. 1/4 on W. face.</p> <p style="text-align: center;">A mound of stone, 3 x 1 1/2 ft. is set W. of cor.</p>

Dependent Resurvey of the West Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS									
	At the cor. point								
	Set an aluminum post, 28 ins. long, 1 in. diam., 4 ins. in the ground, in a mound of stone, 4 1/2 ft. base, to top, with aluminum cap mkd.								
	<table border="0" style="margin-left: auto; margin-right: auto;"> <tr><td>T19N</td></tr> <tr><td>1/4</td></tr> <tr><td>R20W R19W</td></tr> <tr><td>S1 S6</td></tr> <tr><td>1984</td></tr> </table>	T19N	1/4	R20W R19W	S1 S6	1984			
T19N									
1/4									
R20W R19W									
S1 S6									
1984									
	Deposit the mkd. stone in the mound of stone.								
	N. 0°13' E., beginning new measurement.								
	Ascend over mountainous terrain, through yucca, cacti and sparse juniper.								
11.00	Begin steep, rolling land.								
40.75	The cor. of Tps. 19 and 20 N., Rs. 19 and 20 W., monumented with a porphyry stone, 24 x 11 x 7 ins., projecting 19 ins. from the ground, mkd. XXN on the N. face, XIXW on the E. face, XIXN on the S. face, and XXN on the W. face and 6 notches on each of the four edges.								
	Cor. is set in a scattered mound of stone.								
	At the cor. point								
	Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.								
	<table border="0" style="margin-left: auto; margin-right: auto;"> <tr><td>T20N</td></tr> <tr><td>R20W R19W</td></tr> <tr><td>S36 S31</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S1 S6</td></tr> <tr><td>T19N</td></tr> <tr><td>1984</td></tr> </table>	T20N	R20W R19W	S36 S31	<hr/>		S1 S6	T19N	1984
T20N									
R20W R19W									
S36 S31									
<hr/>									
S1 S6									
T19N									
1984									
	Deposit the mkd. stone in the mound of stone.								

Dependent Resurvey of the North Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

<p>CHAINS</p>	<p style="text-align: center;">Restoring the survey executed by William Alexander, in 1910</p> <hr/> <p>From the cor. of Tps. 19 and 20 N., Rs. 18 and 19 W., hereinbefore described.</p> <p>N. 89°53' W., bet. secs. 1 and 36, on the N. bdy. of the Tp.</p> <p>Over slightly rolling land, along a road, through creosote.</p> <p>40.04 The 1/4 sec. cor. of secs. 1 and 36, monumented with a malpais stone, 18 x 9 x 8 ins., projecting 10 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T20N R19W S36 1/4— S 1 T19N 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <hr/> <p>N. 89°51' W., beginning new measurement.</p> <p>Over slightly rolling land, through creosote.</p> <p>39.95 Center of graded road, 22 lks. wide, bears N. and S.</p> <p>40.06 Point for the cor. of secs. 1, 2, 35 and 36, determined by calculated bearings from nearby lot cors. as shown on the subdivision map of Golden Valley Ranchos Unit 21, on file in the Mohave County Courthouse, Kingman, Arizona.</p> <p style="padding-left: 40px;">A rebar, 5/8 in. diam., firmly set, projecting 4 ins. from the ground, bears N. 86°21' W., 9.72 chs. dist. This monument was set in 1960 by J.T. Jordan, PE 1219, AZ, as the SW cor. of Lot 9, Block P, Unit 21, as shown on the subdivision map of Golden Valley Ranchos Unit 21, on file in the Mohave County Courthouse, Kingman, Arizona, and is harmoniously related with surrounding lot cors.</p>
---------------	--

Dependent Resurvey of the North Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>A rebar, 5/8 in. diam., firmly set, projecting 12 ins. from the ground, bears N. 6°49' W., 5.04 chs. dist. This monument was set in 1960 by J.T. Jordan, No. 1219, AZ, as the cor. bet. Lots 6 and 7, Block P, Unit 21, as shown on the subdivision map of Golden Valley Ranchos Unit 21, on file in the Mohave County Courthouse, Kingman, Arizona, and is harmoniously related with surrounding lot cors.</p> <p>This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 12 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 2px 5px;">T20N</td> <td style="padding: 2px 5px;">R19W</td> </tr> <tr> <td style="padding: 2px 5px;">S35</td> <td style="padding: 2px 5px;">S36</td> </tr> <tr> <td colspan="2" style="text-align: center; border-top: 1px solid black; padding: 2px 0 2px 5px;"> </td> </tr> <tr> <td style="padding: 2px 5px;">S2</td> <td style="padding: 2px 5px;">S1</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px 0 2px 5px;">T19N</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px 0 2px 5px;">1984</td> </tr> </table> </div> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 22 lks. S. of a bladed swath, 20 lks. wide, bears W., and 9 lks. E. of a bladed swath, 20 lks. wide, bears N. and S.</p> <hr style="border: 0.5px solid black; margin: 10px 0;"/> <p>N. 89°56' W., bet. secs. 2 and 35, on the N. bdy. of the Tp.</p> <p>Slightly ascending along a graded road, through creosote.</p> <p>39.96 The 1/4 sec. cor. of secs. 2 and 35, monumented with a rebar, of unknown origin, 1 1/4 ins. diam., projecting 12 ins. from the ground. This is accepted as a careful and faithful perpetuation of the cor. position.</p> <p style="padding-left: 40px;">A rebar, 5/8 in. diam., set flush with ground, is set alongside the cor.</p> <p>At the cor. point</p>	T20N	R19W	S35	S36			S2	S1	T19N		1984	
T20N	R19W												
S35	S36												
S2	S1												
T19N													
1984													

Dependent Resurvey of the North Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 22 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T20N R19W S35 1/4— S 2 T19N 1984</p> <p>Deposit the rebars in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located in a wash, 25 lks. wide, drains E., and 23 lks. S. of an intersection of roads, 30 lks. wide, extending N., E. and W.</p> <p>From this cor. point, a rebar, 5/8 in. diam., projecting 8 ins. from the ground, set in 1960 by J.T. Jordan, PE 1219, AZ, as the SW cor. of Lot 9, Block M, Unit 21, as shown on the subdivision map of Golden Valley Ranchos Unit 21, on file in the Mohave County Courthouse, Kingman, AZ., bears N. 26 1/2° E., 68 lks. dist.</p> <p>From this same cor. point, a rebar, 5/8 in. diam., projecting 12 ins. from the ground, set in 1960 by J.T. Jordan, PE 1219, AZ, as the SE cor. of Lot 8, Block L, Unit 21, as shown on the subdivision map of Golden Valley Ranchos Unit 21, on file in the Mohave County Courthouse, Kingman, AZ., bears N. 26 1/4° W., 68 lks. dist.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°56' W., beginning new measurement.</p> <p>Slightly ascending along a road, through creosote.</p> <p>40.00 Point for the cor. of secs. 2, 3, 34 and 35, determined by calculated bearings and distances from nearby lot cors. as shown on the subdivision map of Golden Valley Ranchos Unit 21, on file in the Mohave County Courthouse, Kingman, AZ.</p>
--------	--

Dependent Resurvey of the North Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>A rebar, 5/8 in. diam., firmly set, projecting 7 ins. from the ground, bears N. 3°29' E., 10.02 chs. dist. This monument was set in 1960 by J.T. Jordan, PE 1219, AZ, as the cor. bet. Lots 10 and 11, Block I, Unit 21, as shown on the subdivision map of Golden Valley Ranchos Unit 21, on file in the Mohave County Courthouse, Kingman, Arizona, and is harmoniously related with surrounding lot cors.</p> <p>A rebar, 5/8 in. diam., firmly set, projecting 8 ins. from the ground, bears N. 83°10' E., 5.045 chs. dist. This monument was set in 1960 by J.T. Jordan, PE 1219, AZ, as the cor. bet. Lots 8 and 9, Block I, Unit 21, as shown on the subdivision map of Golden Valley Ranchos Unit 21, on file in the Mohave County Courthouse, Kingman, AZ, and is harmoniously related with surrounding lot cors.</p> <p>This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 16 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">T20N R19W</td> </tr> <tr> <td style="text-align: center;">S34</td> <td style="text-align: center;">S35</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td style="text-align: center;">S3</td> <td style="text-align: center;">S2</td> </tr> <tr> <td colspan="2" style="text-align: center;">T19N</td> </tr> <tr> <td colspan="2" style="text-align: center;">1984</td> </tr> </table> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 13 lks. S. of a bladed swath, 30 lks. wide, bears E. and W. and 20 lks. E. of a bladed swath 30 lks. wide, bears N.</p> <hr/> <p>N. 89°54' W., bet. secs. 3 and 34.</p> <p>Slightly ascending along a graded road.</p> <p>39.85 Center of a road, 20 lks. wide, bears S., only.</p>	T20N R19W		S34	S35	-----		S3	S2	T19N		1984	
T20N R19W													
S34	S35												

S3	S2												
T19N													
1984													

Dependent Resurvey of the North Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
40.03	<p>The 1/4 sec. cor. of secs. 3 and 34, monumented with a malpais stone, 22 x 8 x 6 ins., projecting 11 ins. from the ground, mkd. 1/4 on N. face.</p> <p>A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 16 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T20N R19W S34 1/4— S 3 T19N 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 25 lks. N. of a road, 20 lks. wide, bears E. only.</p> <hr style="width: 20%; margin: 10px auto;"/>
40.01	<p>N. 89°54' W., beginning new measurement.</p> <p>Ascend over slightly rolling, rocky land, through creosote.</p> <p>The cor. of secs. 3, 4, 33 and 34, monumented with an iron post, 3 ins. diam., projecting 36 ins. from the ground, leaning in a mound of stone 3 1/2 x 2 ft., with brass cap mkd.</p> <p style="text-align: center;">T20N R19W S33 S34 — — S4 S3 T19N 1915</p> <p>Reset the iron post, 12 ins. in the ground, in a mound of stone, 4 ft. base to top, add the marks 1984 to the brass cap.</p> <p>A steel fence post is alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>

Dependent Resurvey of the North Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS							
	<p>Restoring the survey executed by Hugo Price in 1915</p> <hr/>						
	<p>S. 89°45' W., bet. secs. 4 and 33, on the N. bdy. of the Tp. Ascending to steep, extremely rugged terrain.</p>						
40.26	<p>The 1/4 sec. cor. of secs. 4 and 33, monumented with an iron post, 1 in. diam., projecting 30 ins. from the ground, in a mound of stone, 3 1/2 x 2 1/2 ft., with brass cap mkd.</p> <div style="text-align: center;"> <table> <tr><td>S33</td></tr> <tr><td>1/4</td></tr> <tr><td>—</td></tr> <tr><td>S 4</td></tr> <tr><td>1915</td></tr> </table> </div> <p>Not remonumented</p> <p>From this cor. point, Dripping Spring bears S. 6°25' E., 30.50 chs. dist.</p> <hr/>	S33	1/4	—	S 4	1915	
S33							
1/4							
—							
S 4							
1915							
	<p>S. 89°41' W., beginning new measurement. Over extremely rugged, mountainous terrain.</p>						
39.54	<p>The cor. of secs. 4, 5, 32 and 33, monumented with an iron post, 3 ins. diam., projecting 1 ft. from a mound of stone, 3 x 2 ft., with brass cap mkd.</p> <div style="text-align: center;"> <table> <tr><td>T20N R19W</td></tr> <tr><td>S32 S33</td></tr> <tr><td>— —</td></tr> <tr><td>S5 S4</td></tr> <tr><td>T19N</td></tr> <tr><td>1915</td></tr> </table> </div> <p>Not remonumented</p> <p>Cor. is located on top of a rock outcropping, 10 ft. high.</p> <hr/>	T20N R19W	S32 S33	— —	S5 S4	T19N	1915
T20N R19W							
S32 S33							
— —							
S5 S4							
T19N							
1915							

Dependent Resurvey of the North Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS							
	<p>S. 89°54' W., bet. secs. 5 and 32, on the N. bdy. of the Tp.</p> <p>Over extremely rugged, mountainous terrain.</p>						
40.02	<p>The 1/4 sec. cor. of secs. 5 and 32, monumented with an iron post, 1 in. diam., projecting 18 ins. from the ground, with brass cap mkd.</p>						
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>S32</td></tr> <tr><td>1/4</td></tr> <tr><td>—</td></tr> <tr><td>S 5</td></tr> <tr><td>T19N</td></tr> <tr><td>1915</td></tr> </table>	S32	1/4	—	S 5	T19N	1915
S32							
1/4							
—							
S 5							
T19N							
1915							
	<p>Not remonumented</p> <p>A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p> <hr style="width: 20%; margin: 0 auto;"/>						
	<p>S. 89°36' W., beginning new measurement.</p> <p>Over extremely rugged, mountainous terrain.</p>						
39.85	<p>The cor. of secs. 5, 6, 31 and 32, monumented with a malpais stone, 22 x 16 x 10 ins., projecting 14 ins. from the ground, mkd. with 5 grooves on the E. face and 1 groove on the W. face.</p>						
	<p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>						
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T20N R19W</td></tr> <tr><td>S31 S32</td></tr> <tr><td>—</td></tr> <tr><td>S6 S5</td></tr> <tr><td>T19N</td></tr> <tr><td>1984</td></tr> </table>	T20N R19W	S31 S32	—	S6 S5	T19N	1984
T20N R19W							
S31 S32							
—							
S6 S5							
T19N							
1984							
	<p>Deposit the mkd. stone in the mound of stone.</p> <p>Cor. is located on a flat bench at the base of a N. slope.</p> <hr/>						

Dependent Resurvey of the North Bdy.,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the survey executed by William Alexander, in 1910</p> <hr/> <p>N. 89°50' W., bet. sec. 6 and 31, on the N. bdy. of the Tp.</p> <p>Over extremely rugged, mountainous terrain.</p>
39.96	<p>The 1/4 sec. cor. of secs. 6 and 31, monumented with a malpais stone, 15 x 10 x 7 ins., projecting 11 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T20N R19W S31 1/4— S 6 T19N 1984</p> <p>from which</p> <p style="padding-left: 40px;">Top of a rimrock surface, 7 ft. high, bears N. 54° E., 69 lks. dist., mkd. X BO.</p> <p>Deposit the mkd. stone in the mound of stone.</p> <hr/> <p>N. 89°48' W., beginning new measurement.</p> <p>Over extremely rugged, mountainous terrain.</p>
38.43	<p>The cor. of Tps. 19 and 20 N., Rs. 19 and 20 W., hereinbefore described.</p> <hr/>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS

Restoring the survey executed by
William Alexander, in 1910-1912

From the cor. of secs. 23, 24, 25 and 26, monumented with a malpais stone, 18 x 10 x 8 ins., projecting 8 ins. from the ground, mkd. with 1 groove on the E. face and 5 grooves on the S. face.

A mound of stone, 3 x 1 ft. is set W. of cor.

At the cor. point

Set an iron post, 27 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, cemented to bedrock over a magnet, in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.

T19N	R19W
S23	S24
S26	S25
1984	

Deposit the mkd. stone in the mound of stone.

Set a steel fence post alongside the cor.

Cor. is located 12 lks. E. and 12 lks. S. of a bladed swath, 25 lks. wide, bears N. and W.

N. 0°04' W., bet. secs. 23 and 24.

Over mostly level land, rocky terrain, along a road, through creosote, yucca and cacti.

40.14 The 1/4 sec. cor. of secs. 23 and 24, monumented with a lava stone, 21 x 12 x 7 ins., projecting 8 ins. from the ground, mkd. 1/4 on W. face.

A mound of stone, 3 x 1 ft. is set W. of cor.

At the cor. point

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 15 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T19N R19W 1/4 S23 S24 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 18 lks. E. of a road, 16 lks. wide, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°03' W., beginning new measurement.</p> <p>Over mostly level land, rocky terrain, along a road, through creosote and yucca.</p> <p>40.02 The cor. of secs. 13, 14, 23 and 24, monumented with a lava stone, 20 x 12 x 6 ins., projecting 6 ins. from the ground, mkd. with 1 groove on the E. face and 3 grooves on the S. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 ft. x 1 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 19 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S14 S13 <hr style="width: 50%; margin: 0 auto;"/>S23 S24 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 20 lks. N. and 20 lks. E. of the center of a road, 20 lks. wide, bears S. and W.</p> <hr style="width: 80%; margin: 10px auto;"/>
--------	---

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS																							
39.97	<p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., monumented with an iron post, 2 1/2 ins. diam., projecting 18 ins. from the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <table border="1" data-bbox="828 462 982 651"> <tr> <td colspan="2" style="text-align: center;">T19N</td> </tr> <tr> <td style="text-align: center;">R19W</td> <td style="text-align: center;">R18W</td> </tr> <tr> <td style="text-align: center;">S13</td> <td style="text-align: center;">S18</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td style="text-align: center;">S24</td> <td style="text-align: center;">S19</td> </tr> <tr> <td colspan="2" style="text-align: center;">1977</td> </tr> </table> <p>Not remonumented</p> <p>A mound of stone, 3 x 2 ft. is set W. of cor.</p> <p>N. 89°54' W., bet. secs. 13 and 24.</p> <p>Over lightly rolling land, rocky soil, through creosote, yucca and sparse cacti.</p> <p>The 1/4 sec. cor. of secs. 13 and 24, monumented with a lava stone, 16 x 13 x 7 ins., projecting 5 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 2 1/2 x 1 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <table border="1" data-bbox="828 1323 982 1480"> <tr> <td colspan="2" style="text-align: center;">T19N R19W</td> </tr> <tr> <td colspan="2" style="text-align: center;">S13</td> </tr> <tr> <td colspan="2" style="text-align: center;">1/4—</td> </tr> <tr> <td colspan="2" style="text-align: center;">S24</td> </tr> <tr> <td colspan="2" style="text-align: center;">1984</td> </tr> </table> <p>Rebuild original mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.</p> <p>Deposit mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin-left: auto; margin-right: auto;"/>	T19N		R19W	R18W	S13	S18	-----		S24	S19	1977		T19N R19W		S13		1/4—		S24		1984	
T19N																							
R19W	R18W																						
S13	S18																						

S24	S19																						
1977																							
T19N R19W																							
S13																							
1/4—																							
S24																							
1984																							

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 89°53' W., beginning new measurement.</p> <p>Over slightly rolling land, rocky soil, through yucca, creosote, and sparse cacti.</p>
39.94	<p>The cor. of secs. 13, 14, 23 and 24.</p>
	<p>N. 0°11' W., bet. secs. 13 and 14.</p> <p>Over mostly level land, rocky soil, through creosote, yucca and cacti.</p>
40.00	<p>The 1/4 sec. cor. of secs. 13 and 14, monumented with a lava stone, 19 x 13 x 6 ins., projecting 9 ins. from the ground, mkd. 1/4 on W. face.</p>
	<p>A scattered mound of stone is set to the W. of cor.</p>
	<p>At the cor. point</p>
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">T19N R19W 1/4 S14 S13 1984</p>
	<p>Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p>
	<p>Deposit the mkd. stone in the mound of stone.</p>
	<p>N. 0°09' W., beginning new measurement.</p> <p>Over mostly level land, rocky soil, through creosote, yucca and cacti.</p>
25.90	<p>Underground pipeline, bears NE and SW.</p>
33.80	<p>Center of pavement of Oatman Highway, 30 lks. wide, bears NE and SW.</p> <p>Along the E. side of a road.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS											
39.94	<p>The cor. of secs. 11, 12, 13 and 14, monumented with a malpais stone, 20 x 10 x 7 ins., projecting 11 ins. from the ground, mkd. with 1 groove on the E. face and 4 grooves on the S. face.</p> <p>A mound of stone, 3 1/2 ft. x 1 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 15 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <table border="1" data-bbox="846 682 992 835"> <tr> <td colspan="2">T19N R19W</td> </tr> <tr> <td>S11</td> <td>S12</td> </tr> <tr> <td colspan="2">-----</td> </tr> <tr> <td>S14</td> <td>S13</td> </tr> <tr> <td colspan="2">1984</td> </tr> </table> <p>From this cor. point, an open end iron pipe, of unknown origin, 1 1/4 ins. diam., projecting 30 ins. from the ground, bears South, 2 lks. dist.</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 12 lks. N. and 30 lks. E. of a bladed swath, 30 lks. wide, bears N. and S.</p>	T19N R19W		S11	S12	-----		S14	S13	1984	
T19N R19W											
S11	S12										

S14	S13										
1984											
	<p>From the 1/4 sec. cor. of secs. 26 and 27, monumented with a granite stone, 18 x 8 x 8 ins., projecting 10 ins. from the ground, mkd. 1/4 on W. face.</p> <p>A mound of stone, 3 1/2 x 1 1/2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 10 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <table border="1" data-bbox="846 1669 992 1789"> <tr> <td colspan="2">T19N R19W</td> </tr> <tr> <td colspan="2">1/4</td> </tr> <tr> <td>S27</td> <td>S26</td> </tr> <tr> <td colspan="2">1984</td> </tr> </table>	T19N R19W		1/4		S27	S26	1984			
T19N R19W											
1/4											
S27	S26										
1984											

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>N. 0°05' W., bet. secs. 26 and 27.</p> <p>Over rolling land, across washes, through creosote and yucca.</p>
39.04	<p>Point for the witness cor. of secs. 22, 23, 26 and 27, at proportionate dist. There is no remaining evidence of the original cor. position.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 15 ins. in the ground, in a mound of stone, 3 1/2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>W C T19N R19W S22 S23 ----- S27 S26 1984</p> </div>
40.04	<p>True point for the cor. of secs. 22, 23, 26 and 27, at proportionate dist.</p> <p>Point falls in a wash, 60 lks. wide, 5 ft. deep, drains SE, unsuitable for monumentation.</p> <hr style="border: 0.5px solid black; margin: 10px 0;"/> <p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>N. 89°51' W., bet. secs. 23 and 26.</p> <p>Over level land, along a road, through creosote and yucca.</p>
39.93	<p>The 1/4 sec. cor. of secs. 23 and 26, monumented with a lava stone, 18 x 16 x 11 ins., projecting 9 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="text-align: center;">A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an iron post, 27 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, cemented to bedrock over a magnet, in a mound of stone, 2 1/2 ft. base to top, with brass cap mkd.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R19W S23 1/4— S26 1984</p>
	<p>Bury the mkd. stone alongside the iron post.</p>
	<p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 89°59' W., beginning new measurement.</p>
	<p>Over mostly level land, rocky soil, through creosote, yucca and cacti.</p>
20.11	<p>A rebar, 5/8 in. diam., projecting 10 ins. from the ground, bears South, 4.4 lks. dist. This monument is of unknown origin and is not utilized in the course of this resurvey.</p>
40.04	<p>True point for the cor. of secs. 22, 23, 26 and 27.</p> <hr style="width: 60%; margin: 10px auto;"/>
	<p>N. 0°14' W., bet. secs. 22 and 23.</p>
	<p>Over slightly rolling land, rocky terrain, through creosote, yucca and cacti.</p>
40.04	<p>The 1/4 sec. cor. of secs. 22 and 23, monumented with a lava stone, 17 x 15 x 9 ins., projecting 8 ins. from the ground, mkd. 1/4 on W. face.</p>
	<p style="padding-left: 40px;">A mound of stone, 2 1/2 x 1/2 ft. is set W. of cor.</p>
	<p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 14 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R19W 1/4 S22 S23 1984</p>
	<p>Deposit the mkd. stone in the mound of stone.</p>
	<p>Cor. is located 10 lks. W. of a road, 15 lks. wide, bears N. and S., and on the center line of a road, 24 lks. wide, bears E., only.</p> <hr style="width: 20%; margin: 10px auto;"/>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>N. 0°04' W., beginning new measurement.</p> <p>Over mostly level land, rocky soil, along a road, through creosote, yucca and cacti.</p> <p>40.07 The cor. of secs. 14, 15, 22 and 23, monumented with a malpais stone, 14 x 7 x 6 ins., projecting 9 ins. from the ground, mkd. with 2 grooves on the E. face and 3 grooves on the S face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 1/2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T19N</td> <td style="padding: 0 5px;">R19W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S15</td> <td style="padding: 0 5px;">S14</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S22</td> <td style="padding: 0 5px;">S23</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">1984</td> </tr> </table> </div> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 22 lks. N. and 22 lks. W. of the center of a road, 25 lks. wide, bears E. and S.</p> <hr style="border: 0.5px solid black; margin: 10px 0;"/> <p>From the cor. of secs. 13, 14, 23 and 24.</p> <p>N. 89°58' W., bet. secs. 14 and 23.</p> <p>Over slightly rolling terrain, along a road, through creosote, yucca and cacti.</p> <p>40.05 The 1/4 sec. cor. of secs. 14 and 23, monumented with a lava stone, 16 x 10 x 8 ins., projecting 6 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 ft. is set N. of cor.</p>	T19N	R19W	S15	S14	S22	S23	1984	
T19N	R19W								
S15	S14								
S22	S23								
1984									

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	At the cor. point
	Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.
	T19N R19W
	S14
	1/4—
	S23
	1984
	Deposit mkd. stone in mound of stone.
	Set a steel fence post alongside the cor.
	Cor. is located 15 lks. N. of a road, 20 lks. wide, bears E. and W.
	S. 89°59' W., beginning new measurement.
	Over slightly rolling land, through creosote, Mormon tea, and cholla cacti.
40.05	The cor. of secs. 14, 15, 22 and 23
	N. 0°10' W., bet. secs. 14 and 15.
	Over slightly rolling land, along a road, through creosote, Mormon tea, yucca and cholla cacti.
8.45	Center of pavement of Oatman Highway, 30 lks. wide, bears NE and SW.
40.06	The 1/4 sec. cor. of secs. 14 and 15, monumented with a malpais stone, 17 x 8 x 7 ins., projecting 4 ins. from the ground, mkd. 1/4 on W. face, in a scattered mound of stone.
	At the cor. point
	Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base, to top, with aluminum cap mkd.

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R19W 1/4 S15 S14 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°04' W., beginning new measurement.</p> <p>Over steep, rolling hills, through creosote and sparse yucca.</p> <p>40.02 The cor. of secs. 10, 11, 14 and 15, monumented with a malpais stone, 22 x 8 x 8 ins., projecting 9 ins. from the ground, mkd. with 2 grooves on the E. face and 4 grooves on the S. faces.</p> <p style="padding-left: 40px;">A scattered mound of stone is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 17 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S10 S11 ----- S15 S14 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 60%; margin: auto;"/> <p>From the cor. of secs. 11, 12, 13 and 14.</p> <p>N. 89°49' W., bet. secs. 11 and 14.</p> <p>Along the N. side of a road, through creosote and yucca.</p> <p>6.80 Power line, bears NE and SW.</p> <p>28.40 Underground pipeline, bears NE and SW.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
39.99	<p>The 1/4 sec. cor. of secs. 11 and 14, monumented with a malpais stone, 21 x 12 x 9 ins., projecting 10 ins. from the ground, mkd. 1/4 on N. face.</p> <p>A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 17 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S11 1/4— S14 1984</p> <p>From this cor. point, a rebar, 5/8 in. diam., projecting 4 ins. from the ground, bears N. 30°42' E., 88 lks. dist. This monument was set in 1970 by Herb Shipley, LS 5361, as shown on the survey plat of the SW 1/4 of the SW 1/4 of sec. 11, Page 10, Book 1 of Records of Surveys on file in the Mohave County Courthouse, Kingman, AZ.</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 22 lks. N. of a bladed swath, 30 lks. wide, bears E. and W., and 9 lks. W. of a bladed swath, 66 lks. wide, bears N.</p> <p style="text-align: center;">_____</p> <p>N. 89°56' W., beginning new measurement.</p> <p>Ascend slightly along N. side of a road, through creosote and cholla cacti.</p>
40.00	<p>The cor. of secs. 10, 11, 14 and 15.</p> <p>_____</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

<p>CHAINS</p> <p>39.90</p> <p>39.88</p>	<p>N. 0°12' W., bet. secs. 10 and 11.</p> <p>Over steep terrain, with rock outcroppings, through creosote, yucca and cacti.</p> <p>The 1/4 sec. cor. of secs. 10 and 11, monumented with a lava stone, 22 x 13 x 6 ins., projecting 14 ins. from the ground, mkd. 1/4 on W. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 1/2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 10 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T19N R19W 1/4 S10 S11 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°05' W., beginning new measurement.</p> <p>Over mostly level land, rocky soil, through creosote, yucca and cacti.</p> <p>Point for the cor. of secs. 2, 3, 10 and 11, determined at a calculated bearing and dist. from a lot cor.</p> <p style="padding-left: 40px;">An angle iron, 1 in. wide, projecting 10 ins. from the ground, with a washer mkd. LS 5361, bears N. 45°00' W., 1.07 chs. dist. This monument was set in 1970 by Herb Shipley, LS 5361, AZ, as shown on the survey plat of the S 1/2 of the SE 1/4 of sec. 3, Page 11, Book 2 of Records of Surveys on file in the Mohave County Courthouse, Kingman, AZ.</p> <p>This is accepted as the best available evidence of the original cor. position.</p>
---	---

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 2px 5px;">T19N</td> <td style="padding: 2px 5px;">R19W</td> </tr> <tr> <td style="padding: 2px 5px;">S3</td> <td style="padding: 2px 5px;">S2</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black; height: 1px;"></td> </tr> <tr> <td style="padding: 2px 5px;">S10</td> <td style="padding: 2px 5px;">S11</td> </tr> <tr> <td colspan="2" style="padding: 2px 5px;">1984</td> </tr> </table> </div> <p>A lava stone, 21 x 12 x 7 ins., mkd. with 2 grooves on one face and 5 grooves on another face, was found nearby, disturbed and lying loose in road grader spoils.</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 12 lks. S. of a bladed swath , 15 lks. wide, bears E. and W.</p> <hr style="border: 0.5px solid black; margin: 10px 0;"/> <p>From the true point for the cor. of secs. 22, 23, 26 and 27.</p> <p>N. 89°50' W., bet. secs. 22 and 27.</p> <p>Over rolling land, across washes, through creosote and yucca.</p> <p>40.04 The 1/4 sec. cor. of secs. 22 and 27, monumented with a malpais stone, 16 x 14 x 10 ins., projecting 4 ins. from the ground, mkd. 1/4 on N. face, and X on top.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 2 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., on the chiseled X, in a mound of stone, 5 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 2px 5px;">T19N</td> <td style="padding: 2px 5px;">R19W</td> </tr> <tr> <td style="padding: 2px 5px;">S22</td> <td></td> </tr> <tr> <td style="padding: 2px 5px;">1/4</td> <td style="border-top: 1px solid black; height: 1px;"></td> </tr> <tr> <td style="padding: 2px 5px;">S27</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px 5px;">1984</td> </tr> </table> </div>	T19N	R19W	S3	S2			S10	S11	1984		T19N	R19W	S22		1/4		S27		1984	
T19N	R19W																				
S3	S2																				
S10	S11																				
1984																					
T19N	R19W																				
S22																					
1/4																					
S27																					
1984																					

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>From the cor. of secs. 21, 22, 27 and 28, monumented with a malpais stone, 20 x 11 x 6 ins., projecting 8 ins. from the ground, mkd. with 3 grooves on the E. face and 2 grooves on the S. face.</p> <p style="text-align: center;">A mound of stone, 3 x 2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T19N R19W</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> <tr> <td colspan="2"><hr/></td> </tr> <tr> <td>S28</td> <td>S27</td> </tr> <tr> <td colspan="2">1984</td> </tr> </table> </div> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 50 lks. E. of a wash, 15 lks. wide, drains NE.</p> <p>N. 0°07' W., bet. secs. 21 and 22.</p> <p>Over slightly rolling land, rocky soil, through creosote and catclaw.</p>	T19N R19W		S21	S22	<hr/>		S28	S27	1984	
T19N R19W											
S21	S22										
<hr/>											
S28	S27										
1984											
40.03	<p>The 1/4 sec. cor. of secs. 21 and 22, monumented with a malpais stone, 18 x 10 x 7 ins., projecting 10 ins. from the ground, mkd. 1/4 on W. face.</p> <p style="text-align: center;">A mound of stone, 3 x 2 1/2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T19N R19W</td> </tr> <tr> <td colspan="2">1/4</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> <tr> <td colspan="2">1984</td> </tr> </table> </div>	T19N R19W		1/4		S21	S22	1984			
T19N R19W											
1/4											
S21	S22										
1984											

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 30 lks. S. of a wash, 30 lks. wide, drains SE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°07' W., beginning new measurement.</p> <p>Over slightly rolling land, rocky soil, through creosote and catclaw.</p>										
<p>40.02</p>	<p>The cor. of secs. 15, 16, 21 and 22, monumented with a lava stone, 22 x 10 x 8 ins., projecting 10 ins. from the ground, mkd. with 3 grooves on the E. face, 3 grooves on the S. face, and 19 N. on N. face.</p> <p style="padding-left: 40px;">A scattered mound of stone, 3 1/2 ft. base is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <table border="1" style="border-collapse: collapse; margin: 0 auto;"> <tr> <td colspan="2" style="padding: 2px;">T19N R19W</td> </tr> <tr> <td style="padding: 2px;">S16</td> <td style="padding: 2px;">S15</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black; padding: 2px;"></td> </tr> <tr> <td style="padding: 2px;">S21</td> <td style="padding: 2px;">S22</td> </tr> <tr> <td colspan="2" style="padding: 2px;">1984</td> </tr> </table> </div> <p>Deposit the mkd. stone in the mound of stone.</p> <hr style="width: 80%; margin: 10px auto;"/>	T19N R19W		S16	S15			S21	S22	1984	
T19N R19W											
S16	S15										
S21	S22										
1984											
<p>39.99</p>	<p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>N. 89°55' W., bet. secs. 15 and 22.</p> <p>Over slightly rolling land, rocky soil, through yucca, creosote and sparse cacti.</p> <p>The 1/4 sec. cor. of secs. 15 and 22, monumented with a malpais stone, 18 x 13 x 7 ins., projecting 8 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 2 1/2 x 1 ft. is set N. of cor.</p>										

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	At the cor. point
	Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, with aluminum cap mkd.
	<p style="text-align: center;">T19N R19W S15 1/4— S22 1984</p>
	Rebuild the mound of stone 4 ft. base, 1 1/2 ft. high.
	Deposit the mkd. stone in the mound of stone.
	<hr style="width: 20%; margin: auto;"/> <p>N. 89°56' W., beginning new measurement.</p>
	Over mostly level land, rocky soil, through creosote, yucca and sparse cacti.
39.98	The cor. of secs. 15, 16, 21 and 22.
	<hr/> <p>N. 0°05' W., bet. secs. 15 and 16.</p>
	Over rolling land, rocky soil, through creosote, yucca and Mormon tea.
1.00	Center of Oatman Highway, 30 lks. wide, bears NE and SW.
36.40	Power line, bears E. and W.
39.91	The 1/4 sec. cor. of secs. 15 and 16, monumented with a rebar, of unknown origin, 1/2 in. diam., projecting 8 ins. from the ground. This is accepted as a careful and faithful perpetuation of the original cor. position.
	At the cor. point
	Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.
	<p style="text-align: center;">T19N R19W 1/4 S16 S15 1984</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>Deposit the rebar in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located above an underground pipeline, bears SE and NW.</p> <hr/> <p>N. 0°05' W., beginning new measurement.</p> <p>Ascend to mountainous terrain, through creosote, yucca and cacti.</p>										
40.00	<p>The cor. of secs. 9, 10, 15 and 16, monumented with a porphyry stone, 20 x 18 x 16 ins., projecting 6 ins. from the ground, mkd. with 3 grooves on the E. face and 4 grooves on the S face.</p> <p>A mound of stone, 3 x 3 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div data-bbox="846 1035 997 1188" style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T19N R19W</td> </tr> <tr> <td>S9</td> <td>S10</td> </tr> <tr> <td colspan="2"><hr/></td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> <tr> <td colspan="2">1984</td> </tr> </table> </div> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr/> <p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>N. 89°56' W., bet. secs. 10 and 15.</p> <p>Over mountainous land, through cholla cacti.</p>	T19N R19W		S9	S10	<hr/>		S16	S15	1984	
T19N R19W											
S9	S10										
<hr/>											
S16	S15										
1984											
24.05	<p>Point for a witness point at intersection with line 2-3, M.S. 3842 Pilot Knob lode, at a point from which Cor. No. 3 bears S. 44°44' E., 10.230 chs. dist. This point is located in a wash and is impracticable to monument.</p>										
36.87	<p>Point for a witness point at intersection with line 1-4, M.S. 3942 Pilot Knob lode, at a point from which Cor. No. 1 bears N. 44°47' W., 4.033 chs. dist.</p>										

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 16 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">W P T19N R19W S10 — S15 1984</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located on a NE slope.</p>
<p>40.02</p>	<p>The 1/4 sec. cor. of secs. 10 and 15, monumented with a granite stone, 19 x 8 x 6 ins., projecting 11 ins. from the ground, mkd. 1/4 on N. face.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 26 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S10 1/4— S15 1984</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Deposit the stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor., Cor. No. 1, M.S. 3842 South Gold Trail lode, bears N. 71°58' W., 2.27 chs. dist., hereinafter described.</p> <p style="text-align: center;">_____</p> <p>S. 89°50' W., beginning new measurement.</p> <p>Over extremely rugged, mountainous terrain.</p>
<p>39.89</p>	<p>The cor. of secs. 9, 10, 15 and 16.</p> <hr/>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 0°02' W., bet. secs. 9 and 10.
	Ascend over rocky mountainous terrain, through medium creosote and various cacti.
23.25	Ridge, bears NE and SW, descend over E. slope.
25.90	Gulch, 38 lks. wide, drains NE.
31.97	Gulch, 15 lks. wide, drains SE.
39.83	The 1/4 sec. cor. of secs. 9 and 10, monumented with a porphyry stone, 15 x 12 x 10 ins., projecting 4 ins. from the ground, mkd. 1/4 on W. face.
	A mound of stone, 3 1/2 x 2 1/2 ft. is set W. of cor.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to bedrock, in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T19N R19W 1/4 S9 S10 1990</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Deposit the mkd. stone alongside the stainless steel post.
	Set a steel fence post alongside the cor.
	From this cor., Cor. 1, M.S. 3842 Gold Trail lode, bears S. 58°34' E., 9.195 chs. dist., hereinafter described.
	<hr style="width: 20%; margin: auto;"/> N. 0°02' W., beginning new measurement.
	Descend over rocky mountainous terrain, through light creosote and various cacti.
23.26	Gulch, 23 lks. wide, drains East.
32.26	Ridge, bears E. and W.
38.72	Wash, 10 lks. wide, drains NE.

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS									
39.92	<p>The cor. of secs. 3, 4, 9 and 10 monumented with a shale stone, 20 x 10 x 3 ins., projecting 6 ins. from the ground, mkd. with 3 grooves on the E. face and 5 grooves on the S. face.</p> <p>A mound of stone, 3 1/2 x 2 1/2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <table border="1" data-bbox="850 716 997 869"> <tr> <td>T19N</td> <td>R19W</td> </tr> <tr> <td>S4</td> <td>S3</td> </tr> <tr> <td>S9</td> <td>S10</td> </tr> <tr> <td colspan="2">1984</td> </tr> </table> <p>Deposit the mkd. stone in the mound of stone.</p> <p>From this cor. point, two local monuments, a rebar, 24 ins. long, 1/2 in. diam., and an angle iron, 24 ins. long, 1 in. wide, mkd. LS 5361, were laying loose alongside. The angle iron was set in 1970 by Herb Shipley, LS 5361, AZ, as shown on the plat of his survey of the S 1/2 of the SW 1/4 of sec. 3, Page 12, Book 1 of Records of Surveys, on file in the Mohave County Courthouse, Kingman, Arizona.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 1.20 chs. N. of a wash, 10 lks. wide, drains NE.</p>	T19N	R19W	S4	S3	S9	S10	1984	
T19N	R19W								
S4	S3								
S9	S10								
1984									
39.88	<p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>S. 89°57' W., bet. secs. 3 and 10.</p> <p>Over rolling land, along the N. side of a road, through creosote, yucca and catclaw.</p> <p>The 1/4 sec. cor. of secs. 3 and 10, monumented with a lava stone, 15 x 10 x 6 ins., projecting 7 ins. from the ground, mkd. 1/4 on N. face</p> <p>A mound of stone, 3 x 1 ft. is set N. of cor.</p> <p>At the cor. point</p>								

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS

Set an iron post, 27 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, cemented to bedrock, over a magnet, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19N R19W

S 3

1/4—

S10

1984

From this cor. point, a angle iron, 1 in. wide, projecting 10 ins. from the ground, mkd. LS 5361, bears N. 32°23' E., 89 lks. dist. This monument was set in 1970 by Herb Shipley, LS 5361, as a lot cor. offset 50 ft. N. and 30 ft. E of the 1/4 sec. cor., as shown on the survey plat of the S 1/2 of the SE 1/4 of sec. 3, Page 11, Book 1 of Records of Surveys on file in the Mohave County Courthouse, Kingman, Arizona.

From this same cor. point, a angle iron, 1 in. wide, projecting 11 ins. from the ground, mkd. LS 5361, bears N. 31°43' W., 89 1/2 lks. dist. This monument was set in 1970 by Herb Shipley, LS 5361, as a lot cor. offset 50 ft. N. and 30 ft. W. of the 1/4 sec. cor., as shown on the survey plat of the S 1/2 of the SW 1/4 of sec. 3, Page 12, Book 1 of Records of Surveys on file in the Mohave County Courthouse, Kingman, Arizona.

Deposit the mkd. stone in the mound of stone.

Set a steel fence post alongside the cor.

Cor. is located 17 lks. S. and 30 lks. W. of the intersection of bladed swaths, 40 lks. wide, bears N., E. and W.

S. 89°57' W., beginning new measurement.

Ascend to extremely rugged, mountainous terrain, along the N. side of a road, through creosote and yucca.

39.87 The cor. of secs. 3, 4, 9 and 10.

N. 0°35' W., bet. secs. 3 and 4.

Over rugged E. face of Black Mountains, through creosote and yucca.

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
39.94	<p>The 1/4 sec. cor. of secs. 3 and 4, monumented with a porphyry stone, 18 x 12 x 4 ins., projecting 11 ins. from the ground, mkd. 1/4 on W. face.</p> <p>A mound of stone, 3 1/2 x 1 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W 1/4 S4 S3 1984</p> <p>From this cor. point, a section of steel fencepost, projecting 6 ins. from the ground, bears S. 45°36' E., 64 1/2 lks. dist. This monument was set by Herb Shipley, LS 5361, in 1970, as the lot cor. offset 30 ft. E. and 30 ft. S. of the 1/4 sec. cor., as shown on the plat of survey of the W 1/2 of the NW 1/4 of sec. 3, Page 13, Book 1 of Records of Surveys, on file in the Mohave County Courthouse, Kingman, Arizona.</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 15 lks. N. and 15 lks. W. of the intersection of the center of roads, 20 lks. wide, bears E. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°03' W., beginning new measurement.</p> <p>Over steep, mountainous terrain, through creosote, yucca and catclaw.</p>
6.40	<p>Saddle on ridge, bears SE and NW.</p> <p>Descend abruptly to mostly level, rolling terrain.</p>
41.54	<p>The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>S. 89°55' W., bet. secs. 21 and 28.</p> <p>Over mountainous terrain, rocky soil, through creosote, catclaw and yucca.</p>
40.56	<p>The 1/4 sec. cor. of secs. 21 and 28, monumented with a malpais stone, 22 x 12 x 9 ins., projecting 19 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 3 ins. in the ground, in a mound of stone, 4 1/2 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T19N R19W S21 1/4— S28 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located on the top of a spur, slopes NE.</p> <hr style="width: 20%; margin: 0 auto;"/>
40.06	<p>S. 89°53' W., beginning new measurement.</p> <p>Over rough, mountainous terrain, through catclaw, yucca and sparse creosote.</p> <p>The cor. of secs. 20, 21, 28 and 29, monumented with a malpais stone, 19 x 10 x 6 ins., projecting 12 ins. from the ground, mkd. with 4 grooves on the E. face and 2 grooves on the S. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 1/2 x 1 1/2 ft. is set N. of cor.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 20 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2">T19N R19W</td> </tr> <tr> <td style="border-right: 1px solid black;">S20</td> <td>S21</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td style="border-right: 1px solid black;">S29</td> <td>S28</td> </tr> <tr> <td colspan="2" style="text-align: center;">1984</td> </tr> </table> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor. point, Walker Springs, bears S. 59°48' W., 35.90 chs. dist., course NE.</p> <p>From this same cor. point, Cool Spring bears N. 43°06' W., 33.90 chs. dist., course NE.</p> <hr/> <p>N. 0°02' E., bet. secs. 20 and 21.</p> <p>Over steep, mountainous terrain, with rock outcroppings, through creosote, yucca and cacti.</p> <p>40.02 The 1/4 sec. cor. of secs. 20 and 21, monumented with a malpais boulder, 4 x 3 x 2 ft., mkd. 1/4 on W. face, and an X on top.</p> <p style="padding-left: 40px;">A scattered mound of stone is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in concrete, into a drill hole on the boulder surface, with top mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2">T19N R19W</td> </tr> <tr> <td colspan="2" style="text-align: center;">1/4</td> </tr> <tr> <td style="border-right: 1px solid black;">S20</td> <td>S21</td> </tr> <tr> <td colspan="2" style="text-align: center;">1984</td> </tr> </table> <p>Raise a mound of stone, 3 1/2 ft. base, 2 ft. high, W. of cor.</p> <p>Set a steel fence post alongside the cor.</p> <hr/>	T19N R19W		S20	S21			S29	S28	1984		T19N R19W		1/4		S20	S21	1984	
T19N R19W																			
S20	S21																		
S29	S28																		
1984																			
T19N R19W																			
1/4																			
S20	S21																		
1984																			

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>N. 0°10' W., beginning new measurement.</p> <p>Ascend in steep mountainous terrain, through creosote and palo verde.</p>								
40.00	<p>The cor. of secs. 16, 17, 20 and 21, monumented with a malpais stone, 20 x 16 x 8 ins., mkd. with 4 grooves on the E. face and 3 grooves on the S. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 1/2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 18 ins. long, 1 in. diam., in concrete, 3 ins. into a drill hole in bedrock, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 5px;">T19N</td> <td style="padding: 0 5px;">R19W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S17</td> <td style="padding: 0 5px;">S16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S20</td> <td style="padding: 0 5px;">S21</td> </tr> <tr> <td colspan="2" style="padding: 0 5px;">1984</td> </tr> </table> </div> <p>Deposit the mkd. stone in the mound of stone.</p> <p>From this same cor. point, a malpais stone, 23 x 13 x 6 ins., set on the ground, bears S. 89° E., 25.0 lks. dist., mkd. with 3 grooves on the N. face, 3 grooves on the E. face and 4 grooves on the W. face, with a mound of stone, 3 x 1 1/2 ft. set W. of cor. This monument is of unknown origin and is not utilized in this survey.</p> <hr style="border: 0.5px solid black;"/> <p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>S. 89°53' W., bet. secs. 9 and 16.</p> <p>Over rugged, mountainous terrain, through yucca, Mormon tea and cacti.</p>	T19N	R19W	S17	S16	S20	S21	1984	
T19N	R19W								
S17	S16								
S20	S21								
1984									
40.42	<p>The 1/4 sec. cor. of secs. 9 and 16, monumented with a lava stone, 17 x 10 x 10 ins., projecting 12 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p>								

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T19N R19W S 9 1/4— S16 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°58' W., beginning new measurement.</p> <p>Over rugged, mountainous terrain, through yucca and cacti.</p> <p>39.10 Ridge, bears N. and S.</p> <p>39.95 The cor. of secs. 8, 9, 16 and 17, monumented with a lava stone, 24 x 13 x 7 ins., projecting 10 ins. from the ground, mkd. with 4 grooves on the E. face and 4 grooves on the S. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 1 1/2 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 17 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S8 S9 — — S17 S16 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <hr/>
--------	--

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>N. 0°04' E., bet. secs. 8 and 9.</p> <p>Over rolling hills, through creosote, yucca and cacti.</p> <p>39.88 The 1/4 sec. cor. of secs. 8 and 9, monumented with a malpais stone, 23 x 14 x 10 ins., projecting 18 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 4 x 3 1/2 ft. is set W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 13 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W 1/4 S8 S9 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Cor. is located 1 ch. W. of a wash, 15 lks. wide, drains SE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°04' W., beginning new measurement.</p> <p>Ascend rugged, mountainous terrain, through juniper, yucca and sparse creosote.</p> <p>39.82 The cor. of secs. 4, 5, 8 and 9, monumented with a granite stone, 14 x 13 x 11 ins., resting on exposed bedrock, mkd. with 4 grooves on E. face and 5 grooves on S. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 1/2 x 1 1/2 ft. is set to W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 4 ins. in bedrock, in a mound of stone, 4 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S5 S4 <hr style="width: 20%; margin: 0 auto;"/>S8 S9 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p>
--------	---

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the cor. of secs. 16, 17, 20 and 21.</p> <p>S. 89°53' W., bet. secs. 17 and 20.</p> <p>Over steep, mountainous terrain, through catclaw, creosote and cacti.</p> <p>39.87 The 1/4 sec. cor. of secs. 17 and 20, monumented with a malpais boulder, 4 x 3 x 3 ft., mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 2 x 1 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in concrete, into a drill hole in the mkd. boulder, with top mkd.</p> <div style="text-align: center; padding-left: 100px;"> <p>T19N R19W S17 1/4— S20 1984</p> </div> <p>from which</p> <p style="padding-left: 40px;">A rock outcropping, 15 x 6 x 4 ft., bears S. 29° W., 25 1/2 lks. dist., mkd. X BO.</p> <p>Rebuild the mound of stone, 4 ft. base, 2 1/2 ft. high.</p> <hr style="width: 20%; margin: 0 auto;"/> <p>S. 89°54' W., beginning new measurement.</p> <p>Over steep, mountainous terrain, through yucca, creosote and cacti.</p>
39.85	<p>The cor. of secs. 17, 18, 19 and 20, monumented with a malpais boulder, 3 x 3 x 1 ft. high, mkd. with 5 grooves on the E. face and 2 grooves on the S face, with an X on top.</p> <p>At the cor. point</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS							
	<p>Set an aluminum tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in concrete, into a drill hole in the mkd. boulder, with top mkd.</p>						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">T19N R19W</td> <td style="padding: 2px;">S18</td> <td style="padding: 2px;">S17</td> </tr> <tr> <td style="padding: 2px;">S19</td> <td style="padding: 2px;">S20</td> <td style="padding: 2px;">1984</td> </tr> </table>	T19N R19W	S18	S17	S19	S20	1984
T19N R19W	S18	S17					
S19	S20	1984					
	<p>from which</p> <p style="margin-left: 40px;">A malpais boulder, 4 x 3 x 1 ft., bears S. 79° E., 21 1/2 lks. dist., mkd. X BO.</p>						
	<p>Set a steel fence post alongside the cor.</p> <hr/>						
	<p>N. 89°33' W., bet. secs. 18 and 19.</p>						
	<p>Over steep mountainous terrain, through medium undergrowth.</p>						
<p>39.97</p>	<p>True point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the original cor. Point unsuitable for monumentation.</p>						
	<p>From this cor. point, an aluminum post, 28 ins. long, 1 in. diam., set 21 ins. in the ground, for the witness cor. to the 1/4 sec. cor. of secs. 18 and 19, bears North, 9 lks. dist. with aluminum cap mkd.</p>						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">W C</td> </tr> <tr> <td style="padding: 2px;">T19N R19W</td> </tr> <tr> <td style="padding: 2px;">S18</td> </tr> <tr> <td style="padding: 2px;">1/4—</td> </tr> <tr> <td style="padding: 2px;">S19 ↓</td> </tr> <tr> <td style="padding: 2px;">1984</td> </tr> </table>	W C	T19N R19W	S18	1/4—	S19 ↓	1984
W C							
T19N R19W							
S18							
1/4—							
S19 ↓							
1984							
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>						
	<p>Set a steel fence post alongside the cor.</p>						
	<p>Cor. is located 6 lks. N. of a cliff, 30 ft. high, bears E. and W.</p>						
<p>78.64</p>	<p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/>						

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	From the cor. of secs. 17, 18, 19 and 20.
	N. 0°03' E., bet. secs. 17 and 18.
	Over steep, mountainous terrain, rocky soil, through catclaw, yucca and cacti.
39.97	The 1/4 sec. cor. of secs. 17 and 18, monumented with a malpais stone, 21 x 15 x 14 ins., projecting 10 ins. from the ground, mkd. 1/4 on W. face.
	A mound of stone, 3 x 1 1/2 ft. is set W. of cor.
	At the cor. point
	Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T19N R19W 1/4 S18 S17 1984</p>
	Deposit the mkd. stone in the mound of stone.
	N. 0°07' W., beginning new measurement.
	Over mountainous terrain, through creosote and yucca.
20.13	Center of pavement of Oatman Highway, 30 lks. wide, bears NE and SW.
20.19	Point for a witness point at the intersection with line 3-4, M.S. 1699B Line Road Mill Site.
	Set a copper rod, 24 ins. long, 3/4 in. diam., 30 ins. in the ground, with a brass cap, 1 in. diam., mkd.
	<p style="text-align: center;">W P S18 S17 1984</p>
	From this cor. point, Cor. No. 4 M.S. 1699B Line Road Mill Site, bears S. 73°14' W., 0.850 chs. dist., hereinafter described.

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
24.98	<p>Point for a witness point at the intersection with line 1-2, M.S. 1699B Line Road Mill Site.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 2 1/2 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">W P T19N R19W S18 S17 1984</p> <p>From this cor. point, Cor. No. 1 M.S. 1699B Line Road Mill Site, bears S. 74°06' W., 1.170 chs. dist., hereinafter described.</p>
25.40	Center of track road, bears NE and NW.
26.05	Power line, bears NW.
40.49	<p>The cor. of secs. 7, 8, 17 and 18, monumented with a porphyry stone, 20 x 15 x 7 ins., lying on its side, in a scattered mound of stone, mkd. with 5 grooves on the E. face and 4 grooves on the S face.</p> <p>At the cor. point</p> <p>Set and cemented an aluminum post, 26 ins. long, 1 in. diam., 17 ins. in the ground, in a drill hole, 2 ins. deep, and in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <p style="text-align: center;">T19N R19W S7 S8 ----- S18 S17 1984</p> <p>Deposit the mkd. stone in the mound of stone.</p> <p>Cor. is located at the base of an eroding sandstone cliff, faces SW.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	From the cor. of secs. 8, 9, 16 and 17.
	N. 89°43' W., bet. secs. 8 and 17.
	Over rolling hillsides, through creosote, yucca and patches of cholla cacti.
31.42	The witness cor. to the 1/4 sec. cor. of secs. 8 and 17, monumented with a malpais stone, 21 x 18 x 5 ins., resting on exposed sandstone formation, in a mound of stone, 3 x 1 ft., mkd. WC 1/4 on the N. face.
	At the cor. point
	Set an aluminum tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, in concrete, into a drill hole, with top mkd.
	<p style="text-align: center;">W C T19N R19W S 8 1/4 ← S17 1984</p>
	Rebuild mound of stone, 3 1/2 ft. base, 2 ft. high, N. of cor.
	Deposit the mkd. stone in the mound of stone.
	Cor. is located on a bench in a sandstone cliff formation, faces SE.
	<hr style="width: 30%; margin: 0 auto;"/> <p>N. 89°44' W., beginning new measurement.</p>
	Over rolling land, through creosote, yucca, cholla and sparse juniper.
8.49	True point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate dist. Point falls in a wash and is not monumented.
18.20	Top of rock ridge, bears N. and S.
28.20	Top of rock ridge, bears NE and SW.
48.30	Base of sandstone cliff, faces SW.
48.41	The cor. of secs. 7, 8, 17 and 18.

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 89°56' W., bet. secs. 7 and 18.</p>
	<p>Over rolling land in valley floor.</p>
19.98	<p>Point for the E 1/16 sec. cor. of secs. 7 and 18.</p>
	<p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 15 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R19W</p>
	<p style="text-align: center;">S 7</p>
	<p style="text-align: center;">E 1/16—</p>
	<p style="text-align: center;">S18</p>
	<p style="text-align: center;">1984</p>
	<p>Set a steel fence post alongside the cor.</p>
39.96	<p>The 1/4 sec. cor. of secs. 7 and 18, monumented with a malpais stone, 15 x 14 x 9 ins., projecting 7 ins. from the ground, mkd. 1/4 on N. face.</p>
	<p style="text-align: center;">A mound of stone, 3 1/2 x 1 1/2 ft. is set N. of cor.</p>
	<p>At the cor. point</p>
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 23 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">T19N R19W</p>
	<p style="text-align: center;">S 7</p>
	<p style="text-align: center;">1/4 —</p>
	<p style="text-align: center;">S18</p>
	<p style="text-align: center;">1984</p>
	<p>from which</p>
	<p style="text-align: center;">A power pole, bears S. 14° E., 22 1/2 lks. dist., lines extend SE and NW.</p>
	<p>Bury original stone alongside the cor.</p>
	<p>S. 88°00' W., beginning new measurement.</p>
	<p>Over rough terrain, through sparse juniper, yucca and cacti.</p>
38.23	<p>The cor. of secs. 7, 12, 13 and 18 on the W. bdy. of the Tp., hereinbefore described.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	From the cor. of secs. 7, 8, 17 and 18.
	N. 0°13' E., bet. secs. 7 and 8.
	Over rugged rock formations.
0.20	Base of sandstone cliff, faces SW.
7.70	Descend into Hidden Valley.
16.77	From this point, a rebar, 5/8 in. diam., projecting 12 ins. from the ground, bears S. 89°58' E., 5 1/2 lks. dist. This monument is of unknown origin and was set as a cor. of the parcel of land described in Book 127 of Deeds, pgs. 258-259, on file in the Mohave County Courthouse, Kingman, Arizona.
19.97	Point for the S 1/16 sec. cor. of secs. 7 and 8. Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T19N R19W S 1/16 S7 S8 1984</p>
	Set a steel fence post alongside the cor.
	Cor. is located 4 lks. W. of a fence line, bears N. and S.
	From this cor. point, the top of a steel rod, 1 in. diam., projecting 24 ins. from the ground, bears S. 21° E., 10 lks. dist.
21.77	Point for AP 1, sec. 7, at intersection with the line of a private survey. Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.
	<p style="text-align: center;">T19N R19W AP1 S7 S8 1984</p>

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Set a steel fence post alongside the cor.
	From this cor. point a rebar, 5/8 in. diam., projecting 12 ins. from the ground, bears N. 89°57' W., 3.2 lks. dist., in a fence line bears N. and S. This monument is of unknown origin and was set as a cor. of the parcel of land described in Book 127 of Deeds, pgs. 258-259, on file in the Mohave County Courthouse, Kingman, Arizona.
37.20	Rock ridge, bears E. and W. Leave Hidden Valley. Begin over extremely rugged, mountainous terrain.
39.94	The 1/4 sec. cor. of secs. 7 and 8, monumented with a malpais stone, 20 x 13 x 7 ins., projecting 12 ins. from the ground, mkd. 1/4 on W. face.
	A mound of stone, 3 x 1 ft. is set W. of cor.
	At the cor. point
	Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T19N R19W 1/4 S7 S8 1984</p>
	Deposit the mkd. stone in the mound of stone.
	<hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">North, beginning new measurement.</p>
	Over extremely rugged, mountainous terrain.
39.44	Point for the cor. of secs. 5, 6, 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, in a mound of stone, 4 1/2 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R19W</td></tr> <tr><td>S6</td><td>S5</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S7</td><td>S8</td></tr> <tr><td colspan="2">1984</td></tr> </table> </div> <p>Set a steel fence post alongside the cor.</p>	T19N	R19W	S6	S5	<hr/>		S7	S8	1984	
T19N	R19W										
S6	S5										
<hr/>											
S7	S8										
1984											
<p>39.89</p>	<p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>S. 89°56' W., bet. secs. 5 and 8.</p> <p>Over rough, mountainous, terrain, through creosote, yucca, juniper and cacti.</p> <p>The 1/4 sec. cor. of secs. 5 and 8, monumented with a granite stone, 23 x 16 x 4 ins., projecting 20 ins. from the ground, mkd. 1/4 on N. face.</p> <p style="padding-left: 40px;">A mound of stone, 3 1/2 x 2 1/2 ft. is set N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 21 ins. long, 1 in. diam., 13 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R19W</td></tr> <tr><td>S 5</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 8</td><td></td></tr> <tr><td colspan="2">1984</td></tr> </table> </div> <p>Rebuild the mound of stone, 4 ft. base, 3 ft. high, N. of cor., with the mkd. stone at the base.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°50' W., beginning new measurement.</p> <p>Over extremely rugged, mountainous rock formations, through creosote, yucca, Mormon tea and cacti.</p>	T19N	R19W	S 5		1/4	—	S 8		1984	
T19N	R19W										
S 5											
1/4	—										
S 8											
1984											
<p>39.76</p>	<p>The cor. of secs. 5, 6, 7 and 8.</p>										

Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 89°44' W., bet. secs. 6 and 7.</p>
	<p>Ascend into extremely rugged, mountainous rock formations.</p>
10.80	<p>Top of rock formations. Begin steep, mountainous terrain, through creosote, yucca and cacti.</p>
39.76	<p>The 1/4 sec. cor. of secs. 6 and 7, monumented with a malpais stone, 14 x 12 x 9 ins., projecting 10 ins. from the ground, mkd. 1/4 on N. face.</p>
	<p>A mound of stone, 4 x 1 ft. is set N. of cor.</p>
	<p>At the cor. point</p>
	<p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 8 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R19W</p>
	<p style="text-align: center;">S 6</p>
	<p style="text-align: center;">1/4 —</p>
	<p style="text-align: center;">S 7</p>
	<p style="text-align: center;">1984</p>
	<p>Deposit the mkd. stone in the mound of stone.</p>
	<hr/> <p>N. 89°46' W., beginning new measurement.</p>
	<p>Over rough, mountainous terrain, through sparse creosote, yucca and cacti.</p>
38.76	<p>The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described.</p>
	<hr/> <p>From the cor. of secs. 5, 6, 7 and 8.</p>
	<p>N. 0°04' W., bet. secs. 5 and 6.</p>
	<p>Over extremely rugged mountainous terrain.</p>
40.38	<p>True point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate dist. Point falls in a long steep rock slide unsuitable for monumentation.</p>

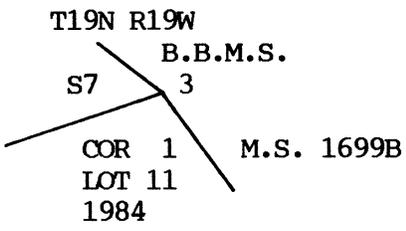
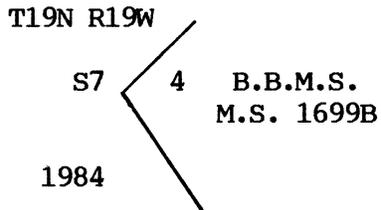
Dependent Resurvey, Portion of the Subdivisional Lines,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
50.91	<p>The witness cor. to the 1/4 sec. cor. of secs. 5 and 6, monumented with a malpais boulder, 7 x 6 x 4 ft. high, on a rock outcropping, mkd. WC 1/4 on the W. face and X on top.</p> <p style="padding-left: 40px;">A mound of stone, 3 x 2 ft. is set NE of cor.</p> <p>Not remonumented</p> <p>from which</p> <p style="padding-left: 40px;">An aluminum post, 28 ins. long, 1 in. diam., set 20 ins. in the ground, for a reference monument, bears East, 5.56 ft. dist., mkd. T19N R19W 1/4 S5 RM 5.56 FT. 1984, and an arrow pointing to the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°03' W., beginning new measurement.</p> <p>Ascend over extremely rugged, mountainous terrain.</p>
29.84	<p>The cor. of secs. 5, 6, 31 and 32 on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p style="text-align: center;">Resurvey of Certain Mineral Surveys, T. 19 N., R. 19 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">M.S. No. 1699B, Billy Bryan Mill Site</p> <hr/> <p style="text-align: center;">Restoring the survey executed by H.K. Wheeler in 1902</p> <hr/> <p>From cor. 1, M.S. 1699B Bill Bryan Mill Site, determined at the center of a mound of stone, 3 ft. base, 1 1/2 ft. high. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set and cemented an aluminum post, 22 ins. long, 1 in. diam., 3 ins. into a drill hole in exposed rock surface, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> <p>T19N R19W</p> <p>M.S. 1699B /</p> <p>B.B.M.S. / S7</p> <p> 1</p> <hr style="width: 20%; margin: 0 auto;"/> <p>1984</p> </div>

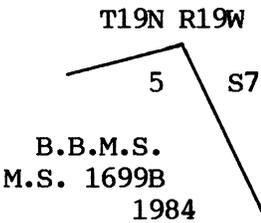
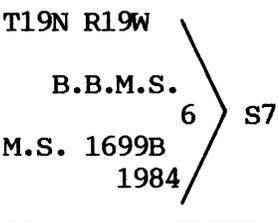
Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 40 lks. W. of a wash, 6 lks. wide, drains SW.</p> <p>S. 87°32' W., on line 1-2.</p> <p>Over slightly rolling land, through creosote and yucca.</p>
2.097	<p>Witness point at intersection with the N. and S. center line of the SE 1/4 of sec. 7, hereinafter described.</p>
3.038	<p>Cor. 2, determined at the center of a mound of stone, 3 x 1 ft. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div data-bbox="828 966 1096 1165" style="text-align: center;"> <p>T19N R19W M.S. 1699B S7 B.B.M.S. 2 1984</p> </div>
	<p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 35 lks. E. of the center of a road, 25 lks. wide, bears SE and NW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 16°02' W., on line 2-3.</p> <p>Over rolling land, through creosote and yucca.</p>
5.77	<p>Point for cor. 4, lot 11, sec. 7.</p> <p>Set an aluminum post, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="812 1669 1161 1858" style="text-align: center;"> <p>T19N R19W COR4 B.B.M.S. LOT 11 S7 M.S. 1699B 1984</p> </div>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located in an electric fence, bears NE and SW.</p>
	<p>Enter canyon with steep sandstone walls.</p>
10.812	<p>Point for cor. 3, identical with cor. 1, lot 11, sec. 7 at proportionate dist., there is no remaining evidence of the original cor. position.</p>
	<p>Set an aluminum post, 20 ins. long, 1 in. diam., 2 ins. into a drill hole in exposed sandstone formation, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p>
	
	<p>N. 24°47' W., on line 3-4.</p>
	<p>Along a wash, through a canyon with steep sandstone walls.</p>
3.342	<p>Point for a witness point, at intersection with the E. and W. center line of the SE 1/4 of sec. 7, hereinafter described.</p>
14.981	<p>Cor. 4, determined at the center of a scattered mound of stone. This is accepted as the best available evidence of the original cor. position.</p>
	<p>At the cor. point</p>
	<p>Set and cemented an aluminum post, 16 ins. long, 1 in. diam., 4 ins. into a drill hole in exposed sandstone formation, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p>
	
	<p>Cor. is located on an overhang, 7 lks. N. of edge.</p>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 60°01' E., on line 4-5.</p>
	<p>Over rolling land, through creosote and yucca.</p>
1.525	<p>Cor. 5, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 3 ft. base, 1 1/2 ft. high, no marks visible.</p>
	<p>At the cor. point</p>
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p>
	 <p style="text-align: center;">T19N R19W</p> <p style="text-align: center;">5 S7</p> <p style="text-align: center;">B.B.M.S. M.S. 1699B 1984</p>
	<p>Deposit the wood post in the mound of stone.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 24°38' E., on line 5-6.</p>
	<p>Descend to canyon with steep walls.</p>
12.449	<p>Point for a witness point, at intersection with the E. and W. center line of the SE 1/4 of sec. 7, hereinafter described.</p>
15.297	<p>Cor. 6, determined by the center of a mound of stone, 3 ft. base, 1 ft. high. This is accepted as the best available evidence of the original cor. position.</p>
	<p>At the cor. point</p>
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 16 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p>
	 <p style="text-align: center;">T19N R19W</p> <p style="text-align: center;">B.B.M.S. 6 S7 M.S. 1699B 1984</p>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>S. 23°16' E., on line 6-1.</p> <p>Along cliff face of canyon wall.</p> <p>5.00 Electric fence, bears NE and SW. Leave canyon and sandstone formations. Enter rolling land, through creosote, yucca and cacti.</p> <p>6.415 Witness point , at intersection with the N. and S. center line of the SE 1/4, sec. 7, hereinafter described.</p> <p>11.668 Cor. 1, and place of beginning.</p> <hr/> <p style="text-align: center;">M. S. No. 1699B, Gold Road Mill Site</p> <hr/> <p style="text-align: center;">Restoring the survey executed by H.K. Wheeler in 1902</p> <hr/> <p>From cor. 1, M.S. 1699B Gold Road Mill Site, monumented with a wood post, 44 x 4 x 4 ins., mkd GRMS COR 1, projecting 20 ins. from a mound of stone, 3 x 1 ft.</p> <p>At the cor. point</p> <p>Set and cemented an aluminum post, 28 ins. long, 1 in. diam., 5 ins. in a drill hole in a rock outcropping, in a mound of stone, 3 ft. base to top, with cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>From this cor. point, USLM 1699B, bears N. 40°12' E., 17 1/2 lks. dist., monumented with an X chiseled on the highest point of rock outcropping and mkd. USLM 1699B on the N. face. (Record: N. 39°27' E.)</p>
--------	--

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this same cor. point, a brass disc, 3 1/2 ins. diam., set flush in a rock outcropping, bears S. 18°51' W., 44.0 lks. dist., mkd. USGS 23 E AM 1965.</p> <p>N. 8°00' E., on line 1-2.</p> <p>Over rolling land, partially developed.</p>
0.851	<p>Point for cor. 2, lot 8, sec. 18, occupied by a rebar, 5/8 in. diam., firmly set, flush with the ground.</p> <p>At the cor. point</p> <p>Set an an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div data-bbox="747 829 1047 1039" style="text-align: center;"> </div> <p>Deposit the rebar alongside the cor.</p>
2.234	<p>Point for cor. 1, lot 8, sec. 18, occupied by a rebar, 5/8 in. diam., firmly set flush with the ground.</p> <p>At the cor. point</p> <p>Set an an aluminum post, 28 ins. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div data-bbox="730 1407 1047 1606" style="text-align: center;"> </div> <p>Deposit the rebar alongside the cor.</p> <p>Set a steel fence post alongside the cor.</p>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
2.35	Intersect the SW side of a pump house, at a point from which the western-most cor. bears N. 39° W., 12 lks. dist.
2.52	Intersect the NW side of the pump house, at a point from which the western-most cor. bears S. 51° W., 12 lks. dist.
2.83	A well head, bears N. 82° W., 14 lks. dist.
5.674	<p>Point for cor. 2, at proportionate dist.; there is no remaining evidence of the original cor. position.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div data-bbox="812 772 1096 966" style="text-align: center;"> <p>T19N R19W</p> <p>S18 2 G.R.M.S. M.S. 1699B 1984</p> </div> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 30 lks. N. of a track road, bears SE and NW.</p> <hr style="width: 20%; margin: 0 auto;"/> <p>N. 80°22' E., on line 2-3.</p> <p>Over rolling land, through creosote.</p>
0.90	Wash, 35 lks. wide, drains S.
1.627	<p>Point for cor. 3, at proportionate dist. The original monument, a wood post, 44 x 4 x 4 ins., was found laying nearby, with a tag attached and mkd. GRMS COR 3.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 2 1/2 ft. base to top, with aluminum cap mkd.</p> <div data-bbox="730 1600 1031 1793" style="text-align: center;"> <p>T19N R19W</p> <p>3 S18 G.R.M.S. M.S. 1699B 1984</p> </div> <hr style="width: 20%; margin: 0 auto;"/>

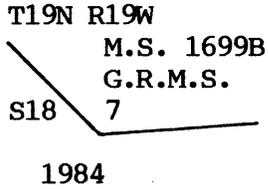
Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>S. 4°47' W., on line 3-4.</p> <p>Over rolling land, along a wash, through sparse vegetation.</p> <p>3.358 Point for cor. 4, at proportionate dist.; there is no remaining evidence of the original cor. position.</p> <p>Set and cemented an aluminum tablet, 3 1/4 ins. diam., 3 1/2 ins. stem, 3 1/2 ins. into a drill hole in rock outcropping, 25 x 8 x 6 ft. high, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Cor. is located 35 lks. E. of a wash, 25 lks. wide, drains SE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 67°22' E., on line 4-5.</p> <p>Over rolling land, through sparse vegetation.</p> <p>5.136 Cor. 5, identical with cor. 1, M.S. 1699B Line Road Mill Site, monumented with a wood post, 44 x 4 x 4 ins., projecting 20 ins. from rubble, with a tag attached and mkd. LRMS 1 on E. and GRMS 5 on the W. faces.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 6 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div>
--------	---

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS										
	<p>Deposit the wood post in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 70 lks. S. of a track road, bears NE and NW.</p> <hr/> <p>S. 3°53' E., on line 5-6, identical with line 1-4, M.S. 1699B Line Road Mill Site.</p> <p>Over a canyon floor, through cottonwood and willow.</p>									
4.726	<p>Cor. 6, identical with cor. 4, M.S. 1699B Line Road Mill Site, monumented with a wood post, 40 x 4 x 4 ins., projecting 30 ins. from a mound of stone, 3 x 1 ft., with a tag attached and mkd. LRMS COR 4 on the E. face, and GRMS COR 6 on the W. face.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div data-bbox="730 1029 1112 1291" style="text-align: center;"> <p>T19N R19W</p> <table border="0"> <tr> <td>M.S. 1699B</td> <td> </td> <td>M.S. 1699B</td> </tr> <tr> <td>G.R.M.S.</td> <td> </td> <td>L.R.M.S.</td> </tr> <tr> <td>6</td> <td> </td> <td>4</td> </tr> </table> <p>S18</p> <p>1984</p> </div>	M.S. 1699B		M.S. 1699B	G.R.M.S.		L.R.M.S.	6		4
M.S. 1699B		M.S. 1699B								
G.R.M.S.		L.R.M.S.								
6		4								
3.913	<p>Deposit the wood post in the mound of stone.</p> <p>Cor. is located 30 lks N. of the Oatman Highway, 30 lks. wide, bears NE and SW.</p> <hr/> <p>S 86°47' W, on line 6-7.</p> <p>Over rough terrain, along the N. edge of the Oatman Highway.</p> <p>Cor. 7, monumented with a wood post, 40 x 4 x 4 ins., projecting 24 ins. from a mound of stone, 3 1/2 ft. x 2 ft., no marks visible.</p>									

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center;">  <p>T19N R19W M.S. 1699B G.R.M.S. S18 7 1984</p> </div> <p>Deposit the wood post in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 36°49' W., on line 7-1.</p> <p>Over rough terrain, along the Oatman Road.</p> <p>5.453 Cor. 1, place of beginning.</p>
	<hr/> <p style="text-align: center;">M.S. No. 1699B, Line Road Mill Site</p> <hr/> <p style="text-align: center;">Restoring the survey executed by H.K. Wheeler in 1902</p> <hr/> <p>From cor. 1, M.S. 1699B Line Road Mill Site, identical with cor. 5, M.S. 1699B Gold Road Mill Site, hereinbefore described.</p> <p>N. 74°06' E., on line 1-2.</p> <p>Over rolling land, through creosote, cholla and catclaw.</p>
<p>1.17</p>	<p>The witness point at intersection with the line bet. secs. 17 and 18, hereinbefore described.</p>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>From this cor. point, the cor. of secs. 7, 8, 17 and 18 bears N. 0°07' W., 15.51 chs. dist., hereinbefore described.</p>
10.826	<p>Cor. 2, monumented with a wood post, 44 x 4 x 4 ins. projecting 24 ins. from a mound of stone, 3 x 1 ft., with a tag attached and mkd. LRMS COR 2 NE.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T19N R19W 2 LRMS MS 1699B 1984 S17</p> </div> <p>Deposit the wood post in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 4°39' E., on line 2-3.</p> <p>Across a canyon floor, through cottonwood and willow.</p>
4.543	<p>Cor. 3, determined at the center of a mound of stone, 4 x 1 1/2 ft. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T19N R19W LRMS M.S. 1699B 1984 3 S17</p> </div> <hr style="width: 20%; margin: 10px auto;"/>

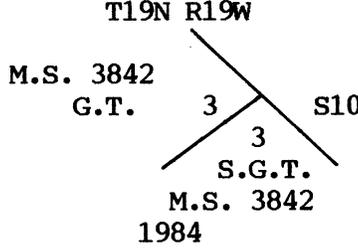
Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>S. 73°14' W., on line 3-4.</p> <p>Along the road fill of the Oatman Highway.</p> <p>10.075 The witness point at intersection with the line bet. secs. 17 and 18, hereinbefore described.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 17 and 18 bears S. 0°07' E., 20.19 chs. dist., hereinbefore described.</p> <p>10.925 Cor. 4, identical with cor. 6, M.S. 1699B Gold Road Mill Site, hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 3°53' W., on line 4-1, identical with line 6-5, M.S. 1699B Gold Road Mill Site.</p> <p>Across a canyon floor, through cottonwood and willow.</p> <p>4.726 Cor. 1, identical with cor. 5, M.S. 1699B Gold Road Mill Site, and the place of beginning.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">M.S. No. 3842, Gold Trail Lode</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">Restoring the survey executed by L.H. Foster in 1922</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From cor. 1, M.S. 3842 Gold Trail Lode, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 4 x 2 ft., no marks visible.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with aluminum cap mkd.</p>
--------	---

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
<p>4.535</p>	<div data-bbox="828 294 1104 493" data-label="Diagram"> <p>T19N R19W S10 M.S. 3842 1 G.T. 1984</p> </div> <p>Deposit the wood post in the mound of stone.</p> <p>N. 48°45' E., on line 1-2.</p> <p>Over mountainous terrain, through creosote and yucca.</p> <p>The NW End Center, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 4 x 1 ft., no marks visible.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, 4 ft. base to top, with aluminum cap mkd.</p>
<p>4.564</p>	<div data-bbox="795 1029 1153 1197" data-label="Diagram"> <p>T19N R19W S10 M.S. 3842 NW END C GT 1984</p> </div> <p>Deposit the wood post in the mound of stone.</p> <hr/> <p>N. 48°52' E., beginning new measurement.</p> <p>Over mountainous terrain, through creosote and yucca.</p> <p>Cor. 2, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 3 x 1 ft., no marks visible, from which accessory of record</p> <p style="padding-left: 40px;">A diorite stone, 8 x 6 x 8 ft. diam., bears N. 44 1/2° W., 51 lks. dist., mkd. + BR GT-2 3842. (Record: N. 45°47' W.)</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R19W</p>  <p>Deposit the wood post in the mound of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 41°06' E., on line 2-3.</p> <p>Over rugged, mountainous terrain, through creosote.</p>
22.732	<p>Cor. 3, identical with cor. 3, M.S. 3842 South Gold Trail lode, monumented with a wood post, 48 x 4 x 4 ins., projecting 28 ins. from a mound of stone, 4 1/2 x 2 ft., with faint scribing.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 4 ins. in the ground, in a mound of stone, 4 1/2 ft. base to top, with aluminum cap mkd.</p>
4.531	<p style="text-align: center;">T19N R19W</p>  <p>Deposit the wood post in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 6 lks. S. of a wash, 2 lks. wide, drains NE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 48°55' W., on line 3-4, identical with line 3-2, M.S. 3842 South Gold Trail lode.</p> <p>Over rugged, mountainous terrain, through sparse vegetation.</p> <p>The SE End Center, identical with the NW End Center of M.S. 3842 South Gold Trail lode, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 3 1/2 x 1 ft., no marks visible.</p>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T19N R19W M.S. 3842 SE END C / M.S. 3842 G.T. / NW END C S.G.T. 1984</p> </div> <p>Deposit the wood post in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 48°48' W., beginning new measurement.</p> <p>Over extremely rugged, mountainous terrain.</p> <p>4.545 Cor. 4, identical with cor. 2, M.S. 3842 South Gold Trail lode, monumented with a wood post, 48 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 4 x 2 ft., no marks visible, from which accessory of record</p> <div style="text-align: center; margin: 10px 0;"> <p>A diorite stone, 5 x 6 x 5 ft. high, bears S. 45° W., 52 1/2 lks. dist., mkd. 2 BR X SGT 2 3842. (The 1922 record of Gold Trail lode erroneously describes this accessory at cor. 3.)</p> </div> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T19N R19W M.S. 3842 G.T. 4 S10 / 2 M.S. 3842 S.G.T. 1984</p> </div>
--------	---

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Deposit the wood post in the mound of stone.</p> <hr/> <p>N. 41°09' W., on line 4-1.</p> <p>Over rugged, mountainous terrain, through sparse vegetation.</p>
22.724	<p>Cor. 1, place of beginning.</p> <hr/> <p style="text-align: center;">M.S. No. 3842, South Gold Trail Lode</p> <hr/> <p style="text-align: center;">Restoring the survey executed by L.H. Foster in 1922</p> <hr/> <p>From cor. 1, M.S. 3842 South Gold Trail lode, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 3 x 1 ft.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T19N R19W M.S. 3842 S.G.T. 1</p> <p>1984</p> </div> <p>Deposit the wood post in the mound of stone.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 10 and 15, bears S. 71°58' E., 2.27 chs. dist., hereinbefore described.</p> <p>N. 41°06' W., on line 1-2.</p> <p>Over rugged, mountainous terrain, through creosote and yucca.</p>
22.728	<p>Cor. 2, identical with Cor. 4, M.S. 3842 Gold Trail lode, hereinbefore described.</p> <hr/>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>N. 48°48' E., on line 2-3, identical with line 4-3, M.S. 3842 Gold Trail lode.</p> <p>Over extremely rugged, mountainous terrain.</p> <p>4.545 The NW End Center, identical with the SE End Center of M.S. 3842 Gold Trail lode, hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 48°55' E., beginning new measurement.</p> <p>Over rugged, mountainous terrain, through sparse vegetation.</p> <p>4.531 Cor. 3, identical with cor. 3, M.S. 3842 Gold Trail lode, hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 41°09' E., on line 3-4.</p> <p>Over mountainous terrain, through creosote and yucca.</p> <p>9.928 Cor. 2, M.S. 3842 Black Talc lode, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 4 1/2 x 1 1/2 ft.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 10 ins. in the ground, in a mound of stone, 4 1/2 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit the wood post in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 41°05' E., beginning new measurement, and on line 2-1, M.S. 3842 Black Talc lode.</p>
--------	---

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Over mountainous terrain, through creosote.</p> <p>5.541 The W. End Center of M.S. 3842 Black Talc lode, monumented with a wood post, 48 x 4 x 4 ins., projecting 29 ins. from a mound of stone, 3 x 1/2 ft.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit the wood post in the mound of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 41°09' E., beginning new measurement.</p> <p>Over mountainous terrain, through creosote.</p> <p>5.516 Cor. 1, M.S. 3842 Black Talc lode, monumented with a wood post, 40 x 4 x 4 ins., projecting 30 ins. from a mound of stone, 3 1/2 x 1 ft.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 6 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit the wood post in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
--------	--

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>S. 40°32' E., beginning new measurement.</p> <p>Over mountainous terrain, through creosote.</p> <p>1.738 Cor. 4, on line 1-2, M.S. 3842 Pilot Knob lode, determined at the center of a mound of stone, 4 x 1 1/2 ft. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p style="margin: 0;">T19N R19W S10 M.S. 3842 4 M.S. 3842 S.G.T. P.K. 1984</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 48°46' W., on line 4-1, identical with a portion of line 2-1, M.S. 3842 Pilot Knob lode.</p> <p>Over mountainous terrain, through creosote.</p> <p>1.243 The NW End Center of M.S. 3842 Pilot Knob lode, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 3 x 1/2 ft.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p style="margin: 0;">T19N R19W M.S. 3842 S.G.T. M.S. 3842 NW END C P.K. 1984</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>Deposit the wood post in the mound of stone.</p>
--------	--

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>S. 48°52' W., beginning new measurement.</p> <p>Over mountainous terrain, through creosote.</p> <p>3.294 The SE End Center, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from the ground, in a mound of stone, 4 1/2 x 1 1/2 ft., no marks visible.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of an iron post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 10 ins. in the ground, in a mound of stone, 4 1/2 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T19N R19W M.S. 3842 SE END C M.S. 3842 S.G.T. P.K. 1984</p> </div> <p>Deposit the wood post in the mound of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 48°44' W., beginning new measurement.</p> <p>Over mountainous terrain, through creosote.</p> <p>1.254 Cor. 1, M.S. 3842 Pilot Knob lode, monumented with a wood post, 40 x 4 x 4 ins., projecting 20 ins. from a mound of stone, 3 1/2 x 1 ft., no marks visible, from which accessory of record</p> <p style="margin-left: 40px;">A diorite stone, 4 x 3 x 3 ft. high, bears S. 14° W., 29 lks. dist., mkd. X BR PK 1 3842.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T19N R19W M.S. 3842 S.G.T. M.S. 3842 1 P.K. S10 1984</p> </div>
--------	---

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Deposit the wood post in the mound of stone.</p> <hr style="width: 20%; margin: 0 auto;"/> <p>S. 48°51' W., beginning new measurement.</p> <p>Over mountainous terrain.</p>
3.276	<p>Cor. 1, place of beginning.</p> <hr/> <p style="text-align: center;">M.S. No. 3842, Black Talc Lode</p> <hr/> <p style="text-align: center;">Restoring the survey executed by L.H. Foster in 1922</p> <hr/> <p>From cor. 1, M.S. 3842 Black Talc lode, hereinbefore described.</p> <p>N. 41°09' W., on line 1-2, identical with a portion of line 4-3, M.S. 3842 South Gold Trail lode.</p> <p>Over mountainous terrain, through creosote.</p>
5.516	<p>The W. End Center, hereinbefore described.</p> <hr style="width: 20%; margin: 0 auto;"/> <p>N. 41°05' W., beginning new measurement.</p> <p>Over mountainous terrain, through creosote.</p>
5.541	<p>Cor. 2, hereinbefore described.</p> <hr/> <p>N. 83°33' E., on line 2-3.</p> <p>Over mountainous terrain, through creosote.</p>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
22.742	<p>Cor. 3, determined at the center of a scattered mound of stone, with the original post, 40 x 4 x 4 ins., laying nearby. This is accepted as the best remaining evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 4 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T19N R19W</p> <p>S10</p> <p>3</p> <p>M.S. 3842</p> <p>B.T.</p> <p>1984</p> </div> <p>Deposit the wood post in the mound of stone.</p> <hr style="width: 20%; margin: auto;"/>
5.507	<p>The E. End Center, monumented with a wood post, 48 x 4 x 4 ins., projecting 32 ins. from the ground, in a scattered mound of stone, no marks visible.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T19N R19W</p> <p>M.S. 3842</p> <p>E END C S10</p> <p>B.T.</p> <p>1984</p> </div> <p>Deposit the wood post in the mound of stone.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 41°14' E., beginning new measurement.</p> <p>Over mountainous terrain, with creosote and cholla cacti.</p>

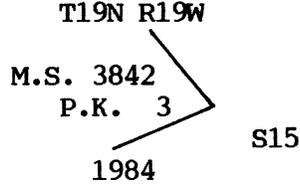

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>5.535 Cor. 4, monumented with a wood post, 40 x 4 x 4 ins., projecting 22 ins. from the ground, in a scattered mound of stone, no visible marks</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit the wood post in the mound of stone.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>S. 83°30' W., on line 4-1.</p> <p>Over mountainous terrain, through creosote and cholla cacti.</p> <p>18.68 Intersect line 2-3, M.S. 3842 Pilot Knob lode, at a point from which cor. 2 bears N. 44°44' W., 0.574 chs. dist., hereinafter described.</p> <p>19.681 Intersect line 1-2, M.S. 3842 Pilot Knob lode, at a point from which cor. 2 bears N. 48°54' E., 0.793 chs. dist., hereinafter described.</p> <p>22.742 Cor. 1, place of beginning.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">M.S. 3842 Pilot Knob Lode</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">Restoring the survey executed by L.H. Foster in 1922</p> <hr style="width: 30%; margin: 10px auto;"/> <p>From cor. 1, M.S. 3842 Pilot Knob lode, hereinbefore described.</p> <p>N. 48°44' E., on line 1-2, identical with a portion of line 1-4, M.S. 3842 South Gold Trail lode.</p> <p>Over mountainous terrain, through creosote.</p>
--------	---

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
1.254	<p>The SE End Center of M.S. 3842 South Gold Trail lode, hereinbefore described.</p> <hr/> <p>N. 48°52' E., beginning new measurement.</p> <p>Over mountainous terrain, through creosote.</p>
3.294	<p>The NW End Center, hereinbefore described.</p> <hr/> <p>N. 48°46' E., beginning new measurement.</p> <p>Over mountainous terrain, through creosote.</p>
1.243	<p>Cor. 4, M.S. 3842 South Gold Trail lode, hereinbefore described.</p> <hr/> <p>N. 48°54' E., beginning new measurement.</p> <p>Over mountainous terrain, through creosote.</p>
2.536	<p>Intersect line 4-1, M.S. 3842 Black Talc lode, at a point from which cor. 1 bears S. 83°30' W., 3.061 chs. dist., hereinbefore described.</p>
3.329	<p>Cor. 2, monumented with a wood post, 48 x 4 x 4 ins., projecting 27 ins. from a mound of stone, 3 1/2 x 1 ft., no marks visible.</p> <p>At the cor. point</p> <p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 15 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.</p> <div data-bbox="779 1444 1112 1633" style="text-align: center;"> <p>T19N R19W</p> </div> <p>Deposit the wood post in the mound of stone.</p> <hr/>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	S. 44°44' E., on line 2-3.
	Over mountainous terrain, through creosote and cholla cacti.
0.574	Intersect line 1-4, M.S. 3842 Black Talc lode, at a point from which cor. 1 bears S. 83°30' W., 4.062 chs. dist., hereinbefore described.
12.497	Point for a witness point at intersection with the line bet. secs. 10 and 15 at a point from which the cor. of secs. 10, 11, 14 and 15 bears S. 89°56' E., 24.05 chs. dist., hereinbefore described.
22.727	Cor. 3, determined at the center of a mound of stone, 4 x 1 ft. This is accepted as the best available evidence of the original cor. position.
	At the cor. point
	Set an aluminum post, 28 ins. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with aluminum cap mkd.
	
	A steel fence post is set alongside the cor.
	S. 48°44' W., on line 3-4.
	Over mountainous terrain, through creosote and cholla cacti.
4.549	The SE End Center, monumented with a wood post, 48 x 4 x 4 ins., with faint scribing, projecting 28 ins. from the ground, in a scattered mound of stone.
	At the cor. point
	Set an aluminum post, 28 ins. long, 1 in. diam., 24 ins. in the ground, with aluminum cap mkd.
	

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Rebuild mound of stone, 3 ft. base, 1 1/2 ft. high, NW of cor.</p> <p>Deposit the wood post in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 48°51' W., beginning new measurement.</p> <p>Over mountainous terrain, through creosote and cholla cacti.</p>
4.551	<p>Cor. 4, monumented with a wood post, 48 x 4 x 4 ins., with faint scribing, projecting 30 ins. from the ground, in a scattered mound of stone.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit the wood post in the mound of stone.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 44°47' W., on line 4-1.</p> <p>Over mountainous terrain, through creosote and cholla cacti.</p>
18.706	<p>Witness point at intersection with the line bet. secs. 10 and 15, hereinbefore described.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 10 and 15 bears N. 89°56' W., 3.15 chs. dist., hereinbefore described.</p>

Resurvey of Certain Mineral Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
22.739	<p>Cor. 1, place of beginning.</p> <hr/> <p style="text-align: center;">Subdivision of Selected Sections, T.19 N., R.19 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">Section 7</p> <hr/> <p>From the 1/4 sec. cor. of secs. 7 and 18.</p> <p>N. 0°15' E., on the N. and S. center line of sec. 7.</p> <p>Over rolling land in a valley floor, through creosote, yucca and cacti.</p>
19.60	<p>Point for the center S 1/16 sec. cor. of sec. 7.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T19N R19W</p> <p style="margin: 0 10px;">C</p> <p>S 1/16 S 7</p> <p style="margin: 0 10px;">C</p> <p>1984</p> </div> <p>Thence Over rugged sandstone formations.</p>
39.20	<p>Point for the center 1/4 sec. cor. of sec. 7, at the intersection with the E. and W. center line of sec. 7.</p>

Subdivision of Selected Sections,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with aluminum cap mkd.</p>
	<p style="text-align: center;">T19N R19W C 1/4 S 7 1984</p>
	<p>Set a steel fence post alongside the cor.</p>
79.54	<p>The 1/4 sec. cor. of secs. 6 and 7.</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 7 and 8.</p>
	<p>S. 88°59' W., on the E. and W. center line of sec. 7.</p>
	<p>Over rough, mountainous terrain, through creosote, yucca and cacti.</p>
19.98	<p>Point for the center E 1/16 sec. cor. of sec. 7.</p>
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 16 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p>
	<p style="text-align: center;">T19N R19W E 1/16 C ——— C S 7 1984</p>
	<p>Set a steel fence post alongside the cor.</p>
	<p>Cor. is located 40 lks. S. of a spur, slopes SW.</p>
39.96	<p>The center 1/4 sec. cor., of sec. 7.</p>
77.50	<p>Ridge, bears NE and SW.</p>

Subdivision of Selected Sections,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
78.67	<p>The 1/4 sec. cor. of secs. 7 and 12 on the W. bdy. of the Tp., hereinbefore described..</p> <hr/> <p style="text-align: center;">SE 1/4 of Section 7</p> <hr/>
	<p>From the E 1/16 sec. cor. of secs. 7 and 18.</p> <p>N. 0°15' E., on the N. and S. center line of the SE 1/4 of sec. 7.</p> <p>Over rolling land in a valley floor, through creosote, yucca and cacti.</p>
6.35	<p>Point for a witness point, at intersection with line 1-2, M.S. 1699B Billy Bryan Mill Site.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 14 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">W P T19N R19W S 7 1984</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor. point, Cor. 2 bears S. 87°32' W., 0.941 chs. dist.</p>
11.27	<p>Point for a witness point at intersection with line 6-1, M.S. 1699B Billy Bryan Mill Site, at a point from which Cor. 1 bears S. 23°16' E., 5.253 chs. dist.; not monumented.</p> <p>Ascend into large sandstone cliff formations.</p>
19.78	<p>Point for the SE 1/16 sec. cor., at intersection with the E. and W. center line of the SE 1/4, sec. 7.</p> <p>Set and cemented an aluminum tablet, 3 1/4 ins. diam., 3 1/2 ins. into a drill hole in exposed sandstone, with top mkd.</p> <p style="text-align: center;">T19N R19W SE 1/16 S7 1984</p>
39.56	<p>The center E 1/16 sec. cor. of sec. 7.</p> <hr/>

Subdivision of Selected Sections,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the S 1/16 sec. cor. of secs. 7 and 8.</p> <p>S. 89°32' W., on the E. and W. center line of the SE 1/4 of sec. 7.</p>
	<p>Over rolling land in Hidden Valley, through sparse juniper and cacti.</p>
9.96	<p>Point for a witness point, at intersection with a metes-and-bounds survey in sec. 7.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">W P T19N R19W S 7 1984</p>
	<p>From this cor. point, a rebar, 5/8 in. diam., projecting 10 ins. from the ground, bears S. 0°16' E., 3.112 chs. dist. This monument is of unknown origin and was set as a cor. of the parcel of land described in Book 127 of Deeds, pgs. 258-259, on file in the Mohave County Courthouse, Kingman, Arizona.</p>
13.73	<p>Point for a witness point, on a projection of line 4-5 of a metes-and-bounds survey in sec. 7.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 6 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p>
	<p style="text-align: center;">W P T19N R19W S 7 1984</p>
	<p>Ascend from Hidden Valley into large sandstone cliff formations.</p>
19.97	<p>The SE 1/16 sec. cor. of sec. 7.</p>
23.00	<p>Descend into canyon with steep walls.</p>

Subdivision of Selected Sections,,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
23.73	Point for a witness point at intersection with line 5-6, M.S. 1699B Billy Bryan Mill Site, at a point from which cor. 6 bears S. 24°38' E., 2.848 chs. dist.; not monumented.
25.36	Point for a witness point at intersection with line 3-4, M.S. 1699B Billy Bryan Mill Site, at a point from which cor. 3 bears S. 24°47' E., 3.342 chs. dist.; not monumented.
26.00	Leave canyon with steep walls and continue over large sandstone formations.
39.95	The center S 1/16 sec. cor. of sec. 7.
Section 8	
	From the true point for the 1/4 sec. cor. of secs. 8 and 17.
	North, on the N. and S. center line of sec. 8.
	Over rolling to steep hills, rocky soil, through sparse creosote, yucca, catclaw and cacti.
33.30	Wash, 90 lks. wide, drains SW.
39.91	Point for the center 1/4 sec. cor. of sec. 8, at intersection with the E. and W. center line of sec. 8.
	Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T19N R19W C 1/4 S8 1984
	Set a steel fence post alongside the cor.
79.46	The 1/4 sec. cor. of secs. 5 and 8.



Subdivision of Selected Sections,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	From the 1/4 sec. cor. of secs. 8 and 9.
	N. 89°40' W., on the E. and W. center line of sec. 8.
	Over rough, rocky terrain, through creosote, yucca, Mormon tea and cacti.
34.50	Wash, 20 lks. wide, drains S.
37.00	Wash, 60 lks. wide, drains SE.
39.94	The center 1/4 sec. cor. of sec. 8.
79.71	The 1/4 sec. cor. of secs. 7 and 8.
<hr/> <p>Metes-and-Bounds Surveys, T.19 N., R.19 W., Gila and Salt River Meridian, Arizona</p> <hr/>	
<hr/> <p>Portion of NE 1/4 SE 1/4, Section 7</p> <hr/>	
<hr/> <p>MEMORANDUM</p> <hr/>	
<p>This Metes-and-Bounds survey is based on the description in the Deed on pages 258-259, Book 127 of Deeds, dated August 23, 1962, on file in the Mohave County Courthouse, Kingman, Arizona.</p> <hr/>	
	From AP 1, on the line bet. secs. 7 and 8.
	N. 89°57' W., on line 1-2.
	Over rolling land, through sparse creosote.
6.93	AP 2, determined by a rebar, 5/8 in. diam., projecting 3 ins. from the ground. This monument, of unknown origin, is accepted as a careful and faithful determination of the position of the cor.
	At the cor. point
	Set an aluminum post, 28 ins. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.

Metes-and-Bounds Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<div style="text-align: center; margin-bottom: 20px;"> <p>T19N R19W</p> <div style="border-left: 1px solid black; border-bottom: 1px solid black; width: 50px; height: 20px; margin: 0 auto;"></div> <p>AP2 S 7</p> <p>1984</p> </div> <p>Deposit the rebar alongside the cor.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°04' E., on line 2-3.</p> <p>Ascend over rolling land, through sparse creosote.</p> <p>7.911 AP 3, determined by a rebar, 5/8 in. diam., projecting 10 ins. from the ground. This monument, of unknown origin, is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, 2 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin-bottom: 20px;"> <p>T19N R19W</p> <div style="border-left: 1px solid black; border-bottom: 1px solid black; width: 50px; height: 20px; margin: 0 auto;"></div> <p>AP3 S 7</p> <p>1984</p> </div> <p>Deposit the rebar alongside the cor.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°57' W., on line 3-4.</p> <p>Over hilly land, through sparse creosote.</p> <p>6.812 AP 4, determined by a rebar, 5/8 in. diam., projecting 8 ins. from the ground. This monument, of unknown origin, is accepted as a careful and faithful determination of the position of the cor.</p>
--------	--


Metes-and-Bounds Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>At the cor. point</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T19N R19W</p>  </div> <p>Deposit the rebar alongside the cor.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 0°03' W., on line 4-5.</p> <p>Over sandstone formations without undergrowth.</p> <p>9.463 AP 5, determined by a spike, set flush with the ground, in a mound of stone, 2 x 1/2 ft. This monument, of unknown origin, is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set and cemented an aluminum post, 14 ins. long, 1 in. diam., 2 ins. into a drill hole in exposed sandstone surface, in a mound of stone, 3 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T19N R19W</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°44' E., on line 5-6.</p> <p>Over mostly level land, through sparse creosote.</p>
--------	--

Metes-and-Bounds Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
3.769	<p>Point for AP 6, determined at the intersection of record bearings from AP 5 and another deed cor.</p>
	<p>Set a monument, 30 ins. long, composed of a stainless steel post, 25 ins. long, 2 1/2 ins. diam., bonded to a magnetic poly breakaway base, 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R19W</p> <div style="text-align: center; border: 1px solid black; padding: 2px; display: inline-block;"> <p>AP6 S 7 1984</p> </div>
	<p>From this cor. point, an open end pipe, 1 in. diam., projecting 4 ft. from the ground, bears N. 65 3/4° E., 24 1/2 lks. dist.</p>
	<p style="text-align: center;">—————</p> <p>S. 0°16' E., on line 6-7.</p>
	<p>Over mostly level land, through sparse creosote.</p>
0.33	<p>The witness point at intersection with the E. and W. center line of the SE 1/4 of sec. 7.</p>
	<p>From this cor. point, a deed cor., bears S. 0°16' E., 3.112 chs. dist., determined by a rebar, 5/8 in. diam., projecting 10 ins. from the ground. This monument, of unknown origin, is accepted as a careful and faithful determination of the position of the cor.</p>
	<hr/>

Metes-and-Bounds Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	Lot 11, Section 7
	<p>From cor. 1, lot 11, sec. 7, identical with cor. 3, M.S. 1699B Billy Bryan Mill Site, hereinbefore described.</p> <p>From this cor. point, the NE cor. of a shed, 18 x 12 ft., bears S. 15 3/4° E. 3.01 chs. dist., long side bears SE.</p> <p>From this same cor. point, the SW cor. of a house, 40 x 25 ft., bears S. 6 1/2° W., 3.06 chs. dist., long side bears NE.</p> <p>S. 50°32' W., on line 1-2.</p> <p>Ascend sandstone formations.</p>
2.571	<p>Point for cor. 2.</p> <p>Set and cemented an aluminum post, 13 ins. long, 1 in. diam., 5 ins. into a drill hole in exposed sandstone formation, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 2°35' W., on line 2-3.</p> <p>Descend to rolling land, through creosote.</p>
3.497	<p>Point for cor. 3.</p>

Metes-and-Bounds Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum post, 28 ins. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T19N R19W</p> </div> <hr/> <p>N. 85°27' E., on line 3-4.</p> <p>Over rolling land, through creosote and scattered juniper.</p> <p>3.547 Cor. 4, on line 2-3, M.S. 1699B Billy Bryan Mill Site, hereinbefore described.</p> <hr/> <p>N. 16°02' W., on line 4-1, identical with a portion of line 2-3, M.S. 1699B Billy Bryan Mill Site.</p> <p>Entering a canyon with steep sandstone walls.</p> <p>5.042 Cor. 1, identical with cor. 3, M.S. 1699B Billy Bryan Mill Site and the place of beginning.</p> <hr/> <p style="text-align: center;">Lot 8, Section 18</p> <hr/> <p>From cor. 1, lot 8, sec. 18, on a portion of line 2-1, M.S. 1699B, Gold Road Mill Site, hereinbefore described.</p> <p>From this cor. point, cor. 2, Gold Road Mill Site, bears N. 8°00' E., 3.440 chs. dist., hereinbefore described.</p>

Metes-and-Bounds Surveys,
T 19 N, R 19 W, Gila and Salt River Meridian, Arizona

CHAINS	<p>S. 8°00' W., on line 1-2, identical with a portion of line 2-1, M.S. 1699B, Gold Road Mill Site.</p> <p>Over rolling land, through creosote.</p> <p>1.383 Cor. 2, hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 39°02' W., on line 2-3.</p> <p>Over rolling land, through creosote.</p> <p>4.989 Point for cor. 3.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 16 ins. in the ground, in a mound of stone, 2 1/2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 52°55' E., on line 3-4.</p> <p>Over nearly level land, through creosote.</p> <p>1.905 Point for cor. 4.</p> <p>Set an aluminum post, 28 ins. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, 2 ft. base to top, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
--------	--

Metes-and-Bounds Surveys,
T.19 N., R.19 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>S. 26°25' E., on line 4-1.</p> <p>Over nearly level land, through creosote.</p>
4.079	<p>Cor. 1, place of beginning.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The land encompassed in this survey is situated about 20 miles SW of Kingman, Arizona. The terrain varies from the extremely rugged Black Mountains in the western portion to a flattened valley floor in the eastern portion. The elevation ranges from 2200 to 4500 ft. above sea level. The soil varies from a sandy loam in lower areas to sandy soil with rock outcroppings in the higher areas.</p> <p>A valley area extends ESE from the NW area of the township with a mountain pass highway to Oatman, Arizona, and with various springs in the valley walls and floor. Drainage is toward this valley and southeasterly from the Black Mountains. Vegetation consists of creosote, yucca, cholla and various cacti and some areas of Mormon tea and scattered juniper.</p> <p>There are residences near the Oatman Highway in secs. 1, 7, 8, 17 and 18, with roads bladed for development in odd-numbered secs. on flat ground. There are active mining operations, although evidence of claims is found throughout the base of the mountains. There is no land under cultivation or timber resources in the township. A power line and an underground gas pipeline roughly follow the Oatman Highway.</p> <p>The mean magnetic declination is 15° E., as shown on U.S.G.S. Quadrangle MOUNT NUTT, ARIZ. 1967.</p> <hr/>

BOOK 5311

106

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Gary D. Knoff	Land Surveyor
Don Brewer	Surveying Technician
Delbert Bybee	Surveying Technician
Tim Tietjen	Surveying Aid
Daryl Moistner	Surveying Aid

CERTIFICATE OF SURVEY

I, Dennis K. McKay, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 3rd day of January, 1984, I have dependently resurveyed a portion of the east boundary (Fifth Guide Meridian West), the south, west and north boundaries, a portion of the subdivisional lines, certain mining claims, subdivision of selected sections and metes-and-bounds surveys of Township 19 North, Range 19 West, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

03/25/91
(Date)

Dennis K. McKay
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the east boundary (Fifth Guide Meridian West), the south, west and north boundaries, a portion of the subdivisional lines, certain mining claims, the subdivision of selected sections and metes-and-bounds surveys of Township 19 North, Range 19 West, Gila and Salt River Meridian, Arizona, executed by Dennis K. McKay, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

3/28/91
(Date)

William F. Oliver
Acting (Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I Certify that the foregoing transcript of the field notes of the above-described surveys in T 19 N, R 19 W, Gila and Salt River Meridian, Arizona is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Chief Cadastral Surveyor of Arizona)~~