

ORIGINAL

1

BOOK 5460

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE
DEPENDENT RESURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES,

AND THE SUBDIVISION OF SECTIONS 22 AND 27,

AND

METES-AND-BOUNDS SURVEYS OF TRACTS 37, 38 AND 39,

TOWNSHIP 4 SOUTH, RANGE 15 EAST

Of the Gila and Salt River Meridian,
In the State of Arizona

EXECUTED BY

Clyde J. King

Cadastral Surveyor

Under Special Instructions dated March 20, 1995, approved March 21, 1995, which provided for the surveys included under Group Number 785, and assignment instructions dated April 24, 1995.

Survey Commenced April 29, 1995

Survey Completed June 20, 1995

INDEX DIAGRAM

BOOK 5460

TOWNSHIP 4 SOUTH, RANGE 15 EAST,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision of section 22	pp. 7 - 8
Subdivision of section 27	pp. 8 - 10
Metes-and-bounds surveys Tract 37	pp. 10 - 31
Tract 38	pp. 10 - 30
Tract 39	pp. 30 - 36

BOOK 5460

T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes describe the dependent resurvey of a portion of the subdivisional lines and the subdivision of sections 22 and 27 and metes-and-bounds surveys of Tracts 37, 38 and 39, Township 4 South, Range 15 East, Gila and Salt River Meridian, Arizona.

The subdivisional lines were surveyed by Alton O. Stinson and William B. Kimmel, in 1918. Mineral Survey No. 4680 was surveyed by Travis L. Gant, in 1970. Mineral Survey No. 4722 was surveyed by Travis L. Gant, in 1975.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated March 20, for Group No. 785, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Sokia Set2B II total station instrument.

The geographic position of the 1/4 sec. cor. of secs. 33 and 34 was determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. U.S. Coast and Geodetic Survey triangulation station "HUB 1947" was used as the control station.

Latitude

Longitude

33°02'28.00" N.

110°48'30.32" W.

NAD27

The mean magnetic declination, as taken from quadrangle map HAYDEN, ARIZ., published in 1964 by U.S. Geological Survey, is 14° E.

BOOK 5460

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS									
40.05	<p style="text-align: center;">Restoring the survey by Alton O. Stinson and William B. Kimmel, in 1918</p> <hr style="width: 20%; margin: auto;"/> <p>Beginning at the 1/4 sec. cor. of secs. 33 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with a mound of stone, 2 ft. base, 2 ft. high, W. of the cor., with brass cap mkd. 1/4 S33 S34 1918.</p> <p>Add the marks T4S R15E 1995 to the brass cap.</p> <p>Cor. is located 2 chs. N. of a wash, drains SE.</p> <p>North, bet. secs. 33 and 34.</p> <p>Over rolling land, through scattered paloverde and cacti.</p> <p>Point for the cor. of secs. 27, 28, 33 and 34, at proportionate distance; there is no remaining evidence of the orig. witness cor. position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to bedrock, supported in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p> <table style="margin: 10px auto; border-collapse: collapse;"> <tr> <td style="padding: 2px;">T4S</td> <td style="padding: 2px;">R15E</td> </tr> <tr> <td style="padding: 2px;">S28</td> <td style="padding: 2px;">S27</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 2px;">S33</td> <td style="border-top: 1px solid black; padding: 2px;">S34</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px;">1995</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The orig. iron post for the witness cor., 2 ins. diam., with brass cap mkd. WC T4S R15E S27 S28 S33 S34 1918 was lying loosely nearby. Remove the iron post from the area, impracticable to bury.</p> <p>Cor. is located 90 lks. W. of a graded gravel road, 40 lks. wide, bears SE and NW.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the 1/4 sec. cor. of secs. 27 and 34, monumented with an iron post, 1/2 in. diam., firmly set, projecting 13 ins. above the ground, with a mound of stone, 3 ft. base 2 ft. high, N. of the cor., with brass cap mkd. 1/4 S27 S34 1918.</p> <p>Add the marks T4S R15E 1995 to the brass cap.</p> <p>Cor. is located on the W. side of a ridge, bears SE and NW.</p>	T4S	R15E	S28	S27	S33	S34	1995	
T4S	R15E								
S28	S27								
S33	S34								
1995									

BOOK 5460

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
12.08	<p>N. 89°57' W., bet. secs. 27 and 34. Over rolling land, through scattered paloverde and cacti. Intersect line 41-42, Tract 37, not monumented. From this point, AP 41, sec. 27, hereinafter described, bears N. 9°27' E., 3.20 chs. dist.</p>
16.51	<p>Intersect line 42-1, Tract 37, not monumented. From this point, AP 1, sec. 27, hereinafter described, bears N. 79°53' W., 22.80 chs. dist.</p>
39.93	<p>The cor. of secs. 27, 28, 33 and 34.</p>
16.05	<p>N. 0°01' E., bet. secs. 27 and 28. Over rolling land, through scattered paloverde and cacti. Intersect line 1-2, Tract 38, sec. 27, not monumented. From this point, AP 1, sec. 27, hereinafter described, bears S. 46°46' E., 0.68 chs. dist.</p>
18.62	<p>Intersect line 2-3, Tract 38, sec. 27, not monumented. From this point, AP 3, sec. 27, hereinafter described, bears N. 34°24' E., 6.88 chs. dist.</p>
40.05	<p>Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the orig. cor. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd. T4S R15E 1/4 S28 S27 1995 Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Cor. is located 55 lks. N. of a track road, 15 lks. wide, bears E. and W. and 50 lks. S. of a wash, drains W.</p>

BOOK 5460

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.10	<p>The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above the ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 3 x 2 ft., to the W., with brass cap mkd. T4S R15E S21 S22 S28 S27 1918.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on the W. side of a spur, bears NE and SW.</p>
	<p>From the cor. of secs. 22, 23, 26 and 27, monumented with an iron post, 2 ins. diam., firmly set, projecting 6 ins. above the ground, encircled with a collar of stone, with brass cap mkd. T4S R15E S22 S23 S27 S26 1918.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located in a nearly flat grassy area.</p> <p>N. 89°41' W., bet. secs. 22 and 27.</p> <p>Over rolling land, through scattered paloverde and cacti.</p>
39.92	<p>The 1/4 sec. cor. of secs. 22 and 27, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, in a mound of stone, 2 ft. base, to top, with brass cap mkd. 1/4 S22 S27 1918.</p> <p>Add the marks T4S R15E 1995 to the brass cap.</p> <p>Cor. is located on a steep E. slope</p>
	<p>N. 89°40' W., beginning new measurement.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
20.91	<p>Intersect line 15-16, Tract 37, not monumented.</p> <p>From this point, AP 15, sec. 27, hereinafter described, bears S. 36°21' E., 0.65 chs. dist.</p>
39.92	<p>The cor. of secs. 21, 22, 27 and 28.</p> <p>From the 1/4 sec. cor. of secs. 21 and 22, monumented with, an iron post, 1 in. diam., firmly set, projecting 16 ins. above the ground, with a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of the cor., with brass cap mkd. 1/4 S21 S22 1918.</p>

BOOK 5460

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.90	<p>Add the marks T4S R15E 1995 to the brass cap.</p> <p>N. 0°08' E., bet. secs. 21 and 22.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>The cor. of secs. 15, 16, 21 and 22, monumented with, an iron post, 2 ins. diam., firmly set, projecting 15 ins. above the ground, with a mound of stone, 3 ft. base, 1 ft. high, W. of the cor., with brass cap mkd. T4S R15E S16 S15 S21 S22 1918.</p> <p>Add the marks 1995 to the brass cap.</p>
39.94	<p>From the 1/4 sec. cor. of secs. 15 and 22 monumented with, an iron post, 1 in. diam., firmly set, projecting 13 ins. above the ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. 1/4 S15 S22 1918.</p> <p>Add the marks T4S R15E 1995 to the brass cap.</p> <p>N. 89°25' W., bet. secs. 15 and 22.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>The cor. of secs. 15, 16, 21 and 22.</p>
39.91	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 89°49' W., bet. secs. 28 and 33.</p> <p>The 1/4 sec. cor. of secs. 28 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 15 ins. above the ground, with a mound of stone, 3 ft. base 1 ft. high, W. of the cor. with brass cap mkd. 1/4 S28 S33 1918.</p> <p>Add the marks T4S R15E 1995 to the brass cap.</p>
	<p style="text-align: center;">Subdivision of Section 22, T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona</p> <p>From the 1/4 sec. cor. of secs. 22 and 27.</p> <p>N. 0°04' E., on the N. and S. center line of sec. 22.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>

BOOK 5460

Subdivision of Section 22,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.96	<p>Point for the center 1/4 sec. cor. of sec. 22, at intersection with the E. and W. center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to bedrock, supported in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T4S R15E C 1/4 S22 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a steep SE slope.</p>
53.98	<p>Point for a witness point, at intersection with line 23-24, Tract 37, hereinafter described.</p> <p>From this cor. point, AP 23, sec. 22, hereinafter described, bears N. 79°46' W., 6.63 chs. dist.</p>
79.68	<p>The 1/4 sec. cor. of secs. 15 and 22.</p>
39.80	<p>From the 1/4 sec. cor. of secs. 22 and 23, monumented with an iron post, 1 in. diam., firmly set, projecting 15 ins. above the ground, with a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of the cor., with brass cap mkd. 1/4 S22 S23 1918.</p> <p>Add the marks T4S R15E 1995 to the brass cap.</p> <p>N. 89°40' W., on the E. and W. center line of sec. 22.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
50.41	<p>The center 1/4 sec. cor. of sec. 22.</p> <p>Intersect line 21-22, Tract 37, not monumented.</p> <p>From this point, AP 22, sec. 22, hereinafter described, bears N. 37°49' W., 0.64 chs. dist.</p>
79.78	<p>The 1/4 sec. cor. of secs. 21 and 22.</p>
	<p style="text-align: center;">Subdivision of Section 27, T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona</p>
	<p>From the 1/4 sec. cor. of secs. 27 and 34.</p>

BOOK 5460

Subdivision of Section 27,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 0°01' E., on the N. and S. center line of sec. 27.
	Over mountainous land, through scattered paloverde and cacti.
19.30	Intersect line 38-39, Tract 37, not monumented.
	From this point, AP 38, sec. 27, hereinafter described, bears S. 79°49' E., 0.35 chs. dist.
20.85	Intersect line 36-37, Tract 37, not monumented.
	From this point, AP 37, sec. 27, hereinafter described, bears S. 74°49' E., 0.63 chs. dist.
35.21	Intersect line 32-33, Tract 37, not monumented.
	From this point, AP 32, sec. 27, hereinafter described, bears S. 72°36' E., 0.77 chs. dist.
39.93	True point for the center 1/4 sec. cor. of sec. 27, at intersection with the E. and W. center line, falls on the steep rocky side of a wash, where it is impracticable to establish a permanent monument.
	From this point, the point selected for the witness cor., bears N. 77°58' W., 1.54 chs. dist.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">WC T4S R15E C 1/4 S27 → 1995</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
79.89	The 1/4 sec. cor. of secs. 22 and 27.
	From the 1/4 sec. cor. of secs. 26 and 27, monumented with an iron post, 1 in. diam., firmly set, projecting 27 ins. above the ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of the cor., with brass cap mkd. 1/4 S27 S26 1918.
	Add the marks T4S R15E 1995 to the brass cap.
	Cor. is located on a spur, bears NW and SE..

BOOK 5460

Subdivision of Section 27,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 89°46' W., on the E. and W. center line of sec. 27. Over mountainous land, through scattered paloverde and cacti.</p>
36.54	<p>Intersect line 31-32, Tract 37, not monumented. From this cor. point AP 31, sec. 27, hereinafter described, bears N. 28°17' E., 2.61 chs. dist.</p>
39.93	<p>True point for the center 1/4 sec. cor. of sec. 27.</p>
58.80	<p>Intersect line 7-8, Tract 37, not monumented. From this cor. point AP 8, sec. 27, hereinafter described, bears N. 47°38' E., 1.01 chs. dist.</p>
79.86	<p>The 1/4 sec. cor. of secs. 27 and 28.</p>
<p>Metes-and-Bound Survey of Tract 37, T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona</p>	
<p>From AP 1, sec. 27, identical to the SW location cor. of mining claim, Chilito 3, monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 3 ins. above the ground, with a mound of stone, 4 ft. base, 3 ft. high, near the cor.</p>	
<p>At the cor. point</p>	
<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>	
<p>T4S R15E S27 \ AP1 1995</p>	
<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p>	
<p>From this cor. point, the cor. of secs. 27, 28, 33 and 34, hereinbefore described, bears S. 13°46' W., 4.10 chs. dist.</p>	
<p>N. 9°34' E., on line 1-2, along the westerly side line of mining claim, Chilito 3.</p>	
<p>Over mountainous land, through scattered paloverde and cacti.</p>	


BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
5.54	<p>Point for AP 2, sec. 27, at intersection with the southeasterly side line of mining claim, Brick # 1 (No One).</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bed rock, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div data-bbox="855 521 1032 676" style="text-align: center;"> <p>T4S R15E S27 AP2 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the NW location cor. of mining claim, Chilito 3, monumented with a concrete filled iron post, 2 ins. diam., firmly set, projecting 18 ins. above the ground, with a mound of stone, 3 ft. base, 3 ft. high, E. of the cor, bears N. 9°34' E., 16.39 chs. dist.</p> <p>From this same cor. point, the SW location cor. of mining claim, Brick # 1 (No One), monumented with, a 1 X 2 ins., wood post, 17 ins. long, loosely set in a mound of stone, 3 ft. base, 2 ft. high, with no marks visible, bears S. 60°31' W., 19.16 chs. dist.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 60°31' E., on line 2-3, along the southeasterly side line of mining claim, Brick # 1 (No One).</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
3.68	<p>AP 3, sec. 27, identical to the SE location cor. of mining claim, Brick # 1 (No One), monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 5 ins. above the ground, with a mound of stone, 4 ft. base, 2 ft. high, E. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="855 1702 1032 1857" style="text-align: center;"> <p>T4S R15E S27 AP3 1995</p> </div>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
4.57	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <p>Cor. is located 125 lks. E. of a graded gravel road, 35 lks. wide, bears N. and S.</p> <hr/> <p>N. 46°46' W., on line 3-4, along the northeasterly end line of mining claim, Brick # 1 (No One).</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>Point for AP 4, sec. 27, at intersection with the southerly end line of mining claim, Black Eagle # 1.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="867 904 1015 1064" style="text-align: center;"> <p>T4S R15E</p>  <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the NE location cor. of mining claim, Brick # 1 (No One), hereinafter described, bears N. 46°46' W., 3.90 chs. dist.</p> <p>From this same cor. point, the SW location cor. of mining claim, Black Eagle # 1, monumented with a mound of stone, 2 ft. high, 2 ft. diam., with the remains of a wood post alongside, bears N. 60°18' W., 1.71 chs. dist.</p> <hr/> <p>S. 60°18' E., on line 4-5, along the southerly end line of mining claim, Black Eagle # 1.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>3.42 The south end center location cor., monumented with a wood post, 2 x 2 ins., firmly set, projecting 26 ins. above the ground, encircled with a collar of stone.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
7.47	<p>Point for AP 5, sec. 27, identical to the SE location cor. of mining claim, Black Eagle # 1, determined by bearing-bearing intersection, parallel to the westerly side line of mining claim Black Eagle # 1 and an extension through the south end center location cor., not monumented.</p> <hr/> <p>N. 30°52' E., on line 5-6, along the easterly side line of mining claim, Black Eagle # 1.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
23.99	<p>AP 6, sec. 27, identical to the NE location cor. of mining claim, Black Eagle # 1, monumented with a wood post, 2 x 2 ins., firmly set, projecting 60 ins. above the ground, in a mound of stone, 5 ft. base, 4 ft. high., not remonumented.</p> <p>Cor. is located on a S. facing slope and 100 lks. N. of a wash drains W.</p> <hr/> <p>N. 61°18' W., on line 6-7, along the northerly end line of mining claim, Black Eagle # 1.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
6.43	<p>True point for AP 7, sec. 27, at the intersection with the southeasterly side line of mining claim, Brick # 10 No. Ten, falls on the W. side of a large wash.</p> <p>From this point, the point selected for a witness cor. bears S. 50°56' E., 0.85 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="817 1478 1015 1670" style="text-align: center;"> <p>WC T4S R15E S27 AP7 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this same point, the NW location cor. of mining claim, Black Eagle # 1, monumented with a wood post, 2 x 2 ins., encircled with a collar of stone, bears N. 61°18' W., 2.75 chs. dist.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this same point, the SW location cor. of mining claim, Brick # 10 No. Ten, identical to the NE location cor. of mining claim, Brick # 9 No. Nine, bears S. 47°38' W., 14.94 chs. dist., hereinafter described.</p> <hr/>
8.31	<p>N. 47°38' E., on line 7-8, along the southeasterly side line of mining claim, Brick # 10 No. Ten.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>Intersect the E. and W. center line of sec. 27, not monumented.</p> <p>From this point, the true point for the center 1/4 sec. cor. of sec. 27, bears S. 89°46' E., 18.87 chs. dist.</p>
9.32	<p>AP 8, sec. 27, identical to the SE location cor. of mining claim, Brick # 10 No. Ten, identical with the SE location cor. of mining claim, Lead Silver No. 5, monumented with a wood post, 4 x 2 x 48 ins. long, firmly set, projecting 24 ins. above the ground, in a mound of stone, 4 ft. base, 2 ft. high.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, on bedrock, supported in a mound of stone, 10 ft. base, to top, with brass cap mkd.</p> <div data-bbox="855 1203 1020 1358" style="text-align: center;"> <p>T4S R15E</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Remove the wood post from the area, impracticable to bury.</p> <p>Cor. is located 27 lks. E. of a trail road, 23 lks. wide, bears NE and SW and 200 lks. W. of a wash, drains SE.</p> <hr/> <p>N. 24°50' E., on line 8-9, along the easterly side line of mining claim, Lead Silver No. 5.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
8.58	<p>True point for AP 9, sec. 27, identical to the NE location cor. of mining claim, Lead Silver No. 5, determined by the recorded location distances, point falls on the W. side of a large wash, where it is impracticable to establish a permanent monument.</p> <p>From this point, the point selected for a witness cor. bears N. 56°19' W., 1.66 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="801 649 1015 840" style="text-align: center;"> <p>WC T4S R15E S27 AP9 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 39°21' W., on line 9-10, along the northeasterly end line of mining claim, Lead Silver No. 5.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
9.09	<p>AP 10, sec. 27, identical to the NW location cor. of mining claim, Lead Silver No. 5, monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 5 ins. above the ground, with a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, E. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="850 1542 1024 1702" style="text-align: center;"> <p>T4S R15E S27 AP10 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <hr/> <p>N. 49°40' E., on line 10-11, along the southeasterly side line of mining claim, Brick # 4 (No Four).</p>



BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
15.13	<p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 11, sec. 27, identical to the SE location cor. of mining claim, Brick # 4 (No Four), identical with the SW location cor. of mining claim Drusilla, monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 6 ins. above the ground, with a mound of stone, 6 ft. base, 3 ft. high, S. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div data-bbox="855 719 1020 876" style="text-align: center;"> <p>T4S R15E</p> <p>AP11</p> <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <p>Cor. is located on a steep S. slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 49°47' W., on line 11-12, along the southwesterly end line of mining claim, Drusilla, identical to the northeasterly end line of mining claim, Brick # 4 (No Four).</p>
5.02	<p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 11, sec. 27, identical to the end center location cor., monumented with a mound of stone, 4 ft. base, 3 ft. high.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="855 1613 1020 1770" style="text-align: center;"> <p>T4S R15E</p> <p>AP12</p> <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
4.59	<p>N. 36°45' W., on line 12-13.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 13, sec. 27, identical to the NW location cor. of mining claim, Drusilla, identical with the NE location cor. of mining claim, Brick # 4 (No Four), the SE location cor. of mining claim, Brick No. 6 and the SW location cor. of mining claim, Fanny, monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 5 ins. above the ground, with a mound of stone, 3 ft. base, 2 ft. high, E. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  <p>T4S R15E S27 AP13 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <p>Cor. is located on a rocky SE slope.</p>
3.93	<p>N. 38°06' W., on line 13-14, along the southwesterly end line of mining claim, Fanny, identical to the northeasterly end line of mining claim, Brick No. 6.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 14, sec. 27, identical to the end center location cor., monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 5 ins. above the ground, with a mound of stone, 5 ft. base, 3 ft. high, S. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  <p>T4S R15E S27 AP14 1995</p> </div>



BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona


CHAINS	
5.03	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <p>Cor. is located 50 lks. S. of a trail road, 22 lks. wide, bears NW and SE.</p> <hr/> <p>N. 33°23' W., on line 14-15.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 15, sec. 27, identical to the NW location cor. of mining claim, Fanny, identical with the NE location cor. of mining claim, Brick No. 6, the SE location cor. of mining claim, Brick No 8 and the SW location cor. of mining claim, Ethel, monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 1 in. above the ground, with a mound of stone, 4 1/2 ft. base, 2 1/2 ft. high, W. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div data-bbox="850 1064 1015 1223" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <hr/> <p>N. 36°21' W., on line 15-16, along the southwesterly end line of mining claim, Ethel, identical to the northeasterly end line of mining claim, Brick No 8.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
0.65	<p>Intersect the line bet. secs. 22 and 27, not monumented.</p> <p>From this point, the cor. of secs. 21, 22, 27 and 28, hereinbefore described, bears N. 89°40' W., 19.01 chs. dist.</p>
5.69	<p>AP 16, sec. 22, identical to the end center location cor., monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 6 ins. above the ground, with a mound of stone, 3 ft. base, 2 ft. high, E. of the cor.</p> <p>At the cor. point</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
3.26	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to bedrock, supported in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;">  <p>T4S R15E S22 AP16 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <p>Cor. is located on a spur, bears NW and SE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 22°28' W., on line 16-17.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 17, sec. 22, identical to the NW location cor. of mining claim, Ethel, identical with the NE location cor. of mining claim, Brick No 8, the SE location cor. of mining claim, Brick No. 12 and the SW location cor. of mining claim, Spring, monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 4 ins. above the ground, with a mound of stone, 4 ft. base, 2 ft. high, W. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to bedrock, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;">  <p>T4S R15E S22 AP17 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <p>Cor. is located 45 lks. W. of a ridge, bears NE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 35°01' W., on line 17-18, along the southwesterly end line of mining claim, Spring, identical to the northeasterly end line of mining claim, Brick No. 12.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
9.00	<p>AP 18, sec. 22, identical to the NW location cor. of mining claim, Spring, identical with the NE location cor. of mining claim, Brick No. 12, monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 5 ins. above the ground, with a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, W. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T4S R15E</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 61°27' E., on line 18-19, along the northwesterly side line of mining claim, Spring.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
22.42	<p>Point for AP 19, sec. 22, at intersection with the southwesterly side line of mining claim, Tip Top.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T4S R15E</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and rebar beneath the stainless steel post.</p> <p>From this cor. point, the NE location cor. of mining claim, Spring identical to SE location cor. of mining claim, Quartzite, monumented with an iron post, 1 in. diam., firmly set in concrete, projecting 6 ins. above the ground, with a mound of stone, 4 ft. base, 2 ft. high, E. of the cor., with brass cap mkd. QTZ 3, bears N. 61°27' E., 0.68 chs. dist.</p>

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this same cor. point, the NW location cor. of mining claim, Tip Top, monumented with an iron post, 1 in. diam., firmly set in concrete, projecting 7 ins. above the ground, with a mound of stone, 3 ft. base, 2 ft. high, S. of the cor., with brass cap mkd. 1 TIP TOP, bears N. 37°43' E., 17.96 chs. dist.</p> <p>Cor. is located 200 lks. E. of a ridge, bears NW and SE.</p> <hr/> <p>S. 37°43' E., on line 19-20, along the southwesterly side line of mining claim, Tip Top.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
4.45	<p>AP 20, sec. 22, identical to the SW location cor. of mining claim, Tip Top, monumented with an iron post, 1 in. diam., firmly set, in concrete, projecting 6 ins. above the ground, with a mound of stone, 6 ft. base, 4 ft. high, E. of the cor., with brass cap mkd. 4 TIP TOP, not remonumented.</p> <p>Cor. is located on a spur, bears NW and SE.</p> <hr/> <p>N. 53°51' E., on line 20-21, along the southeasterly end line of mining claim, Tip Top.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
9.09	<p>AP 21, sec. 22, identical to the SE location cor. of mining claim, Tip Top, monumented with an iron post, 1 in. diam., firmly set, in concrete, projecting 4 ins. above the ground, with a mound of stone, 2 ft. base, 2 ft. high, N. of the cor., with brass cap mkd. 3 TIP TOP, not remonumented.</p> <hr/> <p>N. 37°49' W., on line 21-22, along to the northeasterly side line of mining claim, Tip Top.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
16.33	<p>Intersect the E. and W. center line of sec. 22, not monumented.</p> <p>From this point, the center 1/4 sec. cor. of sec. 22, hereinbefore described, bears S. 89°40' E., 10.61 chs. dist.</p>
16.97	<p>Point for AP 22, sec. 22, at intersection with the westerly side line of mining claim, Chilito 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>


BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="855 293 1020 451" data-label="Diagram"> </div> <p data-bbox="409 485 1371 549">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="409 583 1447 740">From this cor. point, the NE location cor. of mining claim, Tip Top, monumented with an iron post, 1 in. diam., firmly set, projecting 7 ins. above the ground, with a mound of stone, 4 ft. base, 2 ft. high, N. of the cor., with brass cap mkd. 2 TIP TOP, bears N. 37°49' W., 5.44 chs. dist.</p> <p data-bbox="409 774 1463 868">From this point, the SW location cor. of mining claim Chilito 32, monumented with a mound of stone, 5 ft. base, 4 ft. high, bears S. 17°03' W., 6.89 chs. dist.</p> <hr data-bbox="720 895 1158 902"/> <p data-bbox="409 932 1384 995">N. 17°03' E., on line 22-23, along the westerly side line of mining claim, Chilito 32.</p> <p data-bbox="409 1029 1397 1059">Over mountainous land, through scattered paloverde and cacti.</p> <p data-bbox="249 1093 1466 1251">15.31 AP 23, sec. 22, identical to the NW location cor. of mining claim, Chilito 32, monumented with a concrete filled iron post, 2 ins. diam., firmly set in concrete, projecting 20 ins. above the ground, with a mound of stone, 6 ft. base, 3 ft. high, E. of the cor., not remonumented.</p> <p data-bbox="409 1285 994 1315">Cor. is located on a steep W. slope.</p> <hr data-bbox="720 1342 1158 1349"/> <p data-bbox="409 1378 1384 1442">S. 79°46' E., on line 23-24, along the northerly end line of mining claim Chilito 32.</p> <p data-bbox="409 1476 1397 1506">Over mountainous land, through scattered paloverde and cacti.</p> <p data-bbox="265 1540 1384 1604">6.63 Point for a witness point at intersection with the N. and S. center line of sec. 22.</p> <p data-bbox="409 1638 1450 1732">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> <p>T4S R15E</p>  <p>1995</p> </div>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the center 1/4 sec. cor. of sec. 22, hereinbefore described, bears S. 0°04' W., 14.02 chs. dist.</p> <p>Cor. is located on a steep NW slope.</p>
9.07	<p>The NE location cor. of mining claim, Chilito 32, identical to the NW location cor. of mining claim, Chilito 33, monumented with a concrete filled iron post, 2 ins. diam., firmly set, in concrete, projecting 20 ins. above the ground, with a mound of stone, 6 ft. base, 3 ft. high, E. of the cor.</p> <p>Continue, along the northerly end line of mining claim, Chilito 33.</p>
18.00	<p>AP 24, sec. 22, identical to cor. 4, Chilito 34 and cor. 4, Chilito 40, MS. 4680, monumented with an iron post, 1 in. diam., firmly set, in concrete, projecting 12 ins. above the ground, with a mound of stone, 4 ft. base, 4 ft. high, E. of the cor., with brass cap mkd. 4 CH 34 4680 4 CH 40 4680, not remonumented.</p>
	<p>Thence on the record courses of Chilito 34, Chilito 28, Chilito 20 and Chilito 21, Mineral Survey No. 4680.</p>
	<p>From AP 25, sec. 27, identical to cor. 3, Chilito 21, MS 4680, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. 2 CH 12 4680 3 CH 21 4680, not remonumented.</p> <p>Cor. is located on a steep rocky NW slope.</p> <p>S. 10°10' W., on line 25-26, along a portion of line 3-2, Chilito 11, MS 4680.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
2.08	<p>Point for AP 26, sec. 27, at intersection with line 1-2, Emerald, MS 4722, not monumented.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this point, cor. 2, Chilito 11, monumented with a brass tablet, 2 ins. diam., firmly set, cemented in place in granite bedrock, with top mkd. 2 CH 11 4680, bears S. 10°10' W., 16.09 chs. dist.</p> <p>From this same point, cor. 1, Emerald, identical to cor. 4, Cobre Hierro, MS 4722, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins above the ground, with brass cap mkd. 1 EM 4 CH 4722, bears N. 62°25' E., 13.39 chs. dist.</p>
	<hr/> <p>S. 62°25' W., on line 26-27, along a portion of line 1-2, Emerald, MS 4722.</p>
8.61	<p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 27, sec. 27, identical to cor. 2, Emerald, MS 4722, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins above the ground, with brass cap mkd. 2 EM 4722, not remonumented.</p>
5.02	<hr/> <p>S. 28°27' E., on line 27-28, along a portion of line 2-3, Emerald, MS 4722.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>Point for AP 28, sec. 27, at intersection with the northerly end line of mining claim, Black Eagle # 5, not monumented.</p>
1.49	<p>From this point, cor. 3, Emerald, MS 4722, monumented with an iron post, 1 in. diam., firmly set, projecting 17 ins above the ground, with brass cap mkd. 3 EM 4722, bears S. 28°27' E., 4.03 chs. dist.</p> <p>From this same point, the NE location cor. of mining claim, Black Eagle # 5, monumented with a mound of stone, 4 ft. high, 5 ft. diam., bears S. 88°32' E., 7.64 chs. dist.</p> <hr/> <p>N. 88°32' W., on line 28-29, along the northerly end line of mining claim Black Eagle # 5.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 29, sec. 27, identical to the NW location cor. of mining claim, Black Eagle # 5, monumented with a mound of stone, 3 ft. base, 2 ft. high, not remonumented.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
10.86	<p>S. 1°27' W., on line 29-30, along the westerly side line of mining claim, Black Eagle # 5.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>Point for AP 30, sec. 27, at intersection with the northerly end line of mining claim, Black Eagle # 4, not monumented.</p> <p>From this point, the SW location cor. of mining claim Black Eagle # 5, hereinafter described, bears S. 1°27' W., 11.94 chs. dist.</p> <p>From this same point, the NE location cor. of mining claim Black Eagle # 4, monumented with a mound of stone, 3 ft. base, 2 ft. high, bears S. 78°23' E., 4.14 chs. dist.</p> <hr/>
5.48	<p>N. 78°23' W., on line 30-31, along the northerly end line of mining claim, Black Eagle # 4.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 31, sec. 27, identical to the NW location cor. of mining claim, Black Eagle # 4, monumented with a rebar, 1/2 in. diam., firmly set, projecting 8 ins. above the ground, with a mound of stone, 2 ft. base, 2 ft. high, E. of the cor., with aluminum tag mkd. PE 2663, not remonumented.</p> <hr/>
2.61	<p>S. 28°17' W., on line 31-32, along the westerly side line of mining claim, Black Eagle # 4.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
8.21	<p>Intersect the E. and W. center line of sec. 27, not monumented.</p> <p>From this point, the true point for the center 1/4 sec. cor. of sec. 27, bears N. 89°46' W., 3.39 chs. dist.</p> <p>Point for AP 32, sec. 27, at intersection with the northerly end line of mining claim, Black Eagle # 3, not monumented.</p> <p>From this point, the SW location cor. of mining claim, Black Eagle # 4, monumented with a rebar, 1/2 in. diam., firmly set, projecting 4 ins. above the ground, bears S. 28°17' W., 14.20 chs. dist.</p> <p>From this same point, the NE location cor. of mining claim, Black Eagle # 3, monumented with a rebar, 1/2 in. diam., firmly set, projecting 4 ins. above ground, with a mound of stone, 3 ft. base, 2 ft. high, alongside, bears S. 72°36' E., 3.44 chs. dist.</p> <hr/>

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 72°36' W., on line 32-33, along the northerly end line of mining claim, Black Eagle No. 3.</p>
	<p>Over mountainous land, through scattered paloverde and cacti.</p>
0.77	<p>Intersect the N. and S. center line of sec. 27, not monumented.</p>
	<p>From this point, the true point for the center 1/4 sec. cor. of sec. 27, bears N. 0°01' E., 4.72 chs. dist.</p>
5.52	<p>The NW location cor. of mining claim, Black Eagle #. 3, identical to the NE location cor. of mining claim, Black Eagle #. 2, monumented with a wood post, 2 x 2 ins., firmly set, projecting 48 ins. above the ground, in a mound of stone, 5 ft. base, 4 ft. high.</p>
	<p>Continue, along the northerly end line of mining claim, Black Eagle # 2.</p>
14.74	<p>AP 33, sec. 27, identical to the NW location cor. of mining claim, Black Eagle # 2, monumented with a wood post, 4 x 2 ins., firmly set, projecting 36 ins. above the ground, in a mound of stone, 4 ft. base, 3 ft. high, not remonumented.</p>
	<p>S. 29°39' W., on line 33-34, along the westerly side line of mining claim, Black Eagle # 2.</p>
	<p>Over mountainous land, through scattered paloverde and cacti.</p>
23.36	<p>AP 34, sec. 27, identical to the SW location cor. of mining claim, Black Eagle # 2, monumented with a rebar, 1/2 in. diam., firmly set, projecting 5 ins. above the ground, with a mound of stone, 4 ft. base, 2 ft. high, E. of the cor, not remonumented.</p>
	<p>S. 73°37' E., on line 34-35, along the southerly end line of mining claim, Black Eagle No. 2.</p>
	<p>Over mountainous land, through scattered paloverde and cacti.</p>
8.61	<p>The SE location cor. of mining claim, Black Eagle # 2, identical to SW location cor. of mining claim, Black Eagle # 3, monumented with a rebar, 1/2 in. diam., firmly set, projecting 3 ins. above the ground, with a mound of stone, 4 ft. base 4 ft. high, E. of the cor.</p>
	<p>Continue, along the southerly end line of mining claim, Black Eagle # 3.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
17.02	<p>AP 35, sec. 27, identical to the SE location cor. of mining claim, Black Eagle # 3, monumented with a mound of stone 5 ft. diam., 3 ft. high, not remonumented.</p> <hr/> <p>N. 32°37' E., on line 35-36, along the easterly side line of mining claim, Black Eagle # 3.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
8.99	<p>Point for AP 36, sec. 27, at intersection with the southerly end line of mining claim, Black Eagle # 4, not monumented.</p> <p>From this point, the NE location cor. of mining claim, Black Eagle # 3, hereinbefore described, bears N. 32°37' E., 14.35 chs. dist.</p> <p>From this same point, the SW location cor. of mining claim, Black Eagle # 4, hereinbefore described, bears N. 74°49' W., 2.36 chs. dist.</p> <hr/> <p>S. 74°49' E., on line 36-37, identical to the southerly end line of mining claim, Black Eagle # 4.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
2.18	<p>The south end center location cor., monumented with a mound of stone, 4 ft. base, 4 ft. high.</p>
3.84	<p>Intersect the N. and S. center line of sec. 27, not monumented.</p> <p>From this point, the true point for the center 1/4 sec. cor. of sec. 27, bears N. 0°01' E., 19.08 chs. dist.</p>
4.47	<p>Point for AP 37, sec. 27, at intersection with the easterly side line of mining claim, Chilito 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, to bedrock, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="859 1638 1015 1800" style="text-align: center;"> <p>T4S R15E</p> <p>AP37 S27</p> <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor. point, the SE location cor. of mining claim, Black Eagle # 4, hereinafter described, bears S. 74°49' E., 2.63 chs. dist.</p> <p>From this same cor. point, the NE location cor. of mining claim, Chilito 8, identical to cor. 4, Chilito 12, identical with cor. 3, Chilito 13, MS 4680, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. 4 CH. 12 4680 3 CH. 13 4680., bears N. 10°24' E., 21.28 chs. dist.</p> <p>Cor. is located on a steep E. slope.</p>
1.47	<p>S. 10°24' W., on line 37-38, along the easterly side line of mining claim, Chilito 8.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 38, sec. 27, identical to the SE location cor. of mining claim, Chilito 8, monumented with a concrete filled iron post, 2 ins. diam., firmly set, in concrete, projecting 24 ins. above the ground, with a mound of stone, 3 ft. base, 3 ft. high, E. of the cor., not remonumented.</p>
0.35	<p>N. 79°49' W., on line 38-39, along the southerly end line of mining claim, Chilito 8.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>Intersect the N. and S. center line of sec. 27, not monumented.</p>
4.53	<p>From this point, the true point for the center 1/4 sec. cor. of sec. 27, bears N. 0°01' E., 20.63 chs. dist.</p> <p>AP 39, sec. 27, identical to the NE location cor. of mining claim, Chilito 41, monumented with a concrete filled iron post, 2 ins. diam., firmly set, in concrete, projecting 23 ins. above the ground, with a mound of stone, 4 ft. base, 3 ft. high, and wood post, 2 x 2 ins., E. of the cor., not remonumented.</p>
16.62	<p>S. 9°07' W., on line 39-40, along the easterly side line of mining claim, Chilito 41.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p> <p>Point for AP 40, sec. 27, at intersection with the northerly side line of mining claim, Virginia # 4.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T4S R15E AP40 / S27 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the SW location cor. of mining claim Chilito 41, monumented with a rebar, 1/2 in. diam., firmly set, projecting 8 ins. above the ground, with a mound of stone, 4 ft. base, 3 ft. high, S. of the cor., bears S. 9°07' W., 6.04 chs. dist.</p> <p>From this same cor. point, the NE location cor. mining claim, Virginia # 4, monumented with a rebar, 1/2 in. diam., firmly set, projecting 4 ins. above the ground, with a mound of stone, 2 ft. base, 2 ft. high, W. of the cor., bears N. 84°30' E., 18.77 chs. dist.</p> <p>Cor. is located 50 lks. E. of a wash, drains SE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 84°30' W., on line 40-41, along the northerly side line of mining claim, Virginia # 4.</p> <p>Over rolling land, through scattered paloverde and cacti.</p>
4.83	<p>Point for AP 41, sec. 27, at intersections with the easterly side line of mining claim, Chilito 1.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, to bed rock, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T4S R15E AP41 / S27 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case and the rebar beneath the stainless steel post.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS

From this cor. point, the NE location cor. of mining claim, Virginia # 4, monumented with a rebar, 1/2 in. diam., 16 ins. long, firmly set, projecting 3 ins. above the ground, with a mound of stone, 3 ft. base, 2 ft. high, E. of the cor. bears S. 84°30' W., 0.63 chs. dist.

From this same cor. point, the NE location cor. of mining claim, Chilito 1, monumented with an iron post, 1 3/4 ins. diam., firmly set, projecting 21 ins. above the ground, with a mound of stone, 3 ft. base, 3 ft. high, E. of the cor. bears N. 9°27' E., 17.93 chs. dist.

Cor. is located 50 lks. E. of a ridge, bears SE and NW..

S. 9°27' W., on line 41-42, along the easterly side line of mining claim, Chilito 1.

Over rolling land, through scattered paloverde and cacti.

3.20

Intersect the line bet. secs. 27 and 34, not monumented.

From this point, the 1/4 sec. cor. of secs. 27 and 34, hereinbefore described, bears S. 89°57' E., 12.08 chs. dist.

From this same point, AP 42, sec. 34, identical to the SE location cor. of mining claim, Chilito 1, bears S. 9°27' W., 0.78 chs. dist., monumented with a mound of stone, 4 ft. base, 3 ft. high.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.

T4S R15E

AP42
S34

1995

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Cor. is located 200 lks. W. of a ridge, bears N. and S.

N. 89°57' W., bet. secs. 27 and 34.

Over rolling land, through scattered paloverde and cacti.

BOOK 5460

Metes-and-Bounds Survey of Tract 37,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
4.43	<p>Intersect the southerly end line of mining claim, Chilito 1, not monumented.</p> <p>From this point, the cor. of secs. 27, 28, 33 and 34, hereinbefore described, bears N. 89°57' W., 23.42 chs. dist.</p> <p>From this same point, AP 42, sec. 34, identical to the SE location cor. of mining claim, Chilito 1, hereinbefore described, bears S. 79°53' E., 4.37 chs. dist.</p> <hr/> <p>N. 79°53' W., on line 42-1, along the southerly end line of mining claim, Chilito 1.</p> <p>Over rolling land, through scattered paloverde and cacti.</p>
4.77	<p>The SW location cor. of mining claim, Chilito 1, identical to the SE location cor. of mining claim, Chilito 2, monumented with a rebar, 1/2 in. diam., firmly set, projecting 4 ins. above the ground, with a mound of stone, 4 ft. base, 3 ft. high, W. of the cor, not remonumented.</p> <p>Continue along the southerly end line of mining claim, Chilito 2.</p>
13.82	<p>The SW location cor. of mining claim, Chilito 2, identical to the SE location cor. of mining claim, Chilito 3, monumented with a rebar, 1/2 in. diam., firmly set, projecting 3 ins. above the ground, with a mound of stone, 4 ft. base, 3 ft. high, W. of the cor, not remonumented.</p> <p>Continue along the southerly end line of mining claim, Chilito 3.</p>
22.80	<p>AP 1, sec. 27, identical to the SW location cor. of mining claim, Chilito 3, hereinbefore described.</p>
<p>Metes-and-Bound Survey of Tract 38, T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona</p>	
<p>From the point for AP 1, sec. 27, at the intersection of the westerly side line of mining claim, Black Eagle # 1 with the northeasterly end line of claim, Brick # 1 (No One).</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>	


BOOK 5460

Metes-and-Bounds Survey of Tract 38,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="872 300 1004 455" style="text-align: center;"> <p>T4S R15E AP1 S27 1995</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point the cor. of secs. 27, 28, 33 and 34, hereinbefore described, bears S. 1°50' W., 15.59 chs. dist.</p> <p>From this same cor. point the SW location cor. of mining claim, Black Eagle # 1, hereinbefore described, bears S. 30°52' W., 0.41 chs. dist.</p> <p>From this same cor. point the SE location cor. of mining claim, Brick # 1 (No One), hereinbefore described, bears S. 46°46' W., 6.32 chs. dist.</p> <p>Cor. is located on a steep E. slope.</p> <p>N. 46°46' W., on line 1-2, along the northeasterly end line of mining claim, Brick # 1 (No One).</p> <p>Over rolling land, through scattered paloverde and cacti.</p> <p>0.68 Intersect the line bet. secs. 27 and 28, not monumented.</p> <p>From this point, the cor. of secs. 27, 28, 33 and 34, hereinbefore described, bears S. 0°01' W., 16.05 chs. dist.</p> <p>From this same point, AP 2, sec. 28, identical to the NE location cor. of mining claim, Brick # 1 (No One), monumented with a rebar, 1/2 in. diam., firmly set, projecting 3 ins. above the ground, with a mound of stone, 3 ft. base, 2 ft. high, E. of the cor., bears N. 46°46' W., 1.47 chs. dist.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, to bedrock, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="855 1708 1020 1864" style="text-align: center;"> <p>T4S R15E S28 AP2 1995</p>  </div>


BOOK 5460

Metes-and-Bounds Survey of Tract 38,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
2.57	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a ridge, bears ESE and WNW.</p> <hr/> <p>N. 0°01' E., bet. secs. 27 and 28.</p> <p>Over rolling land, through scattered paloverde and cacti.</p> <p>Intersect the easterly side line of mining claim, Brick # 9 No. Nine, not monumented.</p> <p>From this point, the 1/4 sec. cor. of secs. 27 and 28, hereinbefore described, bears N. 0°01' E., 21.43 chs. dist.</p> <p>From this same point, AP 2, sec. 28, identical to the NE location cor. of mining claim, Brick # 1 (No One), hereinbefore described, bears S. 34°24' W., 1.90 chs. dist.</p> <hr/> <p>N. 34°24' E., on line 2-3, along the easterly side line of mining claim, Brick # 9 No. Nine.</p> <p>Over rolling land, through scattered paloverde and cacti.</p>
6.88	<p>AP 3, sec. 27, identical to the NE location cor. of mining claim, Brick # 9 No. Nine, identical to the SW location cor. of mining claim, Brick # 10 No. Ten, monumented with a rebar, 1/2 in. diam., firmly set, projecting 3 ins. above the ground, with a mound of stone, 4 ft. base, 3 ft. high, E. of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div data-bbox="867 1487 1015 1649" style="text-align: center;"> <p>T4S R15E</p>  <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 47°38' E., on line 3-4, along the southeasterly side line of mining claim, Brick # 10 No. Ten.</p> <p>Over rolling land, through scattered paloverde and cacti.</p>


BOOK 5460

Metes-and-Bounds Survey of Tract 38,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
5.40	<p>Point for AP 4, at intersection with the westerly side line of mining claim, Black Eagle # 1.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to bedrock, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T4S R15E</p>  <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the SE location cor. of mining claim, Brick # 10 No. Ten, identical to the SE location cor. of mining claim, Lead Silver No. 5, hereinbefore described, bears N. 47°38' E., 18.86 chs. dist.</p> <p>From this same cor. point, the NW location cor. of mining claim, Black Eagle # 1, hereinbefore described, bears N. 30°52' E., 9.03 chs. dist.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 30°52' W., on line 4-1, along the westerly side line of Black Eagle # 1.</p> <p>Over rolling land, through scattered paloverde and cacti.</p>
14.39	<p>AP 1, sec. 27, hereinbefore described.</p> <hr/> <p style="text-align: center;">Metes-and-Bound Survey of Tract 39, T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From AP 1, sec. 27, identical to the SW location cor. of mining claim, Chilito 9, monumented with a concrete filled iron post, 2 ins. diam., firmly set in concrete, projecting 21 ins. above the ground, in a mound of stone, 2 1/2 ft. base, to top, not remonumented.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 27 and 34, hereinbefore described, bears S. 6°22' W., 19.10 chs. dist.</p> <p>N. 5°52' E., on line 1-2, along the westerly side line of mining claim, Chilito 9.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 39,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
1.27	<p>Point for AP 2, at intersection with the southerly end line of mining claim, Black Eagle # 4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to bedrock, supported in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T4S R15E</p>  <p>1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point the NW location cor. of mining claim Chilito 9, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. 4 CH. 12 4680 3 CH. 13 468, bears N. 5°52' E., 21.49 chs. dist.</p> <p>From this same cor. point, the SW location cor. of mining claim, Black Eagle # 4, hereinbefore described, bears N. 74°49' W., 8.53 chs. dist.</p> <p>Cor. is located on a steep E. slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 74°49' E., on line 2-3, along the southerly end line of mining claim, Black Eagle # 4.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
0.93	<p>Point for AP 3, sec. 27, identical to the SE location cor. of mining claim Black Eagle # 4, determined by bearing-bearing intersection, parallel to the westerly side line of mining claim Black Eagle # 4 and an extension through the south end center location cor., not monumented.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 28°17' E., on line 3-4, along the easterly side line of mining claim, Black Eagle # 4.</p> <p>Over mountainous land, through scattered paloverde and cacti.</p>
14.00	<p>Point for AP 4, sec. 27, at intersection with the westerly side line of mining claim, Black Eagle # 5, not monumented.</p> <p>From this cor. point the NE location cor. of mining claim, Black Eagle # 4, hereinbefore described, bears N. 28°17' E., 9.02 chs. dist.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 39,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this same cor. point the NW location cor. of mining claim, Black Eagle # 5, hereinbefore described, bears N. 1°27' E., 19.64 chs. dist.</p> <hr/>
	<p>S. 1°27' W., on line 4-5, along the westerly side line of mining claim, Black Eagle # 5.</p>
	<p>Over mountainous land, through scattered paloverde and cacti.</p>
3.16	<p>AP 5, sec. 27, identical to the SW location cor. of mining claim, Black Eagle # 5, monumented with a mound of stone, 3 ft. base, 3 ft. high, not remonumented.</p> <hr/>
	<p>S. 87°48' E., on line 5-6, along the southerly end line of mining claim, Black Eagle # 5.</p>
	<p>Over mountainous land, through scattered paloverde and cacti.</p>
2.53	<p>AP 6, sec. 27, at intersection with the easterly side line of mining claim, Chilito 9, not monumented.</p>
	<p>From this point, the south end center location cor. of mining claim, Black Eagle # 5, monumented with a mound of stone, 3 ft. base, 3 ft. high, bears S. 87°48' E., 1.99 chs. dist.</p>
	<p>From this same point, the true point for the NE location cor. of mining claim, Chilito 9, bears N. 5°56' E., 11.00 chs. dist., determined at record bearing and dist, S. 79°45'30" E., 35.00 ft. dist. from the witness cor. to cor. 3, Chilito 12 (cancelled), MS 4680, monumented with an iron post, 1 in. diam., firmly set, projecting 15 ins. above the ground, with brass cap mkd. 3 CH 12 4680 WC</p> <hr/>
	<p>S. 5°56' W., on line 6-7, along the easterly side line of mining claim, Chilito 9.</p>
	<p>Over mountainous land, through scattered paloverde and cacti.</p>
11.77	<p>AP 7, sec. 27, identical to the SE location cor. of mining claim, Chilito 9, monumented with a concrete filled iron post, 2 ins. diam., firmly set in concrete, projecting 19 ins. above the ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 3 ft. base, 2 ft. high, E. of the cor., not remonumented.</p> <hr/>
	<p>N. 79°43' W., on line 7-1, along the southerly end line of mining claim, Chilito 9.</p>

BOOK 5460

Metes-and-Bounds Survey of Tract 39,
T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS 9.04	<p>Over mountainous land, through scattered paloverde and cacti.</p> <p>AP 1, sec. 27, identical to the SW location cor. of mining claim, Chilito 9, hereinbefore described.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <hr/> <p>This survey is located approximately 2 miles north of the town of Hayden Arizona. The elevation ranges from 3000 to 400 feet above sea level.</p> <p>The access to the survey area is by way of Arizona State Highway 177 and various mining roads.</p> <p>The soil is broken limestone. The vegetation consists of paloverde, mesquite and cacti.</p> <p>Extensive prior mineral activity was noted in the survey area.</p> <hr/>
------------------------	---

BOOK 5460

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

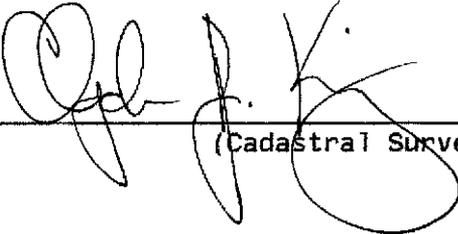
FIELD ASSISTANTS

NAMES	CAPACITY
W. William Foster	Surveying Technician
Geoffery A. Graham	" "
Lawrence T. Kempe	" "
Robert J. Lyle	" "

CERTIFICATE OF SURVEY
BOOK 5460

I, Clyde J. King, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 20th day of March, 1995, I have dependently resurveyed a portion of the subdivisional lines, subdivided sections 22 and 27 and performed metes-and-bounds surveys of Tracts 37, 38 and 39 of Township 4 South, Range 15 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

5-1-96
(Date)

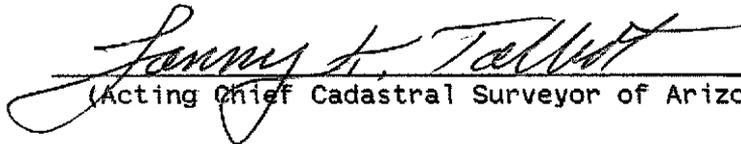

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines, the subdivision of sections 22 and 27, and the metes-and-bounds surveys of Tracts 37, 38 and 39 of Township 4 South, Range 15 East, Gila and Salt River Meridian, Arizona, executed by Clyde J. King, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

May 6, 1996
(Date)


(Acting Chief Cadastral Surveyor of Arizona)

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 4 S., R. 15 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.

(Date)

(Acting Chief Cadastral Surveyor of Arizona)