

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

MINERAL SURVEY NO. 4416

.....
..... Arizona Land District.

FIELD NOTES

Of The Survey Of The Mining Claim Of

PHELPS DODGE CORPORATION

Known As The

Veiled Prophet #s 6 through 30 lodes

Greenlee Gold Mountain Mining District,

Greenlee County, Arizona

Sections 34 and 35, Township 3 S., Range 29 E., G.&S.R.Mer.
2 and 3 4 S. 29 E., G.&S.R.Mer.
Surveyed under order dated September 18, 1956

by Robert Lenon Mineral Surveyor.

Claim located See back of this sheet, 19.....

Survey commenced November 17, 1956

Survey completed October 30, 1957

Address of claimant Evans, Kitchel & Jenckes, Attorneys for Claimant
807 Title & Trust Building
Phoenix, Arizona

DATES OF AMENDED LOCATIONS

.....
.....
.....

Page No.	Name of claim	Location date
33	Veiled Prophet #6	November 18, 1954
27	Veiled Prophet #7	" " " "
29	Veiled Prophet #8	" " " "
30	Veiled Prophet #9	" " " "
31	Veiled Prophet #10	September 16, 1954
34	Veiled Prophet #11	" " " "
30	Veiled Prophet #12	November 13, 1954
26	Veiled Prophet #13	November 16, 1954
21	Veiled Prophet #14	November 13, 1954
22	Veiled Prophet #15	September 15, 1954
16	Veiled Prophet #16	September 17, 1954
15	Veiled Prophet #17	" " " "
14	Veiled Prophet #18	September 20, 1954
13	Veiled Prophet #19	" " " "
9	Veiled Prophet #20	" " " "
19	Veiled Prophet #21	October 8, 1954
19	Veiled Prophet #22	" " " "
17	Veiled Prophet #23	" " " "
10	Veiled Prophet #24	September 27, 1954
12	Veiled Prophet #25	" " " "
5	Veiled Prophet #26	October 1, 1954
8	Veiled Prophet #27	October 5, 1954
6	Veiled Prophet #28	October 2, 1954
3	Veiled Prophet #29	October 1, 1954
1	Veiled Prophet #30	October 2, 1954

COMMENTS

This survey was made with a Berger transit No. 6072, with horizontal limb, $5\frac{1}{2}$ ins. diam., having two double opposite verniers, and full vertical circle, 5 ins. diam., having one double vernier; the verniers read to one minute of arc; the eyepiece is equipped with a colored shade set in the dust shutter for making direct observations upon the sun. The instrument was in good condition at the time of the survey and all adjustments were in good order.

All azimuths in this record were determined by the method of doubling angles, referred to the meridian determined by the following observation:

November 17th, 1956, at cor. No. 4 of the Veiled Prophet No. 20 lode; in Latitude $33^{\circ}08'$ N., and Longitude $109^{\circ}20'$ W., I make a series of six altitude observations upon the sun for azimuth at approximately equal time intervals, three each with the telescope in direct and reversed positions, observing opposite limbs of the sun, and reading the horizontal angle from a reference point about 1500 feet northwesterly; SW. to the sun.

Mean time of observation, 105th
meridian standard time = 2h 50m p.m.

Declination of sun at mean time of observation = $19^{\circ}07\frac{1}{2}'$ S.

Mean observed vertical angle to sun's center = $24^{\circ}36\frac{1}{2}'$

Mean observed horizontal angle from
reference point to sun's center = $276^{\circ}54'$

True bearing to reference point = N. $53^{\circ}43\frac{1}{2}'$ W.

The lines were measured with a Lufkin steel tape, 500 feet in length, graduated every foot, with the end feet graduated to tenths and hundredths, and a Chicago steel tape, 300 feet in length, graduated every foot, with the end feet graduated to tenths; both tapes were compared with a Lufkin standard at the time of beginning the survey, and found correct.

All lines and connections of this survey were run by direct methods where the lines are accessible; the inaccessible lines were run by traverse methods, as shown by the calculation sheets herewith submitted.

The magnetic declination observed at each corner of the survey gave a uniform value of $12^{\circ}45'$ E.

Survey No. 4416

Feet

VEILED PROPHET #30 LODE

At cor. No. 1 of the Veiled Prophet #30 lode, identical with cor. No. 1, Iolanthe; cor. No. 4, Dead Pine; and cor. No. 3, El Moro lodes, all of Sur. No. 2485, a pine post firmly set in a stone mound, with faint markings visible, and which I mkd. VP30-1-4416; from which

The cor. of secs. 26, 27, 34 and 35, T. 3 S., R. 29 E., G. & S. R. M., Arizona, bears N. $33^{\circ}11'$ E., 428.25 ft. dist., an iron pipe, 2 ins. diam., with brass cap, firmly set and properly mkd.

CHECK Feet	
	Thence N. 84°08' E.
905.	Gulch, 3 ft. wide, course S. 32° E.
1045.	Gulch, 3 ft. wide, course S. 60° E.
1087.19	Intersect line 2-3, Sur. No. 1712, Good Boy lode, at a point from which cor. No. 3 bears S. 43°09' W., 557.45 ft. dist.
1160.0	Cor. No. 2, on line 4-1, Survey No. 2485, Iolanthe lode. Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap, mkd. VP30-2-4416; from which Cor. No. 4, Survey No. 2485, Iolanthe lode, bears N. 84°08' E., 345.63 ft. dist. Cor. No. 2, Survey No. 3078, Prince lode, bears S. 25°37' W., 180.63 ft. dist. A pinon tree, 6 ins. diam., bears N. 60°20' E., 30.4 ft. dist., mkd. X-VP30-2-4416-BT. Build a mound of stone alongside. Thence S. 28°51' W.
75.	Gulch, 3 ft. wide, course S. 55° E.
170.	Gulch, 5 ft. wide, course S. 75° E.
361.15	Lode line, discovery point bears S. 84°08' W., 450.0 ft. dist. Set an iron pin, 3/4 ins. diam., build a mound of stone alongside.
722.3	Cor. No. 3, on line 3-4 of Good Boy lode, identical with line 1-2 of Regulation lode, both of Survey No. 1712. Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap, mkd. VP30-3-4416; from which A pinon tree, 8 ins. diam., bears N. 76°40' W., 15.1 ft. dist., mkd. X-VP30-3-4416BT. Cor. No. 3, Good Boy lode, Survey No. 1712, bears N. 25°42' W., 242.50 ft. dist. Cor. No. 2, Regulation lode, Survey No. 1712, bears N. 25°42' W., 248.76 ft. dist. Build a mound of stone alongside. Thence S. 84°08' W.
217.41	Cor. No. 2, Veiled Prophet #29 lode of this survey.
327.85	Intersect line 2-3, Survey No. 1712, Regulation lode, at a point from which cor. No. 2 bears N. 40°16' E., 337.68 ft. dist.

<p>Feet</p> <p>360.</p> <p>920.</p> <p>1160.0</p> <p>1.69</p> <p>361.15</p> <p>722.3</p>	<p>Gulch, 10 ft. wide, course S. 40° E.</p> <p>Gulch, 3 ft. wide, course S. 40° E.</p> <p>Cor. No. 4, identical with Cor. No. 4, Survey No. 2485, El Moro lode; found an old stone mound, no B.O.'s seen.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap mkd. VP30-4-4416-EM-4-2485; from which</p> <p style="padding-left: 40px;">A pinon tree, 8 ins. diam., bears N. 61°30' E., 20.0 ft. dist., mkd. X-VP30-4-4416BT.</p> <p>Build a mound of stone alongside.</p> <p style="padding-left: 40px;">Thence N. 28°51' E.</p> <p>Intersect line 1-2, Veiled Prophet #29 lode of this survey.</p> <p>Lode line, discovery point bears N. 84°08' E., 710 ft. dist.</p> <p style="padding-left: 40px;">Set an iron pin, 3/4 ins. diam., in an old stone mound.</p> <p>Cor. No. 1, and place of beginning.</p>
<p>VEILED PROPHET #29 LODE</p>	
<p>218.38</p> <p>455.</p> <p>1015.</p> <p>1049.73</p> <p>1160.0</p>	<p>At Cor. No. 1, being identical with cor. No. 1 of the Veiled Prophet #26 lode of this survey, and being on line 4-1, Survey No. 2485, El Moro lode.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap mkd., VP29-1-VP26-1-4416; from which</p> <p style="padding-left: 40px;">The corner of secs. 26, 27, 34 and 35 bears N. 38°18'50" E., 1289.28 ft. dist., previously described.</p> <p style="padding-left: 40px;">Cor. No. 4, Veiled Prophet #30 lode of this survey, bears N. 84°35' E., 217.42 ft. dist., previously described.</p> <p style="padding-left: 40px;">A pinon tree, 10 ins. diam., bears S. 25°30' W., 22.2 ft. dist., mkd., X-VP26-1-4416BT.</p> <p>Build a mound of stone alongside.</p> <p style="padding-left: 40px;">Thence N. 84°13' E.</p> <p>Intersect line 4-1, Veiled Prophet #30 lode of this survey, identical with line 3-4, Survey No. 2485, El Moro lode.</p> <p>Gulch, 3 ft. wide, course S. 40° E.</p> <p>Gulch, 10 ft. wide, course S. 40° E.</p> <p>Intersect line 2-3, Survey No. 1712, Regulation lode, at a point from which cor. No. 2 bears N. 40°16' E., 337.45 ft. dist.</p> <p>Cor. No. 2.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap mkd. VP29-2-4416; from which</p>

Feet	<p>A pinon tree, 11 ins. diam., bears S. 57°30' W., 29.1 ft. dist., mkd. X-VP29-2-4416BT.</p> <p>Build a mound of stone alongside.</p> <p>Thence S. 10°47' E.</p>
301.14	<p>Lode line, discovery point bears S. 84°13' W., 1010 ft. dist.</p> <p>Set an iron pin, 3/4 ins. diam., build a mound of stone alongside.</p>
602.28	<p>Cor. No. 3.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap mkd., VP29-3-4416; from which</p> <p>Cor. No. 1, Sur. No. 3078, Prince lode, bears S. 2°28' W., 80.27 ft. dist.</p> <p>Cor. No. 3, Sur. No. 1712, Paramour lode, bears S. 77°38' W., 348.28 ft. dist.</p> <p>A pinon tree, 8 ins. diam., bears S. 41°30' W., 23.3 ft. dist., mkd., X-VP29-3-4416BT.</p> <p>Build a stone mound alongside.</p> <p>Thence S. 84°13' W.</p>
115.	<p>Gulch, 10 ft. wide, course S. 40° E.</p>
785.14	<p>Intersect line 2-3, Survey No. 1712, Regulation lode, at a point from which Cor. No. 3 bears S. 40°16' W., 74.98 ft. dist., and Cor. No. 2 bears N. 40°16' E., 1201.94 ft. dist.</p>
799.46	<p>Intersect line 3-4, Veiled Prophet #28 lode of this survey.</p>
1160.0	<p>Cor. No. 4, being identical with Cor. No. 2, Veiled Prophet #26 lode of this survey.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap mkd. VP29-4-VP26-2-4416; from which</p> <p>Cor. No. 3, Survey No. 1712, Regulation lode, bears S. 86°34' E., 325.04 ft. dist.</p> <p>A pinon tree, 6 ins. diam., bears N. 66°30' W., 16.2 ft. dist., mkd. X-VP26-2-4416BT.</p> <p>Build a stone mound alongside.</p> <p>Thence N. 10°47' W.</p>
301.14	<p>Lode line, discovery point bears N. 84°13' E., 150.0 ft. dist.</p> <p>Set an iron pin, 3/4 ins. diam., build a mound of stone alongside.</p>
324.00	<p>Intersect line 3-4, Veiled Prophet #28 lode of this survey.</p>
602.28	<p>Cor. No. 1, and place of beginning.</p>

Survey No. 4416

Chain
Feet

VEILED PROPHET #26 LODE

Beginning at cor. No. 1, Veiled Prophet #26 lode, being identical with cor. No. 1, Veiled Prophet #29 lode of this survey; previously described.

Thence S. 10°47' E.

- 278.28 Intersect line 3-4, Veiled Prophet #28 lode of this survey.
- 301.14 Lode line, discovery point bears S. 84°35' W., 180 ft. dist.
- 602.28 Cor. No. 2, identical with cor. No. 4, Veiled Prophet #29 lode of this survey; previously described.
- Thence S. 84°35' W.
- 583.28 Cor. No. 2, Veiled Prophet #28 lode of this survey falling on line 3-4, Veiled Prophet #27 lode of this survey.
740. Gulch, 2 ft. wide, course N. 10° W:
- 1379.41 Intersect line 1-2, Survey No. 2357, Leo C. lode, at a point from which cor. No. 2 bears S. 13°33' E., 134.05 ft. dist.
- 1436.8 Cor. No. 3.
- Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP26-3-4416; from which
- A granite outcrop, 72 x 144 ins., 36 ins. high bears S. 68°45' E., 6.7 ft. dist., mkd. X-BR-3-4416.
- Build a mound of stone alongside.
- Thence N. 10°47' W.
- 246.95 Intersect line 2-3, Veiled Prophet #27 lode of this survey.
- 301.14 Lode line, discovery point bears N. 84°35' E., 1256.8 ft. dist.
- Set an iron pipe, 3/4 in. diam., build a mound of stone alongside.
- 325.75 Intersect line 2-3, Survey No. 2357, Antietam lode at a point from which Cor. No. 2 bears N. 16°34' E., 187.63 ft. dist.
- 549.47 Intersect line 4-1, Sur. No. 2357, Leo C. lode, at a point from which cor. No. 1 bears N. 25°07' E., 48.48 ft. dist.
- 562.34 Cor. No. 4, Survey No. 2485, Boulder Mine lode; from which
- The southerly end center, on line 4-1, bears N. 61°16' W., 298.5 ft. dist.
- Cor. No. 2, Survey No. 2357, Antietam lode bears S. 61°44' E., 111.0 ft. dist.
- 602.28 Cor. No. 4.
- Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP26-4-4416; from which

	<p>A granite outcrop, 10 x 20 x 15 ft. high bears N. 43°15' E., 9.5 ft. dist., mkd. X-VP26-4-4416BR.</p> <p>Cor. No. 1, Sur. No. 2357, Leo C. lode, bears S. 75°19' E., 31.49 ft. dist.</p> <p>Cor. No. 2, Sur. No. 2357, Antietam lode bears S. 48°54' E., 139.65 ft. dist.</p> <p>Build a mound of stone alongside.</p> <p>Thence N. 84°35' E.</p>
30.76	Cor. No. 1, Sur. No. 2485, Lone Pine lode.
157.76	Cor. No. 4, Sur. No. 2485, Lone Pine lode; identical with cor. No. 1, ElMoro lode.
400.	Antietam Gulch, 10 ft. wide, course N. 55° W.
1150.	Antietam Gulch, 10 ft. wide, course S. 40° W.
1360.	Center of shaft, 5 x 6 ft., 5 ft. deep.
1436.8	Cor. No. 1, and place of beginning.
	<p>VEILED PROPHET #28 LODE</p> <p>Beginning at cor. No. 1, falling on line 2-3, Sur. 1712, Paramour lode, at a point from which cor. No. 2 bears S. 10°47' W., 570.86 ft. dist., and also on line 3-4, Veiled Prophet #20 lode of this survey.</p> <p>This cor. falls in the bed of Placer Gulch, 20 ft. wide, course S. 65° W. to this point and S. 20° W. below this point, where a permanent monument cannot be maintained. I run S. 56°05' E., 30.0 ft. dist. and set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground with bronze cap mkd. WC-VP28-1-4416; for witness cor. No. 1; from which</p> <p>An oak tree, 8 ins. diam., bears N. 11°40' E., 17.0 ft. dist., mkd. X-WC1-4416.</p> <p>Build a mound of stone alongside.</p> <p>Return to cor. No. 1; from which</p> <p>The $\frac{1}{4}$ sec. cor., secs. 34 and 35 bears S. 14°46' E., 172.04 ft. dist., an iron pipe, 1 in. diam., with brass cap attached, firmly set and properly mkd.</p> <p>Cor. No. 4, Sur. No. 1712, Regulation lode, bears N. 6°47'15" W., 270.14 ft. dist.</p> <p>Thence N. 56°05' W.</p>
803.80	Cor. No. 3, Veiled Prophet #20 lode, identical with cor. No. 4, Veiled Prophet #27 lode of this survey.
1469.93	Cor. No. 2, on lines 2-3, Veiled Prophet #26 lode, and on lines 3-4, Veiled Prophet #27 lode, both of this survey.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP28-2-4416; from which

Survey No. 4416

7

Chain Feet	A pinon tree, 11 ins. diam., bears S. 0°20' W., 9.0 ft. dist., mkd. X-VP28-2-4416.
	Build a mound of stone alongside.
	Thence N. 33°55' E.
300.00	Lode line, discovery point bears S. 56°05' E., 700 ft. dist.
	Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
600.00	Cor. No. 3
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP28-3-4416; from which
	A pinon tree, 8 ins. diam., bears S. 63°20' E., 17.4 ft. dist. mkd. X-3-4416.
	Build a mound of stone alongside.
	Thence S. 56°05' E.
223.25	Intersect line 4-1, Veiled Prophet #29 lode, being identical with line 1-2, Veiled Prophet #26 lode of this survey.
728.55	Intersect line 3-4, Veiled Prophet #29 lode of this survey.
738.54	Intersect line 2-3, Sur. No. 1712, Regulation lode, at a point from which cor. No. 3 bears S. 40°16' W., 65.79 ft. dist.
1213.6	Intersect line 2-3, Sur. No. 1712, Paramour lode, at a point from which cor. No. 3 bears N. 10°47' E., 281.58 ft. dist.
1339.49	Intersect line 1-4, Sur. No. 1712, Regulation lode, at a point from which cor. No. 4 bears S. 40°31' W., 397.84 ft. dist.
1460.	Gulch, 3 ft. wide, course S. 45° E.
1469.93	Cor. No. 4
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP28-4-4416; from which
	A pinon tree, 6 ins. diam., bears S. 64°30' E., 18.1 ft. dist., mkd. X-VP28-4-4416BT.
	Build a mound of stone alongside.
	Thence S. 33°55' W.
3.	Gulch, 3 ft. wide, course S. 45° E.
300.0	Lode line, discovery point bears N. 56°05' W., 769.93 ft. dist.
	Set an iron pin, 3/4 in. diam., build a mound of stone alongside.
600.0	Cor. No. 1, and place of beginning.

XXXX Feet	VEILED PROPNET #27 LODE
	Beginning at cor. No. 1, identical with cors. No. 1, 2 & 3, Veiled Prophet #'s 24, 20 & 19 lodes, all of this survey.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP27-1-VP24-1-VP20-2-VP19-3-4416; from which
	The $\frac{1}{4}$ sec. cor., secs. 34 & 35 bears S. 83°37' E., 1052.20 ft. dist., previously described.
	A point on a siliceous outcrop, 8 ft. wide and 10 ft. high bears N. 55°35' W., 16.1 ft. dist., mkd. X-VP20-2-4416-BR.
	Build a mound of stone alongside.
	Thence N. 56°05' W.
600.00	Cor. No. 1, Veiled Prophet #25 lode, identical with cor. No. 4, Veiled Prophet #24 lode, both of this survey.
1182.42	Intersect line 2-3, Sur. No. 2357, Leo C. lode, at a point from which Cor. No. 2 bears N. 25°28' E., 4.84 ft. dist.
1200.00	Cor. No. 4, Veiled Prophet #25 lode of this survey.
1464.65	Intersect line 2-3, Sur. No. 2357, Antietam lode, at a point from which cor. No. 2 bears N. 16°34' E., 492.06 ft. dist.
1500.00	Cor. No. 2
	Set a steel nail, 3 ft. above the general surface, in a granite ledge, 50 x 15 ft. in size, mkd. VP27-2-4416; from which
	Cor. No. 3, Sur. No. 2357, Antietam lode, bears S. 13°31'30" W., 636.22 ft. dist.
	A point on a granite ledge, 6 x 18 ins., 12 ins. high bears S. 56°15' E., 9.75 ft. dist., mkd. X-BR-2-4416.
	Thence N. 33°55' E.
113.18	Intersect line 2-3, Sur. No. 2357, Antietam lode, at a point from which cor. No. 2 bears N. 16°34' E., 373.46 ft. dist.
234.54	Intersect line 3-4, Veiled Prophet #26 lode of this survey.
295.48	Intersect line 1-2, Sur. 2357, Leo C. lode, at a point from which cor. No. 1 bears N. 13°33' W., 298.86 ft. dist.
300.0	Lode line, discovery point bears S. 56°05' E., 1235 ft. dist.
	Set a square-headed bolt $\frac{1}{2}$ in. diam., build a mound of stone alongside.
600.0	Cor. No. 3.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP27-3-4416; from which
	A siliceous outcrop, 24 x 36 x 36 ins. high bears S. 52°10' W., 39.2 ft. dist., mkd. X-BR-3-4416.
	Build a mound of stone alongside.

Survey No. 4416

9

Feet	
	Thence S. 56°05' E.
610.	Gulch, 3 ft. wide, course N. 10° W.
833.87	Cor. No. 2, Veiled Prophet #28 lode of this survey, on line 2-3, Veiled Prophet #26 lode of this survey.
1500.00	Cor. No. 4, being identical with cor. No. 3, Veiled Prophet #20 lode of this survey. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap, mkd. VP20-3-VP27-4-4416; from which An oak tree, 8 ins. diam., bears N. 36°45' E., 8.0 ft. dist., mkd. X-4-4416. Build a mound of stone alongside.
	Thence S. 33°55' W.
300.0	Lode line, discovery point bears N. 56°05' W., 265 ft. dist. Set an iron pin 3/4 in. diam., build a mound of stone alongside.
600.0	Cor. No. 1, and place of beginning.
VEILED PROPHET #20 LODE	
	Beginning at cor. No. 1, being identical with cor. No. 4, Veiled Prophet #19 lode, and falling on line, 2-3 Veiled Prophet #23 lode, both of this survey. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP20-1-VP19-4-4416; from which The standard cor. of secs. 34 and 35, bears S. 5°56' W., 1928.22 ft. dist., an iron pipe, 2 ins. diam., with brass cap, firmly set and properly mkd. Cor. No. 2, Sur. No. 1712, Paramour lode, bears N. 47°03' W., 477.85 ft. dist. A pinon tree 8 ins. diam., bears S. 25°10' E., 32.8 ft. dist. mkd. X-VP19-4-4416BT. Build a mound of stone alongside.
	Thence N. 56°05' W.
690.	Placer Gulch, 20 ft. wide, course S. 15° W.
1500.00	Cor. No. 2, identical with cors. No. 1, 1 & 3, Veiled Prophet #27, 24 & 19 lodes, all of this survey; previously described.
	Thence N. 33°55' E.
300.00	Lode line, discovery point bears S. 56°05' E., 365 ft. dist.
600.00	Cor. No. 3, identical with cor. No. 4, Veiled Prophet #27 lode, and falling on line 1-2, Veiled Prophet #28 lode, both of this survey; previously described.

Chains Feet	
	Thence S. 56°05' E.
803.80	Cor. No. 1, Veiled Prophet #28 lode of this survey, on line 2-3, Sur. No. 1712, Paramour lode.
833.80	Witness cor., cor. No. 1, Veiled Prophet #28 lode of this survey.
1455.43	Intersect line 4-1, Sur. No. 1712, Paramour lode, at a point from which cor. No. 1 bears S. 10°48' W., 315.02 ft. dist.
1500.00	Cor. No. 4, being identical with Cor. No. 3, Veiled Prophet #23 lode of this survey. Set a copper-coated steel rod, 3 ft. long, 3/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP23-3-VP20-4-4416; from which Cor. No. 1, Sur. No. 1712, Paramour lode bears S. 18°38'30" W., 300.33 ft. dist. A juniper tree, 8 ins. diam., bears N. 23°30' W., 44.2 ft. dist., mkd. X-VP20-4-4416-BT. Build a mound of stone alongside. Thence S. 33°55' W.
104.4	Intersect line 4-1, Sur. No. 1712, Paramour lode, at a point from which Cor. No. 1 bears S. 10°48' W., 201.51 ft. dist.
300.00	Lode line, discovery point bears N. 56°05' W., 1135 ft. dist. Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
323.50	Intersect line 1-2, Sur. 1712, Paramour lode at a point from which cor. No. 1 bears S. 79°12' E., 86.02 ft. dist.
500.00	Gulch, 5 ft. wide, course N. 35° W.
600.00	Cor. No. 1, and place of beginning.
VEILED PROPHEET #24 LODE	
	Beginning at cor. No. 1, identical with cors. Nos. 1, 2, & 3, Veiled Prophet #'s 27, 20, & 19 lodes, all of this survey; previously described. Thence S. 33°55' W.
600.00	Cors. No. 2 & 4, Veiled Prophet #'s 19 & 18 lode, both of this survey.
1200.00	Cors. No. 3 & 3, Veiled Prophet #'s 18 & 17 lodes, both of this survey.
1406.38	Intersect line 3-4, Sur. No. 1730, Victor lode, at a point from which cor. No. 3 bears N. 42°37' W., 225.20 ft. dist.
1500.00	Cor. No. 2. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap, mkd. VP24-2-4416; from which

Survey No. 4416

11

CASSY
Feet

Cor. No. 3, Sur. No. 1730, Victor lode, bears N. 22° 23' W.,
263.24 ft. dist.

A porphyry outcrop, 24 x 24 ins., 18 ins. high bears N. 12° 10'
W., 20.3 ft. dist., mkd. X-BR-2-4416.

Build a mound of stone alongside.

Thence N. 56° 05' W.

99.82 Intersect line 2-3, Sur. No. 1582, Copper lode at a point from which
cor. No. 3 bears S. 31° 12' W., 826.24 ft. dist.

254.43 Intersect line 2-3, Sur. No. 1730, Victor lode, at a point from
which cor. No. 3 bears N. 47° 33' E., 150.30 ft. dist.

300.00 Lode line, discovery point bears N. 33° 55' E., 1365 ft. dist.

Set an iron pin, 5/8 in. diam., build a mound of stone
alongside.

591.32 Intersect line 2-3, Sur. No. 1937, Buckeye lode, at a point from
which cor. No. 3 bears S. 13° 34' E., 74.62 ft. dist.

600.0 Cor. No. 3, being identical with cor. No. 2, Veiled Prophet #25 lode
of this survey.

Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins.
in the ground, with bronze cap mkd. VP25-2-VP24-3-4416; from which

Cor. No. 3, Sur. No. 1937, Buckeye lode, bears S. 17° 42' E.,
81.23 ft. dist.

Cor. No. 1, Sur. No. 1582, Copper lode, bears N. 22° 11' 30" E.,
641.18 ft. dist.

A pinon tree, 8 ins. diam., bears S. 80° 50' E., 39.4 ft. dist.,
mkd. X-VP25-2-4416BT.

Build a mound of stone alongside.

Thence N. 33° 55' E.

7.96 Intersect line 2-3, Sur. No. 1937, Buckeye lode, at a point from
which Cor. No. 3 bears S. 13° 34' E., 86.40 ft. dist.

634.44 Intersect line 1-2, Sur. No. 1582, Copper lode, at a point from
which cor. No. 1 bears N. 59° 00' W., 130.45 ft. dist.

1500.00 Cor. No. 4, being identical with cor. No. 1, Veiled Prophet #25
lode of this survey; and being on line 1-2, Veiled Prophet #27
lode of this survey.

Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins.
in the ground, with bronze cap mkd. VP25-1-VP24-4-4416; from which

The 1/4 sec. cor., secs. 34 & 35 bears S. 73° 41' 15" E., 1608.34
ft. dist.

A point on a porphyry outcrop, 12 x 36 ins., 24 ins. high
bears S. 62° E., 3.3 ft. dist., mkd. X-ER-1-4416.

Build a mound of stone alongside.

0000 Feet	Thence S. 56°05' E.
300.0	Lode line, disc. pt., bears S. 33°55' W., 135 ft. dist. Set an iron pin, 3/4 in. diam., build a mound of stone alongside.
600.0	Cor. No. 1 and place of beginning.
VEILED PROPHET #25 LODE	
	Beginning at cor. No. 1, identical with cor. No. 4, Veiled Prophet #24 lode, and falling on line 1-2, Veiled Prophet #27 lode, both of this survey; previously described. Thence S. 33°55' W.
865.56	Intersect line 1-2, Sur. No. 1582, Copper lode; previously described.
1492.04	Intersect line 2-3, Sur. No. 1937 Buckeye lode; previously described.
1500.00	Cor. No. 2, identical with cor. No. 3, Veiled Prophet #24 lode of this survey; previously described. Thence N. 56°05' W.
94.26	Intersect line 4-1, Sur. No. 1582, Copper lode, at a point from which cor. No. 1 bears N. 30°38' E., 628.83 ft. dist.
300.00	Lode line, discovery point bears N. 33°55' E., 390 ft. dist. Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
340.	Gulch, 3 ft. wide, course W.
600.00	Cor. No. 3. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground with bronze cap mkd. VP25-3-4416; from which Cor. No. 3, Sur. No. 2357, Leo C. lode, bears N. 58°55'30" E., 431.34 ft. dist. A siliceous outcrop, 36 x 48 ins., 18 ins. high bears N. 31°20' E., 8.5 ft. dist., mkd. X-VP25-3-4416-BR. Build a mound of stone alongside. Thence N. 33°55' E.
558.09	Intersect line 3-4, Sur. No. 2357, Leo C. lode, at a point from which cor. No. 3 bears S. 13°34' E., 247.40 ft. dist., identical with line 2-3 Sur. No. 1937, Buckeye lode, at a point from which cor. No. 3 bears S. 13°34' E., 900.42 ft. dist.
895.	Gulch, 8 ft. wide, course N. 55° W.
1060:	Gulch, 5 ft. wide, course W.
1500.00	Cor. No. 4, falling on line 1-2, Veiled Prophet #27 lode of this survey.

81
16

Survey No. 4416

13

CHANGES Feet	
	<p>in place, A porphyry boulder / 36 x 48 ins., 36 ins. high, mkd. X-Cor; from which</p> <p>Marks, X-BR-4-4416, on cor. boulder, bears S. 56°05' E., 1.85 ft. dist.</p> <p>Cor. No. 2, Sur. No. 2357, Leo C. lode bears S. 71°56' E., 17.53 ft. dist.</p> <p>Thence S. 56°05' E.</p>
17.58	Intersect line 2-3, Sur. No. 2357, Leo C. lode, at a point from which cor. No. 2 bears N. 25°28' E., 4.84 ft. dist.
300.00	<p>Lode line, discovery point bears S. 33°55' W., 1110 ft. dist.</p> <p>Set an iron pin, 5/8 in. diam., build a mound of stone alongside.</p>
600.00	Cor. No. 1, and place of beginning.
VEILED PROPHET #19 LODE	
	<p>Cor. No. 1, being identical with cor. No. 1, Veiled Prophet #18 lode and being on line 2-3 Veiled Prophet #23 lode, both of this survey.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam. 27 ins. in the ground, with bronze cap mkd. VP18-1-VP19-1-4416; from which</p> <p>The standard cor. for Secs. 34 & 35 bears S. 5°27' E., 1426.43 ft. dist.</p> <p>A siliceous outcrop, 48 x 48 x 12 ins. high, bears S. 28°00' E., 7.7 ft. dist., mkd. X-VP19-1-4416 BR.</p> <p>Build a mound of stone alongside.</p> <p>Thence N. 56°05' W.</p>
615.	Placer Gulch, 20 ft. wide, course S. 35° W.
1500.00	<p>Cor. No. 2, being identical with cor. No. 4, Veiled Prophet #18 lode, and being on line 1-2 Veiled Prophet #24, both of this survey.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP19-2-VP18-4-4416; from which</p> <p>Cor. No. 2, Sur. No. 1582, Copper lode bears S. 62°23' W., 274.93 ft. dist.</p> <p>A porphyry outcrop, 36 x 48 ins., 54 ins. high bears N. 45°45' W., 39.2 ft. dist., mkd. X-BR-2-4416.</p> <p>Build a mound of stone alongside.</p> <p>Thence N. 33°55' E.</p>
300.0	<p>Lode line, discovery point bears S. 56°05' E., 940 ft. dist.</p> <p>Set an iron pin 3/4 in. diam., build a mound of stone alongside.</p>

Feet	
600.0	Cor. No. 3, being identical with Cor. Nos. 1, 1, & 2, Veiled Prophet #'s 24, 27, & 20, all of this survey; previously described. Thence S. 56°05' E.
810.	Placer Gulch, 20 ft. wide, course S, 15° W.
1500.0	Cor. No. 4, being identical with cor. No. 1, Veiled Prophet #20 lode, and being on line 2-3 Veiled Prophet #23 lode, both of this survey; previously described. Thence S. 33°55' W.
300.0	Lode line, discovery point bears N. 56°05' W., 560 ft. dist. Set an iron pin 3/4 in. diam., build a mound of stone alongside.
600.0	Cor. No. 1, and place of beginning.

VEILED PROPHET #18 LODE

	Cor. No. 1, being identical with cor. No. 1, Veiled Prophet #19 lode, and on line 2-3, Veiled Prophet #23 lode, both of this survey, previously described. Thence S. 33°55' W.
240.	Gulch, 3 ft. wide, course N. 80° W.
300.00	Lode line, being identical with cor. Nos. 2 & 4, Veiled Prophet #23 & 21 lodes, both of this survey; point of discovery bears N. 56°05' W., 430 ft. dist.
600.00	Cor. No. 2, being identical with cor. No. 4, Veiled Prophet #17 lode, and on line 3-4, Veiled Prophet #21 lode, both of this survey. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap, mkd. VP18-2-VP17-4-4416; from which A pinon tree, 8 ins. diam., bears N. 73°40' E., 18.4 ft. dist. mkd. X-VP18-2-4416BT. Build a mound of stone alongside. Thence N. 56°05' W.
940.	Placer Gulch, 20 ft. wide, course S. 35° W.
1500.00	Cor. No. 3, being identical with cor. No. 3, Veiled Prophet #17 lode, and on line 1-2, Veiled Prophet #24 lode, both of this survey. Set a point 5 ft. up on an outcrop, 100 x 100 ft. in size, 50 ft. high, mkd. X-VP18-3-VP17-3-4416; from which Cor. No. 4, Sur. No. 1730, Victor lode, bears S. 17°13'30" E., 468.08 ft. dist.

Survey No. 4416

15

	<p>Thence N. 33°55' E.</p> <p>300.00 Lode line, discovery point bears S. 56°05' E., 1070 ft. dist.</p> <p>Set an iron pin, 3/4 in. diam., build a mound of stone alongside.</p>
600.00	<p>Cor. No. 4, being identical with cor. No. 2, Veiled Prophet #19 lode, and on line 1-2, Veiled Prophet #24 lode, both of this survey; previously described.</p> <p>Thence S. 56°05' E.</p>
885.00	<p>Placer Gulch, 20 ft. wide, course S. 35° W.</p>
1500.00	<p>Cor. No. 1, and place of beginning.</p>
VEILED PROPHET #17 LODE	
	<p>Beginning at cor. No. 1, identical with cor. No. 1, Veiled Prophet #16 lode, falling on line 3-4, Veiled Prophet #21 lode, both of this survey.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap, mkd. VP17-1-VP16-1-4416; from which</p> <p>The standard cor. for secs. 34 & 35 bears S. 62°13' E., 909.96 ft. dist.</p> <p>A granite face 50 ft. wide, 25 ft. high bears N. 75°45' E., 5.0 ft. dist., mkd. X-BR-1-4416.</p> <p>Build a mound of stone alongside.</p> <p>Thence N. 56°05' W.</p>
245.	<p>Gold Standard Canyon, 20 ft. wide, course S. 35° W.</p>
1180.	<p>Placer Gulch, 20 ft. wide, course S. 40° W.</p>
1207.03	<p>Intersect line 4-5, Sur. No. 1730, Victor lode, at a point from which cor. No. 4 bears N. 47°03'30" E., 314.57 pt. dist.</p>
1300.	<p>Gulch, 5 ft. wide, course S. 40° E.</p>
1500.00	<p>Cor. No. 2, identical with cor. No. 4, Veiled Prophet #16 lode of this survey.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap, mkd. VP16-4-VP17-2-4416; from which</p> <p>A pinon tree, .7 ins. diam., bears S. 16°55' W., 21.8 ft. dist., mkd. X-4-4416.</p> <p>Build a mound of stone alongside.</p> <p>Thence N. 33°55' E.</p>
75.	<p>Gulch, 3 ft. wide, course S. 40° E.</p>
90.	<p>An open cut, 4 ft. wide, 10 ft. long, runs N. 34° E.</p>
300.00	<p>Lode line, identical with cor. No. 2, Veiled Prophet #24 lode of this survey, discovery point bears S. 56°05' E., 390 ft. dist.</p>

393.62	Intersect line 3-4, Sur. No. 1730, Victor lode, from which cor. No. 4 bears S. $42^{\circ}37'$ E., 374.80 ft. dist.
600.00	Cor. No. 3, identical with cor. No. 3, Veiled Prophet #18 lode, and falling on line 1-2, Veiled Prophet #24 lode, both of this survey; previously described. Thence S. $56^{\circ}05'$ E.
560.00	Placer Gulch, 20 ft. wide, course S. 35° W.
1500.00	Cor. No. 4, identical with cor. 2, Veiled Prophet #18 lode, and falling on line 3-4, Veiled Prophet #21 lode, both of this survey; previously described. Thence S. $33^{\circ}55'$ W.
300.00	Gold Standard Canyon, 20 ft. wide, course N. 55° W.
300.00	Lode line, discovery point bears N. $56^{\circ}05'$ W., 1110 ft. dist. Cut an X on bedrock in gulch, build a mound of stone on bank above.
600.00	Cor. No. 1, and place of beginning.
VEILED PROPHET #16 LODE	
	Beginning at cor. No. 1, identical with cor. No. 1, Veiled Prophet #17 lode, falling on line 3-4, Veiled Prophet #21 lode, both of this survey; previously described. Thence S. $33^{\circ}55'$ W.
300.00	Lode line, discovery point bears N. $56^{\circ}05'$ W., 720 ft. dist. Set an iron pin, $5/8$ in. diam., build a mound of stone alongside.
340.	Gulch, 20 ft. wide, course N. 45° W.
600.00	Cor. No. 2, identical with cor. No. 3, Veiled Prophet #21 lode, falling on line 2-3, Veiled Prophet #15 lode, both of this survey. Set a copper-coated steel rod, 3 ft. long, $3/8$ in. diam., 27 ins. in the ground, with bronze cap attached, mkd. VP16-2-VP21-3-4416; from which A siliceous outcrop, 48×48 ins., 60 ins. high bears S. $82^{\circ}05'$ E., 11.4 ft. dist., mkd. X-BR-3-4416. Build a mound of stone alongside. Thence N. $56^{\circ}05'$ W.
150.	Gulch, 5 ft. wide, course N. 25° W.
448.38	Cors. No. 4 & 2, Veiled Prophet #14 & 15 lodes, both of this survey.
540.	Gulch, 3 ft. wide, course N.

Survey No. 4416

Feet	Description
750.	Gold Standard Canyon, 25 ft. wide, course N. 80° W.
1180.	Placer Gulch, 25 ft. wide, course S. 40° W.
1315.	Gulch, 3 ft. wide, course S.
1347.12	Intersect line 4-5, Sur. No. 1730, Victor lode at a point from which cor. No. 4 bears N. 47°03'30"E, 930.70-ft. dist.
1500.00	Cor. No. 3 Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap, mkd. VP16-3-4416; from which Cor. No. 3, Sur. No. 1582, Copper lode, bears N. 5°10' W., 96.22 ft. dist. A porphyry outcrop, 48 x 84 ins., 30 ins. high bears N. 6°50' W., 20.4 ft. dist., mkd. X-BR-3-4416. Build a mound of stone alongside. Thence N. 33°55' E.
130.00	Gulch, 2 ft. wide, course S. 40° E.
300.00	Lode line, discovery point bears S. 56°05' E., 780 ft. dist. Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
600.00	Cor. No. 4, identical with cor. No. 2, Veiled Prophet #17 lode, this survey; previously described. Thence S. 56°05' E.
200.	Gulch, 5 ft. wide, course S. 40° E.
292.97	Intersect line 4-5, Survey No. 1730, Victor lode.
320.00	Placer Gulch, 20 ft. wide, course S. 40° W.
1255.	Gold Standard Canyon, 20 ft. wide, course S. 35° W.
1500.00	Cor. No. 1, and place of beginning.
VEILED PROPHET #23 LODE	
	Beginning at cor. No. 1, identical with cors. No. 1 & 1, Veiled Prophet #'s 21 & 22 lodes, both of this survey. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP21-1-VP22-1-VP23-1-4416; from which The standard cor. for secs. 34 & 35 bears S. 13°07'45" W., 858.69 ft. dist. A siliceous outcrop, 36 x 48 ins., 48 ins. high bears N. 89°15' E., 2.2 ft. dist., mkd. X-BR-1-4416.

Chains Feet	
300.00	Build a mound of stone alongside. Thence N. 56°05' W. Lode Line, discovery point bears N. 33°55' E., 920 ft. dist.
	Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
600.00	Cor. No. 2, identical with cor. No. 4, Veiled Prophet #21 lode, and falling on line 1-2, Veiled Prophet #18 lode, both of this survey.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground with bronze cap, mkd. VP23-2-VP21-4-4416; from which A siliceous outcrop 6 ft. wide, 10 ft. high bears S. 17°30' E., 19.1 ft. dist., mkd. X-VP21-4-4416-BR.
	Build a mound of stone alongside.
	Thence N. 33°55' E.
60.	Gulch, 3 ft. wide, course N. 80° W.
300.00	Cor. No. 1, Veiled Prophet #18 lode, identical with cor. No. 1, Veiled Prophet #19 lode, both of this survey.
900.00	Cor. No. 4, Veiled Prophet #19 lode, identical with cor. No. 1, Veiled Prophet #20 lode, both of this survey.
1000.	Gulch, 5 ft. wide, course N. 35° W.
1176.50	Intersect line 1-2, Sur. No. 1712, Paramour lode; previously described.
1395.60	Intersect line 4-1, Sur. No. 1712, Paramour lode; previously described.
1500.00	Cor. No. 3, being identical with cor. No. 4, Veiled Prophet #20 lode of this survey; previously described.
	Thence S. 56°05' E.
300.00	Lode line, discovery point bears S. 33°55' W., 580 ft. dist.
	Set an iron pin, 5/8 ins. diam., build a mound of stone alongside.
600.00	Cor. No. 4
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap, mkd. VP23-4-4416; from which
	An oak tree, 8 ins. diam., bears N. 88° E., 8.6 ft. dist., mkd. X-BT-4-4416.
	Build a mound of stone alongside.
	Thence S. 33°55' W.
370.	Gulch, 10 ft. wide, course N. 45° W.
1135.	Gulch, 2 ft. wide, course N. 55° W.
1500.00	Cor. No. 1, and place of beginning.

CS
22

Survey No. 4416

19

Chain Feet	
	VEILED PROPHET #21 LODE
	Beginning at cor. No. 1, identical with cors. No. 1 & 1, Veiled Prophet #'s 22 & 23 lodes, both of this survey; previously described.
	Thence S. 33°55' W.
625.	Gold Standard Canyon, 10 ft. wide, course N. 55° W.
1415.	Gulch, 10 ft. wide, course N. 50° W.
1500.00	Cor. No. 2, identical with cor. No. 4, Veiled Prophet #22 lode; falling on line 2-3, Veiled Prophet #15 lode; both of this survey;
	Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap mkd. VP21-2-VP22-4-4416; from which
	A juniper tree, 10 ins. diam., bears S. 19°00' E., 31.9 ft. dist., mkd. X-BT-2-4416.
	Build a mound of stone alongside.
	Thence N. 56°05' W.
40.	Gulch, 3 ft. wide, course N. 50° E.
300.00	Lode line, discovery point bears N. 33°55' E., 120 ft. dist.
	Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
600.00	Cor. No. 3, identical with cor. No. 2, Veiled Prophet #16 lode, falling on line 2-3, Veiled Prophet #15 lode, both of this survey; previously described.
	Thence N. 33°55' E.
260.	Gulch, 20 ft. wide, course N. 45° W.
600.00	Cors. No. 1 & 1, Veiled Prophet #'s 16 & 17 lodes; both of this survey.
900.00	Gold Standard Canyon; 20 ft. wide, course N. 56° W.
1200.00	Cors. No. 2 & 4, Veiled Prophet #'s 18 & 17 lodes, both of this survey.
1500.00	Cor. No. 4, identical with cor. No. 2, Veiled Prophet #23 lode, and falling on line 1-2 Veiled Prophet #18 lode, both of this survey; previously described.
	Thence S. 56°05' E.
300.00	Lode line, discovery point bears S. 33°55' W., 1380 ft. dist,
600.00	Cor. No. 1, and place of beginning.
	VEILED PROPHET #22 LODE
	Beginning at cor. No. 1, being identical with cor. Nos. 1 & 1; Veiled Prophet #21 & 23, both of this survey, previously described.
	Thence S. 56°05' E.
300.0	Lode line, discovery point bears S. 33°55' W., 1265 ft. dist.

CHANGES Feet	Set an iron pin, 3/4 in. diam., build a mound of stone alongside.
600.0	<p>Cor. No. 2</p> <p>Set a square nail, with a brass washer, on a bedrock face, 24 ins. high, 20 x 30 ft. in size, with a chiseled arrow pointing toward said nail, from which</p> <p>A point on the same bedrock outcrop bears S. 69°35' E., 4.35 ft. dist., mkd. X-VP22-2-4416BR.</p> <p>Thence S. 33°55' W.</p>
575.	Gold Standard Canyon, 10 ft. wide, course N. 55° W.
604.26	Intersect the S. bdy. of sec. 35, T. 3 S., R. 29 E., at a point from which the standard cor. of secs. 34 and 35 bear West, 355.80 ft. dist., an iron pipe, 2 ins. diam., with brass cap, firmly set and properly mkd.
1210.4	Intersect line 2-3, Sur. No. 1640, Veiled Prophet No. 5 lode, at a point from which Cor. No. 3 bears N. 38° 31' W.. 204.55 ft. dist.
1263.6	Intersect the line bet. secs. 2 and 3, T. 4 S., R. 29 E., at a point from which the C.C. of secs. 2 and 3 bears North, 547.15 ft. dist.
1500.0	<p>Cor. No. 3,</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap mkd. VP22-3-4416; from which</p> <p>Cor. No. 3, Sur. No. 1640, Veiled Prophet No. 5 lode bears N. 4°53' E., 401.83 ft. dist.</p> <p>Cor. No. 3, Sur. No. 2907, Sirdar lode, bears N. 75°04'40" E., 800.16 ft. dist.</p> <p>Cor. No. 1, Sur. No. 3944, Evolutor lode, bears N. 76°34'20" E., 716.47 ft. dist.</p> <p>A porphyry outcrop, 18 x 24 ins., 12 ins. high, bears S. 66°40' E., 4.0 ft. dist., mkd. X-VP22-3-4416BR.</p> <p>Build a mound of stone alongside.</p> <p>Thence N. 56°05' W.</p>
147.61	Cor. No. 3, Veiled Prophet #15 lode of this survey.
300.00	<p>Lode line, discovery point bears N. 33°55' E., 235 ft. dist.</p> <p>Set an iron pin, 3/4 ins. diam., build a mound of stone alongside.</p>
306.13	Intersect line 3-4, Sur. No. 1640, Veiled Prophet No. 5 lode at a point from which cor. No. 3 bears N. 51°26'40" E., 368.48 ft. dist.
370.	Gulch, 5 ft. wide, course N. 50° W.
600.00	Cor. No. 4, being identical with cor. No. 2, Veiled Prophet #21 lode of this survey; previously described; falling on line 2-3, Veiled Prophet #15 lode of this survey.

	<p>Thence N. 33°55' E.</p>
85.	Gulch, 10 ft. wide, course N. 50° W.
875.	Gold Standard Canyon, 10 ft. wide, course N. 55° W.
1500.00	Cor. No. 1 and place of beginning
	<p>VEILED PROPHET #14 LODE</p> <p>Beginning at cor. No. 1, identical with cor. No. 1, Veiled Prophet #15 lode, and falling on line 1-2, Veiled Prophet #13 lode, both of this survey.</p> <p>Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP14-1-VP15-1-4416; from which</p> <p>The S. 1/4 sec. cor. of sec. 34, T.3 S., R.29 E., G. & S. R. M., Greenlee County, Arizona, an iron pipe, 1 in. diam., with brass cap attached, firmly set and properly marked, bears N. 72° 05' 30" W., 905.43 ft. dist.</p> <p>A pinon tree, 10 ins. diam., bears S. 8°51' E., 2.25 ft. dist., mkd. X-BT-1-4416.</p> <p>Build a mound of stone alongside.</p> <p>Thence N. 57°55' W.</p>
654.20	Cors. No. 1 and 1, Veiled Prophet #'s 12 and 13 lodes, both of this survey.
890.	Placer Gulch, 25 ft. wide, course S. 45° W.
1445.51	Intersect line 1-2, Sur. No. 1734, Tip Top lode at a point from which cor. No. 1 bears N. 35°37'30" E., 579.90 ft. dist., and Cor. No. 6, Sur. No. 1730, Victor lode bears N. 35°37'30" E., 124.54 ft. dist.
1500.00	Cor. No. 2, falling on line, 4-1, Veiled Prophet #12 lode of this survey.
	<p>This cor. falls in a cliff area at a point where a permanent monument cannot be set.</p> <p>Cor. No. 6, Victor lode, Sur. No. 1730 on line 1-2 of Tip Top lode, Sur. No. 1734 bears N. 58°40' E., 133.98 ft. dist.</p> <p>I run N. 57°55' W., 20.00 ft. dist. and set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground with bronze cap mkd. WC-VP14-2-4416; for witness cor. No. 2; from which</p> <p>A point on the face of a 20 ft. cliff in the notch of the quartzite rim bears N. 57°55' W., 17.45 ft. dist., mkd. WC-X-BR-2-4416.</p> <p>Build a mound of stone alongside.</p>
	Return to Cor. No. 2.
	Thence N. 32°05' E.
300.00	Lode line, discovery point bears S. 57°55' E., 890 ft. dist.
	Set an iron pin, 5/8 ins. diam., build a mound of stone alongside.

Chain
Feet

584.87

Cor. No. 3.

Set a wooden post, 4 x 4 ins., 4 ft. long, in a mound of stones, mkd. NWCOR-VP14-3-4416 from which

A point on a siliceous face, 4 x 5 ft. in size, bears N. 71°10' W., 20.7 ft. dist., mkd. X-BR-3-4416.

Phelps Dodge Corporation, triangulation station S-107, bears N. 72°03'30" W., 114.28 ft. dist., a hexagonal steel pin, concreted in bedrock.

Cor. No. 2, Sur. No. 1730, Victor lode, bears N. 21°38' E., 52.40 ft. dist.

Thence S. 56°05' E.

84.54

Intersect the common line 1-2 and 4-1, Sur. No. 1730, Victor lode, and Sur. No. 1734, Tip Top lode at a point from which cor. No. 1, Victor lode, identical with cor. No. 1, Tip top lode, bears S. 27°56' E., 6.72 ft. dist.

449.15

Cor. No. 3, Veiled Prophet #16 lode of this survey.

602.03

Intersect line 4-5, Sur. No. 1730, Victor lode, previously described.

634.15

Gulch, 3 ft. wide, course S.

769.15

Placer Gulch, 25 ft. wide, course S. 40° W.

1199.15

Standard Gold Canyon, 25 ft. wide, course N. 80° W.

1409.15

Gulch, 3 ft. wide, course N.

1500.77

Cor. No. 4, identical with cor. No. 2, Veiled Prophet #15 lode and falling on line 2-3, Veiled Prophet #16 lode, both of this survey.

Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP14-4-VP15-2-4416; from which

A juniper tree, 10 ins. diam., bears S. 54°48' W., 48.8 ft. dist., mkd. X-BT-4-4416.

Build a mound of stone alongside.

Thence S. 32°05' W.

236.86

Lode line, discovery point bears N. 57°55' W., 610 ft. dist.

Set an iron pin, 5/8 in. diam., build a mound of stone alongside.

265.

Gulch, 3 ft. wide, bears N.

536.86

Cor. No. 1, and place of beginning.

VEILED PROPHET #15 LODE

Beginning at cor. No. 1, identical with cor. No. 1, Veiled Prophet #14 lode, this survey; previously described.

Thence N. 32°05' E.

Feet	
271.86	Gulch, 3 ft. wide, bears N.
300.00	Lode line, discovery point bears S. 57°55' E., 440 ft. dist.
536.86	Cor. No. 2, identical with cor. No. 4, Veiled Prophet #14 lode, and falling on line 2-3, Veiled Prophet #16 lode, both of this survey; previously described. Thence S. 56°05' E.
298.38	Gulch, 5 ft. wide, course N. 25° W.
448.38	Cor. No. 2, Veiled Prophet #16 lode, identical with cor. No. 3, Veiled Prophet #21 lode, both of this survey.
1008.38	Gulch, 3 ft. wide, course N. 50° E.
1048.38	Cor. No. 2, Veiled Prophet No. 21 lode, identical with Cor. No. 4, Veiled Prophet #22 lode, both of this survey.
1278.38	Gulch, 5 ft. wide, course N. 50° W.
1342.25	Intersect line 3-4, Sur. No. 1640, Veiled Prophet No. 5 lode, previously described.
1500.77	Cor. No. 3, falling on line 3-4, Veiled Prophet #22 lode of this survey. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP15-3-4416; from which A porphyry outcrop, 72 x 48 ins., 36 ins. high bears N. 30°30' W., 28.1 ft. dist., mkd. X-BR-3-4416. Build a mound of stone alongside. Thence S. 32°05' W.
90.	Gulch, 6 ft. wide, course N. 40° W.
188.85	Lode line, discovery point bears N. 57°55' W., 1060 ft. dist. Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
488.85	Cor. No. 4 Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap attached, mkd. VP15-4-4416; from which A porphyry outcrop, 12 x 48 ins., 18 ins. high bears N. 23°30' W., 10.5 ft. dist., mkd. X-BR-4-4416. Build a mound of stone alongside. Thence N. 57°55' W.
332.00	Intersect line 3-4, Sur. No. 1640, Veiled Prophet No. 5 lode at a point from which Cor. No. 4 bears S. 51°26'40" W., 525.06 ft. dist.; also intersect line 2-3, Veiled Prophet #11 lode of this survey.

Survey No. 4416

24

Feet	Set an iron pin, 3/4 in. diam.
654.20	Cor. No. 2, Veiled Prophet #13 lode of this survey.
841.82	Intersect line 1-2, Veiled Prophet #11 lode of this survey.
920.	Gulch, 3 ft. wide, course N. 10° W.
1500.00	Cor. No. 1, and place of beginning.
VEILED PROPHET #12 LODE	
	Beginning at cor. No. 1, identical with cor. No. 1, Veiled Prophet #13 lode, and falling on line 1-2, Veiled Prophet #14 lode, both of this survey.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground with bronze cap mkd. VP12-1-VP13-1-4416 from which
	The south 1/4 sec. cor. of sec. 34, previously described, bears S. 77°12' W., 314.93 ft. dist.
	Cor. No. 5, Sur. No. 1730, Victor lode, bears N. 55°01' W., 390.60 ft. dist.
	A porphyry outcrop, 72 x 36 ins., 36 ins. high bears S. 28°10' W., 24.0 ft. dist., mkd. X-BR-1-4416.
	Build a mound of stone alongside.
	Thence S. 32°05' W.
200.	Gulch, 4 ft. wide, course N. 30° W.
300.00	Lode line, discovery point bears N. 57°55' W., 325 ft. dist.
	Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
600.00	Cor. No. 2, identical with cor. No. 4, Veiled Prophet #13 lode, and falling on line 4-1, Veiled Prophet #9 lode, both of this survey.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP12-2-VP13-4-4416; from which
	A pinon tree, 6 ins. diam., bears N. 57°00' E., 39.4 ft. dist., mkd. X-4-4416.
	Build a mound of stone alongside.
	Thence N. 57°55' W.
300.00	Cor. No. 4, Veiled Prophet #9 lode, identical with cor. No. 1, Veiled Prophet #8 lode, both of this survey.
450.00	Placer Gulch, 25 ft. wide, course S. 35° W.
828.45	Intersect line 1-2, Sur. No. 1734, Tip Top lode at a point from which cor. No. 2 bears S. 35°37'30" W., 313.51 ft. dist.
900.00	Cor. No. 4, Veiled Prophet #8 lode, identical with cor. No. 1, Veiled Prophet #7 lode, both of this survey.

Chains Feet	
1390.88	Intersect line 2-3, Sur. No. 1734, Tip Top lode at a point from which cor. No. 3 bears N. 27°58' W., 50.59 ft. dist.
1481.35	Intersect line 2-3, Sur. No. 1740 Dry Jack lode at a point from which cor. No. 2 bears N. 17°12' E., 417.46 ft. dist.
1500.00	Cor. No. 3, identical with cor. No. 4, Veiled Prophet #7 lode of this survey.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap attached, mkd. VPL2-3-VP7-4-4416; from which
	Cor. No. 3, Tip Top lode, identical with cor. No. 5, Jumbo lode, both of Sur. No. 1734, bears S. 79°04' E., 70.0 ft. dist.
	A point on a porphyry face, 48 x 48 ins. in size, bears S. 57°55' E., 11.8 ft. dist., mkd. X-BR-3-4416
	Build a mound of stone alongside.
	Thence N. 32°05' E.
62.87	Intersect line 5-6, Sur. No. 1734, Jumbo lode at a point from which cor. No. 5 bears S. 27°58' E., 75.35 ft. dist.
70.17	Intersect line 2-3, Sur. No. 1740, Dry Jack lode, at a point from which cor. No. 2 bears N. 17°12' E., 344.85 ft. dist.
300.00	Lode line, discovery point bears S. 57°55' E., 1175 ft. dist.
	Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
600.00	Cor. No. 4
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VPL2-4-4416; from which
	A porphyry outcrop, 48 x 60 ins., 36 ins. high, bears S. 56°25' E., 54.25 ft. dist., mkd. X-BR-4-4416.
	Build a mound of stone alongside.
	Thence S. 57°55' E.
100.77	Intersect line 4-5, Sur. No. 1734, Jumbo lode, at a point from which Cor. No. 5 bears S. 35°37' W., 575.84 ft. dist., identical with cor. No. 3, Sur. No. 1734, Tip Top lode.
634.20	Witness cor., cor. No. 2, Veiled Prophet #14 lode.
654.20	Cor. No. 2, Veiled Prophet #14 lode of this survey.
708.69	Intersect line 1-2, Sur. No. 1734, Tip Top lode; previously described.
1264.20	Placer Gulch, 25 ft. wide, course S. 45° W.
1500.00	Cor. No. 1, and place of beginning.

Chains
Feet

VEILED PROPHET #13 LODE

Beginning at cor. No. 1, identical with cor. No. 1, Veiled Prophet #12 lode, and falling on line 1-2, Veiled Prophet #14 lode, both of this survey; previously described.

Thence S. 57°55' E.

654.20 Cor. No. 1, Veiled Prophet #14 lode, identical with cor. No. 1, Veiled Prophet #15 lode, both of this survey.

1234.20 Gulch, 3 ft. wide, course N. 10° W.

1312.38 Intersect line 1-2, Veiled Prophet #11 lode of this survey.

1500.00 Cor. No. 2, falling on line 4-1, Veiled Prophet #15 lode of this survey.

Set a point on a rhyolite outcrop, 24 x 24 ins. in size, 36 ins. high, mkd. X-2-4416.

Thence S. 32°05' W.

300.00 Lode line, discovery point bears N. 57°55' W., 1280 ft. dist.

Set an iron pin, 5/8 in. diam., build a mound of stone alongside.

495.68 Intersect line 3-4, Sur. No. 1640, Veiled Prophet No. 1 lode at a point from which

Cor. No. 3, a copper-coated steel rod with bronze cap attached, set from apparent bearing tree position in an old stone mound, bears N. 58°02' W., 303.14 ft. dist.

The intersection of line 3-4 with line 1-2, former Bungaloo lode, Uns., a copper-coated steel rod with bronze cap attached, bears N. 58°02' W., 61.37 ft. dist.; from which

Cor. No. 1, former Bungaloo, identical with cor. No. 1, former Independent lodes, both unsurveyed, a copper-coated steel rod, with bronze cap attached, set in a stone mound, bears S. 43°20' W., 40.64 ft. dist.

600.00 Cor. No. 3.

Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap attached, mkd. VPL3-3-4416; from which

Cor. No. 3, Veiled Prophet No. 1 lode, Sur. No. 1640, bears N. 39°02' W., 320.40 ft. dist.

A granitic ledge, 36 x 48 ins., 24 ins. high, bears S. 83°20' W., 7.25 ft. dist., mkd. X-BR-3-4416.

Build a mound of stone alongside.

Thence N. 57°55' W.

123.37 Intersect line 1-2, Independence lode, Uns., at a point from which cor. No. 1 bears N. 72°08' E., 84.05 ft. dist.

Chains
Feet

303.20 Intersect line 2-3, Sur. No. 1640, Veiled Prophet No. 1 lode at a point from which cor. No. 3 bears N. 32°07' E., 103.70 ft. dist., and the intersection with line 1-2, former Independent lode, Uns., bears S. 32°07' W., 214.09 ft. dist.

600.00 Cor. No. 1, Veiled Prophet #10 lode of this survey.

661.75 Intersect line 1-2, Veiled Prophet #11 lode of this survey.

1200.00 Cor. No. 4, Veiled Prophet #10 lode, identical with cor. No. 1, Veiled Prophet #9 lode, both of this survey.

1500.00 Cor. No. 4, identical with cor. No. 2, Veiled Prophet #12 lode of this survey; previously described.

Thence N. 32°05' E.

300.00 Lode line, discovery point bears S. 57°55' E., 220 ft. dist.

400.00 Gulch, 4 ft. wide, course N. 30° W.

600.00 Cor. No. 1, and place of beginning.

VEILED PROPHET #7 LODE

Beginning at cor. No. 1, identical with cor. No. 4, Veiled Prophet #8 lode, and falling on line 2-3, Veiled Prophet #12 lode, both of this survey.

Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP7-1-VP8-4-4416; from which

The south $\frac{1}{4}$ sec. cor. of sec. 34, previously described, bears S. 87°08' E., 774.94 ft. dist.

Phelps Dodge triangulation station 272 bears S. 45°25' W., 422.33 ft. dist.; a hexagonal steel pin; concreted in bedrock.

A point on a cliff, 35 ft. high, bears N. 57°55' W., 35.0 ft. dist., mkd. X-BR-1-4-4416.

Build a mound of stone alongside.

Thence S. 32°05' W.

282.84 Intersect line 2-3, Sur. No. 1734, Tip Top lode, at a point from which cor. No. 2 bears S. 27°58' E., 60.23 ft. dist.

1500.00 Cor. No. 2, identical with cor. No. 3, Veiled Prophet #8 lode, and falling on line 4-1, Veiled Prophet #6 lode, both of this survey.

Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap, mkd. VP7-2-VP8-3-4416; from which

A southerly facing porphyry face, 12 x 24 ins. in size, bears N. 6°00' E., 8.75 ft. dist., mkd. X-BR-2-3-4416.

Build a mound of stone alongside.

Thence N. 57°55' W.

Chains Feet	
25.	King Canyon, 25 ft. wide, course S. 10° W.
160.	Abandoned tram road, 6 ft. wide, bears N. 30° W. and S. 30° E.
185.85	Intersect line 2-3, Sur. No. 1732, White Hawk East Extension lode, at a point from which cor. No. 2 bears N. 17°34' E., 468.44 ft. dist.
300.00	Lode line, identical with cor. No. 4, Veiled Prophet #6 lode of this survey, discovery point bears N. 32°05' E., 610 ft. dist.
600.00	Cor. No. 3
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP7-3-4416; from which
	Cor. No. 1, Sur. No. 1732, White Hawk East Extension lode, identical with cor. No. 4, Sur. No. 1740, Dry Jack lode, bears N. 10°11'30" W., 421.67 ft. dist.
	Cor. No. 2, Sur. No. 1732, White Hawk Extension lode, identical with Cor. No. 3, Sur. No. 1740, Dry Jack lode, bears N. 65°17' E., 541.93 ft. dist.
	A pinon tree, 8 ins. diam., bears S. 44°38' W., 35.75 ft. dist., mkd. X-3-4416.
	Build a mound of stone alongside.
	Thence N. 32°05' E.
260.	Abandoned tram road, 6 ft. wide, bears N. 5° W. and S. 5° E.
310.	King Canyon, 25 ft. wide; course S. 25° E.
381.15	Intersect the common line, 1-2 & 4-3, Sur. No. 1732, White Hawk East Extension lode & Sur. No. 1740, Dry Jack lode at a point from which cor. 1, White Hawk East Extension, and cor. No. 4, Dry Jack lode bears N. 71°37' W., 291.96 ft. dist.
390.	King Canyon, 25 ft. wide, course S. 70° W.
690.	King Canyon, 20 ft. wide, course S. 15° E.
1500.00	Cor. No. 4, identical with cor. No. 3, Veiled Prophet #12 lode of this survey; previously described.
	Thence S. 57°55' E.
18.65	Intersect line 2-3, Sur. No. 1740, Dry Jack lode, at a point from which cor. No. 3 bears S. 17°12' W., 1082.83 ft. dist.
109.12	Intersect line 2-3, Sur. No. 1734, Tip Top lode; previously described.
300.00	Lode line, discovery point bears S. 32°05' W., 890 ft. dist.
	Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
600.00	Cor. No. 1, and place of beginning.

Chains Feet	VEILED PROPHET #6 LODE
	Beginning at cor. No. 1, identical with cor. No. 4, Veiled Prophet #9 lode, and falling on line 2-3, Veiled Prophet No. 12 lode, both of this survey.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground with a bronze cap attached, mkd. VP8-1-VP9-4-4416; from which
	The south $\frac{1}{4}$ sec. cor. of sec. 34, T. 3 S., R. 29 E., previously described, bears N. 43°29'30" E., 385.91 ft. dist.
	A porphyry outcrop, 24 x 24 ins.; 18 ins. high, bears S. 82° 40' E., 20.6 ft. dist., mkd. X-BR-4-4416.
	Build a mound of stone alongside.
	Thence S. 32°05' W.
320.	Gulch, 3 ft. wide, course N. 80° W.
1100.	Gulch, 3 ft. wide, course S. 70° W.
1500.00	Cor. No. 2, identical with cor. No. 3, Veiled Prophet #9 lode, and falling on line 4-1, Veiled Prophet #6 lode, both of this survey.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP8-2-VP9-3-4416; from which
	A porphyry outcrop, 24 x 48 ins., 12 ins. high, bears S. 76°40' E., 8.5 ft. dist., mkd. X-BR-3-4416.
	Build a mound of stone alongside.
	Thence N. 57°55' W.
300.00	Lode line, discovery point bears N. 32°05' E., 180 ft. dist.
	Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
450.	Place Gulch, 25 ft. wide, course S. 40° W.
600.00	Cor. No. 3, identical with cor. No. 2, Veiled Prophet #7 lode, and falling on line 4-1, Veiled Prophet #6 lode, both of this survey; previously described.
	Thence N. 32°05' E.
1217.16	Intersect line 2-3, Sur. No. 1734, Tip Top lode; previously described.
1500.00	Cor. No. 4, identical with cor. No. 1, Veiled Prophet #7 lode, and falling on line 2-3, Veiled Prophet No. 12 lode, both of this survey; previously described; from which
	Cor. No. 2, Sur. No. 1734, Tip Top lode, bears S. 22°37' W., 317.24 ft. dist.
	Thence S. 57°55' E.
71.55	Intersect line 1-2, Sur. No. 1734, Tip Top lode, previously described.

Chain feet	
300.00	Lode line, discovery point bears S. 32°05' W., 1320 ft. dist. Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
450.	Placer Gulch, 25 ft. wide, course S. 35° W.
600.00	Cor. No. 1; and place of beginning.
	VEILED PROPHET #9 LODE
	Beginning at cor. No. 1, identical with cor. No. 4, Veiled Prophet #10 lode, and falling on line 3-4, Veiled Prophet #13 lode, both of this survey. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap attached, mkd. VP9-1-VP10-4-4416; from which The south $\frac{1}{4}$ sec. cor. of sec. 34, T. 3 S.; R. 29 E., previously described, bears N. 22°04'20" W., 646.01 ft. dist. A porphyry outcrop, 60 x 60 x 36 ins. high, bears S. 8°00' E., 41.80 ft. dist., mkd. X-BR-4-4416. Build a mound of stone alongside. Thence S. 32°05' W.
498.12	Cor. No. 4, Sur. No. 1640, Veiled Prophet No. 4 lode.
900.	Gulch, 8 ft. wide, course N. 70° W.
1481.40	Intersect line 1-2, former Bottom Dollar lode claim, unsurveyed, at a point from which cor. No. 1 bears N. 58°03' E., 530.33 ft. dist.
1500.00	Cor. No. 2; identical with cors. No. 3 & 1, Veiled Prophet #'s 10 & 6 lodes, both of this survey; and falling on line 3-4, Sur. No. 1640, Veiled Prophet No. 4 lode. Set a hardened steel nail in roadway cutbank at a point on the northerly side of road, 6 ft. upon the face of bank, mkd. VP6-1-VP9-2-VP10-3-4416; from which The south $\frac{1}{4}$ sec. cor. of sec. 34, previously described, bears N. 16°30'20" E., 1949.91 ft. dist. A point on a vertical face of cutbank bears N. 57°55' W., 5.6 ft. dist., mkd. X-BR-2-4416. Thence N. 57°55' W.
250.	Drill road, 20 ft. wide, bears S. 50° W., and N. 50° E.
300.00	Lode line, discovery point bears N. 32°05' E., 280 ft. dist., mkd. bedrock in draw "X-END CTR".
600.00	Cor. No. 3, identical with cor. No. 2, Veiled Prophet #8 lode, and falling on line 4-1, Veiled Prophet #6 lode, both of this survey; previously described.

XXXX	Thence N. 32°05' E.
Feet	
400.	Gulch, 3 ft. wide, course S. 70° W.
1180.	Gulch, 3 ft. wide, course N. 80° W.
1500.00	Cor. No. 4, identical with cor. No. 1, Veiled Prophet #8 lode, and falling on line 2-3, Veiled Prophet #12 lode, both of this survey; previously described.
	Thence S. 57°55' E.
300.00	Lode line, discovery point bears S. 32°05' W., 1220 ft. dist.; identical with cors. No. 2 and 4, Veiled Prophet #'s 12 and 13 lodes.
600.00	Cor. No. 1, and place of beginning.
VEILED PROPHECT #10-LODE	
	Beginning at cor. No. 1, falling on line 3-4, Veiled Prophet #13 lode of this survey.
	Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground with bronze cap, mkd. VP10-1-4416; from which
	The south $\frac{1}{4}$ sec. cor. of sec. 34, previously described, bears N. 39°18'40" W., 1185.63 ft. dist.
	A point on the vertical face of a porphyry bluff bears S. 57°55' E., 8.8 ft. dist., mkd. X-BR-1-4416.
	Build a mound of stone alongside.
	Thence S. 32°05' W.
370.	Gulch, 4 ft. wide, course N. 85° W.
496.90	Cors. No. 1 and 4, Sur. No. 1640, Veiled Prophet Nos. 4 and 3 lodes; Found an old stone mound, badly scattered; set a copper-coated steel rod with bronze cap attached, unmarked within the mound; from which
	Cor. No. 2, Sur. No. 1640, Veiled Prophet No. 1 lode bears S. 58°02' E., 296.51 ft. dist., falling on line 4-1, Veiled Prophet No. 3 lode.
	The intersection of line 1-2, former Independence lode claim, Uns., with line 4-1, Veiled Prophet No. 3 lode bears S. 58°02' E., 59.07 ft.; from which cor. No. 2, former Independence lode claim, Uns., bears S. 72°08' W., 663.40 ft. dist.
567.06	Intersect line 4-1; Veiled Prophet #11 lode of this survey, identical and line 1-2, former Independence lode claim, Uns., Set an iron pin, 5/8 in. diam.; from which
	Cor. No. 2, former Independence lode claim, Uns., bears S. 72°08' W., 571.59 ft. dist.
	The intersection of line 1-2, former Independence lode claim, Uns., with line 4-1, Sur. No. 1640, Veiled Prophet No. 3 lode bears N. 72°08' E., 91.81 ft. dist.

35

Survey No. 4416

32

Feet	The intersection of line 1-2, former Independence lode claim, Uns., with line 2-3, Sur. No. 1640, Veiled Prophet No. 1 lode bears N. 72°08' E., 461.10 ft. dist.
1280.	Gulch, 3 ft. wide, course N. 75° W.
1500.00	Cor. No. 2, falling on the common line 1-2 and 3-4, Sur. No. 1640, Veiled Prophet Nos. 4 and 3 lodes. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap attached, mkd. VP10-2-4416; from which Cor. No. 2, Veiled Prophet No. 4 lode, identical with Cor. No. 3, Veiled Prophet No. 3 lode, both of Sur. No. 1640, bears S. 32°05' W., 492.0 ft. dist.
	A pinon tree, 8 ins. diam., bears N. 50°45' E., 40.7 ft. dist., mkd. X-BT-2-4416.
	Build a mound of stone alongside. Thence N. 57°55' W.
300.00	Lode line, discovery point bears N. 32°05' E., 1370 ft. dist. Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
365.	Drill road, 20 ft. wide, bears N. 10° E. and S. 10° W.
380.	Gulch, 5 ft. wide, course S. 65° W.
575.	Drill road, 20 ft. wide, bears E. and W.
600.00	Cor. No. 3, identical with cors. No. 1 and 2, Veiled Prophet #'s 6 and 9 lodes, both of this survey; and falling on line 3-4, Sur. No. 1640, Veiled Prophet No. 4 lode; previously described. Thence N. 32°05' E.
18.60	Intersect line 1-2, former Bottom Dollar lode claim, Uns.; previously described.
600.00	Gulch, 8 ft. wide, course N. 70° W.
1001.88	Cor. No. 4, Sur. No. 1640, Veiled Prophet No. 4 lode; previously described.
1500.00	Cor. No. 4, identical with cor. No. 1, Veiled Prophet #9 lode, and falling on line 3-4, Veiled Prophet #13 lode, both of this survey; previously described. Thence S. 57°55' E.
300.00	Lode line, discovery point bears S. 32°05' W., 130 ft. dist.
538.25	Intersect line 1-2, Veiled Prophet #11 lode of this survey.
600.00	Cor. No. 1, and place of beginning.

Chains
Feet

VEILED PROPHET #6 LODE

Beginning at cor. No. 1, identical with cors, No. 2 and 3, Veiled Prophet #'s 9 and 10 lodes, both of this survey and falling on line 3-4, Sur. No. 1640, Veiled Prophet No. 4 lode; previously described.

Thence S. 32°05' W.

15. Drill road, 20 ft. wide, bears E. and W.
- 300.00 Lode line, discovery point bears N. 57°55' W., 1240 ft. dist.
Set an iron pin, 5/8 in. diam., build a mound of stone alongside.
- 492.87 Cor. No. 3, Sur. No. 1640, Veiled Prophet No. 4 lode, identical with line 5-1, Sur. No. 2907, North King lode, at a point from which cor. No. 5 bears N. 58°00' W., 44.38 ft. dist.
570. Gulch, 6 ft. wide, course S. 60° W.
- 600.00 Cor. No. 2..
Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap attached, mkd. VP6-2-4416; from which
Cor. No. 1, Jamieson lode, identical with cor. No. 5, North King lode of Sur. No. 2907, bears N. 9°34' E., 115.90 ft. dist.
A point on a porphyry face, 48 x 60 ins. in size, bears S. 8°20' W., 27.9 ft. dist., mkd. X-BR-2-4416.
Build a mound of stone alongside.
Thence N. 57°55' W.
20. Gulch, 6 ft. wide, course S. 65° W.
- 41.08 Intersect the common line 1-2 and 4-5, Jamieson and North King lodes, both of Sur. No. 2907, at a point from which the common cor. 1 and 5 bears N. 30°19' E., 107.12 ft. dist.
- 641.34 Intersect the common line 1-2 and 3-4, Jamieson No. 2 and Jamieson lodes, both of Sur. No. 2907, at a point from which the common cor. 1 and 4 bears N. 30°19' E., 106.24 ft. dist.
1210. King Canyon, 25 ft. wide, course S. 45° W.
- 1230.49 Intersect line 2-3, Sur. No. 1732, White Hawk East Extension lode at a point from which cor. No. 2 bears N. 17°34' E., 1088.23 ft. dist.
- 1241.60 Intersect line 3-4, Sur. No. 2907, Jamieson No. 2 lode, at a point from which cor. No. 4 bears N. 30°19' E., 105.37 ft. dist.
1430. Abandoned tram road, 6 ft. wide, bears S. 80° W. and N. 80° E.
- 1500.00 Cor. No. 3, falls in steep draw, 8 ft. wide, course S. 35° E.
Cut a point on bedrock in bottom of draw, mkd. COR-X-VP6-3-4416; from which
A hardened steel nail set in a cross (X) in bedrock in the bottom of draw bears S. 22° E., 6.5 ft. dist. mkd. 3-4416-BR.
Cor. No. 4, Sur. No. 2907, Jamieson No. 2 lode, bears S. 80° 21' E., 276.04 ft. dist.

Chains Feet	
	Cor. No. 3, Sur. No. 1732, White Hawk East Extension lode bears S. 12°20' E., 523.40 ft. dist. Thence N. 32°05' E.
300.00	Lode line, discovery point bears S. 57°55' E., 260 ft. dist. Set a hardened steel nail near top of cliff, build a mound of stone on top of cliff above.
600.00	Cor. No. 4, falling on line 2-3, Veiled Prophet #7 lode of this survey. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground, with bronze cap mkd. VP6-4-4416; from which Phelps-Dodge Corporation Triangulation Station No. S-135, a hexagonal steel rod, 1 in. diam., concreted in bedrock bears S. 23°18' W., 213.17 ft. dist. A porphyry outcrop, 48 x 60 ins., 36 ins. high bears S. 11°50' E., 19 ft. dist., mkd. X-BR-4-4416. Build a mound of stone alongside. Thence S. 57°55' E.
114.15	Intersect line 2-3, Sur. No. 1732, White Hawk East Extension lode; previously described.
140.	Abandoned tram road, bears N. 30° W. and S. 30° E.
275.	King Canyon, 25 ft. wide, course S. 10° W.
300.00	Cor. Nos. 3 and 2, Veiled Prophet #8 and 7 lodes, both of this survey.
450.	Placer Gulch, 25 ft. wide, course S. 40° W.
900.00	Cor. Nos. 2 and 3, Veiled Prophet #8 and 9 lodes; both of this survey.
1250.	Drill road, 20 ft. wide, bears N. 50° E. and S. 50° W.
1500.00	Cor. No. 1, and place of beginning.
	VEILED PROPHET #11 LODE
	Beginning at cor. No. 1. Set a copper-coated steel rod, 3 ft. long, 5/8 in. diam., 27 ins. in the ground; with bronze cap attached, mkd. VP11-1-4416; from which The south 1/4 sec. cor. of sec. 34; previously described, bears N. 17°11' W., 1068.68 ft. dist. A porphyry outcrop, 48 x 36 ins., 42 ins. high, bears S. 19° 36' E., 33.7 ft. dist., mkd. X-BR-1-4416. Build a mound of stone alongside. Thence N. 70°24' E.
406.64	Intersect line 4-1, Veiled Prophet #10 lode, common to line 3-4, Veiled Prophet #13 lode, both of this survey.

Chains- Feet	
1110.	Gulch, 3 ft. wide, course N. 10° W.
1171.36	Intersect line 1-2, Veiled Prophet #13 lode, common to line 4-1, Veiled Prophet #15 lode, both of this survey.
1487.45	Cor. No. 2
	Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap attached, mkd. VP11-2-4416; from which
	A porphyry outcrop, 60 x 72 ins., 36 ins. high bears S. 19°36' E. 45.35 ft. dist., mkd. X-BR-2-4416.
	Build a mound of stone alongside.
	Thence S. 19°36' E.
285.	Gulch, 3 ft. wide, course N. 10° E.
300.00	Lode line, discovery point bears S. 70°24' W., 690 ft. dist.
	Cut X-END CTR on large porphyry outcrop, build mound of stone alongside.
400.00	Intersect line 4-1, Veiled Prophet #15 lode, this survey, at its intersection with line 3-4, Sur. No. 1640, Veiled Prophet No. 5 lode, previously described.
600.00	Cor. No. 3
	Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap attached, mkd. VP11-3-4416; from which
	A granite boulder, 24 x 48 ins., 24 ins. high bears N. 19°36' W., 14.8 ft. dist., mkd. X-BR-3-4416.
	Build a mound of stone alongside.
	Thence S. 70°24' W.
473.22	Intersect line 3-4, Sur. No. 1640, Veiled Prophet No. 1 lode at a point from which Cor. No. 3 bears N. 58°02' W., 488.86 ft. dist. and
	Cor. No. 4, Sur. No. 1640, Veiled Prophet No. 5 lode bears N. 58°02' W., 37.59 ft. dist.
486.49	Intersect line 4-1, Sur. No. 1640, Veiled Prophet No. 5 lode at a point from which Cor. No. 4 bears N. 38°31' W., 31.13 ft. dist.
900.	Gulch, 3 ft. wide, course N. 70° W.
1239.17	Intersect line 1-2, Veiled Prophet No. 1 lode, common to line 4-1, Veiled Prophet No. 3 lode, both of Sur. No. 1640, at a point from which
	Cor. No. 1, Veiled Prophet No. 3 bears S. 58°02' E., 285.67 ft. dist. and Cor. No. 2, Veiled Prophet No. 1 lode bears N. 58°02' W., 14.33 ft. dist.
1487.45	Cor. No. 4.
	Set a copper-coated steel rod, 3 ft. long, 5/8 ins. diam., 27 ins. in the ground, with bronze cap attached, mkd. VP11-4-4416; from which

Chains Feet		
	A porphyry outcrop, 60 x 18 ins., 24 ins. high bears N. 33° E., 7.0 ft. dist., mkd. X-BR-4-4416.	
	Build a mound of stone alongside.	
	Thence N. 19°36' W.	
200.0	Intersect line 1-2, Veiled Prophet #10 lode of this survey, common to lines 1-2 and 3-4, Veiled Prophet No. 4 and Veiled Prophet No. 3 lodes, both of Sur. No. 1640, at the intersection with line 1-2, former Independence lode, Uns.; previously described.	
300.0	Lode line, discovery point bears N. 70°24' E., 797.45 ft. dist.	
	Set an iron pin, 5/8 ins. diam., build a mound of stone alongside.	
312.87	Intersect line 4-1, Sur. No. 1640, Veiled Prophet No. 4 lode at a point from which Cor. No. 1 bears S. 58°02' E., 88.56 ft. dist.	
350.	Gulch, 4 ft. wide, course S. 50° W.	
600.00	Cor. No. 1, and place of beginning.	
	AREAS	
	Total Area, Veiled Prophet #30 lode	15.810
	Area in conflict with:	
	Sur. No. 1712, Good Boy lode	1.940
	Sur. No. 1712, Regulation lode	0.881
	Total Area, Veiled Prophet #29 lode	15.978
	Area in conflict with:	
	Sur. No. 1712, Regulation lode	6.167
	Sur. No. 2485, El Moro lode	0.003
	Veiled Prophet #30 lode of this survey	0.015
	Veiled Prophet #30 lode of this survey, exclusive of its conflict with Sur. No. 1712, Regulation lode	0.015
	Total Area, Veiled Prophet #26 lode	19.779
	Area in conflict with:	
	Sur. No. 2357, Antietam lode	0.234
	Sur. No. 2357, Leo C lode	0.568
	Sur. No. 2357, Leo C lode, exclusive of its conflict with	
	Sur. No. 2357, Antietam lode	0.419
	Sur. No. 2485, Boulder Mine lode	0.014
	Total Area, Veiled Prophet #28 lode	20.247
	Area in conflict with:	
	Sur. No. 1712, Paramour lode	1.765
	Sur. No. 1712, Regulation lode	3.176
	Sur. No. 1712, Regulation lode, exclusive of its conflict with	
	Sur. No. 1712, Paramour lode	2.841
	Veiled Prophet #26 lode of this survey	3.697
	Veiled Prophet #29 lode of this survey	1.336
	Total Area, Veiled Prophet #27 lode	20.661
	Area in conflict with:	
	Sur. No. 2357, Antietam lode	0.046
	Sur. No. 2357, Leo C lode	1.092
	Sur. No. 2357, Leo C lode, exclusive of its conflict with Sur. No. 2357, Antietam lode	1.046
	Veiled Prophet #26 lode of this survey	5.907
	Veiled Prophet #26 lode of this survey, exclusive of its conflict with Sur. No. 2357, Leo C lode	5.593
	Total Area, Veiled Prophet #20 lode	20.661
	Area in conflict with:	
	Sur. No. 1712, Paramour lode	5.894

Chains

Total Area, Veiled Prophet #24 lode	20.661
Area in conflict with:	
Sur. No. 1582, Copper lode	7.195
Sur. No. 1730, Victor lode	0.662
Sur. No. 1730, Victor lode, exclusive of its conflict with	
Sur. No. 1582, Copper lode	0.250
Sur. No. 1937, Buckeye lode	0.001
Sur. No. 1937, Buckeye lode, exclusive of its conflict with	
Sur. No. 1582, Copper lode	0.000
Total Area, Veiled Prophet #25 lode	20.661
Area in conflict with:	
Sur. No. 1582, Copper lode	1.628
Sur. No. 1937, Buckeye lode	3.898
Sur. No. 1937, Buckeye lode, exclusive of its conflict with	
Sur. No. 1582, Copper lode	3.781
Sur. No. 2357, Leo C lode	2.195
Total Area, Veiled Prophet #19 lode	20.661
Total Area, Veiled Prophet #18 lode	20.661
Total Area, Veiled Prophet #17 lode	20.661
Area in conflict with:	
Sur. No. 1730, Victor lode	2.677
Total Area, Veiled Prophet #16 lode	20.661
Area in conflict with:	
Sur. No. 1730, Victor lode	3.071
Total Area, Veiled Prophet #23 lode	20.661
Area in conflict with:	
Sur. No. 1712, Paramour lode	0.199
Total Area, Veiled Prophet #21 lode	20.661
Total Area, Veiled Prophet #22 lode	20.661
Area in conflict with:	
Sur. No. 1740, Veiled Prophet #5 lode	1.883
Sec. 2, T. 4 S., R. 29 E.	2.311
Sec. 2, T. 4 S., R. 29 E., exclusive of its conflict with	
Sur. No. 1640, Veiled Prophet No. 5 lode	2.283
Total Area, Veiled Prophet #14 lode	19.314
Area in conflict with:	
Sur. No. 1730, Victor lode	5.332
Sur. No. 1734, Tip Top lode	0.971
Total Area, Veiled Prophet #15 lode	17.660
Area in conflict with:	
Sur. No. 1640, Veiled Prophet No. 5 lode	2.771
Total Area, Veiled Prophet #12 lode	20.661
Area in conflict with:	
Sur. No. 1734, Tip Top lode	8.360
Sur. No. 1734, Jumbo lode	1.067
Sur. No. 1740, Dry Jack lode	0.015
Sur. No. 1740, Dry Jack lode, exclusive of its conflict with	
Sur. No. 1734, Jumbo lode	0.015
Total Area, Veiled Prophet #13 lode	20.661
Area in conflict with:	
Sur. No. 1640, Veiled Prophet No. 1 lode	0.724
Sur. No. 1640, Veiled Prophet No. 1 lode, exclusive of its unpatented portion	0.202
Total Area, Veiled Prophet #7 lode	20.661
Area in conflict with:	
Sur. No. 1732, White Hawk East Extension lode	3.454
Sur. No. 1734, Tip Top lode	1.594
Sur. No. 1740, Dry Jack lode	4.035
Total Area, Veiled Prophet #8 lode	20.661
Area in conflict with:	
Sur. No. 1734, Tip Top lode	0.426

Chains	Total Area, Veiled Prophet #9 lode	20.661
	Total Area, Veiled Prophet #10 lode	20.661
	Area in conflict with:	
	Sur. No. 1640, Veiled Prophet No. 4 lode	13.808
	Sur. No. 1640, Veiled Prophet No. 4 lode, exclusive of its unpatented portion	7.400
	Total Area, Veiled Prophet #6 lode	20.661
	Area in conflict with:	
	Sur. No. 1732, White Hawk East Extension lode	2.642
	Sur. No. 2907, North King lode	0.105
	Sur. No. 2907, Jamieson lode	1.469
	Sur. No. 2907, Jamieson No. 2 lode	1.457
	Sur. No. 2907, Jamieson No. 2 lode, exclusive of its conflict with Sur. No. 1732, White Hawk East Extension lode	1.451
	Total Area, Veiled Prophet #11 lode	20.488
	Area in conflict with:	
	Sur. No. 1640, Veiled Prophet No. 1 lode	3.465
	Sur. No. 1640, Veiled Prophet No. 1 lode, exclusive of its unpatented portion	2.501
	Sur. No. 1640, Veiled Prophet No. 3 lode	0.820
	Sur. No. 1640, Veiled Prophet No. 3 lode, exclusive of its unpatented portion	0.772
	Sur. No. 1640, Veiled Prophet No. 4 lode	0.071
	Sur. No. 1640, Veiled Prophet No. 4 lode, exclusive of its unpatented portion	0.000
	Sur. No. 1640, Veiled Prophet No. 5 lode	1.304
	Sur. No. 1640, Veiled Prophet No. 5 lode, exclusive of its conflict with Sur. No. 1640, Veiled Prophet No. 1 lode	1.300
	Veiled Prophet #10 lode of this survey	2.269
	Veiled Prophet #10 lode of this survey, exclusive of its conflict with:	
	(1) Sur. No. 1640, Veiled Prophet No. 4 lode	2.198
	(2) Sur. No. 1640, Veiled Prophet No. 4 lode, exclusive of its unpatented portion	2.269
	Veiled Prophet #13 lode of this survey	5.850
	Veiled Prophet #13 lode of this survey, exclusive of its conflict with:	
	(1) Sur. No. 1640, Veiled Prophet No. 1 lode	5.126
	(2) Sur. No. 1640, Veiled Prophet No. 1 lode, exclusive of its unpatented portion	5.648
	Veiled Prophet #15 lode of this survey	1.451

LOCATION

This survey is located in secs. 2 and 3, T. 4 S., R. 29 E. and secs. 34 and 35, T. 3 S., R. 29 E., G.&S.R.M., Arizona.

This survey is essentially identical with the locations as marked on the ground; falling entirely within the location.

EXPENDITURES

The improvements and the value of the labor and improvements made upon or for the benefit of each of the lode locations embraced in said mining claim by the claimant or its grantors are as follows:

- No. 1 The discovery cut of Veiled Prophet #6 lode; the face of which, being the discovery point, is on the lode line, 260 ft. from a point on line 3-4, 300 ft. from Cor. No. 4; 5 ft. wide; runs N. 70° E., 20 ft. to 16 ft. face.
Value \$300.

Chains

- No. 2 A shaft, 5 x 8 ft. in size, the center of which bears N. 86° W., 510 ft. from Cor. No. 1; 10 ft. deep.
Value \$125.
- No. 3 A cut, 4 ft. wide, the face of which bears N. 88° E., 340 ft. from Cor. No. 3; runs N. 70° E., 8 ft. to 10 ft. face.
Value \$65.
- No. 4 An adit, 5 x 6 ft. in size, the portal of which bears S. 42° E., 530 ft. from Cor. No. 4; runs S. 40° E., 100 ft. to breast.
Value \$1,000.
- No. 5 An adit, 3 x 6 ft. in size, the portal of which bears N. 72° W., 725 ft. from Cor. No. 1; runs S. 42° E., 150 ft. to breast.
Value \$950.
- No. 6 A shaft, 5 x 7 ft. in size, the center of which bears N. 89° W., 520 ft. from Cor. No. 1; 8 ft. deep.
Value \$100.
- No. 7 A cut, 5 ft. wide; the face of which bears N. 83° W., 525 ft. from Cor. No. 1; runs N. 35° E., 50 ft. to 14 ft. face.
Value \$2,350.
- No. 8 A cut, 5 ft. wide; the face of which bears S. 89°35' W., 525 ft. from Cor. No. 1; runs E., 10 ft. to 6 ft. face.
Value \$60.
- No. 1 The discovery cut of Veiled Prophet #7 lode, the entrance of which, being the discovery point, is on the lode line, 610 ft. from a point on line 2-3, 300 ft. from Cor. No. 2; 8 ft. wide, runs S. 60° E., 20 ft. to 12 ft. face.
Value \$320.
- No. 2 An adit, 3 x 5 ft. in size, the portal of which bears S. 4° E., 715 ft. from Cor. No. 4; runs S. 55° W., 8 ft. to breast.
Value \$50.
- No. 3 An adit, 4 x 8 ft. in size; the portal of which bears N. 55° E., 330 ft. dist. from Cor. No. 3; runs N. 85° E., 6 ft. to breast.
Value \$70.
- No. 1 The discovery cut of Veiled Prophet #8 lode, the face of which being the discovery point is on the lode line 180 ft. from a point on line 2-3, 300 ft. from Cor. No. 2; 4 ft. wide; runs S. 80° E., 16 ft. to 14 ft. face.
Value \$285.
- No. 2 A cut, 6 ft. wide, the face of which bears N. 65° E., 470 ft. from Cor. No. 3; runs N. 85° E., 12 ft. to 10 ft. face.
Value \$150.
- No. 3 An adit, 5 x 6 ft. in size, the portal of which bears N. 50° E., 735 ft. from Cor. No. 3; runs N. 20° W., 80 ft. to breast.
Value \$650.
- No. 4 A cut, 4 ft. wide, the face of which bears N. 5° W., 735 ft. from Cor. No. 2; runs S. 75° E., 10 ft. to 8 ft. face.
Value \$70.
- No. 5 An inclined shaft, 4 x 6 ft. in size, the center of which bears N. 70° W., 835 ft. from Cor. No. 2; 25 ft. deep.
Value \$150.

Claims	
No. 6	A cut, 7 ft. wide, the face of which bears N. 11° E., 825 ft. from Cor. No. 2; runs N. 10° E., 12 ft. to 8 ft. face. Value \$100.
No. 7	A cut; 12 ft. wide, the face of which bears S. 45° W., 740 ft. from Cor. No. 1; runs S. 45° E., 10 ft. to 16 ft. face. Value \$300.
No. 8	An adit, 5 x 5 ft. in size; the portal of which bears S. 45° W., 650 ft. from Cor. No. 1; runs S. 30° E., 12 ft. to breast. Value \$110.
No. 9	An adit, 5 x 5 ft. in size, the portal of which bears S. 53° W., 260 ft. from Cor. No. 1; runs S. 50° E., 50 ft. to breast. Value \$400.
No. 10	An adit, 6 x 6 ft. in size, the portal of which bears S. 89° W., 230 ft. from Cor. No. 1; runs S. 80° W., 30 ft. to breast. Value \$260.
No. 11	A cut, 4 ft. wide, the face of which bears S. 82° W., 145 ft. from Cor. No. 1; runs S. 50° E., 10 ft. to 8 ft. face. Value \$65.
No. 12	A shaft, 4 x 6 ft. in size, the center of which bears N. 55° W., 90 ft. from Cor. No. 1; 8 ft. deep; an adit, beginning near the collar, 3 x 5 ft. in size, bears S. 5° E., 5 ft. to breast. Value of shaft and adit \$140.
No. 13	An inclined shaft, 4 x 6 ft. in size, 100 ft. deep, judging by the size of dump; the center of which bears S. 85° W., 220 ft. from Cor. No. 1; filled to collar with water. Value \$1,000.
No. 1	The discovery cut of Veiled Prophet #9 lode, the face of which being the discovery point is on the lode line 280 ft. from a point on line 2-3, 300 ft. from Cor. No. 3; 6 ft. wide, runs S. 50° E., 15 ft. to 12 ft. face. Value \$200.
No. 1	The discovery point of Veiled Prophet #10 lode, being on the lode line 130 ft. from a point on line 4-1, 300 ft. from Cor. No. 1. No value.
No. 2	A cut, 5 ft. wide; the face of which bears S. 67° W., 185 ft. from Cor. No. 1; runs S. 20° E., 15 ft. to 10 ft. face. Value \$185.
No. 1	The discovery point of Veiled Prophet #11 lode, being on the lode line, 690 ft. from a point on line 2-3; 300 ft. from Cor. No. 2. No value.
No. 2	A shaft, 5 x 10 ft. in size; the center of which bears S. 87° W., 715 ft. from Cor. No. 3; 8 ft. deep. Value \$175.
No. 1	The discovery cut of Veiled Prophet #12 lode, the entrance of which, being the discovery point is on the lode line 325 ft. from point on line 1-2, 300 ft. from Cor. No. 1. 6 ft. wide; runs S. 44° E., 12 ft. to 10 ft. face. Value \$180.

Chains-	
No. 2	A cut, 6 ft. wide, the face of which bears S. 83°40' W., 415 ft. from Cor. No. 1; runs S. 33° E., 8 ft. to 10 ft. face. Value \$120.
No. 3	A shaft, 4 x 6 ft. in size, the center of which bears S. 87°45' W., 560 ft. from Cor. No. 1; 8 ft. deep. Value \$100.
No. 4	A shaft, 4 x 6 ft. in size, the center of which bears N. 39°30' W., 520 ft. from Cor. No. 2; 8 ft. deep. Value \$100.
No. 5	A cut, the face of which bears N. 41°45' W., 530 ft. from Cor. No. 2; 4 ft. wide; runs N. 5° W., 12 ft. to 8 ft. face. Value \$95.
No. 6	A shaft, 6 x 8 ft. in size; the center of which bears N. 55°20' W., 600 ft. from Cor. No. 2; 35 ft. deep. Value \$140.
No. 1	The discovery cut of Veiled Prophet #13 lode, the face of which being the discovery point is on the lode line, 220 ft. from a point on line 4-1, 300 ft. from Cor. No. 1; runs N. 72° E., 12 ft. to 11 ft. face. Value \$165.
No. 2	A cut, 5 ft. wide, the face of which bears S. 50°10' E., 335 ft. from Cor. No. 1; runs S. 50° E., 9 ft. to 6 ft. face. Value \$65.
No. 1	The discovery point of Veiled Prophet #14 lode, being on the lode line, 610 ft. from a point on line 4-1, 300 ft. from Cor. No. 1. No value.
No. 2	A cut, 6 ft. wide, the face of which bears N. 36°10' W., 660 ft. from Cor. No. 1; runs S. 59° E., 15 ft. to 12 ft. face. Value \$270.
No. 3	A cut, 6 ft. wide, the face of which bears N. 65°40' W., 670 ft. from Cor. No. 4; 14 ft. face; runs S. 43° E., 10 ft. to face and portal of adit, 5 x 6 ft. in size; running S. 34° W., 100 ft. to breast. Value \$1,000.
No. 4	A cut, 5 ft. wide; the face of which bears N. 68°45' W., 310 ft. from Cor. No. 4; 10 ft. face; runs S. 50° W., 6 ft. to face and portal of adit, 5 x 6 ft. in size; running S. 50° W., 60 ft. to breast. Value \$500.
No. 1	The discovery point of Veiled Prophet #15 lode, being on the lode line 440 ft. from a point on line 1-2, 300 ft. from Cor. No. 1. No value.
No. 2	A cut, 6 ft. wide, the face of which bears S. 81°30' E., 475 ft. from Cor. No. 1; runs S. 45° W., 15 ft. to 10 ft. face. Value \$200.
No. 1	The discovery cut of Veiled Prophet #16 lode, the face of which; being the discovery point, is on the lode line 720 ft. from a point on line 1-2, 300 ft. from Cor. No. 1; 4 ft. wide, runs N. 80° E., 15 ft. to 7 ft. face. Value \$180.
No. 2	A cut, 6 ft. wide, the face of which bears S. 89° W., 505 ft. from Cor. No. 1; runs N. 12° W., 12 ft. to 10 ft. face. Value \$150.

Chains	
No. 3	A cut, 4 ft. wide; the face of which bears S. 76° E., 650 ft. from Cor. No. 3; runs S. 55° E., 15 ft. to 4 ft. face. Value \$50.
No. 4	A shaft, 5 x 7 ft. in size, the center of which bears S. 45° E., 290 ft. from Cor. No. 4; 7 ft. deep. Value \$70.
No. 5	A shaft, 6 x 9 ft. in size; the center of which bears S. 43° E., 490 ft. from Cor. No. 4; 8 ft. deep. Value \$80.
No. 6	A cut, 5 ft. wide; the face of which bears N. 80° E., 415 ft. from Cor. No. 3; runs N. 40° W., 20 ft. to 10 ft. face and portal of adit, 4 x 6 ft. in size; running N. 40° W., 12 ft. to breast. Value \$320.
No. 7	An adit, 5 x 6 ft. in size; the portal of which bears S. 85° E., 510 ft. from Cor. No. 3; 5 x 6 ft. in size; runs N. 82° E., 20 ft. to breast. Value \$200.
No. 8	An adit, 4 x 4 ft. in size; the portal of which bears N. 88° E., 520 ft. from Cor. No. 3; runs S. 38° E., 40 ft. to breast. Value \$250.
No. 9	A cut, 6 ft. wide; the face of which bears S. 38° E., 525 ft. from Cor. No. 4; runs N. 55° E., 15 ft. to 4 ft. face. Value \$60.
No. 10	A cut, 4 ft. wide; the face of which bears N. $84^{\circ}30'$ W., 370 ft. from Cor. No. 1; 10 ft. face; runs N. 15° W., 15 ft. to face and portal of adit, 4 x 6 ft. in size; running N. 15° W., 25 ft. to breast. Value \$300.
No. 1	The discovery point of Veiled Prophet #17 lode, being on the lode line 390 ft. from a point on line 2-3, 300 ft. from Cor. No. 2. No value.
No. 2	A cut, 5 ft. wide; the face of which bears E., 490 ft. from Cor. No. 2; runs N. 20° E., 12 ft. to 10 ft. face. Value \$100.
No. 3	A cut, 8 ft. wide; the face of which bears S. $85^{\circ}50'$ E., 780 ft. from Cor. No. 2; runs N. 65° E., 20 ft. to 12 ft. face. Value \$425.
No. 4	A shaft, 6 x 10 ft. in size, the center of which bears S. 85° E., 740 ft. from Cor. No. 2; 20 ft. deep. Value \$200.
No. 1	The discovery point of Veiled Prophet #18 lode, being on the lode line, 430 ft. from a point on line 1-2, 300 ft. from Cor. No. 1. No value.
No. 2	A cut, 4 ft. wide; the face of which bears W., 490 ft. from Cor. No. 1; runs N. 55° E., 12 ft. to 10 ft. face. Value \$110.
No. 3	A cut, 4 ft. wide; the face of which bears S. 86° W., 415 ft. from Cor. No. 1; 12 ft. face; runs N. 45° E., 20 ft. to face and portal of adit 4 x 6 ft. in size; running N. 45° E., 25 ft. to breast. Value \$400.

Chains-	
No. 4	A cut, the face of which bears N. 89° E., 400 ft. from Cor. No. 3; 6 ft. wide; runs N. 75° W., 15 ft. to 5 ft. face. Value \$110.
No. 5	A cut, 5 ft. wide, the face of which bears N. 80° E., 545 ft. from Cor. No. 3; runs N. 30° E., 12 ft. to 4 ft. face. Value \$50.
No. 1	The discovery point of Veiled Prophet #19 lode, being on the lode line, 560 ft. from a point on line 4-1, 300 ft. from Cor. No. 1. No value.
No. 2	A cut, 6 ft. wide, the face of which bears N. 82° W., 645 ft. from Cor. No. 4; runs N. 60° E., 14 ft. to 10 ft. face. Value \$180.
No. 3	A cut, 5 ft. wide, the face of which bears N. 48° W., 565 ft. from Cor. No. 1; runs N. 70° E., 13 ft. to 12 ft. face. Value \$150.
No. 1	The discovery point of Veiled Prophet #20 lode, being on the lode line, 365 ft. from a point on line 2-3, 300 ft. from Cor. No. 2. No value.
No. 2	A cut, 5 ft. wide, the face of which bears S. 12° E., 395 ft. from Cor. No. 3; runs N. 25° E., 15 ft. to 12 ft. face. Value \$180.
No. 3	A cut, 6 ft. wide; the face of which bears S. 84° E., 640 ft. from Cor. No. 2; 12 ft. face; runs N. 10° W., 18 ft. to face and portal of adit, 5 x 6 ft. in size, running N. 10° W., 20 ft. to breast. Value \$430.
No. 4	A cut, 6 ft. wide, the face of which bears S. 70° E., 680 ft. from Cor. No. 2; runs N. 53° W., 20 ft. to 12 ft. face. Value \$300.
No. 1	The discovery point of Veiled Prophet #21 lode, being on the lode line, 120 ft. from a point on line 2-3, 300 ft. from Cor. No. 3. No value.
No. 2	A cut, the face of which bears S. 76° E., 350 ft. from Cor. No. 3; 4 ft. wide; runs S. 25° W., 12 ft. to 12 ft. face. Value \$125.
No. 3	A shaft, 4 x 6 ft. in size, the center of which bears S. 20° W., 735 ft. from Cor. No. 4; 15 ft. deep. Value \$150.
No. 4	A shaft, 6 x 6 ft. in size, the center of which bears S. 15° E., 175 ft. from Cor. No. 4; 15 ft. deep. Value \$150.
No. 5	An adit, 4 x 6 ft. in size, the portal of which bears N. 2° E., 300 ft. from Cor. No. 2; runs N. 65° E., 15 ft. to breast. Value \$150.
No. 1	The discovery point of Veiled Prophet #22 lode, being on the lode line, 235 ft. from a point on line 3-4, 300 ft. from Cor. No. 4. No value.
No. 2	A cut, 5 ft. wide, the face of which bears N. 88° E., 400 ft. from Cor. No. 4; runs N. 55° E., 10 ft. to 12 ft. face. Value \$125.

470

Survey No. 4416

44

Chain-	
No. 3	A cut, 5 ft. wide; the face of which bears S. 40° W., 580 ft. from Cor. No. 2; runs N. 50° E., 20 ft. to 10 ft. face. Value \$200.
No. 4	A cut; 6 ft. wide, the face of which bears S. 45° W., 590 ft. from Cor. No. 2; runs N. 35° E., 10 ft. to 8 ft. face. Value \$100.
No. 5	A shaft, 4 x 6 ft. in size, the center of which bears S. 44° W.; 540 ft. from Cor. No. 2; 6 ft. deep. Value \$60.
No. 1	The discovery point of Veiled Prophet #23 lode, being on the lode line, 580 ft. from a point on Line 3-4; 300 ft. from Cor. No. 4. No value.
No. 2	A cut; 5 ft. wide, the face of which bears S. 10° W., 655 ft. from Cor. No. 3; runs S. 12 ft. to 10 ft. face. Value \$120.
No. 3	A cut, 5 ft. wide, the face of which bears S. 41° E., 560 ft. from Cor. No. 3; runs N. 55° E., 15 ft. to 10 ft. face. Value \$110.
No. 4	An adit, 4 x 6 ft. in size; the portal of which bears S. 21° E.; 610 ft. from Cor. No. 3; runs N. 20° E., 80 ft. to breast. Value \$500.
No. 1	The discovery point of Veiled Prophet #24 lode, being on the lode line, 135 ft. from a point on line 4-1, 300 ft. from Cor. No. 1. No value.
No. 2	A cut, 5 ft. wide, the face of which bears S. 31° E., 290 ft. from Cor. No. 4; runs N. 85° W., 10 ft. to 10 ft. face. Value \$100.
No. 3	A cut, 6 ft. wide, the face of which bears N. 25° E., 730 ft. from Cor. No. 2; runs N. 55° W., 10 ft. to 6 ft. face. Value \$75.
No. 1	The discovery point of Veiled Prophet #25 lode, being on the lode line, 390 ft. from a point on line 2-3, 300 ft. from Cor. No. 2. No value.
No. 2	A cut, 5 ft. wide, the face of which bears N. 1° E., 478 ft. from Cor. No. 2; runs N. 73° E., 15 ft. to 10 ft. face. Value \$160.
No. 3	A cut, 4 ft. wide, the face of which bears N. 5° 10' E., 420 ft. from Cor. No. 2; 10 ft. face; runs N. 45° E.; 20 ft. to face and portal of adit, 4 x 6 ft. in size; running N. 45° E., 50 ft. to breast. Value \$550.
No. 4	A cut, 5 ft. wide, the face of which bears N. 11° E., 490 ft. from Cor. No. 2; runs N. 30° E., 15 ft. to 8 ft. face. Value \$120.
No. 5	A trench, 3 ft. wide, the face of which bears N. 13° E., 540 ft. from Cor. No. 2; runs S. 22° W., 30 ft. to 3 ft. face. Value \$80.
No. 1	The discovery cut of Veiled Prophet #26 lode, the face of which, being the discovery point is on the lode line 180 ft. from a point on line 1-2, 301.14 ft. from Cor. No. 2; 5 ft. wide; 10 ft. face; runs S., 12 ft. to face. Value \$120.

Chains	
No. 2	A cut, 6 ft. wide, the face of which bears S. 19° W., 270 ft. from Cor. No. 1; runs S. 20° E., 20 ft. to 8 ft. face. Value \$200.
No. 3	A cut, 10 ft. wide, the face of which bears N. 88° W., 90 ft. from Cor. No. 2; 10 ft. face; runs S. 5° W., 30 ft. to face and portal of adit, 5 x 6 ft. in size, running S. 5° W., 20 ft. to breast. Value \$400.
No. 1	The discovery point of Veiled Prophet #27 lode, being on the lode line 265 ft. from a point on line 4-1, 300 ft. from Cor. No. 1. No value.
No. 2	A cut, 4 ft. wide, the face of which bears S. 80° W., 385 ft. from Cor. No. 4; runs N. 42° W., 12 ft. to 10 ft. face. Value \$100.
No. 1	The discovery point of Veiled Prophet #28 lode, being on the lode line 700 ft. from a point on line 2-3, 300 ft. from Cor. No. 3. No value.
No. 2	A cut, 6 ft. wide, the face of which bears N. 20° W., 560 ft. from Cor. No. 1; runs N. 45° W., 20 ft. to 12 ft. face. Value \$300.
No. 3	A cut, 10 ft. wide, the face of which bears S. 85° E., 535 ft. from Cor. No. 2; 10 ft. face; runs S. 10° W., 45 ft. to portal of adit, 5 x 6 ft. in size; running S. 10° W., 15 ft. to breast. Value \$300.
No. 4	A cut, 4 ft. wide, the face of which bears S. 83° E., 560 ft. from Cor. No. 2; 6 ft. face; runs S. 20° W., 15 ft. to face and portal of adit, 4 x 6 ft. in size, running S. 20° W., 20 ft. to breast. Value \$230.
No. 5	A trench, 12 ft. wide, the face of which bears N. 64° W., 885 ft. from Cor. No. 4; runs S. 85° W., 20 ft. to a 4 ft. face; average depth is 4 ft. Value \$120.
No. 1	The discovery cut of Veiled Prophet #29 lode, the face of which, being the discovery point, is on the lode line 150 ft. from a point on line 4-1, 301.14 ft. from Cor. No. 1; 4 ft. wide; runs W., 15 ft. to 8 ft. face. Value \$90.
No. 2	A cut, 6 ft. wide, the face of which bears E., 635 ft. from Cor. No. 1; runs S. 65° E., 15 ft. to 4 ft. face. Value \$60.
No. 3	A shaft, 4 x 10 ft. in size; the center of which bears N. 83° E., 260 ft. from Cor. No. 4; 6 ft. deep. Value \$60.
No. 4	A shaft, 6 x 6 ft. in size; the center of which bears N. 48° E., 175 ft. from Cor. No. 4; 5 ft. deep. Value \$50.
No. 5	A cut, 6 ft. wide, the face of which bears N. 75° E., 230 ft. from Cor. No. 4; runs S. 45° E., 20 ft. to an 8 ft. face. Value \$150.
No. 1	The discovery cut of Veiled Prophet #30 lode, the face of which being the discovery point is on the lode line 450 ft. from a point on line 2-3, 361.15 ft. from Cor. No. 2; 4 ft. wide, runs N. 50° E., 12 ft. to 10 ft. face. Value \$100.

Chains	
No. 2	A cut, 6 ft. wide, the face of which bears S. 62° W., 740 ft. from Cor. No. 2; runs N. 18° E., 16 ft. to 10 ft. face. Value \$200.
No. 3	A cut, 8 ft. wide, the face of which bears S. 64° W., 710 ft. from Cor. No. 2; runs N. 12° E., 12 ft. to 6 ft. face. Value \$120.
No. 4	A cut, 6 ft. wide, the face of which bears S. 75° E., 400 ft. from Cor. No. 1; runs N. 15° E., 10 ft. to 4 ft. face. Value \$40.
No. 5	A cut, 6 ft. wide, the face of which bears S. 42° E., 65 ft. from Cor. No. 1; runs N. 37° W., 20 ft. to an 8 ft. face. Value \$200.
No. 6	A cut, 4 ft. wide, the face of which bears N. 63° E., 220 ft. from Cor. No. 4; runs N. 10° W., 20 ft. to 6 ft. face. Value \$120.
No. 7	A cut, 4 ft. wide, the face of which bears N. 72° E., 735 ft. from Cor. No. 4; 10 ft. face; runs N. 35° E., 25 ft. to face and portal of adit, 4 x 6 ft. in size, running N. 35° E., 35 ft. to breast. Value \$400.
No. 8	A trench, 6 ft. wide, the center of which bears N. 70° E., 820 ft. from Cor. No. 4; bears E. and W., 8 ft. to entrance; average depth is 3 ft. Value \$50.
No. 9	A cut, 4 ft. wide, the face of which bears N. 68° E., 850 ft. from Cor. No. 4; runs N. 35° E., 10 ft. to 4 ft. face. Value \$25.
No. 10	A cut, 10 ft. wide, the face of which bears N. 74° W., 350 ft. from Cor. No. 3; runs N. 50° E., 15 ft. to 8 ft. face. Value \$200.
No. 11	A cut, 8 ft. wide, the face of which bears N. 83° W., 350 ft. from Cor. No. 3; runs N. 10° W., 20 ft. to 8 ft. face. Value \$230.
No. 12	A cut, 6 ft. wide, the face of which bears N. 88° W., 370 ft. from Cor. No. 3; runs N. 35° E., 15 ft. to 8 ft. face. Value \$120.
No. 13	An inclined shaft, 6 x 6 ft. in size, the center of which bears N. 58° E., 250 ft. from Cor. No. 4; 50 ft. deep. Value \$500.
No. 14	A cut, 4 ft. wide, the face of which bears S. 53° W., 580 ft. from Cor. No. 2; runs N. 85° W., 15 ft. to 10 ft. face. Value \$120.

An interest in common improvements described as follows:

A road, beginning in Standard Gulch and winding approximately $1\frac{1}{2}$ miles around the mountain, and across Veiled Prophet #10, 6 and 9 lodes to the drill holes on Veiled Prophet #6 and 9 lodes and the access trail to the remainder of the group. It runs 1100 ft. across the three claims of this survey; an undivided interest to each of the 25 lode claims.

Chains-

Value of road across survey: \$11,000.
Value of 1/25th interest: \$440.

A diamond drill hole, $3\frac{1}{2}$ ins. diam., 1000 ft. deep; which bears S. 78° W., 265 ft. from Cor. No. 1, Veiled Prophet #6. Diamond Drill Hole No. 396.

Value \$3350.

A diamond drill hole, $3\frac{1}{2}$ ins. diam., 780 ft. deep; bears N. $8^{\circ}40'$ E., 360 ft. from Cor. No. 2, Veiled Prophet #9. Diamond Drill Hole No. 399.

Value \$3100.

Value of both drill holes: \$6,450.

Value of 1/25 interest: \$258.

OTHER IMPROVEMENTS

An abandoned tramway road bed runs across the southwesterly end of Veiled Prophet #6 lode and into the southerly part of Veiled Prophet #7 lode.

Claimant unknown.

A cased drill hole, 6 ins. diam., depth unknown, bears S. 50° E., 420 ft. from Cor. No. 4, Veiled Prophet #6 lode.

Claimant unknown.

The Lynch cabins, the larger is 15 x 20 ft. in size, bears S. 60° E., 260 ft. and the smaller, 10 x 14 ft. in size, bears S. 70° E., 350 ft. from Cor. No. 3, Veiled Prophet #16 lode.

Claimant unknown.

A cut, 5 ft. wide, the face of which bears N. 21° W., 280 ft. from Cor. No. 2, Veiled Prophet #25 lode; runs N. 34° E., 25 ft. to 12 ft. face.

Claimant unknown.

A cut, 10 ft. wide, the face of which bears N. 86° W., 670 ft. from Cor. No. 3, Veiled Prophet #29 lode; runs S. 55° W., 20 ft. to a 10 ft. face.

Claimant unknown.

A cut, 6 ft. wide, the face of which bears N. 28° W., 290 ft. from Cor. No. 3, Veiled Prophet #29 lode; runs N. 30° E., 15 ft. to 6 ft. face.

Claimant unknown.

A cut, 6 ft. wide, the face of which bears N. 26° W., 285 ft. from Cor. No. 3, Veiled Prophet #29 lode; runs N. 35° E., 20 ft. to 6 ft. face.

Claimant unknown.

A cut, 5 ft. wide; the face of which bears N. 14° W., 365 ft. from Cor. No. 1, Veiled Prophet #28 lode; runs N. 50° W., 12 ft. to 10 ft. face.

Claimant unknown.

A cut, 6 ft. wide; the face of which bears N. 86° E., 310 ft. from Cor. No. 1, Veiled Prophet #29 lode; runs S. 26° W., 10 ft. to 6 ft. face.

Claimant unknown.

A cut, 4 ft. wide; the face of which bears N. 25° E., 750 ft. from Cor. No. 2, Veiled Prophet #10 lode; runs N. 50° E., 6 ft. to 6 ft. face.

Claimant unknown.

Chains-

OTHER CORNER DESCRIPTIONS AND SUPPLEMENTAL DATA

Sur. No. 1582 Copper lode; Cor. No. 1 was not found; Cor. No. 2 has been destroyed, I reset a stake from probable bearing tree; Cor. No. 3 is an old stone mound, ties were made to a stake set in the center; Cor. No. 4 is a 4 x 6 in. post, firmly set in a stone mound; line 4-3 is shown approximately as approved; line 1-2 was found correct as approved; line 2-3 was found to be S. 31°12' W., 1485.31 ft., instead of S. 31° W., 1500 ft. as approved.

Sur. No. 1582 Republic lode; Cor. No. 1 is an old 4 x 4 post, set in a stone mound, no visible markings; no bearing objects were seen; line 1-2 was found to be S. 31° W., 545.70 ft. instead of S. 31° W., 561 ft. as approved.

Sur. No. 1640 Veiled Prophet No. 1 lode; Cor. No. 3 is a scattered stone mound, the bearing tree is down; Cor. No. 2 is a stone mound with scribed remains of a post in and around. Line 2-3 was found to be N. 32°07' E., 600. ft. instead of N. 31°50' E., 600 ft. as approved.

Sur. No. 1640 Veiled Prophet No. 2 lode; Cor. No. 4, identical with Cor. No. 1, Veiled Prophet No. 3 lode, is a 4 x 4 post, found lying beside a vague stone mound; reset in stone mound; Phelps Dodge Triangulation Station #270 bears S. 19°22' E., 354.9 ft. dist.; Cor. No. 1 is a scribed post set in a stone mound; bearing tree is down. Line 1-4 was found to be N. 58°02' W., 602.7 ft. instead of N. 58°02' W., 600.00 ft. as approved.

Sur. No. 1640 Veiled Prophet No. 3 lode; Cor. No. 4 identical with Cor. No. 1, Veiled Prophet No. 4 lode, is an old stone mound, no accessories were seen; Cor. No. 3, identical with Cor. No. 2, Sur. No. 1640, Veiled Prophet No. 4 lode, is a 4 x 6 in. post in a rock slide, firmly set, no accessories were found; line 4-1 was found to be S. 58°02' E., 596.51 ft. instead of S. 58°02' E., 600.00 ft. as approved. Line 3-4 was found to be N. 32°05' E., 1495.10 ft., instead of N. 31°58' E., 1491.60 ft. as approved.

Sur. No. 1640 Veiled Prophet No. 4 lode; Cor. No. 4 is a 4 x 4 post in a stone mound; Cor. No. 3 and all its accessories has been destroyed. Line 4-1 was found correct as approved. Line 2-3 is shown approximately as approved. Line 3-4 is shown 1494.75 ft., N. 32°05' E., instead of N. 31°58' E., 1491.60 ft. as approved.

Sur. No. 1640 Veiled Prophet No. 5 lode; Cor. No. 4 is a stone mound; set a copper-coated steel rod with unmarked bronze cap near the center. Cor. No. 3 is a 4 x 4 in. post, firmly set and properly marked; Cor. No. 2 is a stake set in a stone mound, found from bearing rock data. Line 2-3 was found correct as approved. Line 3-4 was found to be S. 51°27' W., 1417.07 ft. instead of S. 51°19' W., 1415.40 ft. as approved. Line 4-1 is shown as approved.

Sur. No. 1712 Good Boy lode; Cor. No. 2 is a 4 x 4 post, set in a stone mound; Cor. No. 3 is a 4 x 4 post set in a stone mound; Cor. No. 4 was set loosely in a stone mound, I reset it solidly. Line 2-3 was found to be 1103.0 ft. long, instead of 1101.76 ft. as approved; line 3-4 was found to be S. 25°42' E., 645.04 ft. instead of S. 25°37' E., 643.68 ft. as approved; Distance from Cor. No. 3 to Cor. No. 2, Regulation lode, same survey, was found to be 6.26 ft. instead of 6.76 ft. as approved.

Sur. No. 1712 Paramour lode; Cor. No. 1 is an old stone mound with splintered remains of post; Cor. No. 2 is a 4 x 4 in. post,

Chains

firmly set in an old stone mound. Cor. No. 3 is a 4 x 4 post, firmly set and properly marked in an old stone mound; line 1-2 was found to be 599.15 ft. long instead of 600.00 ft. as approved; line 2-3 was found to be N. 10°47' E., 1504.90 ft. instead of N. 10°48' E., 1500.00 ft. as approved. Line 4-1 is shown as approved.

Sur. No. 1712 Regulation lode; Cor. No. 1 is a 4 x 4 in. post, firmly set and properly marked in an old stone mound; Cor. No. 2 is a 4 x 4 post, firmly set in a stone mound, properly marked. Cor. No. 3 is a 4 x 4 post, firmly set in a stone mound. Cor. No. 4 is a 4 x 4 in. post, firmly set and properly mkd., set in a stone mound. Line 1-2 was found to be N. 25°42' W., 658.06 ft. instead of N. 25°37' W., 657.2 ft. as approved; line 2-3 was found to be S. 40°16' W., 1276.91 ft. instead of S. 40°18' W., 1275.45 ft. as approved; line 3-4 was found to be S. 25°42' E., 652.06 ft. instead of S. 25°37' E., 657.2 ft. as approved. Line 4-1 was found to be N. 40°31' E., 1274.49 ft. instead of N. 40°18' E., 1275.45 ft. as approved.

Sur. No. 1730 Victor lode; Cor. No. 1 is a 4 x 4 in. post set in a stone mound; Cor. No. 2 is a 4 x 6 in. wooden post, set in a stone mound; Cor. No. 3 is a post set in a stone mound; Cor. No. 4 was not found, no accessories have been found; Cor. No. 5 is an old stone mound; Cor. No. 6 is a post in an old mound, firmly set and properly marked. Line 1-2 was found to be N. 27°56' W., 115.24 ft. instead of N. 27°42' W., 114.5 ft. as approved; Line 2-3 was found to be N. 47°33' E., 1023.70, instead of N. 46°24' E., 1024.5 ft. as approved. Line 3-4 was found to be S. 42°37' E., 600.00 ft. instead of S. 43°36' E., 600.00 ft. as approved. Line 4-5 was found to be S. 47°13' W., 1495.73 ft. instead of S. 46°24' W., 1500.00 ft. as approved. Line 5-6 was found to be N. 43°02' W., 407.18 ft. instead of N. 43°36' W., 397.5 ft. as approved. Line 6-1 was found to be N. 35°37' E., 455.36 ft. instead of N. 34°37' E., 453.5 ft. as approved.

Sur. No. 1732 White Hawk East Extension lode; Cor. No. 1, identical with Cor. No. 4, Sur. No. 1740 Dry Jack lode is a post, set in a mound of stones, properly marked; Cor. No. 2, identical with Cor. No. 3, Dry Jack lode, is a post, set in a mound of stones, firmly set and properly marked; line 2-3 was found to be S. 17°34' W., 1474.4 ft. instead of S. 17°50' W., 1500.00 ft. as approved. Line 1-2 was found to be S. 71°37' E., 597.40 ft. instead of S. 72°10' E., 600 ft. as approved.

Sur. No. 1734 Jumbo lode; Cor. No. 5, identical with Cor. No. 3, Tip Top lode, same survey, is a 4 x 4 in. post, set in a mound of stones; Cor. No. 4 is a post set in a mound of stones. Line 4-5 was found to be S. 35°37' W., 1214.6 ft. instead of S. 34°37' W., 1207.4 ft. as approved.

Sur. No. 1734 Tip Top lode; Cor. No. 4 is a vague monument with remnants of a properly marked post nearby; Cor. No. 1 is identical with Cor. No. 1 Victor lode, Sur. No. 1730; Cor. No. 2 is a 4 x 4 in. post set in a mound of stones. Line 2-1 was found to be N. 35°37' E., 1494.56 ft. instead of N. 34°37' E., 1500.00 ft. as approved; line 2-3 was found to be N. 27°58' W., 677.35 ft. instead of N. 27°42' W., 677.50 ft. as approved.

Sur. No. 1740 Dry Jack lode; Cor. No. 2 is a vague stone mound with a fallen post nearby. Line 2-3 was found to be S. 17°12' W., 1500.29 ft. instead of S. 17°50' W., 1500.00 ft. as approved. Line 3-4 is common to line 1-2, Sur. No. 1732, White Hawk East Extension lode.

Sur. No. 1937 Buckeye lode; Cor. No. 3 is a 4 x 4 in. post set in a stone mound, properly marked. Line 3-4 is shown approximately as approved. Line 2-3 is shown approximately as approved.

Chains

Sur. No. 2357 Antietam lode; Cor. No. 2, with all accessories, has been destroyed; Cor. No. 3 has been destroyed; ties were made from stake reset from bearing rock data. Line 2-3 was found to be S. 16°34' W., 1116.84 ft. instead of S. 16°37' W., 1123.56 ft. as approved.

Sur. No. 2357 Leo C lode; Cor. No. 1 is a 4 x 4 in. post, set in a stone mound, firmly set, markings are illegible; Cor. No. 2 is a post, 4 x 6 ins. in size, firmly set in a mound of stones, with faint markings; Cor. No. 3 is a splintered post, firmly set in a large stone mound, with faint markings; Cor. No. 4 was not seen. Line 1-2 was found to be S. 13°33' E., 728.86 ft. instead of S. 13°44' E., 728.5 ft. as approved. Line 2-3 was found to be S. 25°28' W., 1126.12 ft. instead of S. 25°30' W., 1130.03 ft. as approved. Line 4-1 is shown as approved.

Sur. No. 2485 Boulder Mine lode; Cor. No. 4 is a short post, 4 x 6 ins. in size, firmly set in a stone mound; line 3-4 is shown as approved; line 4-1 is shown approximately as approved.

Sur. No. 2485 El Moro lode; Cor. No. 1, identical with Cor. No. 4, Lone Pine lode, same survey, was found lying beside a faint monument; we set a stake, using the approved data, from the existing cors. of nearby patented claims. Cor. No. 3, identical with Cors. 4 and 1, Dead Pine and Iolanthe lodes, both of the same survey, is a 4 x 6 in. post, firmly set in a stone mound, properly marked; it was used as Cor. No. 1, Veiled Prophet #30 lode, this survey. Cor. No. 4 was an old stone mound; we set a copper-coated steel rod with a bronze cap mkd. VP30-4-4416-EM-4-2485 in the center and built another stone mound alongside. Line 3-4 was found to be S. 28°51' W., 722.3 ft. instead of S. 28°47' W., 725.8 ft. as approved. Line 4-1 was found to be S. 84°35' W., 1496.46 ft. instead of S. 84°32' W., 1497 ft. as approved.

Sur. No. 2485 Iolanthe lode; Cor. No. 4 is a post, 4 x 6 ins. in size, set in a stone mound. Line 4-1 was found to be S. 84°08' W., 1505.63 ft. instead of S. 84°15' W., 1500.00 ft. as approved.

Sur. No. 2485 Lone Pine lode; Cor. No. 1 is a 4 x 6 in. post, 4 ft. long, set in a stone mound, properly marked; line 4-1 was found to be approximately correct as approved.

Sur. No. 2907 Jamieson No. 2 lode; Cor. No. 4 is a properly marked point on a bedrock ledge; Cor. No. 1, identical with Cor. No. 4 Jamieson lode, same survey, is a cross chiseled on a large porphyry bluff, properly marked. Line 4-1 was found to be correct as approved. All others are shown correct as approved.

Sur. No. 2907 Jamieson lode; Cor. No. 1, identical with Cor. No. 5, North King lode, same survey, has been destroyed; the dump from the drill road above has covered its position. Line 4-1 is shown correct as approved. The side lines are shown as approved.

Sur. No. 2907 North King lode; Cor. No. 1 is a post, firmly set in a mound of stones, properly marked. All lines were found correct as approved, accumulated.

Sur. No. 2907 North King No. 2 lode; Cor. No. 4 is a 4 x 4 in. post, firmly set and properly marked, in a mound of stones, in a rock slide. Line 3-4 was found to be correct as approved. Line 4-1 is shown as approved.

Sur. No. 2907 Sirdar lode; Cor. No. 3 is an old stone mound; the ties were made to a stake set in the center. Line 2-3 is shown as approved.

Chains

Sur. No. 3078 Prince lode; Cor. No. 1 is an old stone mound, a post was found, lying away from the mound; the ties were made to a stake set in the center of the mound. Cor. No. 2 is an old mound with a loose post lying nearby; the ties were made to a stake set in the mound; no accessories were found at either cor. Line 1-2 was found to be N. 17°58' E., 1223.5 ft. instead of N. 17°59' E., 1220.48 ft. as approved.

Sur. No. 3944 Evolutor lode; Both Cors. 1 and 2 are stones, firmly set and properly marked; line 1-2 was found correct as approved.

The Cor. common to secs. 26, 27, 34 and 35, T. 3 S., R. 29 E., G.&S.R.M., is a General Land Office Pipe, with brass cap attached, firmly set and properly marked.

The $\frac{1}{4}$ sec. Cor. common to secs. 34 and 35, T. 3 S., R. 29 E., G.&S.R.M., is a General Land Office Pipe, with brass cap attached, firmly set and properly marked.

The standard Cor. common to secs. 34 and 35, T. 3 S., R. 29 E., falling on the North line of sec. 2, T. 4 S., R. 29 E., is a General Land Office Pipe with brass cap attached, firmly set and properly marked.

The closing Cor. common to secs. 2 and 3, T. 4 S., R. 29 E., falling on the South line of sec. 34, T. 3 S., R. 29 E., is a General Land Office Pipe with brass cap attached, firmly set and properly marked.

The $\frac{1}{4}$ sec. Cor. common to secs. 3 and 34, Ts. 3 and 4 S., R. 29 E., is a General Land Office Pipe with brass cap attached, firmly set and properly marked.

Triangulation Station 270 of the Phelps Dodge Triangulation Net is a hexagonal steel rod, 1 in. diam., concreted in rock. It bears S. 19°22' E., 354.9 ft. from Cor. No. 4, Sur. No. 1640, Veiled Prophet No. 2 lode.

Triangulation Station S-107 is a hexagonal steel rod, 1 in. diam., concreted in rock. It bears N. 72°03' W., 114.28 ft. from Cor. No. 3, Veiled Prophet #14 lode, this survey; Cor. No. 4, Sur. No. 1734, Jumbo lode bears N. 46°37' W., 411.23 ft. dist.

Triangulation Station 272 is a hexagonal steel rod, 1 in. diam., concreted in the top of a rock bluff. It bears S. 45°25' W., 422.83 ft. from Cor. No. 1, Veiled Prophet #7 lode, this survey.

Triangulation Station S-135 is a hexagonal steel rod, 1 in. diam., concreted in the top of a rock bluff. It bears S. 23°18' W., 213.17 ft. from Cor. No. 4, Veiled Prophet #6 lode, this survey.

FIELD ASSISTANTS

Name	Capacity
Frank Eastman	Instrumentman
Hazen Hunter	Instrumentman
S. G. Walters	Instrumentman
Frank Vasquez	Chainman
Joe D. Alvarez	Chainman
Marlin Widger	Chainman
Art Sylvester	Chainman
Merrill G. Bertrand	Chainman

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

55

CERTIFICATE OF SURVEYOR

Nov. 17, 1957

I, ROBERT LENON

Mineral Surveyor, hereby certify upon honor that in pursuance of an order received from the _____

Office Cadastral Engineer, at Phoenix, Arizona

dated Sept. 18, 1956, I have faithfully and correctly executed the survey of

the mining claim of PHELPS DODGE CORPORATION,

known as the Veiled Prophet #6 to #30 lodes

(Lode, placer, or mill site)

situate in Greenlee Gold Mountain Mining District, Secs. 2 & 3

34 & 35

T. 3 S., R. 29 E.

4 S., R. 29 E., G. & S. R. Meridian, Arizona, and

(State)

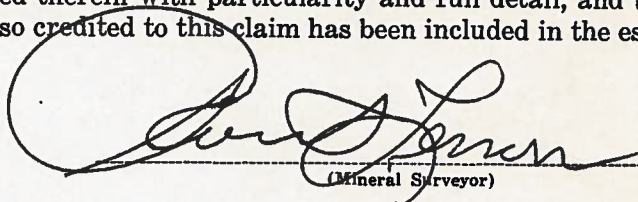
designated as Survey No. 1116, which is represented in the foregoing field notes as having been executed by me and under my direction, and that said survey has been made in strict conformity with said order, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes, and I do further certify that the labor expended and improvements made

upon or for the benefit of the lode location(s) embraced in the said mining claim by

(Lode or placer)

claimant(s) or its grantors are fully stated in my report therein, and that the character, extent, location, and itemized value thereof are specified therein with particularity and full detail, and that no portion of, or interest in, said labor and improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

Patagonia, Arizona
(Place)


(Mineral Surveyor)

CERTIFICATE OF APPROVAL

Bureau of Land Management--Survey Office
(Office)

Phoenix, Arizona March 27, 1959

(Place)

(Date)

The foregoing field notes of mineral survey No. 1116, in Sections 34 and 35


" 2 and 3

3 S., R. 29 E.
4 S., R. 29 E., Gila and Salt River Meridian,

Arizona, executed by Robert Lenon, Mineral Surveyor,

(State)

under order dated September 18, 1956, having been critically examined and the necessary corrections made prior to their certification by the surveyor, the field notes and the survey therein described are hereby approved.


Lester S. Mann

Office Cadastral Engineer
(Title)

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of field notes of the above described mineral survey No. _____ is a true copy of the original field notes.

