

No. 1014

Herbert R. Patrick Deputy Surveyor.

T. 6 N. R. 4 W.

Gila and Salt River? Meridian.

FIELD NOTES

OF

The Subdivision Lines of

Township 6 North Range 4 West

Gila and Salt River Meridian.

BY

Herbert R. Patrick Deputy Surveyor.

under his Contract of March 20th 1880

Survey commenced May 13th 1880

Survey completed May 15th 1880

Platted,
Copied for Washington,
Transcript sent to Commissioner,

No. 1014

Reed, U.S.S. & Co.

J.P.

1014

No. 1014

BOOK 1014

Herbert R. Patrick, Deputy Surveyor.

T. *6 No.* R. *4 W.*

Gila and Salt River Meridian.

FIELD NOTES

OF

The *Subdivision* Lines of

Township *6 North* Range *4 West*.

Gila and Salt River Meridian.

BY

Herbert R. Patrick, Deputy Surveyor.

under his Contract of *March, 20th 1850*

Survey commenced *May*.

Survey completed

Platted,

Copied for Washington,

Transcript sent to Commissioner,

Township

6 North

Range


4 West

Gila + Salt River

Meridian.

BOOK 1014

Index to pages

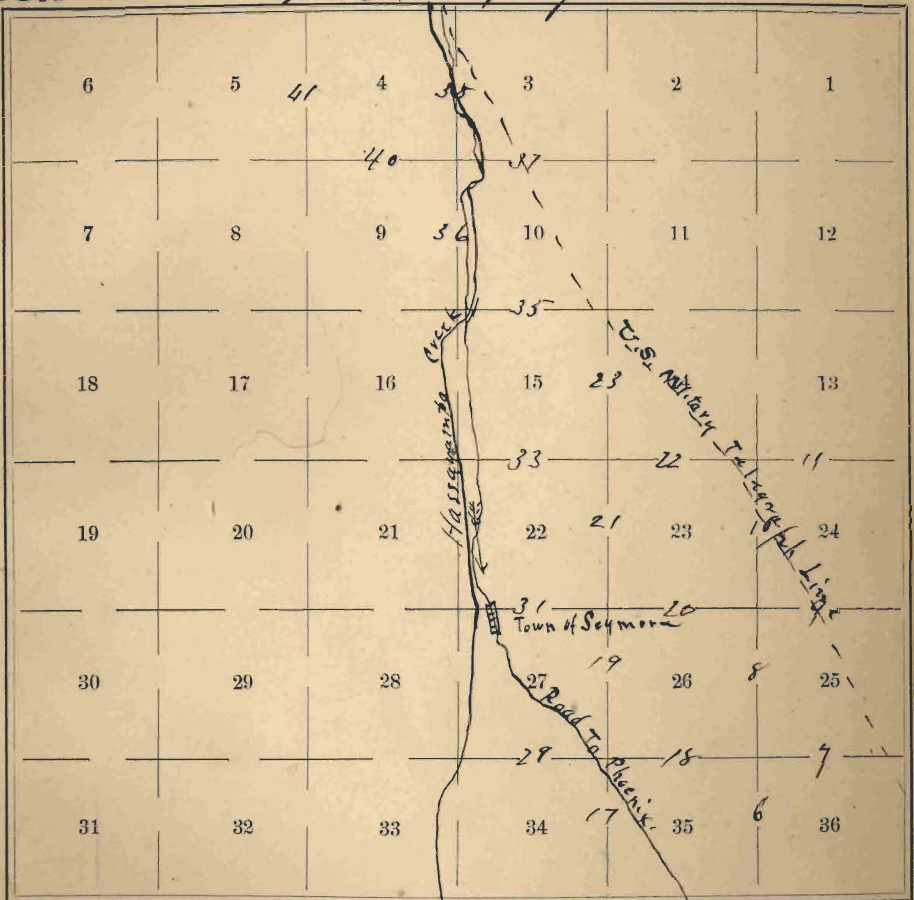

General Description of 44945

Township _____ Range _____

Meridian.

Pages 2 & 3
BLANK

BOOK 1014

Chains From the corner to Sections 35, 36, 1 and 2 on the South boundary 1 ran North, between Sections 35 and 36.

Variation $14^{\circ} 14'$ East.

(By observation of Polaris with Reacher plain Transit)

Having run the East boundary of Sec 36 this same date my Chain and Transit have the proper adjustment.

40.00

Set Post 3 in sq. $3' \frac{1}{2}$ ft high, 1 ft in ground and ~~on~~ built mound of earth 2 ft high, with pits 1 ft deep, 1 ft wide & 2 ft long as per instructions for $\frac{1}{4}$ Sec. Cor. from which a Paloverde 8 in diam bvs S. $32^{\circ} 10' W$. 60 ft no other tree near.

80.00

Set post $4' \frac{1}{2}$ in sq. 4 ft high, marked & notched, 1 ft in ground and on ~~built~~ mound of earth 2 ft high, with pits 1 ft deep, 1 ft wide & 2 ft long as per instructions for Cor W Sec. 25-26-35-36. from which a Paloverde 13 in diam bvs N. $12^{\circ} E$. 73 ft
 a " " " " " N. $61^{\circ} W$. 220 ft
 " " " " " S. $13^{\circ} 41' W$ 260 ft

Surface level,
 Timber, scattering Paloverde
 Mesquite, Cactus, good grass.

Chains East, on a random line between Sections 25 and 36.

Variation 14014' East.

40.00 Set Temporary State pin $1/4$ Sec. Cor. 1.
 63.30 Small arroyo, bearing $N. 30^{\circ} E.$
 41.00 Telegraph Line (N.S. Mid. L.L.) bearing $N. 32^{\circ} W.$
 79.95 Intersect N. & S. Line 81 kts N. of Post, the Corto
 Sec 25 & 36.

From which I ran $N. 89^{\circ} 57' W.$
 on a true line.

Va. 14014'S.

39.97 1/2 Set a post $3 1/2$ in sq. 4 ft long, marked $1/4 S.$
 1 ft in ground and ~~built~~ built
 mound ~~at~~ this, with pits 1 ft deep 1 ft
 wide and 2 ft long as per instructions
 for $1/4$ Sec. Cor. from which
 a palo verde 6 in diam, bearing $N. 18^{\circ} 36' E. 149 1/2$
 a mesquite 4 in " " $S. 73^{\circ} 57' W. 168 1/2$

79.95 The Corto Sec 25-26-35-36.
 Surface, level. Soil 2nd rate -
 no water.
 Palo verde, Mesquite, Cactus
 Grease wood & low shrubs scattering
 Good grass.

May 12th 1880

Township 6 North Range 4 West

Gila and Salt River Meridian.

Chains North, between Sections 25 and 26.

Variation $140^{\circ}14'$ East.

BOOK 1014
40.00 Set a post 3 in sq. 4 ft long
Marked $\frac{1}{4}S$. 1 ft in ground and
~~1 ft~~ built mound of earth 2 ft high
with pits 1 ft deep 1 ft wide and 2 ft
long as per instructions for Sec 25
from which.
A mesquite 5 in diam brs $S. 24^{\circ}42' W$
275 ft.
No other tree near

80.00 Set a post $4\frac{1}{2}$ in x 4 in x 4 ft long. Marked
and notched, 1 ft in ground above
charred slate and ~~on~~ built
mound of earth 2 ft high with
pits, 1 ft deep, 1 ft wide and 2 ft long
as per instructions for Cor to
Sec 23-24-25 & 26, from which
A Saguaro, 17 in diam, 15 ft high
brs N. $60^{\circ}18' W$. 129 ft
No trees near.
Surface level,
Soil - Ind vale, No water.
Timber - A few Palo verde,
Mesquite, greasewood and low
brush, good grass.

Township 6 North Range 4 West
Gila and Salt River Meridian.

Chains	East, on a random line between Sections 24 and 25.
23.45 40.00 80.04	<p>U.S. Military Telegraph line Variation $14^{\circ}14'$ East. Course $33^{\circ}25'W$. Set a stake for temporary $1/4$ Sec. Cor. Intersected N.T.S. line at a post, the corner to Sec. 24 and 25. From which I run West on a true line. $14^{\circ}14'E$.</p>
40.02	<p>Set a post 3 in sq. x $4\frac{1}{2}$ ft long, marked $1/4$ S. 1 ft in ground, and at built around of earth 2 ft high, with pits 1 ft deep 1 ft wide, 2 ft long as per instructions for $1/4$ Sec. cor. from which a Mesquite 3' in diam. $64\frac{1}{2}$ ft a Saguaro $1/2$ in diam, 8 ft high. $64\frac{1}{2}$ ft</p>
80.04	<p>The Cor. near to Sec 23 + 24 + 25 + 26, Surface, smooth slightly undulating slopes gently to N. Timber, a few Mesquites, palo verde, greasewood bush, low shrubs Cactus and grass.</p>

Chains North, between Sections 23 and 24.
 Variation 140/14' East.

40.00
 44.50
 62.00
 65.00
 80.00

Set a Malpias Stone 17x12x4 ins
 2/3 in ground. Marked '14. and
~~2 1/2~~ built mound of earth
 2 ft high with pit 1 ft deep 1/4 wide
 2 ft long as per instructions for
 1/4 Sec Cor. from which
 An Iron wood 12 in diam bvs. S. 140° W ^{25 3/4}
 a paloverde 4 W diam. bvs. 380° 20' E ^{10 1/2}
 U.S. Mil. Telegraph line bvs. N. 38° 09' W.
 Brown mesa descend to N.
 deep Arroyo, bvs. N. 41° W.
 Set a Malpias Stone 19x9x9 ins
 3/4 in ground. Notched, and above
 charred slabs, built mound of
 stones 2 ft high on N. with pit
 1 ft deep, 1/4 wide, 2 ft long as per
 instructions for Cor to Sec 13-14
 23-24.
 No. trees near.
 Surface last rock broken.
 Soil partly gravel & stone
 Timber scattering Ironwood
 Paloverde, Cactus bushes,
 Grass in arroyos.

Chains

East, on a random line between Sections 13 and 24.

Variation $14^{\circ} 14'$ East.

- 16.80 Arroyo bos. N. $44^{\circ} W$.
- 37.00 Enter deep Arroyo bos. N. $27^{\circ} W$.
- 40.00 Set stake for Temporary $1/4$ Sec. Cor.
- 46.00 Down hill, Enter mesa.
- 60.00 Deep Arroyo bos. N. $48^{\circ} 20' W$.
- 80.50 Intersect N. & S. Line $12\frac{1}{2}$ lts S. of stone
 the cor. to Sec. 13 & 24. from which
 Run S. $89^{\circ} 55' W$. on line
 N. $14^{\circ} 14' E$.
- 40.25 Set a granite stone $16 \times 11 \times 6$ ins.
 marked, and $7/8$ in ground, and on
 W. built mound of stones. with
 charred staves. & pits 1 ft deep. 1 ft
 wide 2 ft long as per instructions
 for $1/4$ Sec. Cor.
 No trees near.
 This cor. stands on Western slope
 The corner to Sec 13-14-23 & 24.
 Suspect, hilly & broken.
 Soil partly gravel, part
 Rocky.
 Limber. Palo verde.
 Ironwood, lactus, brush &
 Grass in Arroyos.
 May 13th 1880
- 80.50

12 Township
BOOK 1014
Chains

6 North Range 4 West

Gila and Salt River Meridian.

North, between Sections 13 and 14.

Variation East.

In less than forty Chains
the line North between
Sections 13 and 14 runs
into unsurveyable land
& therefore moved to the corner
of Sec. 34 & 35 on the South
boundary of the township
From which I run:
(See page 17)

Township

6 North.

Range

4 West

BOOK

17

1014

Gila and Salt River

Meridian.

Chains

North, between Sections 34 and 35.

Variation

140° 14'

East.

6.50

Old road bvs N. 70° W.

40.00

Set a post 3 in. sq. 3 1/2 ft long, marked,
1 ft in ground, and ~~on~~ a built
mound of earth 2 ft high, with pits
1 ft deep, 2 ft long, 1 ft wide as per
instructions for 1/4 Sec. cor. from which,
A Paloverde 7 1/2 diam. bvs S. 84° 27' E. 85 lbs.
A Mesquite 6" W. " bvs N. 38° W. 75 "

65.78

Road from Phoenix To Symon bvs N. 42° 30' W.

80.00

Set a post 4 in. sq. 4 ft long marked & set
1 ft in ground, and ~~on~~ built mound
of earth 2 ft high with pits 1 ft deep, 1 ft
wide 2 ft long as per instructions
for Cor. W Sec 26-27-34-35 from which
A Saguaro 18 diam, 12 ft hi. bvs S. 68° 21' W. 100"
" Paloverde 8 diam bvs East 196 lbs.
" " 6 " " " N 60° W 97 lbs

Surface nearly level.

Soil 2nd & 3rd class

Nowater, Timber, Paloverde

Mesquite - scattering.

Veg. Cactus shrubs & grass.

BOOK 1014
 Chains

East, on a random line between Sections 26 and 35.

Variation $14^{\circ} 14'$ East.

- 40.00 Set a stake for temporary $\frac{1}{4}$ Sec Cor
- 43.00 Top of gentle swell or ridge.
- 80.00 Intersect the N. & S. line at post
 the corner to Sec 25-26-35-36. from
 which I run west on the line
 Va. $14^{\circ} 14' E$.
- 40.00 Set a post 3 in sq. 4 ft. long marked,
 1 ft in ground and ~~on~~ built
 mound of earth 2 ft high, with
 pits 1 ft deep, 1 ft wide 2 ft long
 as per instructions for $\frac{1}{4}$ Sec Cor
 A Paloverde 10 in diam br. S. $130^{\circ} 54'$ W. $130 1/2$
 " Sugar 16" " 11 ft hi for S. $78^{\circ} 4' E$
- 80.00 The corner to Sec. 26-27-34-35.

Township 6 North Range 4 West BOOK 1014
Gila and Salt River Meridian 1014

Chains North, between Sections 26 and 27. BOOK 1014

Variation $140^{\circ}14'$ East.

40.00 Sit a post 3 in sq. 4 ft long. Marked.
 1 ft in ground and ~~is~~ built mound
 of earth 2 ft high, with pits 1 ft deep
 1 ft wide & 2 ft long, as per instructions
 for 114 Sec. Cor. from which
 a paloverde *Quercus*, b.s. N. $140^{\circ}42'W$, $50\frac{1}{2}$
 No other tree near.

50.00 Sit a post 4 in sq. 4 ft long, marked
 & notched, 1 ft in ground, and
~~is~~ built mound of earth 2 ft
 high, with pits 1 ft deep, 1 ft wide
 2 ft long, as per instructions for
 Cor. to Sec. 22 + 23 - 26 - 27, from which
 a mesquite & *Acacia* b.s. S. $25^{\circ}10'W$, $98\frac{1}{2}$
 " " 6 " " " S. $48^{\circ}22'E$ $81\frac{1}{2}$
 " " 6 " " " N. $80^{\circ}12'E$ 120 "

Surface - level
 Soil 1st & 3rd rate
 no water
 Timber - Mesquite, Paloverde,
 Vegi - Grass, Cactus
 brush.

Township

6 North

Range

4 West

Gila and Salt River,

Meridian.

BOOK 1014

Chains

East, on a random line between Sections 23 and 26.

Variation

14° 14'

East.

40.00

50.00

Set a stake for temporary $\frac{1}{4}$ Sec. Cor.
 Intersected the N.S. line at the
 Corner to 23-24-25-26, from which
 I run West on true line.

Va. 14° 14' E.

40.00

Set a post 3 in sq. 4 ft long, marked,
 1 ft in ground, and ~~set~~ built
 mound of earth 2 ft high, with pits
 1 ft deep, 1 ft wide, 2 ft long as per instructions
 for $\frac{1}{4}$ Sec. Cor. from which
 a mesquite 7 in diam. bvs. S. 65° W. 88 ft.
 No other trees near.

80.00

to Cor. to Sec. 22-23-26-27

Surface - level.

Soil 2nd 3rd class

no water

Timber, scattering Polewoods,

Mesquite & brush.

Veg. - Shubs & grass.

May 13, 1880

Township 6 North Range 4 West 21

Gila and Salt River Meridian.

BOOK 1014

Chains North, between Sections 22 and 23.

Variation $140^{\circ} 14'$ East.

40.00 Set a post 3 in sq. 4 ft long, marked,
1 ft in ground, drove charred
slate, and ~~on it~~ built mound
of earth 2 ft high with pits 1 ft
deep, 1 ft wide, 2 ft long as per instruc-
tions for '14 Sec. Cor.

No trees near.

64.00 Brown mesa, leave same, enter rolling hills,
69.00 arroyo for N. 27° W.

76.00 Crosses pt ridge.

80.00 Set a granite stone 22 x 9 x 6 ins, 3/4 in
ground. Marked, drove charred
slate, and on n. built mound of
earth 2 ft high, with pits 1 ft deep,
1 ft wide, 2 ft long as per instructions
for Cor. to Sec 14 15-22-23, from
which a Paloverde 13 in diam for N. 45° 30' W. 9 1/2
no other trees near.

Surface: Mostly level except last rock
which is hilly.

Timber: scarce, Paloverde,
Mesquite & brush.

Soil: Partly red soil -
Partly gravel,
good grass.

Chains	East, on a random line between Sections 14 and 23.
	Variation 140° 14' East.
5.00	Foot of Ridge.
7.00	Top " Kater Hills.
37.25	A Saguaro 14 in diam. 6 ft high.
40.00	Set a stake for temporary '14 Sec. Cor.
48.00	Arroyo, bds. N. 48° W.
49.20	U.S. Military Telegraph line bds. N. 42° 45' W.
63.40	Arroyo 76 ft deep bds N. 47° W.
80.10	Intersected N. 7 South line 9 lks S. of Stone. The corner to Sec. 13-14-23+24 from which I run S. 89° 56' W. on line Va. 14° 14' E.
40.05-	Set a post 3 1/2 in sq. 4 ft long. marked 1 ft in ground, and built built mound 2 ft high. With pits 1 ft deep 2 ft long 1 ft wide as per instructions for '14 Sec. Cor. from which a paloverde 12 in diam bds N. 75° E. 45 lks " " " " S. 30° E 83 "
80.10	This cor located on brow mesa, 50 lks north The Cor to Sec 14-15-22-23. Susper Broken trough. partly gravel partly Stone. Timber Paloverde & ironwood Cactus, good grass in arroyos

Gila and Salt River

BOOK 1014

Meridian.

Chains

North, between Sections 14 and 15.

Variation $140^{\circ}14'$ East.

15.00

700 ft high hill ascend to n.

40.00

Top of Same. Set a granite stone
 $14 \times 12 \times 4$ ins. 23 in ground. Marked,
 and on n. built mound of stones
 2 ft high, with pits 1 ft deep. 1 ft wide
 2 ft long as per instructions for
 1/4 Sec. Cor. from which
 a Paloverde runs diam. brs $N. 16^{\circ}18' E. 79$
 One Iron wood, 13 " " " S. $67^{\circ}35' W. 113/4$

48.20

About descent on.

56.00

Keef Arroyo brs. S. $76^{\circ}45' W.$

68.00

Ridge brs. S. $80^{\circ} W.$

80.00

Set a Malpais Stone. $18 \times 10 \times 4$ ins.
 34 in ground, marked, and on n. built
 Mound of earth ^(2 ft high) & gravel, with cleared
 date, and pit 1 ft deep 1 ft wide
 2 ft long as per instructions for Cor
 Sec 10-11-14-15.

No trees near.

Surface

Rough & Broken.

Soil, gravel & rocky
 except Arroyos.

Timber, a few Paloverde,
 Iron wood, Veg. Cactus shrubs
 and grass. " " " 1880

28

Township 6 North Range 4 West

BOOK 1014

Gila and Salt River

Meridian.

BOOK
chains

North, between Sections 33 and 34.

Variation 14° 14' East.

PAGES 26 + 27
BLANK

24 Township 6 North Range 4 West
BOOK 1014 Gila & Salt River Meridian.

Chains East, on a random line between Sections 11 and 14.

Variation East.
In less than 40 Chains East
No line between ^{Sec 11 + 14} hills into Rough
rocky hills and cañons and
unsurveyable land.

Therefore move to the Corner
of Section 27-28-33+34 the
line north ^{between Sec 33+34} having been retraced
by me and found to agree
with notes furnished me
by the Surveyor General.

From this corner draw:—
(See page 28)

Township

6 North

Range

West

BOOK

29

Gila and Salt River

Meridian. 1014

Chains

East, on a random line between Sections 27 and 34.

Variation $14^{\circ} 14'$ East.

7.00

Hassayampa Creek, dry bed, bds. $S 19^{\circ} W$

10.00

leave bottom land, enter hills.

12.00

Brown ridge.

16.00

Arroyo bds. $N. 27^{\circ} W$,

20.00

Enter mesa.

40.00

Set State for temporary '14 Sec. Cor.

66.00

Road from Phoenix to Sigmon bds $N. 44^{\circ} W$.

80.66

Intersects. $N 8$ line 16 lbs N. of Post

to Cor to Sec. 34 & 35 - 26 - 27. from

which Iron $N. 89^{\circ} 53' W$. on section.Va. $14^{\circ} 14'$ East.

40.33

Set a post $3\frac{1}{2}$ in diam. 4 ft long. marked1 ft in ground. and ~~set~~ built around

of earth 2 ft high. with spits 1 ft deep.

1 ft - 1/2 in. 2 ft deep as per instructions

for '14 Sec. Cor. from which

a Palomide 7 in diam bds. $S 40^{\circ} 15' W$. 25 lbs." " " " " $N. 23^{\circ} 6' W$. 100 lbs

80.66

The Cor to Sec 27 - 28 - 33 - 34

Surface. W. half hilly. E. half level.

Soil sandy & gravel.

Timber. Palomide,

veg. cactus. Grass in

Arroyos W. half,

May 14 1880

30 Township

Range

Meridian.

BOOK 1014

Chains

North, between Sections 27 and 28.

Variation

East.

The line north between Sections 27 + 28
 having been run and retraced by
 me, and found to agree with notes
 furnished me by the Surveyor
 General & commence at the
 corner 21-22-27-28 and Revis
 (Exposure 31)

Chains

East, on a random line between Sections 22 and 27.

Variation 140° 14' East.

over Sec 27

6.40

W. Bank Hassayampa Creek 4 ch wide

17:18

West side of principal street of village of
Szymora Street for S. 11° 5' E.

Note: I could not find any boundary
lines to this town site, stakes, or
monuments for corners to town site
or blocks, or obtain a plat of the
town, but was informed that it contained
two rows of blocks. Running N. & S. on either
side of the principal street, which is 70 ft wide,
and 4 blks. on each side thereof.

From pt. where E. & W. line intersects W. line of
street I chained S. 11° 5' E. 17.55 to point
supposed to be S. end of town site

and from same pt. N. 11° 5' W. 2.95 to
point supposed to be on N. line of town.

19.00

top ridge Gutesu mesa,

40.00

Set a stake for temporary 1/4 Sec. Corn

58.00

Arroyo for S. 53° W

79.92

Intersected N. & S. line. 8 1/4 N. of Post.
to cor to Sec 22-28-26-27 from which
I run N. 89° 57' W. on true line.

39.96

Set a post 3 1/2 in dia. 4 ft long. Marked
1 ft in ground and a hole 1/2 in dia and 1/2 ft
2 ft high, with pits 1 ft deep 1/2 ft wide

BOOK 1014
 Chains

North, between Sections 21 and 22.

East bet. 22 & 27 (continued) Variation East.

2 ft long as per instructions for
 1/4 Sec Cor. from which
 a Palomde 7 1/2 diam bro. North. 7 lks. dist.
 " " 9 " " " S. 26° 12' W. 116 1/4
 79.92 lth Cor. to section 22-21-27-28.
 Surface - part level, part hilly.
 Soil 2nd & 3rd class.
 Timber - Palomde,
 mesquite (scattering)
 Negl - Cactus & grass.
 May 14 1880

The line North between Sec. 21 & 22
 having been run & retraced by
 me and found to agree with
 notes furnished me by the
 Surveyor General.
 I therefore commence at the
 corner to Sec 15-16-21-22
 I am
 See p. 85

Chains	East, on a random line between Sections 15 and 22.
	Variation $14^{\circ}14'$ East.
00.40	Dry bed. Nassayampa Creek, $\text{bds. S } 10^{\circ} \text{ E}$
9.50	East Bank, " "
18.70	Road. Sigmora & Wickenburg $\text{bds. N } 22^{\circ} \text{ W}$
24.00	Top Ridge
27.00	Arroyo $\text{bds. S. } 65^{\circ} \text{ W}$.
40.00	Set plate for temporary 14° Sec. Cor.
40.50	Abrupt descent to E. Enter wide defavero $\text{bds. S } 65^{\circ} \text{ W}$
80.00	Intersects Nat. S. line 6 lks. N. of Stow Corner to Sec. 14-15-21-22, from which run N. $89^{\circ}57' \text{ W}$. on <u>True</u> line ($\text{Pa. } 14^{\circ}14'$)
40.00	Set a Malpais Stow $16 \times 12 \times 6$ ins. 7 in ground. Marked, and on W. built mound of earth. 2 ft high, with pits 1 ft deep. 1 ft wide, 2 ft long as per instanc- tions for 14° Sec. Cor. from which a Paloverde 14° in diam $\text{bds. S } 78^{\circ}10' \text{ W}$. 16 lks. " " " " " $\text{N. } 38^{\circ}30' \text{ E}$. 26 "
80.00	The Corner to Sec. 15-16-21-22. Surface, part ballou land, part hills. Soil 2nd & 3rd rate Timber, paloverde, Mesquits Cactus & good Grass. May 14 1880

Chains

North, between Sections 15 and 16.

Variation

East.

The line North between Sections
 15 & 16. having been run &
 retraced by me and found
 to agree with notes furnished
 me by the Surveyor General
 I commence at the corner
 between 9-10 - 15-16 as previously
 described, and run —
 (See p. 35)

Chains	East, on a random line between Sections 10 and 15.
	Variation $14^{\circ}14'$ East.
7.00	Hassayampa Creek (dry bed) 2 ch wide. bvs. S. $11^{\circ}00'$ 6 ch S. creek turns 6 W.
20.00	R1-Ridge
30.00	Deep Arroyo bvs. N. $64^{\circ}00'$
40.00	Set Stake for temporary $1/4$ Sec Cor. (Top high ridge.)
44.00	Deep Arroyo 40' deep. bvs N. $16^{\circ}00'$
50.00	" Rocky " 60 " bvs N. $22^{\circ}00'$
80.22	Intersect N.T.S. line. 20 lts N. of Stow. Use Cor to Sec. 10-11-14-15 from which I run N. $89^{\circ}51'00''$ W. on true line
	Va. $14^{\circ}14'E$
40.11	Set a Malpais Stow $14 \times 8 \times 8$ ins $2/3$ in ground, marked, and on W. butt mound of earth 2 ft high. With pile 1 ft deep. 2 ft long 4 ft wide as per instructions for $1/4$ Sec Cor. point in a paloverde 11 W chain bvs. N. $8^{\circ}51'00''$ W. 18 1/2 " Saguaro 16 " " 18 ft hi. bvs. $57^{\circ}18'00''$ W. 29 1/2
80.22	The Corner to Sec. 9-10-15-16.
	Surface Broken and rough. Soil 3rd rate. Timber Paloverde, Mesquite Cactus & Grass

Gila and Salt River.

Meridian.

BOOK
and run
Chains

Commence at the corner 9-10-15-16 as before described

North, between Sections 9 and 10.

Variation 140 14' East.

Find this line to agree with notes furnished me by Surveyor general as follows:

- 10.00
- 15.10
- 40.00
- 56.00
- 65.00
- 80.00

Foot of hills.

Top " "

A stone 18x10x10 ins (light colored granite. No trees near. An adobe house on knoll 4.60 N.E. This corner still standing and identified as '14 cor. being marked '14 facing East.

Foot steep hill.

Top " "

Could not find Cor. Stone 18x10x6 ins as described. I there for replace it with a red colored porphyry stone 16x12x9 ins marked, 73 in ground, above Chard slate. On N. built around of plowies with pits 1 ft deep. 1 ft W. 2 ft long as per instructions for Cor to be 3-4-9-10 No trees near.

Surface - Rough & broken.

Soil - part bottom land, part hills.

Timber - scarce, a few paloverde, Cactus.

Grass in Arroyos.

Note: No house appears as described in notes of Surveyor General, but evidence at the

Township

6 North

Range

4 West

37

BOOK 1014

Meridian.

Gila and Salt River

The cor to Sec. 2-3-10-11 not having been established

Iron Chains

East, on a ^{True} random line between Sections 3 and 10.

Variation 140° 14' East.

12:60

Brow rocky bluff, 50 ft high. Enter Cañon of Hassayampa creek, bds. S. 16° E, a small stream of water, about 15 ch. S. Cañon makes sharp bend to W, with very high steep sides, a few cottonwood and willow trees. Cañon 3 ch wide,

16:00

Top hills, pass between small flats.

25:00

a deep arroyo bds. N. 36° W.

40:00

Set a granite stone 20 x 8 x 6 ins. marked, 1/4 in ground and on W. built mound of earth & stones, with chard slate & pits 1 ft deep, 1 ft wide 2 ft long as per instructions for 1/4 Sec Cor.

No trees near.

In less than 40 ch the line east runs into high & rocky hills & unsurveyable land. I therefore commenced at the cor to Sec

3-4-9-10 and run North

see page 38

has been rammed, the land tilled and another house erected on the west side of creek on higher ground. This fact is also testified to by old settlers,

OK 1014 Gila and Salt River
 & return the line north between Sec 3 & 4,
 Chains North, on a random line between Sections 3 and 4.

Variation 140 14' East.

- 2000 Deep Alloys brs. N. 68° E.
- 2400 Small Ridge
- 33.00 Bottom of " Bank of Creek, running N. & S.
- 40.00 Set a stake for temporary 1/4 Sec Cor
 on E. Bank of Haysay amp Creek
 which brs. S. 78° E.
- 44.00 Road Seymour to Wickinburg brs N. 60° E.
 and find. 1/4 Sec Cor. line brs N.
- 70.00 Fences bend of Road " N. 60° E. & S. W.
- 77.00 Dry wash 20 ft wide brs N. 85° W.
- 79.98 A stone 20 x 12 x 12 ins. identified as
 the cor to Sec 3 & 4 on N. Boundary Sp.
 from which a Mesquite 8 in diam brs
 S. 30° W. 42 lbs.
 All standing and agreeing with
 description in field notes furnished
 me by survey general.
 From this cor I run S. on line
- 39.98 Set a Granite Stone 17 x 10 x 8 ins. marked,
 3/4 in ground, 1/4 in. built mound of stones
 2 ft high, with pits as per instructions for
 1 ft deep, 2 ft long, 1 ft wide as per
 instructions for 1/4 Sec Cor. from
 which a X cross marked on Pt of rocks
 brs S. 120° E 75 lbs.

Netrus near
 Corner on west bank of C. 1.

Township 6 North. Range 4 West.
Gita and Salt River. BOOK 1014 Meridian.

Chains North, between Sections 32 and 33. Variation East.

The line north between Sec 32 + 33 -
29 & 28 - 20 + 21 - 17 + 16 -
8 & 9 passes through high,
mountains, Rocky hills and
Canyons, and all unsurveyable
land. I therefore commence
at the cor. to Sec 3 + 4 - 9 + 10 an
Run - (See page 40)

Note: - At the corner to Section
3 + 4 on N. Boundary I found a
Notice pasted on post signed by
Peter Doll, and claiming land as
follows. from this cor.
Running S. 160 rds to a monument of stones, then
" E. 80 " " " " " "
" S. 80 " " " " " "
" W. 160 " " " " " "
" N. 240 " " " " " "
" E. 80 " to the place of beginning,
and comprising 160 acres or more or
less.

BOOK 1014
 Chains West Zone 4 9
 on a random line between Sections 28 and 33.

Variation 14° 14' East.

- 13.00 a deparroyo brs S. 38° E.
- 40.00 Set a Malpas Stone 15 x 14 x 10, ²/₅ in ground, marked, and on W built mound of stones 2 ft high with pits 1 ft deep, 1 ft wide, 2 ft long as per instructions for ⁷⁴/₁₄ Sec. ⁷⁴/₁₄ Cor. from which. A pole end 12 in diam brs. N. 62° 07' W and iron wood 9" " " " S 66° 30' W ²⁵/₁₅ Corner is located on S. slope of small hill.
- 47.00 Arroyo brs. S. 29° E.
- 56.00 Small Cañon brs S 10° W. 100 wide ascent to W.
- 80.00 Set Granite Stone (Red Color) 18 x 10 x 8 ins marked, 4 in ground and on W built monument of stones, set charred slate, pits 6 in deep, 1 ft wide 2 ft long. ground hard. no trees near. Surface Rough & Rocky, No Soil, Timber scattering Paloverde, Ironwood, Good grass in arroyos.

Chains	North, between Sections <u>4</u> and <u>5</u> on Random line, Variation <u>14° 14'</u> East.
36.00	Crosses E slope of a small Mountain.
40.00	Set a stake for temporary '14 Sec. 4
45.00	Deep arroyo bws N. 79° E.
58.00	Wide Arroyo 8 ch wide bws N. 61° E.
63.00	Commence ascent of high hills.
80.34	Intersect E. & W. line. 24 lbs east of a granite stone 18x10x8 in the corner Sec. 4-5-33-32, from which I run S 0° 10' E on above line. Va. 14° 14' E.
40.34	Set a Post 4 in sq. 4 ft long, marked. 1 ft in ground and mound of stouts. No. 10. ground rocky. A pole side. 4 ins diam bws S. 16° 11' E " " " 7 " " " N. 53° E. 82 1/2
80.34	The Cox to Sec. 4-5-8-9. East half of Sec 4. good bottom land. a good stream of water. West 1/2 Rough and hilly. Timber on bottom land Cottonwood & Willow Up lands. Pole side. Good grass May 15, 1880.

44 Township

6 North. Range 4 West.

BOOK 1014
BOOK
Chains

1014 Gila & Salt River?

Meridian.

East, on a random line between Sections 16 and 21.

Variation

East.

All of the remainder of this township is covered by high mountains, Rocky hills & Canons and therefore unsurveyable.

General Description.

This township contains some large tracts of good soil, but having no water is only fit for producing grass after spring rains, that affords fine grazing for stock.

A few small lots can be had in the Canon of the Hassayampa Creek that will make fine orchards, and vegetable gardens.

The Hassayampa Creek traverses the Twp. from N. to S. and though dry on surface in the summer time, water can be reached by wells and should afford homestead for many stock growers.

In the western portions there are said to be some mining claims, but none known to be of value.

Chains

North, between Sections 16 and 17.

Variation

East.

The village of Suzmore is located as appears on plat & in field notes, is a so called Miners Camp, with a transient population of about 200. who are dependent for employment upon the operations of the Central Arizona Mining Company, now working the Vulture Gold mine about 10 miles S. Westwardly from the town.

This town was located in the early part of the year 1879 by Messrs Cushenberry, Suzmore & Bordwell. But seems that to have been made of record in this County and I am unable to find or ascertain its boundaries.

There is but little timber in this township, being scattered & consisting of Paloverde, Brownwood, Nesquite. In Sections 3 & 4 along the Creek is a belt of Willow & Cottonwood that will be valuable for fencing & building purposes.

Herbert R. Patrick,
Deputy Surveyor.

List of names &

Page 46

Preliminary Oaths of Assistants.

We, John Dunn
 and John Kennedy
 do solemnly swear that we will faithfully execute
 the duties of Chain Carriers; that we will level the
 chain upon uneven ground, and plumb the tally
 pins, whether by sticking or dropping the same;
 that we will report the true distance to all notable
 objects, and the true length of all lines that we as-
 sist in measuring, to the best of our skill and
 ability.

John Dunn
John Kennedy

Sworn to and subscribed before me, this 10th
 day of May, 1880

Wm. Annand
Natny Lubin

We, *Lorenzo Barbey,*
Jose Garcia

do solemnly swear that we will well and truly per-
form the duties of *Arman,*

Flagman.

according to instructions given us, and to the best
of our skill and ability.

Lorenzo Barbey,
Jose Garcia

Sworn to and subscribed before me this *10th,*
day of *May,* 1880.

Wm. A. Mumuk
Notary Public



List of Names. BOOK 1014

A List of the Names of Individuals employed
to assist in running, measuring, or marking the
lines and corners described in the foregoing Field
Notes of the survey of

Township
six North Range four
West

Gila and Salt River
Meridian
Subdivision Lines.

Showing the respective capacities in which they
acted.

John Dunn, Chairman.
John Kennedy, Chainman,
Lorenzo Beebe, Axeman.
Jose Garcia, Flagman.

49

Final Oath of Assistants.

BOOK 1014

We hereby certify that we assisted Herbert
R. Patrick, U. S. Deputy Surveyor, in
 surveying the Surveyable portions
of Township 6 North
Range 4 West
Gila and Salt River Meridian,
Subdivision Six.

and that said Survey has been in all respects, to
 the best of our knowledge and belief, well and
 faithfully executed, and the boundary monuments
 planted according to the instructions furnished by
 the Surveyor-General.

John Quinn Chairman.
John James Chainman,
Lorenzo Barber Axeman.
John Garcia Flagman.

Sworn to and subscribed before me, this 19th
 day of May, 1890

M. A. Hancock
 Notary Public

Final Oath of Deputy Surveyor.

BOOK 1014

I, Lambert R Patrick

U. S. Deputy Surveyor, do solemnly swear that in pursuance of a contract with John Wasson, United States Surveyor-General for Arizona, bearing date the 20th day of March

1880. I have well, faithfully and truly, in my own proper person, and in strict conformity with the instructions furnished by the Surveyor-General, the Surveying Manual, and the laws of the United States, surveyed all those portions of

Township 6 North
Range 4 West

Gila and Salt River
Meridian,

..... as are represented in the foregoing Field Notes as having been surveyed under my directions; and I do further solemnly swear that all the corners of said surveys have been established and perpetuated in strict accordance with the Surveying Manual and printed instructions, and also in accordance with the additional requirements con-

51

tained in circular instructions from the U. S. Surveyor-General for Arizona, dated September 1, 1873, regarding the establishment of corner boundaries of public surveys, and that the foregoing are the true and original Field Notes of such surveys.

Herbert R. Patrick
Deputy Surveyor

BOOK 1014

Sworn to and subscribed before me, this 19th
day of May, 1880

J. M. Hunsack
Notary Public

