

Claims	M & B Desc.	Improvements	Loc. Notices
	Pg. 54	Pg. 73	<u>Red</u> Pg. 34
Agnes	28	67	16
Base	22	65	12
Bernice	22	73	35
Cokespa No. 2	56	70	21
Conch	35	63	4
Conduit	10	64	8
Coyote	16	72	33
Daisy	53	65	9
Deal	18	65	10
Doctor	19	69	22
Dome	37	64	7
Extension	15	71	26
Garfield	44	63	3
Garfield No. 2	8	67	17
Garfield No. 3	29	66	14
Gladys	25	74	36
Glance	57	70	24
Hibben Summit	40	64	6
Kershner	13	71	28
Little Joe	47	72	32
Mac	52	66	13
Midway	23	68	19
Molly	32	69	20
Molly No. 2	34	67	18
Molly No. 3	31	72	29
Off	48	62	2
Oxide	7	65	11
Peak	20	71	27
Queen Mary	45	72	31
Schoonover	50	62	1
Sulphide	5	70	25
Summit	42	70	23
Triangle	38	66	15
Watkins	27	63	5
Wilson	11		

U.C.T. 11.1913

*Platted*

(4-683.)

Mineral Survey No. 3074.

Lot No. \_\_\_\_\_

Arizona. \_\_\_\_\_ Land District.

### FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

Cababi Mining Co

KNOWN AS THE

Sulphide, Oxide, Garfield No. 2, Conduit, Wilson, Kershner, Extension, Coyote, Deal, Doctor, Peak, Bernice, Midway, Gladys, Watkins, Base, Garfield No. 3, Molly No. 3, Molly, Molly No. 2, Conch, Dome, Triangle, Hibben Summit, Summit, Garfield, Queen Mary, Little Joe, Off, Schoonover, Mac, Daisy, Agnes, Cokespa No. 2, Glance

in the Cababi Mining District,  
Pima County, Arizona.

Sections 2-3-4-10-11-12 Township 16 South, Range 4 East, unsurveyed,  
Gila and Salt River Base and Meridian.  
Surveyed under instructions dated May 22, 1913.

by Edgar C. Dietrich,  
U. S. Deputy Mineral Surveyor

Claim located	See location notices.	1
Survey commenced	June 2, 1913.	1
Survey completed	June 23, 1913.	1

6-139

Attorney for claimant:-

S. G. McWade, Agt. & Atty in fact.

P. O. Box 464,

Tucson, Arizona.

SURVEY No. 3074.

Before beginning this survey, the following preliminary work was executed.

First:- Retracement of the Third Standard Parallel South thru a portion of Range 4 East:-

Beginning at the Standard Corner to Secs. 35 - 36, T. 15 S., R. 4 E., G. & S. R. B. & M., which is a granite stone 10x10x6 inches above ground, marked S.C. on its north face and with 5 notches on its west and 1 notch on its east edges. There are the remains of an old mound of stone north of the corner and I rebuild same.

Thence S. 89°-20' W., 2661.2 feet.

Var. 13°-40' E.

To Standard  $\frac{1}{4}$  Corner to Sec. 35, T. 15 S., R. 4 E., which is a granite stone 5x10x5 inches above ground, marked  $\frac{1}{4}$  S.C. on its north face. No mound. I build a mound of stone 2 feet base 2 feet high north of the corner.

*U.S. Mineral Monument No 6 bears S. 0°-17' W., 1159.8  $\frac{3}{4}$  ft.*

Thence N. 89°-49 $\frac{1}{2}$ ' W., 2659.0 feet.

Var. 13°-40' E.

T. 15 S., R. 4 E.

To the Standard Corner to Secs. 34-35, which is a quartz stone 5x8x6 inches above ground, and marked S.C. on its north face, and with 4 notches on its west and 2 notches on its east edges. Remains of an old stone monument north of corner, and I rebuild same.

*U.S. Mineral Monument No 4 bears S. 26°-25 $\frac{3}{4}$ ' W., 8776  $\frac{2}{4}$  ft.*

*Flag on El Picacho bears S. 22°-56' W., 5444  $\frac{1}{4}$  ft.*

Thence S. 89°-17' W., 2661.2 feet.

Var. 13°-40' E.

To the Standard  $\frac{1}{4}$  Corner to Sec. 34, T. 15 S., R. 4 E., which is a granite stone 12x8x5 inches above ground, and marked  $\frac{1}{4}$  S.C. on its north face. Remains of an old stone monument north of the corner, and I rebuild same.

Thence N. 88°-51' W., 2659.9 feet.

Var. 13°-40' E.

To the Standard Corner to Secs. 33-34, T. 15 S., R. 4 E., which is a granite stone 6x12x4 inches above ground, and marked S.C. on its north face, and with 3 notches on its west and 3 notches on its east edges. Remains of an old

stone monument north of the corner, and I rebuild same.

*U.S. Mineral Monument No 4 bears S. 10°-10 $\frac{1}{2}$ ' E., 8005  $\frac{5}{4}$  ft.*

Thence N. 89°-55'W., 2657.3 feet.

Var. 13°-40'E.

To the Standard  $\frac{1}{4}$  Corner to Sec. 33, T.15 S., R.4 E., which is a granite stone 6x8x5 inches above ground, and marked  $\frac{1}{4}$  S. C. on its north face. Remains of an old mound of stone north of the corner, and I rebuild same.

Second:- Re-establishment of U.S. Min. Mon. No. 4:-

On the summit of Tiger Hill, I find an old mound of stone about 5 feet base and 3 feet high, in the center of which, there are the remains of an old post. At the point occupied by this old post, I erect an iron pipe  $3\frac{1}{2}$  inches in diameter and 10 feet long, around which is soldered a lead band, which is marked U. S. M. M. No. 4. Around the pipe I erect a mound of stone 6 feet base and 4 feet high. From the Mineral Monument the Standard Corner to Secs 33-34, T.15 S., R.4 E., bears N. 10°-10'-30"W., 8005.5' dist. The Standard Corner to Secs. 34-35, T.15 S., R.4 E., bears N. 26°-25'-45" E., 8776.9 feet distant.

U.S. Min. Mon. No. 6, bears S. 60°-20'-15" E., 7491.5' dist.

U.S. Min. Mon. No. 5, invisible on account of heat haze.

Flag on El Picacho bears N. 32°-06'E., 3359.4 feet dist.

For the purpose of checking this survey, I also establish, on the summit of El Picacho, a triangulation station. This being the most prominent peak in this vicinity. It is a cone shaped hill and is isolated from the Cababi range. This triangulation station was established by drilling a hole in the solid rock forming the apex of the peak and in this hole is cemented a piece of  $\frac{1}{2}$  inch iron pipe. In this pipe is inserted an iron rod  $\frac{1}{2}$  inch in diameter and 12 feet long with a flag on its top.

Third:- Resurvey of the Picacho Lode, Lot 39 A.

Beginning at an old monument of stone, being Cor. No. 1, of the Picacho lode

Lot No. 39 A. I set an iron pipe 1 inch in diameter, 4 ft. long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Picacho-39A, on its north-easterly face, and surround the pipe with a mound of stone. The Standard  $\frac{1}{4}$  Corner to Sec. 34, T.15S., R.4E., bears N.1°-37'E., 4848.8 feet distant. No bearing trees nor bearing rocks available.

Thence N.83°-21 $\frac{1}{2}$ 'E.

Var. 13°-40'E.

3000

To Cor. No. 2 which is an old mound of stone. I set an iron pipe 1 inch in diameter, 4 feet long, driven 2 feet in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Picacho-39A on its north-westerly face and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.6°-38 $\frac{1}{2}$ 'W.

Var. 13°-40' E.

200

Easterly end center monument, which is an old mound of stone. I rebuild same.

400

To Cor. No. 3, which is an old mound of stone, I set an iron pipe 1 inch in diameter, 4 feet long, driven 2 feet in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Picacho-39A on its south-westerly face and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence S.83°-21 $\frac{1}{2}$ 'W

Var. 13°-40'E.

3000

To Cor. No. 4, which is an old mesquite stake in a mound of stone and marked 4N.W.C.M.C. I replace this stake with an iron pipe 1 inch in diameter, 4 feet long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Picacho-39A on its south-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bear-

ing rocks available.

Thence S.  $6^{\circ}$ - $38\frac{1}{2}'$ E.

Var.  $13^{\circ}$ - $40'$ E.

200 To westerly end center monument, which is an old mound of stone,  $\frac{1}{2}$  rebuild same.

400 To Cor. No. 1, the place of beginning.

Fourth:- Resurvey of the Cokespa lode, Lot 40 A:-

Beginning at Cor. No. 1, which is an old mound of stone, I set an iron pipe 1 inch in diameter, 4 feet long, driven 2 feet in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Cokespa-Lot 40A., on its north-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available. The Standard corner to Secs. 33-34, T.15 S., R.4 E., bears N.  $9^{\circ}$ - $21'$ E., 2994.4 feet distant.

Thence N.  $2^{\circ}$ - $31\frac{1}{2}'$ W.

Var.  $13^{\circ}$ - $40'$ E.

200 To westerly end center monument, which is a mound of stone. I rebuild same.

400 To Cor. No. 2, which is a mound of stone. I set an iron pipe 1 inch in diameter, 4 feet long, driven 2 feet in the ground, and fitted with a brass cap the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Cokespa-Lot 40 A, on its south-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $87^{\circ}$ - $28\frac{1}{2}'$ E.

Var.  $13^{\circ}$ - $40'$ E.

2000 Main shaft, Cokespa lode, bears S.  $2^{\circ}$ - $31\frac{1}{2}'$ E., 264 ft. dist.

2640 To Cor. No. 3, which is a mound of stone. I set an iron pipe, 1 inch in diameter, 4 feet long, driven 2 feet in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Cokespa-Lot 40 A, on its south-westerly face, and surround the pipe with a mound of stone. No bearing trees nor bear-

ing rocks available.

Thence S.  $2^{\circ}-31\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

200 Easterly end center monument, which is a mound of stone.  
I rebuild same.

400 To Cor. No. 4, which is a mound of stone. I set an iron pipe 1 inch in diameter, 4 feet long, driven 2 feet in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074, I mark same 4-Cokespa-Lot 40A on its north-westerly face. No bearing trees nor bearing rocks available.

Thence S.  $87^{\circ}-28\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

2640 To Cor. No. 1, the place of beginning.

---

#### SULPHIDE

Beginning at Cor. No. 1, identical with the location, ~~and with Cor. No. 1 of this survey,~~ which is a mound of stone 2 ft. base, 2 ft. high. I set an iron pipe, 1 inch in diameter, 4 feet long, driven 2 ft. in the ground, and fitted with a brass cap, I mark same 1-Sulphide on its south-westerly face. The top of the brass cap is marked U.S. Mineral Survey <sup>No.</sup> 3074. I surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

The Standard Corner to Secs. 34-35, T. 15S. R. 4E., bears

N.  $13^{\circ}-32'$  E., 2160.2 feet distant.

*U.S. Min. Mon. No. 4 bears S.  $30^{\circ}-33\frac{3}{4}'$  W. 6688 <sup>5</sup>/<sub>16</sub> ft.*

*Flag on El Picacho bears S.  $29^{\circ}-08\frac{3}{4}'$  W. 3331 <sup>5</sup>/<sub>16</sub> ft.*

Thence S.  $83^{\circ}-21\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over ascending ground

10 Road, north-easterly and south-westerly.

300 Northerly end center monument, which is a mound of stone  $2\frac{1}{2}$  ft. base 2 ft. high.

590 Top of rise and descend.

600 To Cor. No. 2, identical with the location (~~and with Cor. No. 2 of this survey,~~) which is a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high. I set an iron pipe, 1 inch in diameter 4 feet long, driven 2 feet in the ground and fitted with

a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Sulphide on its south-easterly face, and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

Thence S.  $2^{\circ}$ - $31\frac{1}{2}'$ E.

Var.  $13^{\circ}$ - $40'$ E.

Over descending ground.

- 300 Road, northerly and southerly.
- 800 Trail, easterly and westerly.
- 845 Wash, 3 feet wide, course westerly and ascend.
- 930 Road, easterly and westerly.
- 1200 Top of ascent, begin descent.
- 1260 Trail, north-easterly and south-westerly.
- 1390 Foot of descent, begin ascent.
- 1450 Top of ascent, begin descent.
- 1500 To Cor. No. 3, identical with the location; which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1 " in diameter, 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Sulphide on its north-easterly face and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $83^{\circ}$ - $21\frac{1}{2}'$ E.

Var.  $13^{\circ}$ - $40'$ E.

Over descending ground.

- 180 Wash, 15 feet wide, course southerly and ascend.
- 300 Southerly end center monument identical with the location, which is a mound of stone 2 feet base, 2 feet high.
- 600 To Cor. No. 4, identical with the location, which is a md. of stone 2 ft. base,  $1\frac{1}{2}$ ft. high. I set an iron pipe 1" in diam. 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Sulphide on its north-westerly face and surround the pipe with a mound of stone.
- No bearing trees nor bearing rocks available.

Thence N.  $2^{\circ}$ - $31\frac{1}{2}'$ W.

Var.  $13^{\circ}$ - $40'$ E.

Over descending ground.



- 135 Wash, 5 feet wide, course westerly, and ascend.  
 575 Trail, north-easterly and south-westerly, and begin des.  
 700 Wash, 3 feet wide, course westerly, and ascend.  
 815 Trail, easterly and westerly, top of ascent and descend.  
 890 Wash, 10 feet wide, course south-westerly, and ascend.  
 940 Wash, 2 feet wide, course westerly and ascend.  
 1000 Main road to Tucson, course north-easterly.  
 1500 To Cor. No. 1, the place of beginning.

---

OXIDE 3074.

Beginning at Cor. No. 1, identical with the location, which is a mound of stone 2 feet base, 2 feet high, I set an iron pipe 1 inch in diameter, 4 feet long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same *and surround the pipe with a md. of stone* 1-Oxide on its south-easterly face, No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  Corner to Sec. 34, T.15S., R.4E., bears  $N. 23^{\circ}-36' W.$ , 2407.0 feet distant.

Thence S.  $2^{\circ}-31\frac{1}{2}' E.$

Var.  $13^{\circ}-40' E.$

Over descending ground.

- 230 Wash, 3 feet wide, course westerly, and ascend.  
 380 Top of ascent and descend.  
 500 Wash 3 feet wide, course westerly, and ascend.  
 775 Road, north-easterly and south-westerly, foot des. and asc.  
 800 Road, easterly and westerly.  
 1200 Top of ascent, and descend.  
 1500 To Cor. No. 2, identical with the location, which is a md. of stone 2 feet base  $1\frac{1}{2}$  feet high. I set an iron pipe 1 inch in diameter, 4 feet long, driven 2 feet in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Oxide on its north-easterly face. No bearing trees nor bearing rocks available.

Thence N.  $83^{\circ}-21\frac{1}{2}' E.$

Var.  $13^{\circ}-40' E.$

Over ascending ground.

180 Trail, north-easterly and south-westerly.  
 210 Top of ascent, and descend.  
 260 Wash, 5 feet wide, course southerly and ascend.  
 300 Southerly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 ft. high.  
 540 Top of ascent and descend.  
 600 To Cor. No. 3, identical with the location, and with Cor. No. 3 of the Sulphide lode of this survey, as previously set and described by me. I mark same 3-Oxide on its north-westerly face. No bearing trees nor bearing rocks available.

Thence N.  $2^{\circ}$ - $31\frac{1}{2}'$ W.

Var.  $13^{\circ}$ - $40'$ E.

Along line 3-2 of the Sulphide lode of this survey.

1500 To Cor. No. 4, identical with the location, and with Cor. No. 2 of the Sulphide lode of this survey as previously set and described by me. I mark same 4-Oxide on its south-westerly face. No bear. trees nor bear. rocks available.

Thence S.  $83^{\circ}$ - $21\frac{1}{2}'$ W.

Var.  $13^{\circ}$ - $40'$ E.

Over descending ground.

290 Foot of descent and ascend.  
 300 To northerly end center monument, identical with the location, which is a mound of stone 2 feet base 2 ft. high.  
 600 To Cor. No. 1, the place of beginning.

---

GARFIELD No. 2

Beginning at Cor. No. 1, identical with the location, which is a mound of stone 2 feet base  $1\frac{1}{2}$  feet high, I set an iron pipe, 1 inch in diameter, 4 feet long, driven 2 feet in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark *and surround the pipe with a mound of stone.* same 1- Garfield No. 2 on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 35, T.15S., R.4E., bears N.  $18^{\circ}$ - $10\frac{1}{2}'$ E., 3534.6 feet distant. U.S. Min. Mon. No. 4 bears S.  $50^{\circ}$ - $33\frac{3}{4}'$ W., 7073.2 feet distant. Flag on El Picacho

bears S. 65°-52¼'W., 4029.9 feet distant.

Thence S. 83°-21½'W.

Var. 13°-40'E.

Over level land.

1500 To Cor. No. 2, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diameter, 4 ft. long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Garfield No. 2 on its south-easterly face, *and surround the pipe with a mound of stone.* No bearing trees nor bearing rocks available.

Thence S. 6°-38½'E.

Var. 13°-40'E.

Over level land.

75 Wash, 5 feet wide, course westerly.

300 To westerly end center monument, identical with the location, which is a mound of stone 2 feet base 1½ feet high.

455 Wash, 5 feet wide, course south-westerly.

575 Road, easterly and westerly.

600 To Cor. No. 3, identical with the location and with Cor. No. 3 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 3-Garfield No. 2, on its north-easterly face. No bearing trees nor bearing rocks available.

Thence N. 83°-21½'E.

Var. 13°-40'E.

Over level land.

60 Road, north-westerly and south easterly.

1275 Road, northerly and southerly.

1290 Begin descent.

1435 Wash, 10 feet wide, course south-westerly, and ascend.

1500 To Cor. No. 4, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074, *and surround the pipe with a mound of stone.* I mark same 4-Garfield No. 2 on its north-westerly face. No bear. trees nor bear. rocks available.

Thence N.  $6^{\circ}-38\frac{1}{2}'$ W.

Var.  $13^{\circ}-40'$ E.

Over *descending* ground.

- 55 Wash, 10 feet wide, course south-westerly and ascend.  
 300 To easterly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 feet high.  
 315 Road, north-easterly and south-westerly.  
 600 To Cor. No. 1, the place of beginning.

CONDUIT ~~LODE~~.

Beginning at Cor. No. 1, identical with the location and with Cor. No. 2 of the Garfield No. 2 lode of this survey as previously set and described by me. I mark same 1-Conduit on its south-westerly face. No bearing trees nor bearing rocks available. The Standard Corner to Secs. 34-35, T.15S., R.4E. bears N.  $1^{\circ}-04\frac{1}{2}'$ W., 3540.5 feet distant.

Thence S.  $83^{\circ}-21\frac{1}{2}'$ W.

Var.  $13^{\circ}-40'$ E.

Over ascending ground.

- 509.3 Cor. No. 4 of the Sulphide lode of this survey.  
 510 Top of ascent and descend.  
 809.3 Southerly end center monument, Sulphide lode of this sur.  
 929.30 Wash, 15 feet wide, course southerly and ascend.  
 1109.3 Cor. No. 3 of the Sulphide lode of this survey, also Cor. No. 3 of the Oxide lode of this survey.  
 1170 Top of ascent and descend.  
 1409.3 Southerly end cen. mon. of the Oxide lode of this survey.  
 1449.3 Wash, 5 feet wide, course southerly, and ascend.  
 1500 To Cor. No. 2, identical with the location, which is a md. of stone 2 ft. base,  $1\frac{1}{2}$  ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Conduit on its south-easterly face, *and surround the pipe with a mound of stone.* No bearing trees nor bearing rocks available.

Thence S.  $6^{\circ}-38\frac{1}{2}'$ E.

Var.  $13^{\circ}-40'$ E.

Over level land.

- 300 To westerly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 feet high.

560 *Trail easterly and westerly*  
 600 To Cor. No. 3, identical with the location, which is a md. of stone 2 ft. base.  $1\frac{1}{2}$  ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Conduit on its north-easterly face, *and surround the pipe with a mound of stone.* No bearing trees nor bearing rocks available.

Thence N.  $83^{\circ}-21\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over level land and along east  $\frac{1}{2}$  of line 4-3 of the Picacho lode, Lot 39 A.

15 Road, north-easterly and south-westerly.

260 Junction of 25 ft. wash from north-east and 5 ft. wash from the south-east.

565 Same 5 ft. wash, course south-westerly.

815 Same 5 ft. wash, course north-westerly.

1230 Same 5 ft. wash, course south-westerly.

1500 To Cor. No. 4, identical with the location, with Cor. No. 3 of the Garfield No. 2 lode of this survey, and with Cor. No. 3 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 4-Conduit on its north-westerly face. No bearing trees nor bearing rocks available.

Thence N.  $6^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 3-2 of the Garfield No. 2 lode of this survey.

300 Easterly end center monument, identical with the location and with the westerly end center monument of the Garfield No. 2 lode, as previously described by me.

600 To Cor. No. 1, the place of beginning.

---

#### WILSON

Beginning at Cor. No. 1, identical with the location, which is a mound of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Wilson *and surround the pipe with a mound of stone.* on its south-easterly face, No bearing trees nor bearing

rocks available. The Standard  $\frac{1}{4}$  Corner to Sec 34, T.15S., R.4 E. bears N.3°-45'E., 3861.8 feet distant.

Thence N. 83°-21 $\frac{1}{2}$ 'E.

Var. 13°-40'E.

Over level land.

- 275 Trail, north-westerly and south-easterly.  
 380 Road, north-westerly and south-easterly.  
 640 Road, north-easterly and south-westerly.  
 885 Wash, 5 feet wide, course south-easterly.  
 1290.7 Cor. No. 2 of the Oxide lode of this survey.  
 1470.7 Trail, north-easterly and south-westerly.  
 1500 To Cor. No. 2, identical with the location, and with Cor. No. 2 of the Conduit lode of this survey as previously set and described by me. I mark same 2-Wilson on its south-westerly face. No bearing trees nor bearing rocks available.

Thence S.6°-38 $\frac{1}{2}$ 'E.

Var. 13°-40'E.

Along line 2-3 of the Conduit lode of this survey.

- 300 Easterly end center monument, identical with the location and with the westerly end center monument of the Conduit lode of this survey, *as previously described by me.*  
 560 Trail easterly and westerly.  
 600 To Cor. No. 3, identical with the location, and with Cor. No. 3 of the Conduit lode of this survey, as previously set and described by me. I mark same 3-Wilson on its north-westerly face. No bearing trees nor bearing rocks available.

Thence S.83°-21 $\frac{1}{2}$ 'W.

Var. 13°-40'E.

Over level land and along the westerly  $\frac{1}{2}$  of line 3-4 of the Picacho lode, Lot 39 A.

- 120 Wash, 8 feet wide course south-easterly.  
 270 Road, north-westerly and south-easterly.  
 465 Same road, course south-westerly.  
 790 Road, north-westerly and south-easterly.  
 1215 Main shaft, 275 feet deep, 5 feet north of line.  
 1230 Trail, northerly and southerly.  
 1275 Edge of dump.

- 1290 Bottom of dump
- 1310 Road, north-easterly and south-westerly.
- 1500 To Cor No. 4 identical with the location and with Cor. No. 4 of the Picacho lode, Lot 39 A., as previously reset and described by me. I mark same 4-Wilson on its north-easterly face. No bearing trees nor bearing rocks available.  

Thence N. 6°-38½'W.  
 Var. 13°-40'E.
- 50 *Trail, easterly and westerly.*
- 300 Westerly end center monument, identical with the location which is a mound of stone 2 feet base, 2 feet high.
- 575 Trail north-westerly and south-easterly.
- 600 To Cor. No. 1, the place of beginning.

KERSHNER

- Beginning at Cor. No. 1, identical with the location and with Cor. No. 1 of the Wilson lode of this survey as previously set and described by me. I mark same 1-Kershner on its south-westerly face. No bearing trees nor bearing rocks available. The Standard ¼ corner to Sec. 34, T.15S., R.4 E. bears N.3°-45'E., 3861.8 feet distant.
- Thence S.83°-21½'W.  
 Var. 13°-40'E.
- Over level land.
- 15 Trail, north-westerly and south-easterly
  - 110 Road, northerly and southerly.
  - 400 Wash, 3 feet wide, course south-easterly.
  - 440 Wash, 3 feet wide, course south-easterly.
  - 680 Wash, 3 feet wide, course southerly, and ascend.
  - 745 Top of rise and descend.
  - 950 Wash, 5 feet wide, course south-easterly and ascend.
  - 955 *Trail, north-westerly and south-easterly.*
  - 1120 Top of ascent and descend.
  - 1270 Wash, 5 feet wide, course south-easterly and ascend.
  - 1500 To Cor. No. 2, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diameter, 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked

U.S. Mineral Survey No. 3074. I mark same 2-Kershner on its south-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence S.  $6^{\circ}-38\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

- 10 Wash, 3 feet wide, course south-easterly and ascend.  
 45 Top of rise and descend.  
 100 Wash, 3 feet wide, course south-easterly and ascend.  
 250 Top of rise and descend.  
 300 To westerly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 feet high.  
 350 Wash, 3 feet wide, course south-easterly, and ascend.  
 415 Top of rise and descend.  
 580 Wash, 6 feet wide, course south-easterly and ascend.  
 600 To Cor. No. 3, identical with the location which is a md. of stone 2 ft. base,  $1\frac{1}{2}$  ft. high. I set an iron pipe 1" in diameter, 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked, U.S. Mineral Survey No. 3074. I mark same 3-Kershner on its north-easterly face and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $83^{\circ}-21\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

- 45 Wash, 6 feet wide, course south-easterly, thence over level land.  
 475 Wash, 8 feet wide, course south-easterly.  
 740 Wash, 5 feet wide, course southerly.  
 810 Begin ascent.  
 825 Top of rise and descend.  
 1035 Wash, 3 feet wide, course southerly and ascend.  
 1220 Road, northerly and southerly.  
 1500 To Cor. No. 4, identical with the location and with Cor. No. 4 of the Wilson lode of this survey, also with Cor. No. 4 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 4-Kershner on its north-west-



erly face. No bearing trees nor bearing rocks available.

Thence N.  $6^{\circ}$ - $38\frac{1}{2}'$ W.

Var.  $13^{\circ}$ - $40'$ E.

Along line 4-1 of the Wilson lode of this survey.

300 Easterly end center monument, identical with the location and with the westerly end center monument of the Wilson lode of this survey as previously described by me.

600 To Cor. No. 1, the place of beginning.

#### EXTENSION

Beginning at Cor. No. 1, identical with the location and with Cor. No. 4 of the Wilson lode, with Cor. No. 4 of the Kershner lode, of this survey, and with Cor. No. 4 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 1-Extension on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 34, T.15S., R.4E. bears N.  $2^{\circ}$ - $21\frac{1}{4}'$ E., 4453.3 feet distant.

Thence S.  $83^{\circ}$ - $21\frac{1}{2}'$ W.

Var.  $13^{\circ}$ - $40'$ E.

Along line 4-3 of the Kershner lode of this survey.

1500 To Cor No. 2, identical with the location and with Cor. No. 3 of the Kershner lode of this survey as previously set and described by me. I mark same 2-Extension on its south-easterly face. No bearing trees nor bearing rocks available.

Thence S.  $6^{\circ}$ - $38\frac{1}{2}'$ E.

Var.  $13^{\circ}$ - $40'$ E.

Over level ground.

170 Wash, 5 feet wide, course north-easterly and ascend.

200 Westerly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 feet high.

400 To Cor. No. 3, identical with the location, which is a mound of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Extension on its north-easterly face and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

Thence N. 83°-21½'E.

Var. 13°-40'E.

Over ascending ground.

- 150 Top of spur , course northerly, and descend.
- 445 Foot of descent, thence over level land.
- 850 Wash, 8 feet wide, course southerly.
- 960 Wash, 6 feet wide, course southerly.
- 1075 Wash, 3 feet wide, course southerly.
- 1285 Road, northerly and southerly.
- 1475 Trail, northerly and southerly.
- 1500 To Cor. No. 4 identical with the location and with Cor. No. 1 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 4-Extension on its north-west-erly face. No bearing trees nor bearing rocks available.

Thence N. 6°-38½'W.

Var. 13°-40'E.

Along line 1-4 of the Picacho lode, Lot 39 A.

- 160 Trail, north-easterly and south-westerly.
- 200 Easterly end center monument, identical with the location and with the westerly end center monument of the Picacho lode, Lot 39 A, as previously described by me.
- 205 Road, north-easterly and south-westerly.
- 400 To Cor. No. 1, the place of beginning.

COYOTE LODE.

Beginning at Cor. No. 1, identical with the location and with Cor. No. 4 of the Garfield No. 2 lode, of this survey as previously set and described by me. I mark same 1-Coyote on its south-westerly face. No bearing trees nor bearing rocks available. The Standard ¼ corner to Sec. 35, T.15S., R.4 E., bears N.14°-30 1/2' E., 4087.0 ft. dist.

Thence S. 83°-21½'W.

Var. 13°-40'E.

Along line 4-3 of the Garfield No.2 lode of this survey.

- 1500 To Cor. No. 2, identical with the location, with Cor. No. 3 of the Garfield No. 2 lode, with Cor. No. 4 of the Con-

duit lode of this survey and with Cor. No. 3 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 2-Coyote on its south-easterly face.

No bearing trees nor bearing rocks available.

Thence S.  $6^{\circ}-38\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over level land.

200 Westerly end center monument, identical with the location and with the easterly end center monument of the Picacho lode, Lot 39 A, as previously described by me.

400 To Cor. No. 3, identical with the location, and with Cor. No. 2 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 3-Coyote on its north-easterly face. No bearing trees nor bear. rocks available.

Thence N.  $83^{\circ}-21\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over level land.

675 Road, north-westerly and south-easterly.

1125 Road, north-easterly and south-westerly.

1150 Begin descent.

1265 Wash, 25 feet wide, course south-westerly, and ascend.

1500 To Cor. No. 4 identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diameter, 4 ft. long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Coyote on its north-  
*and surround the pipe with a mound of stone.*  
westerly face, No bearing trees nor bear. rocks available.

Thence N.  $6^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over ascending ground.

~~75 Wash, 25 feet wide, course north-easterly, and ascend.~~

100 Top of ascent and descend.

150 Wash, 25' wide, course north-westerly and ascend.

200 Easterly end center monument, identical with the location which is a mound of stone 2 feet base, 2 feet high.

265 Trail, north-Easterly and south-westerly.

- 360 Top of ascent and descend.  
 400 To Cor. No. 1, the place of beginning.

## DEAL

Beginning at Cor. No. 1, identical with the location, and with Cor. No. 4 of the Coyote lode of this survey as previously set and described by me. I mark same 1-Deal on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 35, T.15S., R.4 E., bears N.12°-46  $\frac{3}{4}$ 'E., 4462.1 feet distant.

Thence S.83°-21 $\frac{1}{2}$ 'W.

Var.13°-40'E.

Along line 4-3 of the Coyote lode of this survey.

- 1500 To Cor. No. 2, identical with the location, and with Cor. No. 3 of the Coyote lode of this survey, also with Cor. No. 2 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 2-Deal on its south-easterly face. No bearing trees nor bearing rocks available.

Thence S.6°-38 $\frac{1}{2}$ 'E.

Var. 13°-40'E.

Over level land.

- 300 Westerly end center monument, identical with the location, which is a mound of stone 2 feet base, 1 $\frac{1}{2}$  feet high.

- 599 To Cor. No. 3, identical with the location, which is a md. of stone 2 ft. base 1 $\frac{1}{2}$  ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U. S. Mineral Survey No. 3074. I mark same 3-Deal on its north-easterly face, *and surround the pipe with a mound of stone.* No bearing trees nor bearing rocks available.

Thence N.83°-21 $\frac{1}{2}$ 'E.

Var. 13°-40'E.

Over level land

- 610 Road, north-easterly and south-westerly.  
 745 ,Wash, 25 ft. wide, course south-westerly and ascend.  
 970 Road, north-easterly and south-westerly.  
 1500 To Cor. No. 4 identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in

diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Deal on its north-westerly face, *and surround the pipe with a mound of stone.* No bearing trees nor bearing rocks available.

U.S. Min. Mon. No. 4 bears S. 62°-46 3/4' W., 6350.9 ft. dist.

Flag on El Picacho bears S. 89°-07 1/2' W., 3863.1 feet dist.

Thence N. 6°-38 1/2' W.

Var. 13°-40' E.

Over ascending ground.

- 220 Top of ascent and descend.
- 299 Easterly end center monument, identical with the location which is a mound of stone 2 feet base, 2 feet high.
- 445 Wash, 5 feet wide, course south-westerly, and ascend.
- 550 Road, easterly and westerly.
- 599 To Cor. No. 1, the place of beginning.

#### DOCTOR

Beginning at Cor. No. 1, identical with the location, with Cor. No. 3 of the Coyote lode, with Cor. No. 2 of the Deal lode of this survey, and with Cor. No. 2 Of the Picacho lode Lot 39 A, as previously reset and described by me. I mark same 1-Doctor on its south-westerly face. No bearing trees nor bearing rocks available. The Standard corner to Secs. 34-35, T. 15S., R. 4E., bears N. 2°-18' W., 4536.8 feet dist.

Thence S. 83°-21 1/2' W.

Var. 13°-40' E.

Along line 2-1 of the Picacho lode, Lot 39 A.

Over level land.

- 1390 Begin descent.
- 1440 Trail, north-westerly and south-easterly.
- 1500 To Cor. No. 2, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven in the ground, 2 ft., and fitted with a brass cap, the top of which is marked, U.S. Mineral Survey <sup>No.</sup> 3074. I mark same 2-Doctor on its south-easterly face, *and surround the pipe with a mound of stone.* No bearing trees nor bearing rocks available.

Thence S. 6°-38 1/2' E.

Var. 13°-40' E.

Over ascending ground.

- 250 Top of ascent and descend.
- 300 Westerly end center monument, identical with the location which is a mound of stone 2 ft. base, 2 ft. high.
- 405 Wash, 5 feet wide course westerly and ascend.
- 599 To Cor. No. 3, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Doctor on its north-easterly face, *and surround the pipe with a mound of stone.* No bearing trees nor bearing rocks available.

Thence N.83°-21½'E:

Var. 13°-40'E.

Over ascending ground.

- 150 Top of ascent and descend.
- 380 Wash, 10 feet wide, course south-westerly and ascend.
- 610 Trail, north-westerly and south-easterly.
- 1500 To Cor. No. 4, identical with the location, and with Cor. No. 3 of the Deal lode of this survey as previously set and described by me. I mark same 4-Doctor on its north-westerly face. No bearing trees nor bearing rocks available.

Thence N.6°-38½'W.

Var. 13°-40'E.

Along line 3-2 of the Deal lode of this survey.

- 299 Easterly end center monument, identical with the location and with ~~the~~ westerly end center monument of the Deal lode of this survey, *as previously described by me.*
- 599 To Cor. No. 1, the place of beginning.

PEAK LODGE.

Beginning at Cor. No. 1, identical with the location, with Cor. No. 4 of the Extension lode of this survey and with Cor. No. 1 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 1-Peak on its south-easterly face. No bearing trees nor bearing rocks available. The Standard ¼ Corner to Sec. 34, T.15S., R.4E., bears N.1°-37'E., 4848.8 feet distant.

Thence N. 83°-21½'E.

Var. 13°-40'E.

Over ascending ground, along line 1-2 Picacho lode Lot 39A.

- 300 Trail, northerly and southerly.
- 660 Top of spur, northerly.
- 1320 Road, northerly and southerly.
- 1420 Wash, 25 feet wide, course southerly and ascend.
- 1500 To Cor. No. 2, identical with the location and with Cor. No. 2 of the Doctor lode of this survey, as previously set and described by me. I mark same 2-Peak on its south-westerly face. No bearing trees nor bearing rocks avail.

Thence S. 6°-38½'E.

Var. 13°-40'E.

Along line 2-3 of the Doctor lode of this survey.

- 300 Easterly end center monument, identical with the location and with the westerly end center monument of the Doctor lode of this survey as previously described by me.
- 599 To Cor. No. 3, identical with the location and with Cor. No. 3 of the Doctor lode of this survey as previously set and described by me. I mark same 3-Peak on its north-westerly face. No bearing trees nor bearing rocks available.

Thence S. 83°-21½'W.

Var. 13°-40'E.

Over descending ground.

- 85 Road, northerly and southerly.
- 125 Wash, 25 feet wide, course southerly, and ascend.
- 665 Top of connecting ridge north-westerly and south-easterly. Begin descent.
- 1140 Trail, northerly and southerly.
- 1220 Trail, northerly and southerly.
- 1225 Wash, 3 feet wide, course southerly and ascend.
- 1500 To Cor. No. 4 identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam. 4 ft. long, driven 2 ft. in the ground and fitted with a brass cap the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Peak on its north-easterly *and surround the pipe with a mound of stone.* face. No bearing trees nor bearing rocks available.

Thence N. 6°-38½'W.

Var. 13°-40'E.

- Over ascending ground.
- 100 Top of ascent and descend.
- 299 Westerly end center monument, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high.
- 375 Foot of descent thence over level land.
- 530 Wash, 3 feet wide, course westerly.
- 599 To Cor. No. 1, the place of beginning.

## BERNICE LODE.

Beginning at Cor. No. 1, identical with the location, with Cor. No. 4 of the Extension lode, with Cor. No. 1 of the Peak lode of this survey and with Cor. 1 of the Picacho lode, Lot 39 A, as previously reset and described by me. I mark same 1-Bernice on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec 34, T.15S., R.4E., bears N.1°-37'E., 4848.8 ft. dist.

Thence S. 83°-21 $\frac{1}{2}$ 'W.

Var. 13°-40'E.

Along line 4-3 of the Extension lode of this survey.

- 1500 To Cor No. 2 identical with the location and with Cor. No. 3 of the Extension lode of this survey, as previously set and described by me. I mark same 2-Bernice on its south-easterly face. No bear. trees nor bear. rocks available.

*Cor. No. 5, Littlefield lode, survey No. 519, bears N. 86°-06 $\frac{1}{2}$ 'E., 10423 ft.*

Thence S. 6°38 $\frac{1}{2}$ 'E.

Var. 13°-40'E.

- 181.5 Over ascending ground.

185 Top of ascent, begin descent.

- 300 Westerly end center monument, <sup>(identical with the location</sup> which is a mound of stone 2 feet base, 2 feet high.

- 599 To Cor. No. 3, identical with the location, which is a md. of stone 2 ft. base 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Bernice on its north-easterly face. No bearing trees nor bearing rocks available. U.S. Min. Mon. No. 4 bears S. 8°-02'E., 2232.9 ft. distant. Flag on El Picacho bears N. 73°-09 $\frac{1}{2}$ 'E., 2191.1 ft. dist.



Thence N. 83°-21½'E.

Var. 13°-40'E.

Descending along side-hill

- 10 Wash, 2 feet wide, course southerly.
- 310 Wash, 5 feet wide, course south-easterly and ascend.
- 449.85 *Intersect line 2-3 of the Littlefield lode, Survey No. 519, Lot 47, at a point S. 24-04W, 334.45 ft. from Cor. No. 3 of the Littlefield lode.*
- 490 Top of ascent and descend. *Cor. No. 5, said Littlefield lode bears N. 65° 56' W. 600 ft. from Cor. No. 3 thereof.*
- 770 Wash, 15 feet wide, course south-easterly and ascend.
- 900 Top of ascent and descend.
- 1040 Road, northerly and southerly.
- 1200 Wash, 5 feet wide, course southerly and ascend.
- 1500 To Cor. No. 4, identical with the location and with Cor. No. 4 of the Peak lode of this survey, as previously set and described by me. I mark same 4-Bernice on its north-westerly face. No bear. trees nor. bear. rocks available.

Thence N. 6°-38½'W.

Var. 13°-40'E.

Along line 4-1 of the Peak lode of this survey.

- 299 Easterly end center monument, identical with the location and with the westerly end center monument of the Peak lode of this survey as previously described by me.
- 599 To Cor. No. 1, the place of beginning.

MIDWAY LODE.

Beginning at Cor. No. 1, identical with the location which is ~~a~~ mound of stone 2 ft. base, 2 ft. high . I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Midway on its *and surround the pipe with a mound of stone.* south-westerly face, No bearing trees nor bearing rocks available. The Standard corner to Secs. 34-35, T. 15S., R. 4E. bears N. 1°-07¼'E., 5170.2 feet distant. This corner is on line 3-4 of the Doctor lode at a point N. 83°-21½'E., 1145.0 feet from Cor. No. 3 of the Doctor lode .

Thence S. 83°-21½'W.

Var. 13°-40'E.

Along line 4-3 of the Doctor lode of this survey.

- 1145 Cor. No. 3 of the Doctor lode and Cor. No. 3 of the Peak

lode of this survey.

Thence along line 3-4 of the Peak lode of this survey.

1500 To Cor. No. 2, identical with the location, which is a md. of rock, 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Midway on its south-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence S. 29°-38½'E.

Var. 13°-40'E.

Over/descending ground.

~~Top of ascent begin descent.~~

300 To westerly end center monument, identical with the location, which is a mound of stone 2ft. base, 2 ft. high.

305 Wash, 2 feet wide, course south-easterly.

340 Wash, 25feet wide, course south-westerly, and ascend.

400 Top of rise begin descent, westerly.

475 Wash, 5 feet wide, course south-westerly, begin ascent.

600 To Cor. No. 3, identical with the location, which is a md. of stone, 2 ft. base, 2 ft. high, I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Midway on its north-easterly face and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

Thence N. 83°-21½'E.

Var. 13°-40'E.

Over ascending ground.

145 Top of ascent, begin descent.

200 Wash 2 feet wide, course south-westerly, begin ascent.

260 Trail, northerly and southerly. Top of ascent, begin des.

490 Road, northerly and southerly.

510 Wash, 3 feet wide, course south-westerly, begin ascent.

800 Top of ascent, thence on level mesa.

1200 Trail, north-westerly and south-easterly.

1500 To Cor. No. 4, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in

25.

diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked. U.S. Mineral Survey No. 3074. I mark same 4-Midway on its north-westerly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over level land.

300 Easterly end center monument, identical with the location which is a mound of stone, 2 ft. base, 2 ft. high.

600 To Cor. No. 1, the place of beginning.

#### GLADYS

Beginning at Cor. No. 1, identical with the location, which is a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Gladys on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 35, T.15S., R.4E. bears  $N.14^{\circ}-17\frac{1}{4}'$  E., 5146.8 feet distant.

This corner is on line 3-4 of the Deal lode, at a point  $N.83^{\circ}-21\frac{1}{2}'$  E., 1145.0 ft. from Cor. No. 3, of the Deal lode.

Thence S.  $83^{\circ}-21\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 4-3 of the Deal lode of this survey.

1145 Cor. No. 3 of the Deal lode, also Cor. No. 4 of the Doctor lode, of this survey.

Thence along line 4-3 of the Doctor lode of this survey.

1500 To Cor. No. 2, identical with the location and with Cor. No. 1, of the Midway lode of this survey, as previously set and described by me. I mark same 2-Gladys on its south-easterly face. No bearing trees nor bearing rocks available.

Thence S.  $29^{\circ}-38\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Along line 1-4 of the Midway lode of this survey.

300 Westerly end center monument, identical with the location and with the easterly end center monument of the Midway lode of this survey, as previously described by me.

600 To Cor. No. 3 identical with the location and with Cor. No. 4 of the Midway lode of this survey as previously set and described by me. I mark same 3-Gladys on its north-easterly face. No bear. trees nor bear. rocks available.

Thence N.  $83^{\circ}-21\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over level land.

100 Begin descent.

145 Wash, 5 feet wide, course south-westerly and ascend.

165 Top of ascent, begin descent.

175 Wash, 3 feet wide, course south-westerly, begin ascent.

295 Top of ascent, Road northerly and southerly, begin descent.

565 Wash, 25 feet wide, course southerly, begin ascent.

800 Top of ascent begin descent.

850 Wash, 15 feet wide, course southerly, begin ascent.

1210 Top of ascent, begin descent.

1500, To Cor. No. 4, identical with the location, which is a md. of stone, 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Gladys on its north-westerly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

90 Wash, 3 feet wide, course westerly and ascend.

160 Top of ascent, begin descent.

270 Wash, 15 feet wide, course westerly, and ascend.

300 To easterly end center monument, identical with the location which is a mound of stone 2 ft. base, 2 ft. high.

376 Road, easterly and westerly.

600 To Cor. No. 1, the place of beginning.

---

WATKINS

Beginning at Cor. No. 1, identical with the location, and with Cor. No. 4 of the Gladys lode of this survey, as previously set and described by me. I mark same 1-Watkins on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 35, T.15S., R.4E. bears N.10°-01 $\frac{1}{4}$ 'E., 5594.4 feet distant.

Thence S.83°-21 $\frac{1}{2}$ 'W.

Var. 13°-40'E.

Along line 4-3 of the Gladys lode of this survey.

1500 To Cor. No. 2, identical with the location, with Cor. No. 4 of the Midway lode and with Cor. No. 3 of the Gladys lode of this survey, *as previously set and described by me.* I mark same 2-Watkins on its south-easterly face. No bear. trees nor bear. rocks available.

Thence S.29°-38 $\frac{1}{2}$ 'E.

Var. 13°-40'E.

Over level land.

150 ~~be~~ Begin descent.

200 Wash, 5 feet wide, course south-westerly, begin ascent.

290 Top of ascent, road, north-easterly and south-westerly, begin descent.

300 Westerly end center monument, identical with the location which is a mound of stone 2 ft. base, 2 ft. high.

325 Trail, north-westerly and south-easterly.

495 Wash, 25 feet wide, course south-westerly and ascend.

520 Top of ascent, thence over level mesa.

600 To Cor. No. 3, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Watkins on its north-easterly face and surround the pipe with a mound of stone. No. bearing trees nor bearing rocks available.

Thence N.83°-21 $\frac{1}{2}$ 'E.

Var. 13°-40'E.

Over level land.

190 Trail, north-westerly and south-easterly.

215 Begin descent.  
 330 Wash, 3 feet wide, course southerly, begin ascent.  
 550 Top of ascent, begin descent.  
 750 Wash, 3 feet wide, course <sup>south-</sup>westerly, begin ascent.  
 830 Top of ascent, begin descent.  
 1190 Wash, 5 feet wide, course south-easterly, begin ascent.  
 1500 To Cor No. 4, identical with the location, which is a md. of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Watkins on its north-westerly face and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

300 Easterly end center monument, identical with the location which is a mound of stone 2 feet base 2 feet high.  
 600 To Cor. No. 1, the place of beginning.

---

BASE

Beginning at Cor. No. 1, identical with the location, with Cor. No. 4 of the Midway lode, with Cor. No. 3 of the Gladys lode, and with Cor. No. 2 of the Watkins lode of this survey as previously set and described by me. I mark same 1-Base on its south-westerly face. No bearing trees nor bearing rocks available. The Standard corner to Secs. 34-35, T.15S., R.4E. bears N.  $1^{\circ}-58'W.$ , 5694.0 ft. distant.

Thence S.  $83^{\circ}-21\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 4-3 of the Midway lode of this survey.

1500 To Cor. No. 2 identical with the location and with Cor. No. 3 of the Midway lode of this survey, as previously set and described by me. I mark same 2-Base on its south-easterly face. No bearing trees nor bearing rocks available.

Thence S.  $29^{\circ}-38\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over ascending ground.

- 50 Top of rise, begin descent.
- 230 Wash 2 feet wide, course <sup>south</sup> westerly, begin ascent.
- 300 Westerly end center monument, identical with the location which is a mound of stone 2 ft. base, 2 ft. high.
- 340 Top of rise begin descent.
- 580 Wash, 5 feet wide, course south-westerly, *thence over level land.*
- 600 To Cor. No. 3, identical with the location, which is a md. of stone 2 ft. base 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Base on its north-easterly face and surround the pipe with a mound of stone.
- No bearing trees nor bearing rocks available.

Thence N. 83°-21½'E.

Var. 13°-40'E.

Over level land.

- 400 Road, northerly and southerly.
- 875 Road, north-easterly and south-westerly.
- 900 Begin descent.
- 1100 Wash 25 feet wide, course southerly.
- 1400 Begin ascent.
- 1500 To Cor. No. 4, identical with the location, and with Cor. No. 3 of the Watkins lode of this survey, as previously set and described by me. I mark same 4-Base on its north-westerly face. No bear. trees nor bear. rocks available.

Thence N. 29°-38½'W.

Var. 13°-40'E.

Along line 3-2 of the Watkins lode of this survey.

- 300 Easterly end center monument, identical with the location and with the westerly end center monument of the Watkins lode of this survey as previously described by me.
- 600 To Cor. No. 1, the place of beginning.

---

GARFIELD No. 3

Beginning at Cor. No. 1, identical with the location, with Cor. No. 3 of the Watkins lode and with Cor. No. 4 of the

Base lode of this survey, as previously set and described by me. I mark same 1-Garfield No. 3 on its south-westerly face. No bearing trees nor bearing rocks available.

The Standard corner to Secs. 34-35, T.15S., R.4E. bears N.4°-31 3/4'W., 6231.7 feet distant.

Thence S.83°-21 1/2'W.

Var. 13°-40'E.

Along line 4-3 of the Base lode of this survey.

1500 To Cor. No. 2, identical with the location and with Cor. No. 3 of the Base lode of this survey as previously set and described by me. I mark same 2-Garfield No. 3 on its south-easterly face. No bearing trees nor bearing rocks available.

Thence S.29°-38 1/2'E.

Var.13°-40'E.

Over ascending ground.

300 Westerly end center monument, identical with the location which is a mound of stone 2 feet base, 2 feet high.

400 Top of ascent, begin descent.

599 To Cor. No. 3, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Garfield No. 3 on its north-easterly face, *and surround the pipe with a mound of stone.* No bear. trees nor bear. rocks available.

Thence N.83°-21 1/2'E.

Var. 13°-40'E.

Over ascending ground.

10 Road, north-easterly and south-westerly.

170 Road, northerly and southerly.

200 Top, of ascent, begin descent.

360 Wash, 25 feet wide, course south-westerly thence on flat.

815 Wash, 5 feet wide, course northerly and ascend.

1000 Top of rise, begin descent.

1200 Wash, 10 feet wide, course south-westerly, begin ascent.

1500 To Cor. No. 4, identical with the location, which is a md. of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in



diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Garfield No. 3 on its north- and surround the pipe with a mound of stone. westerly face, No bear. trees nor bear. rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over ~~level~~ <sup>descending</sup> ground.

Top of ascent, begin descent.

- 250 Wash, 3 feet wide, course south-westerly and ascend.  
 299 Easterly end center monument, identical with the location which is a mound of stone 2 feet base 2 feet high.  
 400 Top of ascent, thence over level land.  
 599 To Cor. No. 1, the place of beginning.

MOLLY No. 3 lode.

Beginning at Cor. No. 1, identical with the location, and with Cor. No. 4 of the Watkins lode of this survey, as previously set and described by me. I mark same 1-Molly No. 3 on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 35, T.15S., R.4 E. bears N.  $6^{\circ}-24\frac{1}{4}'$  E., 6068.4 feet distant.

Thence S.  $83^{\circ}-21\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 4-3 of the Watkins lode of this survey.

- 1500 To Cor. No. 2 identical with the location, with Cor. No. 3 of the Watkins lode, with Cor. No. 4 of the Base lode, and with Cor. No. 1 of the Garfield No. 3 lode of this survey, as previously set and described by me. I mark same 2-Molly No. 3 on its south-easterly face. No bearing trees nor bearing rocks available.

Thence S.  $29^{\circ}-38\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Along line 1-4 of the Garfield No. 3 lode of this survey.

- 300 Westerly end center monument, identical with the location, and with the easterly end center monument of the Garfield No. 3 lode of this survey as previously described by me.

- 599 To Cor. No. 3 identical with the location, and with Cor. No. 4 of the Garfield No. 3, lode of this survey as pre-

viciously set and described by me. I mark same 3-Molly No. 3 on its north-easterly face. No bearing trees nor bearing rocks available.

Thence N.  $83^{\circ}21\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over ascending ground.

- 370 Top of rise, begin descent.
- 725 Wash, 5 feet wide, course south-westerly begin ascent.
- 1170 Top of rise, begin descent.
- 1300 Wash, 5 feet wide, course south-westerly, begin ascent.
- 1500 To Cor. No. 4, identical with the location, which is a md. of stone, 3 ft. base, 4 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Molly No. 3 on its north-westerly face and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

- 75 Wash, 5 feet wide, course south-westerly, begin ascent.
- 299 To easterly end center monument identical with the location, which is a mound of stone 2 ft. base, 2 ft. high.
- 599 To Cor. No. 1, the place of beginning.

#### MOLLY CORNER.

Beginning at Cor. No. 1, identical with the location, which is a mound of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Molly and surround the pipe with a md. of stone on its south-westerly face. The Standard  $\frac{1}{4}$  corner to Sec. 35, T.15S., R.4E. bears N.  $7^{\circ}-54\frac{1}{4}'$  W., 5913.2 ft. distant. No bearing trees nor bearing rocks available.

Thence S.  $83^{\circ}-21\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

- 90 Wash, 5 feet wide, course northerly, begin ascent.

- 150 Top of ascent, begin descent.
- 290 Wash, 3 feet wide, course northerly, begin ascent.
- 390 Top of ascent, begin descent, *also road northerly and southerly.*
- 465 Wash, 5 feet wide course northerly, begin ascent.
- 1040 Top of ascent, begin descent.
- 1275 Wash, 3 feet wide course northerly, begin ascent.
- 1500 To Cor. No. 2, identical with the location and with Cor. No. 1 of the Molly No. 3 lode, also with Cor. No. 4 of the Watkins lode of this survey as previously set and described by me. I mark same 2-Molly on its south-easterly face. No bearing trees nor bearing rocks available.

Thence S.  $29^{\circ}-38\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Along line 1-4 of the Molly No. 3 lode of this survey.

- 300 Westerly end center monument, identical with the location, and with the easterly end center monument of the Molly No. 3 lode of this survey as previously described by me.

- 500 To Cor. No. 3, identical with the location, and with Cor. No. 4 of the Molly No. 3 lode of this survey as previously set and described by me. I mark same 3-Molly on its north-easterly face. No bear. trees nor bear. rocks available.

Thence N.  $83^{\circ}-21\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over ascending ground.

- 200 Top of ascent, begin descent.
- 600 Wash, 3 feet wide, course south-westerly, begin ascent.
- 700 Top of ascent.
- 990 Road, northerly and southerly.
- 1100 Begin descent.
- 1290 Wash, 8 feet wide, course southerly, begin ascent.
- 1500 To Cor. No. 4, identical with the location, which is a md. of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap the top of which is marked, U.S. Mineral Survey No. 3074. I mark same 4-Molly on its north-westerly face and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$ W.

Var.  $13^{\circ}-40'$ E.

Over descending ground.

- 155 Wash, 8 feet wide, course westerly, begin ascent.  
 200 Top of ascent, begin descent.  
 299 Easterly end center monument, identical with the location,  
 which is a mound of stone 2 feet base, 2 feet high.  
 599 To Cor. No. 1, the place of beginning.

MOLLY No. 2

Beginning at Cor. No. 1, identical with the location, which is a mound of stone 3 ft. base 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Molly No. 2 on (and surround the pipe with a md. of stone its south-westerly face.) No bearing trees nor bearing rocks available. The Standard/corner to Secs. 35-36, T.15S., R.4E. bears N.  $6^{\circ}-07\frac{3}{4}'$ E., 5163.6 feet distant.

Thence S.  $59^{\circ}-49\frac{1}{2}'$ W.

Var.  $13^{\circ}-40'$ E.

Over descending ground.

- 75 Wash, 5 feet wide, course south-westerly and ascend.  
 220 Top of ascent, begin descent.  
 400 Wash, 5 feet wide, course north-westerly, begin ascent.  
 600 Top of ascent, begin descent.  
 775 Wash, 5 feet wide, course north-westerly, begin ascent.  
 970 Top of ascent, begin descent.  
 1105 Foot of descent, begin ascent.  
 1500 To Cor. No. 2, identical with the location, and with Cor. No. 1 of the Molly lode of this survey as previously set and described by me. I mark same 2-Molly No. 2 on its south-easterly face. No bearing trees nor bearing rocks available.

Thence S.  $29^{\circ}-38\frac{1}{2}'$ E.

Var.  $13^{\circ}-40'$ E.

Along line 1-4 of the Molly lode of this survey.

- 300 Westerly end center monument, identical with the location,

and with the easterly end center monument of the Molly lode of this survey as previously described by me.

599 To Cor. No. 3 identical with the location, and with Cor. No. 4 of the Molly lode of this survey as previously set and described by me. I mark same 3-Molly No. 2 on its north-easterly face. No bear. trees nor bear. rocks available.

Thence N.  $59^{\circ}-49\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over ascending ground.

140 Top of spur, northerly, and descend.  
 315 Wash, 5 feet wide, course north-westerly, begin ascent.  
 600 Top of spur, northerly, and descend.  
 875 Wash, 3 feet wide, course north-westerly.  
 975 Begin ascent.  
 1100 Top of ascent, begin descent.  
 1275 Wash, 5 feet wide, course north-~~westerly~~, begin ascent.  
 1500 To Cor. No. 4, identical with the location which is a md. of stone 3 ft. base, 4 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Molly No. 2 on its north-westerly face and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

2210 Wash, 2 feet wide, course north-westerly, begin ascent.  
 299 Easterly end center monument, identical with the location which is a mound of stone 2 feet base 2 feet high.  
 390 Top of ascent, begin descent.  
 480 Wash, 3 feet wide, course westerly, begin ascent.  
 399 To Cor. No. 1, the place of beginning.

---

CONCH

Beginning at Cor. No. 1, identical with the location, and with Cor. No. 4 of the Molly No. 2 lode of this survey, as previously set and described by me. I mark same 1-Conch

on its south-westerly face. No bearing trees nor bearing rocks  
rocks available. The Standard corner to Secs. 35-36, T.  
15S., R. 4E. bears N. 2°-34 3/4'E., 5660.4 feet distant.

Thence S. 59°-49 1/2'W.

Var. 13°-40'E.

Along line 4-3 of the Molly No. 2 lode of this survey.

1500 To Cor. No. 2, identical with the location and with Cor.  
No. 3 of the Molly No. 2 lode also with Cor. No. 4 of the  
Molly lode of this survey, as previously set and described by  
by me. I mark same 2-Conch on its south-easterly face.  
No bearing trees nor bearing rocks available.

Thence S. 29°-38 1/2'E.

Var. 13°-40'E.

Over ascending ground on south slope of hill.

300 Westerly end center monument identical with the location  
which is a mound of stone 2 feet base, 2 feet high.

300 Top of ascent, begin descent

600 To Cor. No. 3, identical with the location, which is a md.  
of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in  
diam., 4 ft. long, driven 2 ft. in the ground, and fitted  
with a brass cap, the top of which is marked U.S. Mineral  
Survey No. 3074. I mark same 3-Conch on its north-easterly  
face and surround the pipe with a mound of stone.  
No bearing trees nor bearing rocks available.

Thence N. 59°-49 1/2'E.

Var. 13°-40'E.

Over ascending ground.

40 Top of spur, southerly, and descend.  
165 Wash, 3 feet wide, course south-westerly, begin ascent.  
280 Top of ascent, begin descent.  
750 Wash, 2 feet wide course southerly, begin ascent.  
1120 Top of ascent, begin descent.  
1215 Wash, 4 feet wide, course south-westerly, begin ascent.  
1375 Top of spur, south-easterly, begin descent.  
1500 To Cor. No. 4, identical with the location which is a md.  
of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in

diam., 4 ft. long, driven 2 ft. in the ground and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Conch on its north-westerly face, and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

Thence  $N. 29^{\circ} - 38\frac{1}{2}' W.$

Var.  $13^{\circ} - 40' E.$

Over descending ground.

- 300 Easterly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 feet high.
- 340 Wash, 5 feet wide, course westerly, begin ascent.
- 410 Top of ascent, begin descent.
- 510 Wash, 3 feet wide, course westerly, begin ascent.
- 600 To Cor. No. 1, the place of beginning.

#### DOME

Beginning at Cor. No. 1, identical with the location, and with Cor. No. 2 of the Conch lode, with Cor. No. 3 of the Molly No. 2 lode, and with Cor. No. 4 of the Molly lode of this survey, as previously set and described by me. I mark same 1-Dome on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  Corner to Sec. 35, T.15S., R.4E. bears  $N. 9^{\circ} - 52' W.$ , 6473.4 feet distant.

Thence  $S. 59^{\circ} - 49\frac{1}{2}' W.$

Var.  $13^{\circ} - 40' E.$

Over descending ground.

- 235 Wash, 8 feet wide, course southerly, begin ascent.
- 260 Top of ascent, begin descent.
- 385 Wash, 3 feet wide, course easterly, begin ascent.
- 415 Road north-westerly and south-easterly.
- 585 Top of ascent, begin descent.
- 925 Wash, 5 feet wide, course southerly, begin ascent.
- 1085 Top of ascent, begin descent.
- 1380.8 To Cor. No. 2, identical with the location, which is a mound of stone 3 ft. base 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U. S. Mineral Survey. No. 3074. I mark same 2-Dome on its south-easterly

face and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

Thence S.  $29^{\circ}-38\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

- 100 Wash, 5 feet wide, course westerly, begin ascent.
- 300 To westerly end center monument, identical with the location, which is a mound of stone 2 ft. base, 2 ft. high.
- 600 To Cor. No. 3, identical with the location, which is a mound of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Dome on its north-easterly face and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

*U.S. Min. Mon. No. 4 bears S.  $87^{\circ}-49'$  W., 6782 1/2 ft.  
Flag on El Picacho bears N.  $62^{\circ}-38\frac{1}{2}'$  W., 5623 1/2 ft.*

Thence N.  $59^{\circ}-49\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

- 380 Wash, 5 feet wide, course north-westerly, begin ascent.
- 785 Top of ascent, begin descent.
- 1110 Road, north-westerly and south-easterly.
- 1165 Wash, 15 feet wide, course southerly, begin ascent.
- 1380.8 To Cor. No. 4, identical with the location and with Cor. No. 3 of the Conch lode of this survey, as previously set and described by me. I mark same 4-Dome on its north-westerly face. No bearing trees nor bearing rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 3-2 of the Conch lode of this survey.

- 300 Easterly end center monument, identical with the location, and with the westerly end center monument of the Conch lode of this survey as previously described by me.
- 600 To Cor. No. 1, the place of beginning.

#### TRIANGLE

Beginning at Cor. No. 1, identical with the location, with Cor. No. 1 of the Molly lode, and with Cor. No. 2 of the Molly No. 2 lode of this survey as previously set and described



cribed by me. I mark same 1-Triangle on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 35, T.15S., R.4E., bears N.  $7^{\circ}-54\frac{1}{4}'$ W., 5913.2 feet distant.

Thence S.  $59^{\circ}-49\frac{1}{2}'$ W.

Var.  $13^{\circ}-40'$ E.

Over descending ground,

- 75 Wash, 5 feet wide, course northerly, and ascend.  
 285 Top of ascent, begin descent.  
 415 Road, northerly and southerly.  
 510 Wash, 3 feet wide, course northerly, begin ascent.  
 690 Top of ascent, begin descent.  
 1070 Wash, 3 feet wide, course south-easterly .  
 1145 Same wash, course westerly.  
 1200 Begin ascent.  
 1350 Top of ascent, begin descent.  
 1380.8 To Cor. No. 2, identical with the location, with Cor. No. 3 of the Molly lode, and with Cor. No. 4 of the Molly No. 3 lode of this survey as previously set and described by me. I mark same 2-Triangle on its south-easterly face. No bearing trees nor bearing rocks available.

Thence S.  $29^{\circ}-38\frac{1}{2}'$ E.

Var.  $13^{\circ}-40'$ E.

Over ascending ground.

- 280 Top of ascent, begin descent.  
 300 Westerly end center monument, identical with the location, which is a mound of stone 3 ft. base, 2 ft. high.  
 365 Wash, 5 feet wide, course south-westerly, begin ascent.  
 435 Top of ascent, begin descent.  
 599 To Cor. No. 3 identical with the location and with Cor. No. 2 of the Dome lode of this survey, as previously set and described by me. I mark same 3-Triangle on its north-easterly face. No bear. trees nor bear. rocks available.

Thence N.  $59^{\circ}-49\frac{1}{2}'$ E.

Var.  $13^{\circ}-40'$ E.

Along line 2-1 of the Dome lode of this survey.

- 1380.8 To Cor. No. 4, identical with the location, with Cor. No.

1 of the Dome lode, with Cor. No. 2 of the Conch lode, with Cor. No. 3 of the Molly No. 2 lode, and with Cor. No. 4 of the the Molly lode of this survey, as previously set and described by me. I mark same 4-Triangle on its north-westerly face. No bearing trees nor bearing rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 4-1 of the Molly lode of this survey.

299 Easterly end center monument, identical with the location, with the easterly end center monument of the Molly lode, and with the westerly end center monument of the Molly No. 2 lode of this survey as previously described by me.

399 To Cor. No. 1, the place of beginning.

#### HIBBEN SUMMIT

Beginning at Cor. No. 1, identical with the location, which is a *md.* of stone, 2 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Hibben Summit on its south-easterly face. No bearing trees nor bearing rocks available. I surround the pipe with a mound of stone. The Standard  $\frac{1}{4}$  corner to Sec. 34, T. 15S., R. 4E. bears N.  $5^{\circ}-02'$  W., 5399.6 feet distant. This corner is on line 3-4 of the Peak lode of this survey, at a point N.  $83^{\circ}-21\frac{1}{2}'$  E., 545 feet distant from Cor. No. 4 of the Peak lode.

Thence S.  $29^{\circ}-38\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

1095 Wash, 25 feet wide, course south-westerly and ascend.  
 1155 Top of ascent, begin descent.  
 1225 Wash, 5 feet wide, course westerly, begin ascent.  
 1500 To Cor. No. 2, identical with the location, which is a *md.* of stone 3 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral

Survey No. 3074. I mark same 2-Hibben Summit on its north-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N. 83°-21½'E.

Var. 13°-40'E.

Over ascending ground.

300 Southerly end center monument, identical with the location, which is a mound of stone, 2 ft. base, 2 feet high.

600 To Cor. No. 3, identical with the location, and with the westerly end center monument of the Garfield No. 3 lode of this survey as previously described by me. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Hibben Summit on its north-westerly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N. 29°-38½'W.

Var. 13°-40'E.

Along line 3-2 of the Garfield No. 3 lode of this survey.

300 Cor. No. 2, of the Garfield No. 3 lode of this survey, also Cor. No. 3 of the Base lode, of this survey.

600 *Thence along Line 3-2 of the Base lode of this survey.* Westerly end center monument of the Base lode of this sur.

900 Cor. No. 2 of the Base lode and Cor. No. 3 of the Midway lode of this survey.

*Thence along Line 3-2 of Midway lode of this survey.*

1200 West. end center monument of the Midway lode of this sur.

1500 To Cor. No. 4, identical with the location and with Cor. No. 2 of the Midway lode of this survey, as previously set and described by me. I mark same 4-Hibben Summit on its south-westerly face. No bear. trees nor bear. rocks avail.

Thence S. 83°-21½'W.

Var. 13°-40'E.

Along line 3-4 of the Peak lode of this survey.

300 Northerly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 feet high.

600 To Cor. No. 1, the place of beginning.

## GARFIELD

Beginning at Cor. No. 1, identical with the location, which is a mound of stone, 2 feet base, 2 feet high. I set an iron pipe 1" in diam., 4 feet long, driven 2 feet in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Garfield on its south-westerly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available. The Standard corner to Secs. 34-35, T.15S., R.4E. bears N.7°-35 3/4'E., 7564.3 feet distant.

This corner is on line 2-3 of the Summit lode at a point N.29°-38 1/2'W., 600 feet from Cor. No. 3 of the Summit lode of this survey.

Thence S.83°-21 1/2'W.

Var. 13°-40'E.

Over level land.

- 130 Road, north-easterly and south-westerly.  
 770 Descend into wash.  
 790 Wash, 5 feet wide, course south-westerly.  
 810 Top of bank.  
 1500 To Cor. No. 2, identical with the location, which is a md. of stone, 3 ft. base, 3 ft. high. I set an iron pipe, 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with an ~~xxxxx~~ pipe brass cap, the top of which is marked U. S. Mineral Survey No. 3074. I mark same 2-Garfield on its south-easterly face, and surround the pipe with a md. of stone. No bearing trees nor bearing rocks available.

Thence S.29°-38 1/2'E.

Var. 13°-40'E.

Over level land.

- 300 Westerly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 feet high.  
 350 Descend into wash.  
 365 Wash, 5 feet wide, course south-westerly.

of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3674. I mark same 3-Garfield on its north-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $83^{\circ}-21\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over level land.

- 100 Road, north-easterly and south westerly.  
 510 Descend into wash.  
 530 Wash, 25 feet wide, course south-westerly.  
 550 Top of bank.  
 1500 To Cor. No. 4, identical with the location and with Cor. No. 3 of the Summit lode of this survey as previously set and described by me. I mark same 4-Garfield on its north-westerly face. No bearing trees nor bearing rocks avail.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 3-2 of the Summit lode of this survey.

- 300 Easterly end center monument, identical with the location, which is a mound of stone 2 ft. base, 2 ft. high.  
 600 To Cor. No. 1, the place of beginning.

#### QUEEN MARY LODE.

Beginning at Cor. No. 1, identical with the location, and with Cor. No. 2 of the Garfield lode, of this survey, as previously set and described by me. I mark same 1-Queen Mary on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec 34, T.15S., R.4E., bears N.  $1^{\circ}17'$  W., 7640.1 feet distant.

Thence S.  $76^{\circ}53'$  W.

Var.  $13^{\circ}-40'$  E.

Over level land.

- 20 Descend into wash.  
 30 Wash, 25 feet wide, course south-westerly.  
 45 Top of bank.

- 125 Trail, northerly and southerly.
- 830 Road, northerly and southerly.
- 875 Begin ascent.
- 1245 Top of ascent, begin descent.
- 1500 To Cor. No. 2, identical with the location which is a md. of stone 4 ft. base, 4 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Queen Mary on its south-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.
- U.S. Min. Mon. No. 4 bears N.16°-20'E., 158.74 ft. dist.  
El Picacho bears N.31°-23 3/4'E., 3512.35 feet distant.
- Thence S.29°-38½'E.
- Var.13°-40'E.
- Over descending ground.
- 300 Westerly end center monument, identical with the location, which is a mound of stone, 3 ft. base, 3 ft. high.
- 600 To Cor. No. 3, identical with the location, which is a md. of stone. 4 ft. base 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey NO.3074. I mark same 3-Queen Mary on its north-  
*and surround the pipe with a mound of stone.*  
easterly face. No bearing trees nor bearing rocks avail.  
*Cor. No 5, Grand Prize lode, Survey 532, lot 51, bears S.26°08'W, 636 1/4*
- Thence N.76°-53'E.
- Var. 13°-40'E.
- Over ascending ground.
- 185 Top of ascent, begin descent.
- 375 Foot of descent, thence over level ground.
- 680 Descend into wash.
- 700 Wash 25 feet wide, course south-westerly.
- 720 Top of bank.
- 800 Road, curves from north-west to south-west.
- 850 Trail, north-easterly and south-westerly.
- 880 Descend into wash.
- 900 Wash, 5 feet wide, course south-westerly.

915 Top of bank.  
 1500 To Cor. No. 4, identical with the location and with Cor. No. 3 of the Garfield lode of this survey as previously set and described by me. I mark same 4-Queen Mary on its north-westerly face. No bearing trees nor bearing rocks available.

Thence N.  $29^{\circ}-38\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 3-2 of the Garfield lode of this survey.

300 Easterly end center monument, identical with the location and with the westerly end center monument of the Garfield lode of this survey as previously described by me.

600 To Cor. No 1, the place of beginning.

#### LITTLE JOE

Beginning at Cor. No. 1, identical with the location which is a mound of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Little Joe on *and surround the pipe with a mound of stone.* its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 34, T.15S., R.4E. bears N.  $1^{\circ}43\frac{1}{2}'$  W., 2310.85 feet distant.

Thence S.  $83^{\circ}-21\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

300 Northerly end center monument, *identical with the location, which is a mound of stone 2ft. base, 2ft. high.*  
 560 Wash, 10 feet wide, course northerly.

600 To Cor. No. 2, identical with the location which is a mound of stone. 3 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Little Joe on its south-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence S.  $2^{\circ}-31\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

- Over descending ground.  
 6.1 Cor. No. 3, Cokespa lode, Lot 40 A.  
 200 Wash, 5 feet wide, course north-easterly, begin ascent.  
 406.1 *Easterly end center Cokespa lode, Lot 40 A.*  
 490 Road, north-westerly and south-easterly.
- 1195 Trail, north-westerly and south-easterly.
- 1290 Trail, westerly
- 1500 To Cor. No. 3, identical with the location, which is a md. of stone 2 ft. base 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Little Joe on its north-easterly face. No bearing trees nor bearing rocks available. This corner is on line 1-2 of the Kershner lode of this survey at a point S. 83°-21½'W., 209.3 feet from Cor. No. 1 of the Kershner lode.
- Thence N. 83°-21½'E.  
 Var. 13°-40'E.
- Along line 2-1 of the Kershner lode of this survey.
- 209.3 Cor. No. 1 of the Kershner lode and Cor. No. 1 of the Wilson lode of this survey.
- 300 Thence along line 1-2 of the Wilson lode of this survey. Southerly end center monument identical with the location, which is a mound of stone 2ft. base, 2 ft. high.
- 600 To Cor. No. 4 identical with the location, which is a md. of stone, 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap the top of which is marked U. S. Mineral Survey No. 3074. I mark same 4-Little Joe on its north-westerly face, and surround the pipe with a mound of stone. *This Cor. is on line 1-2, Wilson lode of this survey 320.7 ft. from Cor. No. 1*  
 No bearing trees nor bearing rocks available. *South-westerly corner of the Picacho Mill site, Lot 39 B, bears N. 52°-54½'E., 388.33 ft.*  
 Thence N. 2°-31½'W.  
 Var. 13°-40'E.
- Over level land.
- 1500 To Cor. No. 1, the place of beginning.

OFF

Beginning at Cor. No. 1, identical with the location which is a mound of stone 3 ft. base, 3 ft. high. I set an iron pipe, 1" in diam., 4 ft. long, driven 2 ft. in the ground



and fitted with a brass cap, the top of which is marked U. S. Mineral Survey No. 3074. I mark same 1-Off on its south-westerly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

The Standard  $\frac{1}{4}$  corner to Sec. 34, T.15S., R.4E. bears N.17°-11 $\frac{1}{2}$ 'E., 1869.4 feet distant.

Thence S.87°-28 $\frac{1}{2}$ 'W.

Var. 13°-40'E.

Over descending ground.

400 Trail northerly and southerly.

535 Wash, 5 feet wide, course northerly.

650 ~~30~~ Begins ascent.

825 Top of ascent, begin descent.

1140 Road, northerly and southerly.

1474 To Cor. No. 2, identical with the location, which is a md. of stone 2 ft. base 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked. U.S. Mineral Survey No. 3074. I mark same 2-Off on its south-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence S.2°31 $\frac{1}{2}$ 'E.

Var. 13°-40'E.

Over descending ground.

125 Wash, 5' wide, course easterly, begin ascent.

300 Westerly end center monument, identical with the location which is a mound of stone 2 ft. base, 2 ft. high.

600 To Cor. No. 3 identical with the location, which is a md. of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Off on its north-easterly face, and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

This corner is on line 2-3 of the Cokespa lode, Lot 40 A, at a point N.87°-28 $\frac{1}{2}$ 'E., 1166 feet from Cor. No. 2 of the Cokespa lode.

Thence N.  $87^{\circ}28\frac{1}{2}'$  E.

Var.  $13^{\circ}40'$  E.

- Along line 2-3 of the Cokespa lode, Lot 40 A.  
Over descending ground.
- 100 Wash, 2 feet wide, course north-easterly and ascend.
- 700 Top of ascent, begin descent.
- 920 Trail, northerly and southerly.
- 1200 *Road, north-westerly and south-easterly*
- 1474 To Cor. No. 4, identical with the location, and with Cor. No. 3 of the Cokespa lode, Lot 40 A, as previously reset and described by me. I mark same 4-Off on its north-westerly face. No bearing trees nor bearing rocks available.

Thence N.  $2^{\circ}-31\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

- Along line 3-2 of the Little Joe lode of this survey.  
Over ascending ground.
- 6.1 Cor. No. 2 of the Little Joe lode of this survey.
- 150 Top of ascent, begin descent.
- 300 Easterly end center monument, identical with the location, which is a mound of stone 2 ft. base, 2 ft. high.
- 600 To Cor. No. 1 the place of beginning.

SCHOONOVER

Beginning at Cor. No. 1, identical with the location and with Cor. No. 4 of the Cokespa lode, Lot 40 A, as previously reset and described by me. I mark same 1-Schoonover on its south-westerly face. No bearing trees nor (On line 2-3 Little Joe lode of this sur. 406.1' from Cor. 2.) bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 34, T. 15S., R. 4E. bears N.  $10^{\circ}-21'$  E., 2831.0 feet distant.

Thence S.  $87^{\circ}-28\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

- Over descending ground.
- 70 Along line 4-1 of the Cokespa lode, Lot 40 A.  
Road, north-westerly and south-easterly
- 275 Wash, 3 feet wide course north-easterly, begin ascent.
- 585 Trail, northerly and southerly.
- 1474 To Cor. No. 2, identical with the location, which is a md. of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral

Survey No. 3074. I mark same 2-Schoonover on its south-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence S.  $2^{\circ}$ - $31\frac{1}{2}'$ E.

Var.  $13^{\circ}$ - $40'$ E.

Over descending ground.

300 Westerly end center monument, identical with the location which is a mound of stone 2 feet base, 2 feet high.

600 To Cor. No. 3, identical with the location, which is a md. of stone 3 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Schoonover on its north-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.

Thence N.  $87^{\circ}$ - $28\frac{1}{2}'$ E.

Var.  $13^{\circ}$ - $40'$ E.

Over ascending ground.

75 Top of ascent, begin descent.

200 Wash, 3 feet wide, course southerly, begin ascent.

275 Top of ascent, begin descent.

400 Wash, 2 feet wide, course southerly, begin ascent.

830 Top of ascent, begin descent.

1474 To Cor. No. 4, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Schoonover on its north-westerly face and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available. On line 2-3 Little Joe lode of this sur. 1006.1 ft. from Cor. No. 2.

Thence N.  $2^{\circ}$ - $31\frac{1}{2}'$ W.

Var.  $13^{\circ}$ - $40'$ E.

Along line 3-2 of the Little Joe lode of this survey.

300 Easterly end center monument, identical with the location, which is a mound of stone, 2 ft. base, 2 ft. high.

600 To Cor No. 1, the place of beginning.

## MAC

Beginning at Cor. No. 1, identical with the location, and with Cor. No. 4 of the Schoonever lode of this survey, as previously set and described by me. I mark same 1-Mac on its south-westerly face. No bearing trees nor bearing rocks available. The Standard  $\frac{1}{4}$  corner to Sec. 34, T.15S., R.4 E. bears N.  $8^{\circ}-06\frac{1}{2}'$  E., 3418.5 feet distant.

Thence S.  $87^{\circ}-28\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 4-3 of the Schoonever lode of this survey.

1474 To Cor. No. 2, identical with the location and with Cor. No. 3 of the Schoonever lode of this survey, as previously set and described by me. I mark same 2-Mac on its south-easterly face. No bearing trees nor bearing rocks avail.

Thence S.  $2^{\circ}-31\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over level land.

205 Trail, north-westerly and south-easterly.

300 Westerly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 feet high.

600 To Cor No. 3, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Mac on its north-easterly face, and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

Thence N.  $83^{\circ}-21\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over ascending ground.

60 Top of ascent, begin descent.

180 Wash, 3 feet wide, course westerly, begin ascent.

187.1 Cor. No. 2 of the Kershner lode of this survey.

Thence along line 2-1 of the Kershner lode of this survey.

1477.8 To Cor. No. 4, identical with the location, and with Cor. No. 3 of the Little Joe lode of this survey, as previously

set and described by me. I mark same 4-Mac on its north-westerly face. No bearing trees nor bearing rocks avail.

Thence N.  $2^{\circ}31\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'E$ .

Along line 3-2 of the Little Joe lode of this survey.

193.9 Easterly end center monument, identical with the location, which is a mound of stone, 2 feet base, 2 feet high.

493.9 To Cor. No. 1, the place of beginning.

#### DAISY

Beginning at Cor. No. 1, identical with the location, with Cor. No. 3 of the Schoonover lode, and with Cor. No. 2 of the Mac lode of this survey, as previously set and described by me. I mark same 1-Daisy on its south-westerly

face. No bearing trees nor bearing rocks available.

The Stand. Cor. to Secs. 33-34 <sup>7/8 S. 24 E.</sup> N.  $11-22\frac{1}{2}'$  W., 3572.8' dist.

Thence S.  $87^{\circ}-28\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'E$ .

Over descending ground.

35 Wash, 3 feet wide, course southerly, begin ascent.

290 Top of ascent, begin descent. Trail, north-westerly and south-easterly.

385 Wash, 5 feet wide, course southerly, begin ascent.

600 *Top of ascent, begin descent.*

800 Wash, 5 feet wide, course south-easterly, then 30 feet in wash, and begin ascent.

1500 To Cor. No. 2 identical with the location, which is a mound of stone 2 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Daisy on its south-westerly *and surround the pipe with a mound of stone.* face. No bearing trees nor bearing rocks available.

Thence S.  $2^{\circ}-31\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'E$ .

On east slope of hill.

300 Westerly end center monument, identical with the location, which is a mound of stone 3 ft. base, 2 ft. high.

600 To Cor. No. 3, identical with the location, which is a mound of stone 3 ft. base, 2 ft. high. I set an iron pipe 1" in

diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Daisy on its north-easterly face, *and surround the pipe with a mound of stone.* No bearing trees nor bearing rocks available.

U.S. Min. Mon. No. 4 bears S.  $30^{\circ}-26\frac{1}{2}'$  E., 4305.16 ft. dist.

Flag on El Picacho bears S.  $77^{\circ}-44\frac{1}{2}'$  E., 4052.2 ft. dist.

Thence N.  $87^{\circ}-28\frac{1}{2}'$  E.

Var.  $13^{\circ}-40'$  E.

Over descending ground.

625 Wash, 5 feet wide, course south-easterly, begin ascent.

770 Top of ascent, begin descent.

1230 Wash, 5 feet wide, course southerly, begin ascent.

1500 To Cor. No. 4, identical with the location, and with Cor. No. 3 of the Mae lode of this survey, as previously set and described by me. I mark same 4-Daisy on its north-westerly face. No bearing trees nor bearing rocks available.

Thence N.  $2^{\circ}-31\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 3-2 of the Mac lode of this survey.

300 Easterly end center monument, identical with the location, and with the westerly end center monument of the Mae lode, as previously described by me.

600 To Cor. No. 1, the place of beginning.

#### AGNES LODE.

Beginning at Cor. No. 1, identical with the location, and with Cor. No. 2 of the Schoonover lode of this survey, as previously set and described by me. I mark same 1-Agnes on its south-westerly face. No bearing trees nor bearing rocks available. The Standard corner to Secs. 33-34, T.15 S., R. 4 E., bears N.  $13^{\circ}-09'$  W., 2981.4 feet distant.

Thence S.  $87^{\circ}-28\frac{1}{2}'$  W.

Var.  $13^{\circ}-40'$  E.

Along line 4-1 of the Cokespa lode, Lot 40 A.

Over ascending ground.

790 Top of ascent, begin descent.

855 Wash, 5 feet wide, course south-easterly, begin ascent.

- 950 Top of ascent, begin descent.
- 1010 Wash, 5 feet wide, course south-easterly, begin ascent.
- 1166 Cor. No. 1, of the Cokespa lode, Lot 40 A.
- 1210 Trail, northerly and southerly.
- 1500 To Cor. No. 2, identical with the location, which is a md. of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Agnes on its south-easterly *and surround the pipe with a mound of stone.* face. No bearing trees nor bearing rocks available.
- Thence S.  $2^{\circ}$ - $31\frac{1}{2}'$ E.
- Var.  $13^{\circ}$ - $40'$ E.
- Along east slope of hill.
- 300 Westerly end center monument, identical with the location, which is a mound of stone 3 feet base, 2 feet high.
- 600 To Cor. No. 3, identical with the location, and with Cor. No. 2 of the Daisy lode, of this survey, as previously set and described by me. I mark same 3-Agnes on its north-easterly face. No bearing trees nor bearing rocks available.
- Thence N.  $87^{\circ}$  $28\frac{1}{2}'$ E.
- Var.  $13^{\circ}$ - $40'$ E.
- Along line 2-1 of the Daisy lode of this survey.
- 1500 To Cor. No. 4, identical with the location, with Cor. No. 3 of the Schoonover lode, with Cor. No. 2 of the Mac lode, and with Cor. No. 1 of the Daisy lode of this survey, as previously set and described by me. I mark same 4-Agnes, on its north-westerly face.
- No bearing trees nor bearing rocks available.
- Thence N.  $2^{\circ}$ - $31\frac{1}{2}'$ W.
- Var.  $13^{\circ}$ - $40'$ E.
- Along line 3-2 of the Schoonover lode of this survey.
- 300 Easterly end center monument, identical with the location, and with the westerly end center monument of the Schoonover lode of this survey as previously described by me.
- 600 To Cor. No. 1, the place of beginning.

## COKESPA No. 2

Beginning at Cor. No. 1, identical with the location, and with Cor. No. 2 of the Cokespa lode, Lot 40 A, as previously reset and described by me. I mark same 1-Cokespa No. 2 on its south-westerly face. No bearing trees nor bearing rocks available. The Standard corner to Secs. 33-34, T.15 S., R.4 E. bears N.11°-09 3/4'E., 2604.25 feet distant.

Thence S.87°-28 1/2'W.

Var. 13°-40'E.

Over ascending ground.

- 80 Trail, northerly and southerly.
- 410 Top of ascent, begin descent.
- 620 Wash, 5 feet wide, course south-easterly, begin ascent.
- 1450 Top of ascent, begin descent.
- 1500 To Cor. No. 2, identical with the location, which is a md. of stone, 3 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Cokespa No. 2 on its south-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks avail.
- U.S. Min. Mon. No. 4 bears S. 33°-00'E., 627 1/2 ft.*  
*Flag on El Picacho bears S. 65°-07'E., 5734 1/2 ft.*
- Thence S.2°-31 1/2'E.

Var. 13°-40'E.

Over descending ground.

- 300 Westerly end center monument, identical with the location, which is a mound of stone 3 ft. base, 2 ft. high.
- 475 Wash, 2 feet wide course westerly, begin ascent.
- 600 To Cor. No. 3, identical with the location, which is a md. of stone 3 ft. base, 3 ft. high. I set an iron pipe 1" in diameter, 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Cokespa No. 2 on its north-easterly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.
- Thence N.87°-28 1/2'E.

Var. 13°-40'E.

Over ascending ground.

- 350 Top of ascent, begin descent.



- 1166 Intersect line<sup>2-3</sup> of the Agnes lode of this survey, at a point, S.2°-31½'E., 200 feet from Cor. No. 2 of the Agnes lode.
- 1500 To Cor. No. 4, identical with the location, which is a md. of stone 3 ft. base, 3 ft. high. I set an iron pipe, 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Cokespa No. 2 on its north-westerly face, and surround the pipe with a mound of stone. No bearing trees nor bearing rocks available.  

Thence N.2°-31½'W.  
 Var. 13°-40'E.

 Over descending ground.
- 130 Trail, north-westerly and south-easterly.  
 200 *Cor. No. 1, Cokespa lode, Lot 40A, and*  
 300 *Intersect line 1-2 of the Agnes lode of this survey at a point N. 87°-28'E. 334 ft. from Cor. No. 2 of the Agnes lode.*  
 Easterly end center monument, identical with the location, which is a mound of stone 2 feet base, 2 feet high.
- 360 Wash, 5 feet wide, course south-easterly, begin ascent.  
 400 *Westerly end center Cokespa Lode Lot 40A.*  
 600 To Cor. No. 1, the place of beginning.

GLANCE ROAD.

- Beginning at Cor. No. 1, identical with the location, which is a mound of stone, 2 ft. base 2 ft. high, I set an iron pipe 1" in diam. 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap the top of which is marked U.S. Mineral Survey No. 3074. I mark same 1-Glance on its south-easterly face, and surround the pipe with a mound of stone. No bear. trees nor bear. rocks available. The Standard ¼ corner to Sec. 33, T.15 S., R.4 E., bears N.25°-44 3/4'W., 1385.2 feet distant.
- Thence N.87°-28½'E.  
 Var. 13°-40'E.
- Over ascending ground.
- 240 Top of ascent, begin descent.
  - 300 Northerly end center monument identical with the location, which is a mound of stone 2 feet base, 2 feet high.
  - 355 Foot of descent, begin ascent.
  - 460 Top of ascent, begin descent.

600 To Cor. No. 2, identical with the location, which is a md. of stone 2 ft. base, 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 2-Glance on its south-westerly face, and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

Thence S. 25°-46½'E.

Var. 13°-40'E.

Over ascending ground.

150 Top of ascent, begin descent.

740 Wash 3 feet wide, course easterly, begin ascent.

1000 Top of ascent, begin descent.

1500 To Cor. No. 3, identical with the location, which is a md. of stone, 3 ft. base 2 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap, the top of which is marked U.S. Mineral Survey No. 3074. I mark same 3-Glance on its north-westerly face, and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

This corner is on line 1-2 of the Cokespa No. 2 lode at a point S. 87°-28½'W., 300 feet from Cor. No. 1 of the Cokespa No. 2 lode, of this survey.

Thence S. 87°-28½'W.

Var. 13°-40'E.

Along line 1-2 of the Cokespa No. 2 lode of this survey.

Over ascending ground.

110 Top of ascent, begin descent.

300 Southerly end center monument identical with the location, which is a mound of stone 2 feet base, 2 feet high.

320 Wash, 5 feet wide course south-easterly, begin ascent.

600 To Cor. No. 4, identical with the location, which is a md. of stone, 3 ft. base, 3 ft. high. I set an iron pipe 1" in diam., 4 ft. long, driven 2 ft. in the ground, and fitted with a brass cap the top of which is marked U.S. Mineral Survey No. 3074. I mark same 4-Glance on its north-easterly face and surround the pipe with a mound of stone.

No bearing trees nor bearing rocks available.

This corner ~~xxxxxxxx~~ is on line 1-2 of the Cokespa No. 2 lode of this survey, at a point which is S. 87°-28½'W., 900 feet, from Cor. No 1, of the Cokespa No. 2 lode of this survey.

Thence N. 25°-46½'W.

Var. 13°-40'E.

Over ascending ground.

885 Bank of wash.  
890 Wash, 2 feet wide, course south-easterly, and ascend.  
1085 Top of ascent, begin descent.  
1500 To Cor. No. 1, the place of beginning.

---

#### LOCATION.

These claims are ~~approximately~~ located in the S½ of Sec. 2, in Sec. 3, in the E½ of Sec. 4, in Sec. 10 and in the <sup>and the NW¼ of Sec. 12,</sup> N½ of Sec. 11, T. 16 S., R. 4 E. unsurveyed, and are in the Cababi Mining District, Pima County, Arizona.

---

#### ADJOINING CLAIMS.

The Douglas lode, unsurveyed, claimed by the Cababi Mining Company, bounds the Glance lode on the north.

The Ewing lode, unsurveyed, claimed by the Cababi Mining Company, bounds the Glance lode on the west.

The Ewing lode also bounds a portion of the Cokespa No. 2 lode on the north.

The Laura lode, unsurveyed, claimed by the Cababi Mining Company, bounds the Agnes lode and the Daisy lode on the west.

The Littlefield lode, Survey 519, bounds the Bernice lode on the west and on the south.

The Cababi No. 1, the Cababi No. 2, the Cababi No. 3 and <sup>unsurveyed,</sup> claimed by the Cababi Mining Co. the Cababi NO. 4 <sup>^</sup> bound the Hibben Summit and Summit lodes on the west.

The Cababi No. 4 lode, unsurveyed, claimed by the Cababi Mining Comapny, bounds the Garfield lode on the north. The Cokespa lode, Lot 40A, bounds the Agnes and Schoonover lodes on the north. The Picacho lode, Lot No. 39A, bounds the Peak and Doctor lodes on the north.

AREA.		
Name	Conflict acres.	Net area acres.
Sulphide		20.608 <sup>x</sup>
Oxide		20.608 <sup>x</sup>
Garfield No. 2		20.661 <sup>x</sup>
Conduit		20.661 <sup>x</sup>
Wilson		20.661 <sup>x</sup>
Kershner		20.661 <sup>x</sup>
Extension		13.774 <sup>x</sup>
Coyote		13.774 <sup>x</sup>
Deal		20.627 <sup>x</sup>
Doctor		20.627 <sup>x</sup>
Peak		20.627 <sup>x</sup>
Bernice	Area in conflict with Littlefield lode, Sur.No:519, lode, 5.873 Acres.	20.627
Midway		19.019 <sup>x</sup>
Galdys		19.019 <sup>x</sup>
Watkins		19.019 <sup>x</sup>
Base		19.019 <sup>x</sup>
Garfield No. 3		18.987 <sup>x</sup>
Molly No. 3		18.987 <sup>x</sup>
Molly		18.987 <sup>x</sup>
Molly No. 2		20.626 <sup>x</sup>
Conch		20.660 <sup>x</sup>
Dome		19.019 <sup>x</sup>
Triangle	Area in conflict with Molly lode this survey, 9.493 Acres.	18.987
Hibben Summit		19.019 <sup>x</sup>
Summit		19.019 <sup>x</sup>
Garfield		19.019 <sup>x</sup>
Queen Mary		19.808 <sup>x</sup>
Little Joe		20.608 <sup>x</sup>
Off		20.303 <sup>x</sup>
Schoonover		20.303 <sup>x</sup>
Mae		18.508 <sup>x</sup>
Daisy		20.661 <sup>x</sup>
Agnew		20.661 <sup>x</sup>
Cokespa No. 2	Area in conflict with Agnes lode, this survey, 1.534 acres	20.661
Glance		18.983 <sup>x</sup>
Total acerage		<u>18.983<sup>x</sup></u>

## VEINS.

The presumed course of vein in the following lodes is from the easterly end center to the westerly end center by the courses and distances given herewith.

Garfield No. 2	S. 83°-21½'W., 1500 feet.
Conduit	S. 83°-21½'W., 1500 feet.
Wilson	S. 83°-21½'W., 1500 feet.
Kershner	S. 83°-21½'W., 1500 feet.
Extension	S. 83°-21½'W., 1500 feet.
Coyote	S. 83°-21½'W., 1500 feet.
Deal	S. 83°-21½'W., 1500 feet.
Doctor	S. 83°-21½'W. 1500 feet.
Peak	S. 83°-21½'W., 1500 feet.
Bernice	S. 83°-21½'W., 1500 feet.
Midway	S. 83°-21½'W., 1500 feet.
Gladys	S. 83°-21½'W., 1500 feet.
Watkins	S. 83°-21½'W., 1500 feet.
Base	S. 83°-21½'W., 1500 feet.
Garfield No. 3	S. 83°-21½'W., 1500 feet.
Molly No. 3	S. 83°-21½'W., 1500 feet.
Molly	S. 83°-21½'W., 1500 feet.
Molly No. 2	S. 59°-49½'W., 1500 feet.
Conch	S. 59°-49½'W., 1500 feet.
Dome	S. 59°-49½'W., 1380.8 feet.
Triangle	S. 59°-49½'W., 1380.8 feet.
Garfield	S. 83°-21½'W., 1500 feet.
Queen Mary	S. 76°-53'W., 1500 feet.
Mac	S. 87°-28½'W., 1474 feet.
Schoonover	S. 87°-28½'W., 1474 feet.
Off	S. 87°-28½'W., 1474 feet.
Daisy	S. 87°-28½'W., 1500 feet.
Agnes	S. 87°-28½'W., 1500 feet.
Cokespa No. 2	S. 87°-28½'W., 1500 feet.

The presumed course of vein in the following lodes is from the southerly end center to the northerly end center by the courses and distances given herewith.

Summit	N. 29°-38½'W., 1500 feet.
Hibben Summit	N. 29°-38½'W., 1500 feet.
Sulphide	N. 2°-31½'W., 1500 feet.
Oxide	N. 2°31½'W., 1500 feet.
Little Joe	N. 2°-31½'W., 1500 feet.
Glancee	N. 25°-46½'W., 1500 feet.

#### EXPENDITURE ON IMPROVEMENTS.

I ~~heroby~~ certify that the value of the labor and improvements, upon each of these lodes, placed thereon, by the claimants and their grantors, is ~~not less than Five Hundred Dollars (\$500) for each lode, and that the said improvements consist mining work, as follows:~~

#### Sulphide lode.

From southerly end center

No. 1, Discovery shaft, 4x6x10 feet, bears N. 2°-31½'W., 85 feet distant, value \$100

No. 2, Incline shaft, 4x6x100 feet, course bears N. 16°-35'E., 415 ft. dist. S. 84½'W., with drift in bottom of same, course S. 84½'W., 4x6x25 feet value \$2200, ~~(as this work has been~~

done with a view of developing the ground on the Oxide lode as well as the ground on the Sulphide lode, I credit ½ of the value of this work to each of these two lodes.

½ interest in the above incline shaft

~~and drift credited to this lode) \$1100~~

Total for the Sulphide lode \$1200  
\$2300

#### Oxide lode.

From the northerly end center

No. 1, Discovery shaft, 4x6x10 feet, bears S. 2°-31½'E., 1350 feet dist. value \$100

No. 2, Shaft 4x6x10, bears S. 33°E., 280 ft. dist., value \$100

No. 3, Shaft, 4x6x10 feet, bears S. 25°-40'E.,

195 feet distant	Value	\$100
<del>1/2 interest in No. 2, incline shaft and drift of the Sulphide lode credited to this claim</del>	<del>Value</del>	<del>\$1100</del>
		\$ 300
<u>Total for Oxide lode</u>		<u>\$1400</u>

Garfield No. 2 lode.

From Easterly End Center.

No. 1, Discovery Cut, 3x4x35 feet, bears S. 83°-21 1/2'W., 630 feet.	Value	\$200
No. 2, Shaft, 4x6x20 feet, bears, West 640 feet.	Value	\$220
No. 3, Shaft, 4x6x8 feet, bears N. 88°-10'W., 650 feet.	Value	\$80

Conduit lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x10 feet bears S. 83°-21 1/2'W., 250 feet	Value	\$100
--	-------	-------

Wilson lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears S. 83°-21 1/2'W., 1000 feet	Value	\$100
No. 2, Shaft, 4x6x10 feet, bears S. 77°W. 1475 feet.	Value	\$100
No. 3, Shaft, 4x6x80 feet, bears S. 74°-20'W., 1155 feet.	Value	\$1000
No. 4, Shaft, 4x6x100 feet, bears S. 71°-30'W., 1065 feet.	Value	\$1450
No. 5, Shaft, 4x6x30 feet, bears S. 68°-55'W., 990 feet.	Value	\$330
No. 6, Shaft, 4x6x40 feet, bears S. 62°-10'W., 785 feet.	Value	\$460
No. 7 <del>Shaft</del> Cut, 4x3x10 feet, bears S. 55°-50'W., 620 feet.	Value	\$50

No. 8, Shaft, 4x6x6 feet, bears S. 54°-30'W., 585 feet. (timbered)	Value	\$60
No. 9, Shaft, 6x12x275 feet, bears S. 70°-15'W., 1245 feet. (See supplementary Report.)	Value	\$5000

#### Kershner lode.

From Easterly End Center.

No. 1, Discovery Cut, 4x6x10 feet, bears S. 83°-21½'W., 310 feet	Value	\$50
No. 2, Cut, 4x4x70 feet, bears S. 60°-40'W., 735 feet, course of cut N. 8°W.	Value	\$250
No. 3, Shaft, 4x6x50 feet, bears S. 60°-40'W., 140 feet.	Value	\$600
No. 4, Shaft, 4x6x20 feet, bears S. 39°-50'W., 100 feet.	Value	\$210
No. 5, Shaft, 4x6x10 feet, bears S. 14°-45'W., 80 feet.	Value	\$100
Total for Kershner lode		\$1210

#### Extension lode.

From Easterly End Center.

No. 1, Discovery Cut, 4x6x70 feet, course of cut N. 7°W., with shaft 4x6x8 feet at north end of cut, bears S. 83°-21½'W., 15 feet	Value	\$360
<del>½ interest in Shaft and workings of No. 1 of the Bernice lode credited to this claim</del>	<del>Value</del>	<del>\$425</del>
Total for Extension lode		360 \$785

#### Coyote lode.

From Westerly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears N. 83°-21½'E., 100 feet.	Value	\$100
--	-------	-------



## Deal lode

From Westerly End Center Monument

No. 1, Discovery Shaft, 4x6x10 feet, bears

N. 83°-21½'E., 100 ft. dist.

Value \$100

---

 Doctor lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears

S. 83°-21½'W., 50 feet.

Value \$100

---

 Peak lode.

From Westerly End Center.

No. 1, Discovery Cut, 4x15x30 feet, bears

N. 83°-21½'E., 845 feet

Value \$300

No. 2, Shaft, 4x6x10 feet, bears

S. 87°-40'E., 750 feet.

Value \$100

No. 3, Cut, 4x7x16 feet, bears

N. 68°-30'E., 570 feet.

Value \$80

No. 4, Shaft, 4x6x12 feet, bears

N. 34°-05'E., 375 feet.

Value \$120

Total for Peak lode.

\$600

---

 Bernice lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x60 feet, bears

S. 83°-21½'W., 465 feet, with a X-cut

4x6x10 feet, in the bottom of this

shaft, course N. 5°W., Value \$850

~~(As this shaft is in vein matter which~~

~~is extending in the direction of the Ex-~~  
 tension lode, and as the surface of these  
 two lodes are at the same level, the natu-  
 ral procedure would be to develop the  
 ore body from the direction of the Bernice  
 lode in place of sinking another shaft on  
 the Extension lode. I therefore credit  $\frac{1}{2}$   
 of the foregoing shaft and cross-cut to  
 each of these lodes.

$\frac{1}{2}$  interest in the foregoing shaft and

~~cross cut, credited to this lode.) Value \$425~~

No. 2, Shaft, 4x6x15 feet, bears		
N. 64°35'W., 265 feet.	Value	\$150
No. 3, Shaft, 4x6x8 feet, bears		
N. 59°-05'W., 245 feet.	Value	\$80
		\$1080
Total value for Bernice lode.		\$655

Midway lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears		
S. 83°-21 $\frac{1}{2}$ 'W., 50 feet.	Value	\$100

Gladys lode.

From Westerly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears		
N. 83°-21 $\frac{1}{2}$ 'E., 200 feet.	Value	\$100

Watkins lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears		
--	--	--

67.

S. 83°-21½'W., 80 feet. Value \$100

---

Base lode.

From Westerly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears  
N. 83°-21½'E., 125 feet. Value \$100

---

Garfield No. 3, lode.

From Westerly End Center.

No. 1, Discovery Shaft 4x6x10 feet, bears  
N. 83°-21½'E., 180 feet. Value \$100.00

---

Molly No. 3 lode.

From Westerly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears  
N. 83°-21½'E., 300 feet. Value \$80

No. 2, Shaft, 4x6x10 feet, bears  
N. 43°-45'E., 300 feet. Value \$100

No. 3, Shaft, 4x6x35 feet, bears  
N. 43°-45'E., 275 feet. Value \$400

No. 4, Shaft, 4x6x90 feet, bears  
N. 35°-20'E., 280 feet, with  
Drift in bottom of this shaft  
4x6x10 feet, course S. 85°W., and  
X-cut 4x6x10 feet, course N. 10°E.

Value \$1400

Total Molly No. 3 lode

\$1980

---

 Molly lode.

## From Easterly End Center

No. 1, Discovery Shaft, 4x6x20 feet, bears			
S. 83°-21½'W., 180 feet.	Value		\$210
No. 2, Shaft, 4x6x65 feet, bears			
S. 78°-20'W., 210 feet	Value		\$830
No. 3, Shaft, 4x6x10 feet, bears			
N. 36°-30'W., 260 feet dist.	Value	Value	\$100
No. 4, Shaft, 4x6x135 feet, bears			
N. 88°-15'W., 215 feet	Value		\$2450
Drift in bottom of this shaft			
4x6x60 feet course S. 61½°W.	Value		\$420
and drift 4x6x50 feet			
course N. 61½°E.	Value		\$350
			<u>\$3220</u>

~~As this shaft is in vein matter, which is extending in the direction of the Molly No. 2 lode, and as the surface of these veins are at the same elevation, the natural procedure would be to develop the ore body on the Molly No. 2 lode from the direction of the Molly lode, in place of sinking another shaft on the Molly No. 2 lode.~~

~~I therefore credit  $\frac{1}{2}$  of the work on the above shaft and drifts to the Molly lode and  $\frac{1}{2}$  to the Molly No. 2 lode.~~

~~$\frac{1}{2}$  interest in the above shaft and workings credited to this lode.)~~

~~Value \$1610  
\$4350  
\$2740~~

Total value Molly lode

Molly No. 2 lode.

From Westerly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears

N. 59°-49 $\frac{1}{2}$ 'E., 100 feet Value \$100

~~$\frac{1}{2}$  interest in the No. 1 shaft and workings on the Molly lode credited to this lode~~

~~Value \$1610  
\$100  
\$1710~~

Total value Molly No. 2 lode

Dome lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears

S. 59°-49 $\frac{1}{2}$ 'W., 235 feet. Value \$100

No. 2, Shaft, 4x6x45 feet, bears,

S. 59°-49 $\frac{1}{2}$ 'W., 340 feet Value \$520

Drift in bottom of this

shaft, 4x6x50, course S. 60°W. " \$350

and drift 4x6x60 feet

course N. 60°E. " \$420

and cross-cut, 4x6x30 feet,

course N. 30°W. " \$210

\$1500

~~As this shaft is in vein matter, which is extending toward the Conch and Triangle lodes, and as the surface of these lodes are at the same or a higher elevation than the Dome lode, the work being done on the Dome lode will ultimately develop the ore bodies on the Conch and Triangle lodes. I therefore credit one-third of the value of the work in No. 2~~

~~shaft and workings of the Dome lode to the~~

Dome, Coneh and Triangle lodes.

One-third of the value of the above work

~~credited to this lode (credited to the Dome lode)~~

~~Value \$500~~

Total value Dome lode

\$1600

~~Coneh lode.~~

~~From Westerly End Center.~~

~~No. 1, Discovery Shaft, 4x6x10 feet, bears~~

~~N. 59°-49½'E., 100 feet. Value \$100~~

~~One-third of the value of No. 2 shaft and~~

~~workings of the Dome lode, credited to~~

~~this lode. Value \$500~~

~~Total value Coneh lode \$600~~

~~Triangle lode.~~

~~From Westerly End Center.~~

~~No. 1, Discovery Shaft, 4x6x10 feet, bears~~

~~N. 59°-49½'E., 200 feet Value \$100~~

~~One-third of the value of No. 2 shaft and~~

~~workings of the Dome lode, credited to~~

~~this lode. Value \$500~~

~~Total value Triangle lode. \$600~~

~~Hibben Summit lode.~~

~~From Northerly End Center.~~

~~No. 1, Discovery Shaft, 4x6x70 feet, bears~~

~~S. 29°-38½'E., 295 feet. Value \$900~~

~~No. 2 Shaft, 4x6x10 feet, bears~~

~~S. 38°-40'E., 355 feet. Value \$100~~

~~Total value Hibben Summit lode \$1000~~

~~Summit lode.~~

~~From Northerly End Center.~~

~~No. 1, Discovery Shaft, 4x6x10 feet, bears~~

~~S. 29°-38½'E., 1200 feet Value \$100~~

~~No. 2, Shaft, 4x6x14 feet bears~~

~~S. 40°-05'E., 655 feet. Value \$140~~

---

Garfield lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears		
S. 83°-21½'W., 100 feet.	Value	\$100
No. 2, Shaft 4x6x10 feet, bears		
S. 89°-35'W., 1005 feet	Value	\$100

---

Queen Mary lode.

From Westerly End Center.

No. 1, Discovery Shaft, 4x6x60 feet, bears		
N. 76°-53'E., 150 feet.	Value	\$750
No. 2, Shaft, 4x6x10 feet, bears		
N. 76°-53'E., 100 feet.	Value	\$100
No. 3, Shaft, 4x6x12 feet, bears		
N. 52°-20'E., 160 feet.	Value	\$120
No. 4, Shaft, 4x6x10 feet, bears		
N. 66°-50'E., 150 feet.	Value	\$100
Total value Queen Mary lode		\$1070

---

Little Joe lode.

From Southerly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears		
N. 2°-31½'W., 100 feet.	Value	\$100
No. 2, Shaft, 4x6x10 feet, bears		
N. 40°-55'E., 285 feet.	Value	\$100

## Off lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears		
S. 87°-28½'W., 640 feet.	Value	\$100
No. 2, Shaft, 4x6x8 feet, bears		
S. 78°-40'W., 645 feet.	Value	\$80

## Schoonover lode.

From Easterly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears		
S. 87°-28½'W., 615 feet.	Value	\$100

## Mac lode.

From Westerly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears		
N. 87°-28½'E., 1125 feet.	Value	\$100
No. 2, Shaft, 4x6x16 feet, bears		
N. 85°-40'E., 1130 feet.	Value	\$170
No. 3, Shaft, 4x6x8 feet, bears		
S. 4°-05'E., 170 feet.	Value	\$80

## Daisy lode.

From Westerly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears		
N. 87°-28½'E., 1400 feet.	Value	\$100
No. 2, Shaft, 4x6x10 feet, bears		
S. 50°-05'E., 125 feet.	Value	\$100



Agnes lode.

From Westerly End Center.

No. 1, Discovery Shaft, 4x6x10 feet, bears N. 87°-28½'E., 335 feet.	Value	\$100
No. 2, Shaft, 4x6x6 feet, bears N. 70°E., 970 feet.	Value	\$60
No. 3, Shaft, 4x6x20 feet, bears N. 81°-10'E., 730 feet.	Value	\$210
No. 4, Shaft, 4x6x10 feet, bears S. 78°-50'E., 590 feet.	Value	\$100
No. 5, Shaft, 4x6x12 feet, bears S. 75°-20'E., 620 feet.	Value	\$120
No. 6, Shaft, 4x6x10 feet, bears N. 71°-25'E., 345 feet.	Value	\$100
No. 7, Shaft, 4x6x6 feet, bears N. 66°E., 270 feet.	Value	\$60
No. 8, Shaft, 4x6x3 feet, bears N. 62°-40'E., 310 feet.	Value	\$20
No. 9, Shaft, 4x6x10 feet, bears N. 48°-45'E., 270 feet.	Value	\$100
Total value Agnes lode		\$870

Cokespa No. 2 lode.

From Easterly End Center.

No. 1, Discovery Cut, 4x15x70 feet, bears S. 87°-28½'W., 325 feet, course of cut, S. 3°E.	Value	\$1400
At southerly end of this cut, beg- ins a tunnel 4x6x30 feet, course of tunnel S. 37°E.	Value	\$210
Total value Cokespa No. 2 lode		\$1610

## Glance lode.

From Northerly End Center.

No. 1, Discovery Cut, 4x6x10 feet, bears

S. 25°-46½'E., 1250 feet. Value \$50

No. 2, Shaft, 4x6x10 feet, bears

S. 13°-35'E., 260 feet. Value \$100

No. 3, Cut, 4x10x<sup>15</sup> feet and tunnel

4x6x3 feet, bears S. 27°25'E.,

1325 feet. Course of cut and

tunnel easterly. Value ~~\$120~~ \$120

No. 4, Shaft, 4x6x8 feet, bears

S. 31°30'E., 1340 feet. Value \$80

No. 5, Shaft, 4x6x12 feet, bears

S. 30°-45'E., 1390 feet. Value \$120

No. 6 Cut, 4x10x50 feet, with shaft

4x6x10 feet at end of cut,

bears S. 54°-15'W., 90 feet. Value ~~\$480~~ \$480Total value Glance lode ~~\$950~~ \$950

## INSTRUMENTS.

This survey was made with a Seelig & Sons transit, reading to 30 seconds on the horizontal limb. The tapes used were a 300 foot steel ribbon tape, graduated to (tenths of a foot, and a 100 foot steel ribbon tape, graduated to hundredths of a foot.

## POLARIS OBSERVATIONS.

At 2h45½m A.M., June 2, 1913, l.m.t., I observe Polaris at Eastern elongation, and mark the line thus established by driving an iron pin in the ground 600 feet north of Cor. No. 3, of the Sulphide lode. At 7h 15m A.M., June 3, 1913, I deflect, from the line previously marked, 1°-21½' to the west to the true meridian and from the true meridian, I deflect 2°-31½' to the west to line 2-3 of the Sulphide lode, and from the line thus determined are deflected the courses of this survey.

At 1h 31m, A.M., l.m.t., June 21, 1913, at eastern elongation, and mark the line thus established by driving an iron pin in the ground 400 feet north of Cor. No. 4 of

the Garfield lode, at 8h 00m , A. M., l.m.t., June 22, 1913  
I deflect from the line so marked,  $1^{\circ}-21\frac{1}{2}'$  to the west,  
and from the true meridian, thus established, I deflect  
 $96^{\circ}-38\frac{1}{2}'$  to the west, on Line 1-2 of the Garfield lode,  
which agrees with my course of  $S.83^{\circ}-21\frac{1}{2}'W.$ , for that  
line.

---

Note:- The errors existing as to the difference between  
the various discoveries, as found on the ground, and as  
given in the location notices, together with the position  
given for these claims, with relation to U. S. Mineral  
Monument No. 4, are due to errors in the location notices.

---

Edgar C. Dietrich

U.S. Mineral Surveyor.

Survey commenced June 2, 1913.

Survey completed June 22, 1913.

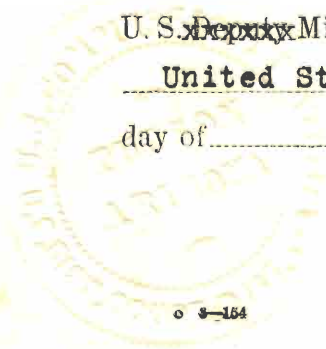
FINAL OATH OF U. S. ~~DEPUTY~~ MINERAL SURVEYOR

I, Edgar C. Dietrich, U. S. ~~Deputy~~ Mineral Surveyor, do solemnly swear that, in pursuance of instructions received from the United States Surveyor General for Arizona, dated May, 22, 1913, I have, in strict conformity to the laws of the United States, the official regulations and instructions thereunder, and the instructions of said Surveyor General, faithfully and correctly executed the survey of the Mining Claim of Cababi Mining Co., known as the Sulphide, Oxide, Garfield No.2, Conduit, Wilson, Kershner, Extension, Coyote, Deal, Doctor, Peak, Bernice, Midway, Gladys, Watkins, Base, Garfield No.3, Molly, Molly No.2, Conch, Dome, Triangle, Hibben Summit, Garfield, Queen Mary, Little Joe, Off, Schoonover, Mac, Daisy, Agnes, Cokespa No.2, Glance, Molly No.3, Summit. situate in Cababi Mining District, Pima County, Arizona, in Sections 2-3-4-10-11-12, Township No. 16 S., Range No. 4 E., G.&S.R.B. & M. unsur. and designated as Survey No. 3074, as represented in the foregoing field notes, which accurately show the boundaries of said mining claim as distinctly marked by monuments on the ground, and described in the attached copy of the location certificate, which was received by me from the Surveyor General with said instructions, and that all the corners of said survey have been established and perpetuated in strict accordance with the law, official regulations and instructions thereunder; and I do further solemnly swear that the foregoing are the true and original field notes of said survey and my report therein, and that the labor expended and improvements made upon said mining claim by claimant or its grantors are as therein fully stated, and that the character, extent, location and itemized value thereof are specified therein with particularity and full detail, and that no portion of said labor or improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

*Edgar C. Dietrich*  
 U. S. ~~Deputy~~ Mineral Surveyor.

Subscribed and sworn to by the said Edgar C. Dietrich  
 U. S. ~~Deputy~~ Mineral Surveyor, before me James R. Dunseath,  
United States Commissioner this 2nd  
 day of October, 1913.

*James R. Dunseath*  
 U. S. Commissioner  
 District of Arizona, residing at  
 Tucson, Arizona



# FINAL OATHS FOR SURVEYS.

## LIST OF NAMES.

A list of the names of the individuals employed by Edgar C. Dietrich,

United States ~~Deputy~~ Mineral Surveyor, to assist in running, measuring, and marking the lines, corners, and boundaries described in the foregoing field notes of the survey of the mining claim<sup>s</sup> of

Cababi Mining Co

known as the Sulphide, Oxide, Garfield No. 2, Conduit, Wilson, Kershner, Extension, Coyote, Deal, Doctor, Peak, Bernice, Midway, Gladys, Watkins, Base, Garfield No. 3, Molly No. 3, Molly, Molly No. 2, Conch, Dome, Triangle, Hibben Summit, Summit, Garfield, Queen Mary, Little Joe, Off, Schoonover, Mae, Daisy, Agnes, Cokespa No. 2, and the @lance, and showing the respective capacities, ~~XXXXXX~~ in which they acted.

James D. Sullivan, Chainman.

James S. Mills, Chainman. ~~XXXXXX~~

, Flagman.

## FINAL OATHS OF ASSISTANTS.

We, James D. Sullivan and James S. Mills

and \_\_\_\_\_, do solemnly swear that we assisted \_\_\_\_\_

Edgar C. Dietrich, United States ~~Deputy~~ Mineral Surveyor, in marking the corners and surveying the boundaries of the mining claim of \_\_\_\_\_

Cababi Mining Co

known as the SULPHIDE and thirty-four other lodes named above,

represented in the foregoing field notes as having been surveyed by said deputy mineral surveyor and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, faithfully and correctly executed, and the corner and boundary monuments established according to law and the instructions furnished by the United States Surveyor-General for Arizona

James D. Sullivan, Chainman.

James S. Mills, Chainman.

, Azman.

, Flagman.

Subscribed and sworn to by the above-named persons before me this 2nd

day of October, 1913., 1913

James D. Sullivan  
U.S. Commissioner  
District of Arizona, residing  
at Tucson, Arizona.

APR 14 1914 79

MINERAL SURVEY No. 3074.

SUPPLEMENTAL REPORT OF IMPROVEMENTS.

-----oOo-----

I hereby certify that the value of the labor performed and improvements made upon or for the benefit of the several lodes embraced in Mineral Survey No. 3074, by the claimant or its grantors, is not less than \$500.00 for each claim, and that the said improvements, in addition to those which were reported at the time of making the survey, consist of the following:-

WILSON LODE.

From the easterly end center monument,

No. 9, Shaft 6x12x350 feet, bears

S. 70°-15'W., 1245 feet/ Value \$10000

In this shaft at the 85 foot level,

a drift 4x6x90 feet, course N. 23°W. Value 900

At the 105 foot level, a drift

4x6x75 feet, course N. 23°W. value 750

At the 130 foot level a 4x6' drift

as follows; N. 29°W., 20 ft.; thence

N. 55°E., 50 ft. to point A; thence

S. 80°E., 30 ft.; thence N. 10°E., 20 ft.

From point A, N. 10°E. 60 ft. Value 2000

At the 215 foot level a 4x6' drift

as follows; N. 58°E., 30 ft., thence N. 32°W., ~~60 ft~~

60 ft., to point B; thence N. 58°E.,

120 ft. to point C; thence N. 58°E.,

60 ft.) From point B, S. 58°W., 150 ft.

From point C, N. 32°W., 40 ft. Value 5000

At the 340 foot level a 4x6' drift

as follows; N. 23°W., 85 ft.; thence

N. 8¼°E., 28 ft.; thence N. 30°-05'E.,

90 feet. Value 2000

Total value of this shaft and drifts \$20650

This shaft being centrally located and all of the drifts therefrom being below the surface of all the other claims in this group, it is therefore a practicable and feasible

working shaft for the entire group and also for the Pica-cho lode, Lot 39A, and for the Cokespa lode, Lot 40A, as by drifting and cross-cutting from this shaft, in different directions, towards and under the various claims of this group, the entire group may be advantageously developed and the ore extracted therefrom. The Garfield No. 3, Mac, Sulphide, Oxide, Glance, Watkins, Deal, Conduit, Peak and Triangle lodes were located January 18, 1913, after the partial construction of said common improvement; however for each of said claims an added value of not less than \$500 has been expended in this common improvement since January 18, 1913. (See affidavit of S. G. McWade, General Manager, Cababi Mining Co., submitted herewith).

This improvement is therefore a common improvement for the benefit of each of the lodes of this group, and also for the Picacho lode, Lot 39A, and for the Cokespa lode, Lot 40A, and a 1/37th undivided interest of the total value of this improvement or \$558.11 is therefore accredited to each of the lodes above mentioned.

#### OFF LODE.

From the easterly end center monument;

No. 3, Shaft 4x6x10 feet bears		
S. 87°-28½'W., 515 feet.	Value	\$100
No. 4, Shaft, 4x6x10 feet, bears		
N. 85°-50'W., 520 feet.	Value	\$100

#### SCHOONOVER LODE.

From the easterly end center monument;

No. 2, Open Cut 4x12x12 feet bears		
S. 87°-28½'W., 200 feet.	Value	\$240
No. 3, Shaft, 4x6x6 feet, bears		
S. 47°-40'W., 155 feet.	Value	\$60

#### Sulphide Lode.

From the southerly end center monument;

No. 3, Shaft, 4x6x22 feet, bears		
N. 2°-31½'W., 900 feet.	Value	\$225

#### DOCTOR LODE.

From the westerly end center monument;

No. 2, Shaft, 4x6x38 feet, bears

N. 83°-21½'E., 100 feet.

Value \$400

SUMMIT LODE.

From the northerly end center monument;

No. 3, Shaft, 4x6x10 feet, bears

S. 29°-38½'E., 300 feet.

Value \$100

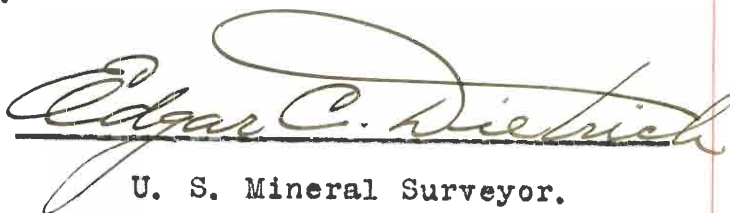
DAISY LODE.

From No. 2 shaft, an open cut 4x10 feet

has been driven North 20 feet

Value \$300

Dated April 11, 1914.

  
U. S. Mineral Surveyor.

State of Arizona )  
County of Pima ) ss.

Subscribed and sworn to, by the said Edgar C. Dietrich, before me, a Notary Public, in and for the County of Pima, State of Arizona, this 11th day of April, 1914, A. D.



Notary Public.

My commission expires



In the Matter of the Application of CABABI MINING CO., a corporation, for United States Patent to the Queen Mary and Thirty-four other lodes in the Cababi Mining District, Pima County, Arizona. Mineral Survey No. 3074. ) AFFIDAVIT OF WORK AND ) LABOR PERFORMED AT ) VARIOUS TIMES ON THE ) MAIN WORKING SHAFT ) OF WILSON LODE. )

Ar 14. 1074

STATE OF ARIZONA, )  
 ) ss.  
 County of Pima. )

S. C. McWADE, of lawful age, being first duly sworn, deposes and says that he is now and has been at all of the times hereinafter mentioned, the General Manager of Cababi Mining Co., a corporation, and, as such General Manager, has had complete charge of all work and labor done and performed on the Wilson Lode Mining Claim, one of the claims embraced in said above described mineral survey No. 3074; that from February 1st, 1909 to March 1st, 1911, the main working shaft on said Wilson Lode was sunk to a depth of 215 feet, said shaft being a double compartment shaft and timbered and lagged throughout, and that cross cuts and drifts aggregating 990 feet in length, in size 4 x 6 feet, were opened at a cost of approximately Thirty Thousand (\$30,000.00) Dollars; that from March 1st, 1911, to January 1st, 1913, all work upon the said shaft and claim, excepting assessment work thereon, was closed down: That from January 1st, 1913, to about January 25th, 1913, the work done consisted of unwatering, clearing and repairing the workings already constructed: That from January 25th, 1913, up to March 1st, 1914, said main working shaft above described, on said Wilson Lode, was sunk to an additional depth of 135 feet, making a total, at said date, of 350 feet in depth, and being a double compartment shaft, timbered and lagged throughout, and that cross cuts and drifts aggregating 450 feet were opened on said shaft during said time, at a cost of approximately Twenty-five Thousand (\$25,000.00) Dollars.

*S. C. McWade*  
 -----

Subscribed and sworn to before me this 1<sup>st</sup> day of April,  
1914.

My Commission expires December 15, 1917.

G. H. Langworthy

Notary Public.

STATE OF ARIZONA, }  
COUNTY OF PIMA. } ss.

I, ..... P. E. Howell, ..... County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
Of Notice of Location of the Sulphide Mining Claim,

.....  
.....  
as appears of record now in my office in Book . T. T. Records of Mines, Pages... 167.....

IN WITNESS WHEREOF, I have hereunto set my hand  
and affixed my official seal, at my office in Tucson,  
this ..... 8th. .... day of

..... April, ....., A. D. 191.. 3.  
*P. E. Howell*  
County Recorder of Pima County, Arizona.

NOTICE OF MINING LOCATION.  
LODE CLAIM.

85  
MAR 13 1913

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Sulphide Mining Claim situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913,

The length of this claim is 1500 feet and I claim 100 feet in a southerly direction and 1400 feet in a northerly direction from the center of the discovery at which this notice is posted lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the south to the north.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 2200 feet in a north-easterly direction from Mineral Monument No. 4, and adjoins the Conduit lode on the north and the Oxide lode on the east.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a monument of stone at a point in a southerly direction 100 feet from the center of the discovery (at which this notice is posted) being in the center of the southerly end line of said claim; thence easterly 300 feet to a stake being at the south-easterly corner of said claim; thence northerly 1500 feet to a stake being at the north-easterly corner of said claim; thence westerly 300 feet to a stake being at the center of the northerly end line of said claim; thence westerly 300 feet to a stake being at the north-westerly corner of said claim; thence southerly 1500 feet to a stake being at the south-westerly corner of said claim; thence easterly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled, "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all of the amendments thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Baker March 6,  
1913, at 11-40 A. M.

P. E. Small  
County Recorder.

by R. M. Shibel  
Deputy.

*Book T T Records of Mines, page 167.*

STATE OF ARIZONA, }  
COUNTY OF PIMA. } ss.

I, ..... P. E. Howell, ..... County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
Of Notice of Location of the Oxide Mining Claim,

.....  
.....  
as appears of record now in my office in Book T. T. Records of Mines, Pages 168

IN WITNESS WHEREOF, I have hereunto set my hand

and affixed my official seal, at my office in Tucson,

this ..... 8th. .... day of

..... April, ...., A. D. 1913.

*P. E. Howell*

County Recorder of Pima County, Arizona.

MAY 13 1913

NOTICE OF MINING LOCATION.  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Oxide Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by, S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913.

The length of this claim is 1500 feet and I claim 1350 feet in a northerly direction and 150 feet in a southerly direction from the center of the Discovery, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the south to the north.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 1800 feet in a north-easterly direction from U. S. Mineral Monument No. 4 and adjoins the Conduit Lode on the north.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a monument of stone, at a point in a southerly direction 150 feet from the discovery (at which this notice is posted) being in the center of the southerly end line of said claim; thence easterly 300 feet to a stake being at the south-easterly corner of said claim; thence northerly 1500 feet to a stake being at the north-easterly corner of said claim; thence westerly 300 feet to a mound of stone being at the center of the northerly end line of said claim; thence westerly 300 feet to a stake being at the northwesterly corner of said claim; thence southerly 1500 feet to a stake being at the south-westerly corner of said claim; thence easterly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all acts amendatory thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Fisher March 6, 1913, at 11:44 A. M.

P. E. Howell  
County Recorder.

L. M. Shickell  
Deputy.

*Book of Records of Mines, page 168.*

## NOTICE OF MINING LOCATION.

## LODE CLAIM.

JAN 13 1913

## TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Garfield No. 2 Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by George H. Richey a citizen of the United States, <sup>of America</sup> the undersigned, on the 1st day of January 1909.

The length of this claim is 1500 feet and I claim 750 feet in an Easterly direction and 750 feet in a Westerly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the East to the West.

The claim is situated and located in the Cababi Mining District, in Pima County, in <sup>the territory of</sup> Arizona, about 3/4 of a mile in an Easterly direction from Picacho Peak and U. S. Patented mine Picacho.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an Easterly direction 750 feet from the center of the discovery shaft (at which this notice is posted) being in the center of the East end line of said claim; thence Southerly 300 feet to a mound of stones being the S. E. corner of said claim; thence Westerly 1500 feet to a mound of stones being at the S. W. corner of said claim; thence Northerly 300 feet to a mound of stones at the center of the West end ~~line~~ of said claim; thence Northerly 300 feet to a mound of stones being at the N. W. corner of said claim; thence ~~Northerly~~ <sup>Easterly</sup> 750 feet to a mound of stones being at the N. E. corner of said claim; thence Southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and acts amendatory thereof.

Dated and posted on the ground this 1st day of January 1909.

George H. Richey

Filed & recorded at request of Tom K. Richey Feb-1-1909 at -2-P.M.  
Ben Heney County Recorder  
by L. M. Shibell, deputy.

State of Arizona, )

- ss.

County of Pima. )

I, P. E. Howell, County Recorder in and for the County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy of the location notice of George H. Richey, for the Garfield No. 2 Mining Claim, as appears of record now in my office in Book NN of Records of Mines, at Page 726.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my official seal, at my office in Tucson, this 8th day of March, A. D. 1913.


P. E. Howell  
County Recorder of Pima County, Arizona.

STATE OF ARIZONA, }  
COUNTY OF PIMA. } ss.

I, ..... P. E. Howell, ..... County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
Of Notice of Location fo the Conduit Mining Claim,

.....  
.....  
as appears of record now in my office in Book T. T. Records of Mines, Pages. .... 166 .....

IN WITNESS WHEREOF, I have hereunto set my hand  
and affxed my official seal, at my office in Tucson,  
this ..... 8th. .... day of

..... April, ...., A. D. 191 .. 3.  
  
County Recorder of Pima County, Arizona.



MAY 13 1913

NOTICE OF MINING LOCATION.  
LODE CLAIM.

---

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Conduit Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913.

The length of this claim is 1500 feet and I claim 1100 feet in an easterly direction and 400 feet in a westerly direction from the center of the Discovery, at which this notice is posted, lengthwise of the claim, together 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the west to the east.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 1400 feet in a north-easterly direction from U. S. Mineral Monument No. 4<sup>th</sup> and is bounded on the north by the Oxide and Sulphide Lodes, on the east by the Garfield No. 2 Lode, the Picacho Lode (Patented) on the south, and on the west by the Wilson Lode.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in a westerly direction 400 feet from the center of the discovery (at which this notice is posted) being in the center of the westerly end line of said claim; thence southerly 300 feet to a stake being at the south-westerly corner of said claim thence easterly 1500 feet to a stake being at the south-easterly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the easterly end line of said claim; thence northerly 300 feet to a stake being at the north-easterly corner of said claim; thence westerly 1500 feet to a stake being at the north-westerly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona entitled "An Act to Revise and Codify the Laws of the Territory of Arizona", approved March 16, 1901, and all acts amendatory thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of  
March 6, 1913, at 11:40 a. m.

Tom H. Richey  
E. Howell  
County Recorder.

by R. M. Shible  
Deputy.

Book P. L. Records of Mines, page 166.

NOTICE OF MINING LOCATION.

LODE CLAIM.

MAR 13 1913

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Wilson Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, a citizen of the United States the undersigned, on the 1 day of January 1909.

The length of this claim is 1500 feet and I claim 500 feet in a Westerly direction and 1000 feet in an Easterly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the East to the West.

The claim is situated and located in the Cababi Mining District, in Pima County, in <sup>the Territory of</sup> Arizona, about 500 feet ~~northwesterly~~ in a Northerly direction from Picacho Peak and lying and adjoining U. S. Pat. Mine on North Side the north line of Picacho being the south line of the claim.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at - a mound of stones at a point in an Easterly direction 500 ~~feet East~~ feet from the center of the discovery shaft (at which this notice is posted) being in the center of the East end line of said claim; thence South --- feet to a mound of stones ~~at~~ being the S.E. corner of said claim; thence Westerly 1500 feet to a mound of stones being at the S. ~~E.~~ W. corner of said claim; thence North~~west~~ 300 feet to a mound of stones ~~being~~ at the center of the West end ~~line~~ of said claim; thence North~~west~~ 300 feet to a mound of stones being at the N. W. corner of said claim; thence Easterly 1500 feet to ~~the place~~ a mound of stones ~~being~~ at the N. E. corner of said claim; thence South~~west~~ 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, ~~and all acts amendatory thereof.~~

Dated and posted on the ground this 1st day of January 1909

Witness

G. H. Richey

S. G. McWade

Filed & recorded at request of Tom K. Richey Feb, 1-1909 at -2-P.M.  
Ben Heney County Recorder  
by L. M. Shibell, deputy.

State of Arizona, )

- ss.

County of Pima. )

I, P. E. Howell, County Recorder in and for the County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy of the location notice of S. G. McWade for the Wilson Mining Claim, as appears of record now in my office in Book NN, of Records of Mines, at Page 731.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my official seal, at my office in Tucson, this 8th day of March, A.D. 1913.

County Recorder of Pima County, Arizona.

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Kershner Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 181

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.  
P. E. Howell  
County Recorder of Pima County,  
Arizona,

Amended

March 13, 1913

NOTICE OF MINING LOCATION.

LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Kershner Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, a citizen of the United States, for the Cababi Mining Co., the undersigned, on the 1st day of March, 1913.

The length of this claim is 1500 feet, and I claim 50 feet in an easterly direction and 1450 in a westerly direction from the center of the Discovery, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 900 feet in a north-westerly direction from Mineral Monument No. 4 and adjoins the Extension Mining Claim, on the north.

The surface boundaries of the claim are located upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction, 50 feet from the center of the discovery (at which this notice is posted), being in the center of the easterly end line of said claim; thence southerly 300 feet to a mound of stone being the south-easterly corner of said claim; thence westerly 1500 feet to a mound of stone being at the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone at the center of the westerly end line of said claim; thence northerly 300 feet to a mound of stone being at the north-westerly corner of said claim; thence easterly 1500 feet to a mound of stone being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona", approved March 16, 1901, and all the amendments thereto.

This is an amended Location Notice of the Kershner Mining Claim, located by S. G. McWade, on the 20th day, of July, 1910, and recorded in Book QQ, Records of Mines, at Page 223, in the office of the County Recorder of the said county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade

for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6, 1913, at 11:40 A. M.

P. E. Howell  
County Recorder.

by L. M. Shible  
Deputy.

*Book T Records of Mines, page 181.*

STATE OF ARIZONA,

COUNTY OF PIMA

} ss.

I, P. E. Howell, County Recorder in and for the  
 County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Extention Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 180

IN WITNESS WHEREOF, I have hereunto set my

hand and affixed my official seal, at my office

in Tucson, this 8th. day of

April, A. D. 1913.

*P. E. Howell*

County Recorder of Pima County,  
 Arizona,

7  
95  
March 3 1913

AMENDED  
NOTICE OF MINING LOCATION.  
LODE CLAIM.

---

TO ALL WHOM IT MAY CONCERN:

This mining Claim, the name of which is the Extension Mining Claim, situated on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration, by S. G. McWade, a citizen of the United States, the undersigned, for the Cababi Mining Co. on the 1st day of March, 1913.

The length of this claim is 1500 feet, and I claim 100 feet in an easterly direction and 1400 feet in a westerly direction from the center of the Discovery at which this notice is posted, lengthwise of the claim, together with 200 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, ~~about~~ in Pima County, State of Arizona, about 400 feet in a north westerly direction from Mineral Monument No. 4, and adjoins, on the west the Picacho Patented Mining Claim.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction 100 feet from the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 200 feet to a mound of stone at the south-easterly corner of said claim; thence westerly 1500 feet to a mound of stone being at the south-westerly corner of said claim; thence northerly 200 feet to a mound of stone being at the center of the westerly endline of said claim; thence northerly 200 feet to a mound of stone being at the north-westerly corner of said claim; thence easterly 1500 feet to a mound of stone at the north-easterly corner of said claim; thence southerly 200 feet to the place of beginning.

All done under Chapter Six, Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all of the amendments there to.

This is an amended Location Notice of the Extension Mining Claim, located by S. G. McWade, on the 20th day of July, 1910, and recorded ~~xxx~~ in Book QQ, of Records of Mines, at Page 224, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6,  
1913, at 11-40 A. M.

P. E. Howell  
County Recorder.

by R. M. Shibley  
Deputy.

*Book P of Records of Mines, page 180.*

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Coyote Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 177

IN WITNESS WHEREOF, I have hereunto set my

hand and affixed my official seal, at my office

in Tucson, this 8th, day of

April, A. D. 1913.

*P. E. Howell*

County Recorder of Pima County,  
Arizona,

6

MAR 13 1913

AMENDED  
NOTICE OF MINING LOCATION.  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Coyote Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States for the Cababi Mining Co., on the 1st day of March, 1913.

The length of this claim is 1500 feet and I claim 750 feet in an easterly direction and 750 feet in a westerly direction from the center of the Discovery at which this notice is posted, lengthwise of the claim, together with 200 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 2400 feet in an easterly direction from Mineral Monument No. 4 and is an easterly extension of the Picacho Patented Mining Claim.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction 750 feet from the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 200 feet to a mound of stone being at the south-easterly corner of said claim; thence westerly 1500 feet to a mound of stone at the south-westerly corner of said claim; thence northerly 200 feet to a mound of stone being at the center of the westerly end line of said claim; thence northerly 200 feet to a mound of stone being at the north-westerly corner of said claim; thence easterly 1500 feet to a mound of stone being at the north-easterly corner of said claim; thence southerly 200 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona", approved March 16, 1901.

This is an amended Location Notice of the Coyote Mining Claim, located by S. G. McWade, on the 20th day of July 1910, and recorded in Book QQ, of Records of Mines, at Page 225, in the office of the County Recorder of the

aforsaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

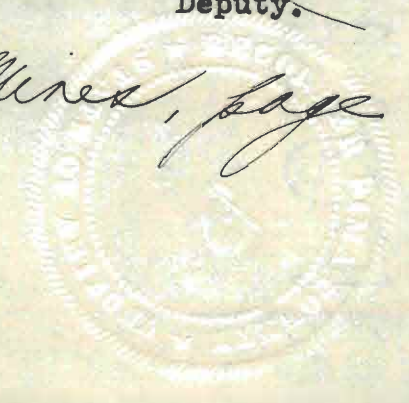
S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom A. Risher March 6, 1913, at 11:50 A.M.

P. E. Howell  
County Recorder.

by L. M. Shibe  
Deputy.

Book ST Records of Mines, page 177.





STATE OF ARIZONA, }  
COUNTY OF PIMA. } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
Of Notice of Location of the Deal Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 164

IN WITNESS WHEREOF, I have hereunto set my hand  
and affixed my official seal, at my office in Tucson,  
this 8th. day of

April, A. D. 1913.  
*P. E. Howell*  
County Recorder of Pima County, Arizona.

NOTICE OF MINING LOCATION.  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Deal Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913.

The length of this claim is 1500 feet and I claim 1000 feet in an easterly direction and 500 feet in a westerly direction from the center of the Discovery, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the west to the east.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 2400 feet in an easterly direction from U. S. Mineral Monument No. 4, and adjoins the Coyote Lode on the south, the Gladdys Lode on the north and the Doctor Lode on the east.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in a westerly direction 500 feet from the center of the discovery (at which this notice is posted) being in the center of the westerly end line of said claim; thence southerly 300 feet to a stake being at the south-westerly corner of said claim; thence easterly 1500 feet to a stake being at the south-easterly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the easterly end line of said claim; thence northerly 300 feet to a stake being at the ~~west~~ north-easterly corner of said claim; thence westerly 1500 feet to a stake being at the north-westerly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all acts amendatory thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of  
March 6, 1913, at 11:40 A. M.

Joseph H. Rippe  
C. E. Howell  
County Recorder.  
by R. M. Shihell  
Deputy

Book of Records of Mines, page 164.

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Doctor Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 178

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th day of  
April, A. D. 1913.

P. E. Howell  
County Recorder of Pima County,  
Arizona,

MAR 13 1913

AMENDED  
NOTICE OF MINING LOCATION,  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Doctor Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade and Geo. H. Richey, the undersigned, citizens of the United States, on the 1st day of March, 1913, for the Cababi Mining Co.

The length of this claim is 1500 feet and we claim 200 feet in an easterly direction and 1300 feet in a westerly direction from the center of the Discovery at which this notice is posted lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposits and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 900 feet in an easterly direction from Mineral Monument No. 4 and adjoins the Picacho Patented Mining Claim on the south.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction 200 feet from the center of the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 300 feet to a mound of stone being at the south-easterly corner of said claim; thence westerly 1500 feet to a mound of stone being at the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the westerly end line of said claim; thence northerly 300 feet to a mound of stone being at the north-westerly corner of said claim; thence easterly 1500 feet to a mound of stone being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all the amendments thereof.

This is an amended Location Notice of the Doctor Mining Claim, located by S. G. McWade and Geo. H. Richey on the 15th day of May 1909, and recorded in Book 00, of Records of Mines at Page 258, in the office of the Pima County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice ~~is~~ is made and posted to ~~correct~~ correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade

Geo. H. Richey  
for the Cababi Mining Co.

Filed and recorded at the request of  
1913, at 11-40 A. M.

Geo. H. Richey March 6,

P. E. Howell County Recorder  
By R. M. Shibell Deputy.

Book 11 Records of Mines, page 178.

STATE OF ARIZONA, }  
COUNTY OF PIMA. } ss.

I, ..... P. E. Howell, ..... County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
..... Of Notice of Location of the Peak Mining Claim, .....

.....  
.....  
as appears of record now in my office in Book T. T. Records of Mines, Pages ..... 165 .....

IN WITNESS WHEREOF, I have hereunto set my hand  
and affixed my official seal, at my office in Tucson,  
this ..... 8th. .... day of

..... April, ....., A. D. 191..3.  
.....  
County Recorder of Pima County, Arizona.

MAR 13 1913

NOTICE OF MINING LOCATION.  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Peak Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913.

The length of this claim is 1500 feet and I claim 750 feet in a westerly direction and 750 feet in an easterly direction from the center of the Discovery, (at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the west to the east.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, ~~where~~ U. S. Mineral Monument No. 4 is located very nearly in the center of this claim.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in a westerly direction 750 feet from the center of the Discovery (at which this notice is posted) being in the center of the westerly end line of said claim; thence northerly 300 feet to a stake being at the north-westerly corner of said claim; thence easterly 1500 feet to a stake being at the north-easterly corner of said claim; thence southerly 300 feet to a mound of stone being at the center of the easterly end line of said claim; thence southerly 300 feet to a stake being at the south-easterly corner of said claim; thence westerly 1500 feet to a stake being the south-westerly corner of said claim; thence northerly 300 feet to the ~~pk~~ place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all acts amendatory thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining Co.

Tom H. Richey,

P. E. Howell  
County Recorder.

by L. M. Shilbell  
Deputy.

Filed and recorded at the request of  
March 6, 1913, at 11-40 A. M.

Book 11 Records of Mines, page 165.

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Bernice Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 179

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.

P. E. Howell

County Recorder of Pima County,  
Arizona,

AMENDED  
NOTICE OF MINING LOCATION,  
LODE CLAIM.

MAR 13 1913

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Bernice Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States for the Cababi Mining Co., on the 1st day of March, 1913.

The length of this claim is 1500 feet and I claim 300 feet in an easterly direction and 1200 feet in a westerly direction from the center of the discovery, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and pre-mises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 700 feet in a westerly direction from Mineral Monument No. 4 and is bounded on the north by the Extension Claim, on the east by the Peak Claim, and on the south by the Cababi No. 1 Claim.

The surface boundaries are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction 300 feet from the center of the discovery at which this notice is posted ~~XXXXXXXXXXXXXXXXXXXX~~ being at the center of the easterly end line of said claim; thence southerly 300 feet to a stake being at the south-easterly corner of said claim; thence westerly 1500 feet to a stake being at the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the westerly end line of said claim; thence northerly 300 feet to a stake being at the north-westerly corner of said claim; thence easterly 1500 feet to a stake being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States of America and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona", approved March 16, 1901, and all the acts amendatory thereof.

This is an amended Location Notice of the Bernice Mining Claim, located by S. G. McWade on the 16th day of August, 1910 and recorded in Book QQ, of Records of Mines, at Page 310, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6, 1913, at 11:40 A. M.

P. E. Howell  
County Recorder.

by L. M. Shihell  
Deputy.

*Book Q Q Records of Mines, page 179.*



STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Midway Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 175

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.  
[Signature]  
County Recorder of Pima County,  
Arizona,

106  
MAY 13 1913

AMENDED  
NOTICE OF MINING LOCATION.  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Midway Mining Claim situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade and Geo. H. Richey, the undersigned, citizens of the United States, for the Cababi Mining Coy on the 1st day of March, 1913.

The length of this claim is 1500 feet and we claim 750 feet in an easterly direction and 750 feet in a westerly direction from the center of the discovery, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 1/4 mile in a south-easterly direction from Mineral Monument No. 4 and adjoins the Doctor Claim on the south.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction 750 feet from the center of the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 300 feet to a mound of stone being at the south-easterly corner of said claim; thence westerly 1500 feet to a mound of stone being at the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the westerly end line of said claim; thence northerly 300 feet to a mound of stone being at the north-westerly corner of said claim; thence easterly 1500 feet to a mound of stone being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all the amendments thereof.

This is an amended Location Notice of the Midway Mining Claim, located by S. G. McWade and Geo. H. Richey, on the 1st day of May 1902, and recorded in Book 00 of Records of Mines, at Page 257, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March 1913.

S. G. McWade

Geo. H. Richey  
for the Cababi Mining Co.

Filed and recorded at the request of Geo. H. Richey March 6, 1913, at 11:40 A. M.

P. E. Howell  
County Recorder

By L. M. Shihell, Deputy.

Book 00 Records of Mines page 175.

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Gladys Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 176

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.  
P. E. Howell  
County Recorder of Pima County,  
Arizona,

AMENDED  
NOTICE OF MINING LOCATION,  
LODE CLAIM.

MAR 13 1913

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Gladys Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co. on the 1st day of March, 1913.

The length of this claim is 1500 feet and I claim 200 feet in a westerly direction and 1300 feet in an easterly direction from the center of the Discovery at which this notice is posted lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 200 feet in an easterly direction from Mineral Monument No. 4, and adjoins the Deal mining claim on the north, the Midway Mining Claim on the east, and the Watkins Mining Claim on the south.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction 1300 feet from the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 300 feet to a stake being at the south-easterly corner of said claim; thence westerly 1500 feet to a stake being at the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the westerly end line of said claim; thence northerly 300 feet to a stake being at the north-westerly corner of said claim; thence easterly 1500 feet to a stake being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona, approved March 16, 1901, and all acts amendatory thereof.

This is an amended Location Notice of the Gladys Mining Claim, located by S. G. McWade for the Cababi Mining Co., on the 2nd day of December, 1910, and recorded in Book QQ, of Records of Mines, at Page 334, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade  
for the Cababi Mining CO.

Filed and recorded at the request of Tom H. Rieley March 6,  
1913, at 11:40 A. M.

C. E. Howell  
County Recorder.

by L. M. Shible Deputy.

*Book TT Records of Mines, page 176.*

STATE OF ARIZONA, }  
COUNTY OF PIMA. } ss.

I, ..... P. E. Howell, ..... County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
Of Notice of Location of the Watkins Mining Claim, .....

as appears of record now in my office in Book T. T. Records of Mines, pages 163. ....

IN WITNESS WHEREOF, I have hereunto set my hand

and affixed my official seal, at my office in Tucson,

this ..... 8th. .... day of

..... April, ....., A. D. 1913.

*P. E. Howell*  
County Recorder of Pima County, Arizona.

NOTICE OF MINING LOCATION.  
LODE CLAIM.

MAR 13 1913

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Watkins Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913.

The length of this claim is 1500 feet and I claim 750 feet in an easterly direction and 750 feet in a westerly direction from the center of the discovery at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the west to the east.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 2700 feet in an easterly direction from U. S. Mineral Monument No. 4, and adjoins the Mollie No. 3 lode on the north, the Base lode on the east and the Gladys lode on the south.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a monument of stone at a point in a westerly direction 750 feet from the center of the Discovery (at which this notice is posted) being in the center of the westerly end line of said claim; thence northerly 300 feet to a stake being at the north-westerly corner of said claim; thence easterly 1500 feet to a stake being at the north-easterly corner of said claim; thence southerly 300 feet to a monument of stone being at the center of the easterly end line of said claim; thence southerly 300 feet to a stake being at the south-easterly corner of said claim; thence westerly 1500 feet to a stake being at the south-westerly corner of said claim; thence northerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all the amendments thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining CO.

Filed and recorded at the request of Tom H. Richey March 6  
1913, at 11-40 A. M.

P. E. Howell  
County Recorder.

by R. M. Shihell  
Deputy.


Book T T Records of Mines, page 163.

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Base Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 174

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.  
  
County Recorder of Pima County,  
Arizona.

16

112  
MAR 13 1913

AMENDED  
NOTICE OF MINING LOCATION.  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Base Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located, for the purposes of exploration and purchase by S. G. McWade and Geo. H. Richey, citizens of the United States, the undersigned, for the Cababi Mining Co. on the 1st day of March, 1913.

The length of this claim is 1500 feet, and we claim 750 feet in an easterly direction and 750 feet in a westerly direction from the center of the Discovery at which this notice is posted, together with 300 feet in ~~xx~~ width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 1200 feet in a south-easterly direction from U. S. Mineral Monument No. 4 and adjoins the Midway Mining Claim on the south

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction 750 feet from the center of the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 300 feet to a mound of stone being at the south-easterly corner of said claim; thence westerly 1500 feet to a mound of stone being at the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the westerly end line of said claim; thence northerly 300 feet to a mound of stone being at the north-westerly corner of said claim; thence easterly 1500 feet to a mound of stone being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Law of the Territory of Arizona," approved March 16, 1901, and all the amendments thereto.

This is an amended location notice of the Base Mining Claim, located by S. G. McWade and Geo. H. Richey, on the 25th day of April, 1909, and recorded in Book 00, of Records of Mines, at Page 255, in the office of the County Recorder of the aforesaid County of Pima, to which reference is hereby made and this ~~insertion~~ Amended Location Notice is made and posted to correct errors in the description in the original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade

Geo. H. Richey  
for the Cababi Mining Co.

Filed and recorded at the request of Geo. H. Richey March 6, 1913,  
at 11:40 A. M.

C. E. Howell  
County Recorder.

by L. M. Shihell  
Deputy.

Book 00 Records of Mines, page 174.



STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Location Notice of the Garfield No. 3 Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 171

IN WITNESS WHEREOF, I have hereunto set my

hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.

P. E. Howell  
County Recorder of Pima County,  
Arizona,

NOTICE OF MINING LOCATION.  
LODE CLAIM.

17  
Mar 13 1913  
114

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Garfield No. 3, Mining Claim, situate on lands belonging to the United States of America and in which there are valuable mineral deposits was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913.

The length of this claim is 1500 feet and I claim 750 feet in an easterly direction and 750 feet in a westerly direction from the center of the Discovery, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the west to the east.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona about 2400 feet in a south-easterly direction from Mineral Monument No. 4, and adjoins the Hibben Summit and Summit lodes on the east and the Base lode on the south, and the Mollie No. 3 lode on the west.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a monument of ~~stone~~ stone at a point in a westerly direction 750 feet from the center of the discovery (at which this notice is posted) being in the center of the westerly end line of said claim; thence northerly 300 feet to a stake being at the north-westerly corner of said claim; thence easterly 1500 feet to a stake being at the north-easterly corner of said claim; thence southerly 300 feet to a monument of stone being at the center of the easterly end line of said claim; thence southerly 300 feet to a stake being at the south-easterly corner of said claim; thence westerly 1500 feet to a stake being at the south-westerly corner of said claim thence northerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United States, and of an Act ~~of~~ of the General Assembly of Arizona, entitled "An Act to Revise and Codify the ~~Law~~ Laws of the Territory of Arizona," approved March 16, 1901, and all the amendments thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6,  
1913, at 11-40 A. M.

P. E. Howell  
County Recorder

by L. M. Shihell  
Deputy.

Book T Records of Mines, page 17.

NOTICE OF MINING LOCATION.

MAR 13 1913

LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Molly No. 3 Mining Claim situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by George H. Richey a citizen of the United States, the undersigned, on the 1st day of January 1909.

The length of this claim is 1500 feet and I claim 500 feet in a Easterly direction and 1000 feet in a Westerly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the East to the West.

The claim is situated and located in the Cababi Mining District, in Pima County, in <sup>the territory of</sup> Arizona, about 1 mile in a Easterly direction from U. S. Patented mine Picacho which is at base of Picacho Peak.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at- a mound of stones at a point in a Easterly direction ~~from~~ 500 feet from the center of the discovery shaft (at which this notice is posted being in the center of the East end line of said claim; thence Southerly 300 feet to a mound of stones being the S.E. corner of said claim; thence Westerly 1500 feet to a mound of stones being at the S.W corner of said claim; thence Northerly 300 feet to a mound of stones ~~being~~ at the center of the West end ~~line~~ of said claim; thence Northerly 300 feet to a mound of stones being at the N. W. corner of said claim; thence Easterly 1500 feet to a mound of stones being at the N. E. corner of said claim; thence Southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assem- of Arizona, entitled "An Act to Revise and Codify the Laws of the Terri- tory of Arizona," approved March 16, 1901, and acts amendatory thereof.

Dated and posted on the ground this 1st day of January 1909.

George H. Richey.

Filed & recorded at request of Tom K. Richey, Feb. 1-1909 at -2-P.M.

Ben Heney County Recorder  
by L. M. Shibell, deputy.

State of Arizona, )  
- ss.  
County of Pima. )

I, P. E. Howell, County Recorder in and for the County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy of the location notice of George H. Richey for the Molly No. 3 Mining Claim, as appears of record now in my office in Book NN of Records of Mines at Page 729.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my official seal, at my office in Tucson, this 9th of ~~March~~ <sup>April</sup> A.D. 1913.

P. E. Howell  
County Recorder of Pima County,  
Arizona.

NOTICE OF MINING LOCATION.

MAR 15 1913

LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Molly Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, ~~was~~ was entered upon and located ~~by George H. Richey~~ ~~for the purposes of exploration and purchase by George H. Richey~~ a citizen of the United States, <sup>of Arizona</sup> the undersigned, on the 1st day of January 1909.

The length of this claim is 1500 feet and I claim 1000 feet in an Easterly direction and 500 feet in a Westerly direction from the center of the discovery ~~shaft~~ shaft, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the East to the West.

The claim is ~~situated~~ situated and located in the Gababi Mining District, in Pima County, in <sup>the Territory of</sup> Arizona, about 1 1/4 miles in an Easterly direction from Picacho Peak, and U. S. Patented mine "Picacho"

The surface boundaries of the claim are marked upon the ground as follows: Beginning at - a mound of stones at a point in an Easterly direction 1000 feet from the center of the discovery shaft (at which this notice is posted) being in the center of the East end line of said claim; thence Southerly 300 feet to a mound of stones <sup>at</sup> the S.E. corner of said claim; thence Westerly 1500 feet to a mound of stones being at the S.W. corner of said claim; thence Northerly 300 feet to a mound of stones at the center of the West end ~~line~~ of said claim; ~~thence Northerly 300 feet to a mound of stones being at the N. W. corner of said claim;~~ thence Northerly 300 feet to a mound of stones being at the N. W. corner of said claim; thence Easterly 1500 feet to a mound of stones being at the N. E. corner of said claim; thence Southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and acts amendatory thereof.

Dated and posted on the ground this 1st day of January 1909.

George H. Richey.

Filed & recorded at request of Tom K. Richey, Feb. 1-1909 at 12-P.M.

Ben Heney County Recorder  
by L. M. Shibell, deputy.

State of Arizona, )  
- ss.  
County of Pima. )

I, P. E. Howell, County Recorder in and for the County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy of the location notice of George H. Richey, for the Molly Mining Claim, as appears of record now in my office in Book NN, of Records of Mines, at Page 727.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my official seal, at my office in Tucson, this 8th day of March, A. D. 1913

P. E. Howell  
County Recorder of Pima County, Arizona.

MAR 15 1913

NOTICE OF MINING LOCATION.

LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Molly No. 2 Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by George H. Richey, a citizen of the United States, the undersigned, on the 1st day of January 1909.

The length of this claim is 1500 feet, and I claim 1250 feet in a Easterly direction and 250 feet in a Westerly ~~dir~~ direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the East to the West.

The claim is situated and located in the Cababi Mining District, in Pima County, in <sup>the Territory of</sup> Arizona, about one 1/2 miles in a Easterly direction from Picacho Peak and U S Patented mine Picacho at base of said Peak or mountain.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stones at a point in a Easterly direction 1250 feet from the discovery shaft (at which this notice is posted) being in the center of the East end line of said claim; thence South 300 feet to a mound of stones being at the S. E. corner of said claim; thence Westerly 1500 feet to a mound of stones being at the S. W. corner of said claim; thence Northerly 300 feet to a mound of stones being at the center of the West end ~~line~~ of said claim; thence Northerly 300 feet ~~to~~ to a mound of stones being at the N. W. corner of said claim; thence Easterly 1500 feet to a mound of stones being at the N. E. corner of said claim; thence Southerly 300 feet to the place ~~p~~ of beginning.

All done under the ~~provisions~~ provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and acts amendatory thereof.

Dated and posted on the ground this 1st day of January 1909  
George H. Richey.

Filed & recorded at request of Tom K. Richey Feb. 1-1909 at-2-P.M.  
Ben Heney County Recorder  
by L. M. Shibell, deputy.

State of Arizona, )  
- ss.  
County of Pima.)

I, P. E. Howell, County Recorder in and for the County of Pima, do hereby certify that the above ~~ixaxixxxx~~ and foregoing is a full, true and ~~correct~~ correct copy of the location notice of George H. Richey, for the ~~Wilson~~ <sup>Molly No. 2</sup> Mining Claim as appears of record now in my office ~~at~~ in Book NN of Records of Mines at Page ~~731~~ <sup>728</sup>.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my official seal, at my office in Tucson, this 8th day of ~~March~~ <sup>March</sup>, A.D. 1913.

*P. E. Howell*

County Recorder of Pima County, Arizona.

NOTICE OF MINING LOCATION.

LODE CLAIM.

131515

TO ALL WHOM IT MAY CONCERN:

This mining Claim, the name of which is the Conch Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located ~~for~~ for the purposes of exploration and purchase by George H. Richey a citizen of the United States, <sup>of Arizona</sup> the undersigned, on the 1st day of January 1909.

The length of this claim is 1500 feet and I claim 10 feet ~~Eastward~~ in an <sup>Easterly</sup> direction and 1490 feet in a Westerly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the East to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, in <sup>the Territory of</sup> Arizona, about 1 1/2 miles in an Easterly direction from Picacho Peak and U. S. Patented Mine Picacho.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at - a mound of stones at a point in an Easterly direction 10 feet from the center of the discovery shaft (at which this notice is posted) being in the center of the East end line of said claim; thence Southerly 300 feet to a mound of stones being the S. E. corner of said claim; thence Westerly 1500 feet to a mound of stones being at the S. W. corner of said claim; thence Northerly 300 feet to a mound of stones at the center of the West end ~~line~~ of said claim; thence Northerly 300 feet to a mound of stones being at the N. W. corner of said claim; thence Easterly 1500 feet to a mound of stones ~~being~~ at the N. E. corner of said claim; thence Southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," ~~approved~~ approved March 16, 1901, and acts amendatory thereof.

Dated and posted on the ground this 1st day of January 1909.

~~XXXXXXXXXXXX~~ Geo. H. Richey

Filed & recorded at request of Tom K. Richey Feb. 1-1909 at-2-P.M.

Ben Heney County Recorder  
by L. M. Shibell, deputy.

State of Arizona, )  
- ss.  
County of Pima. )

I, P. E. Howell, County Recorder in and for the County of Pima, do hereby certify that the above and foregoing is a full true and correct copy of the location notice of George H. Richey for the Conch Mining Claim, as appears of record now in my office in Book NN of Records of Mines at Page 721.

IN WITNESS WHEREOF, I have ~~xxx~~ hereunto set my hand and affixed my official seal, at my office in Tucson, this 8th day of ~~March~~, <sup>April</sup> A.D. 1913.

P. E. Howell  
County Recorder of Pima County, Arizona

NOTICE OF MINING LOCATION.

MAR 13 1913

LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Dome Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by <sup>of America</sup> George H. Richey a citizen of the United States, the undersigned, on the 1st day of January 1909.

The length of this claim is 1500 feet and I claim ~~1450~~ 1450 feet in a Easterly direction and 50 feet in a Westerly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the East to the West.

The claim is situated and located in the Cababi Mining District, in Pima County, <sup>the Territory of</sup> Arizona, about 1 1/2 miles in a Easterly direction from Pica-cho Peak and U. S. Patented mine "Picacho"

The surface boundaries of the claim are marked upon the ground as follows: Beginning at- a mound of stones at a point in an Easterly direc-<sup>1450 feet</sup> tion from the ~~center of the~~ discovery shaft (at which this notice is post- ed) being ~~1450~~ in the center of the East end line of said claim; thence Southerly 300 feet to a mound of stone being the S. E. corner of said claim thence Westerly 1500 feet to a mound of stones being at the S. W. corner of said claim; thence Northerly 300 feet to a mound of stones at the center of the West end ~~line~~ of said claim; thence Northerly 300 feet to a mound of stones being at the N. W. corner of said claim; thence Easterly 1500 feet to a mound of stones being at the N. E. corner of said claim; thence South- erly 300 feet to the place of beginning.

Dated and posted on the ground this 1st day of January 1909.  
Geo. H. Richey.

Filed & recorded at request of Tom K. Richey, Feb. 1-1909 at -2-P.M.  
Ben Heney County Recorder  
by L. M. Shibell, deputy.

State of Arizona, )  
- ss.  
County of Pima. )

I, P. E. Howell, County Recorder in and for the County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy of the location notice of ~~Geo.~~ Geo. H. Rich- ey, for the Dome Mining Claim, as appears of Record now in my office in Book NN of Records of Mines at Page 724;

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my offi- cial, <sup>real</sup> at my office in Tucson, this 8th day of ~~March~~ <sup>March</sup>, A.D. 1913.

*P. E. Howell*

County Recorder of Pima County, Arizona.

\*All done under the provisions of Chapter Six, of Title 114 1/2, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Amend and Clarify the Laws of the Territory of Arizona, approved March 16, 1901, and acts amend- atory thereof."

NOTICE OF MINING LOCATION.  
LODE CLAIM.

MAR 15 1913

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Triangle Mining Claim, situate on lands belonging to the United States of America and in which there are valuable mineral deposits was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913.

The length of this claim is 1500 feet and I claim 1400 feet in an easterly direction and 100 feet in a westerly direction from the center of the Discovery at which this notice is posted lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the west to the east.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 500 feet in a south-easterly direction from U. S. Mineral Monument No. 4, and adjoins the Molly lode on the south and the Dome lode on the north.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in a westerly direction from the center of the discovery (at which this notice is posted) being in the center of the westerly end line of said claim; thence northerly 300 feet to a stake being at the north-westerly corner of said claim; thence easterly 1500 feet to a stake being at the north-easterly corner of said claim; thence southerly 300 feet to a mound of stone being at the center of the easterly end line of said claim; thence southerly 300 feet to a stake being at the south-easterly corner of said claim; thence westerly 1500 feet to a stake being at the south-westerly corner of said claim; thence northerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all acts amendatory thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of  
March, 6, 1913, at 11-40 A. M.

Tom H. Richey  
R. E. Howell  
County Recorder.  
by R. M. Shihell  
Deputy.

Book RR Records of Mines, page 330.



STATE OF ARIZONA, }  
COUNTY OF PIMA. } ss.

I, ..... P. E. Howell, ..... County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
**Of Notice of Location of the Triangle Mining Claim,**  
.....  
.....  
as appears of record now in my office in Book .. R. R. Records of Mines, Pages..... 330.....

IN WITNESS WHEREOF, I have hereunto set my hand  
and affixed my official seal, at my office in Tucson,  
this ..... 8th..... day of

..... April, ... A. D. 191... 3.  
*P. E. Howell*  
.....  
County Recorder of Pima County, Arizona.

STATE OF ARIZONA, }  
 COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
 County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Hibben Summit Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 173

IN WITNESS WHEREOF, I have hereunto set my

hand and affixed my official seal, at my office  
 in Tucson, this 8th. day of

April, A. D. 1913.



County Recorder of Pima County,  
 Arizona,

MAR 13 1913  
123

Amended  
NOTICE OF MINING LOCATION.  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim the name of which is the Hibben Summit Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was ~~not~~ entered upon and located for the purposes of exploration and purchase by S. G. McWade and Geo. H. Richey, the undersigned, citizens of the United States, for the Cababi Mining Co., on the 1st day of March, 1913.

The length of this claim is 1500 feet and we claim 250 feet in a northerly direction and 250 feet in a southerly direction from the center of the Discovery at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of a said claim. The general course of the lode deposit and premises is from the north to the south.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 400 feet in a southerly direction from Mineral Monument No. 4, and adjoins the Peak claim on the south.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in a northerly direction 250 feet from the center of the discovery at which this notice is posted; being in the center of the northerly end line of said claim; thence easterly 300 feet to a mound of stone being at the north-easterly corner of said claim; thence southerly 1500 feet to a mound of stone being at the south-easterly corner of said claim; thence westerly 300 feet to a mound of stone being at the ~~center~~ center of the southerly end line of said claim; thence westerly 300 feet to a mound of stone being at the south-westerly corner of said claim; thence northerly 1500 feet to a mound of stone being at the north-westerly corner of said claim; thence easterly 300 feet to the place of Beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all the amendments thereof.

This is an amended Location Notice of the Hibben Summit Mining Claim, located by Geo. H. Richey and S. G. McWade on the 15th day of May, 1909, and recorded in Book 00 of Records of Mines, at Page 250, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct ~~xxx~~ errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade

Geo. H. Richey  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6, 1913, at 11:40 A. M.

O. E. Howell  
County Recorder.

by L. M. Shibe  
Deputy.

Book 17 Records of Mines, page 173.

STATE OF ARIZONA,

COUNTY OF PIMA.

} ss.

I, ..... P. E. Howell, ..... County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
Of Amended Notice of Location of the Summit Mining Claim,

.....  
.....  
as appears of record now in my office in Book R. E. Records of Mines. Pages... 331.....

IN WITNESS WHEREOF, I have hereunto set my hand

and affixed my official seal, at my office in Tucson,

this ..... 8th. .... day of

..... April, ... A. D. 191... 3.

*P. E. Howell*

County Recorder of Pima County, Arizona.

AMENDED  
NOTICE OF MINING LOCATION,  
LODE CLAIM.

MAR 13 1913

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Summit Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade and George H. Richey, the undersigned, citizens of the United States, for the Cababi Mining Co., on the 1st day of March, 1913.

The length of this claim is 1500 feet and we claim 100 feet in a northerly direction and 1400 feet in a southerly direction from the center of the Discovery at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the north to the south.

The claim is situated and located in the Cababi Mining District in Pima County, ~~Arizona~~ State of Arizona, about 1500 feet in a southerly direction from Mineral Monument No. 4, and adjoins the Hibben Summit Mining claim on the north and the Garfield Mining Claim on the west.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in a northerly direction 100 feet from the center of the discovery (at which this notice is posted) being in the center of the northerly end line of said claim; thence easterly 300 feet to a stake being at the north-easterly corner of said claim; thence southerly 1500 feet to a stake being at the south-easterly corner of ~~said~~ said claim; thence westerly 300 feet to a mound of stone being at the center of the southerly end line of said claim; thence westerly 300 feet to a stake being at the south-westerly corner of said claim; thence northerly 1500 feet to a stake being at the north-westerly corner of said claim; thence easterly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona, approved March 16, 1901, and all acts amendatory thereof.

This is an amended Location Notice of the Summit Mining Claim, located by S. G. McWade and George H. Richey, on the 25th day of April 1909, and recorded in Book 00 of Records of Mines at Page 256, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade  
George H. Richey  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6,  
1913, at 11-40 A. M.

P. E. Howell  
County Recorder.

by L. M. Shihell  
Deputy.

*Book RR Records of Mines, page 351.*

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Garfield Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 172

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.  
P. E. Howell  
County Recorder of Pima County,  
Arizona,

26

AMENDED  
NOTICE OF MINING LOCATION.  
LODE CLAIM.

MAR 13 1913

127

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Garfield Mining Claim situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by George H. Richey, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 1st day of March, 1913.

The length of this claim is 1500 feet and I claim 1400 feet in an easterly direction and 100 feet in a westerly direction from the center of the Discovery at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 2600 feet in a southerly direction from Mineral Monument No. 4, and adjoins the Summit Mining Claim on the east, the Queen Mary Mining Claim on the west, and the Cababi No. 4 Mining Claim on the north.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction from the center of the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 300 feet to a stake being at the south-easterly corner of said claim; thence westerly 1500 feet to a stake being at the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the westerly end line of said claim; thence northerly 300 feet to a stake being at the northwesterly corner of said claim; thence easterly 1500 feet to a stake being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona", approved March, 16, 1913, and all the acts amendatory thereof.

This is an amended Location Notice of the Garfield Mining Claim, located by George H. Richey, on the 1st day of January, 1909, and recorded in Book NN of Records of Mines at Page 725, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st, day of January, 1913.

George H. Richey  
for the Cababi Mining Co.

Filed and recorded at the request of George H. Richey March 6, 1913, at 11-40 A. M.

P. E. Howell  
County Recorder.

by R. M. Shible  
Deputy.

*Book NN Records of Mines, page 172.*

NOTICE OF MINING LOCATION.

128  
MAR 13 1913

LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Queen Mary Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by George H. Richey, a citizen of the United States, <sup>of Arizona</sup> the undersigned, on the 1st day of January 1909.

The length of this claim is 1500 feet, and I claim 750 feet in a Easterly direction and 750 feet in a Westerly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the East to the West

The claim is situated and located in the Cababi Mining District, in Pima ~~County~~ County, in <sup>the Territory of</sup> Arizona, about one mile in a southerly direction from Picacho Peak and ~~xxx~~ Picacho U. S. Patented Mine.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at- a mound of stone at a point in a Easterly direction 750 feet from the discovery shaft (at which this notice is posted) being in the center of the East end line of said claim; thence southerly 300 feet to a mound of stone being the S E corner of said claim; thence Westerly 1500 feet to a mound of stone being at the S W corner of said claim; thence Northerly 300 feet to a mound of stone at the center of the West end ~~line~~ of said claim; <sup>thence</sup> Northerly 300 feet to a mound of stone being at the N W corner of said claim; thence Easterly 1500 feet to a mound of stone at the N.E corner of said claim; thence <sup>southerly</sup> 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all acts amendatory thereof.

Dated and posted on the ground this 1st day of January 1909.

George H. Richey

Filed & recorded at ~~the~~ request of Tom K. Richey, Feb. 1 - 1909 at-2-P. M.

Ben Heney County Recorder  
by L. M. Shibell, deputy.

State of Arizona, )  
- ss.  
County of Pima. )

I, P. E. Howell, County Recorder in and for the County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy of the location notice of George H. Richey, for the Queen Mary mining claim as appears ~~now~~ of record now in my office in Book NN of Records of Mines, at Page 730.

IN WITNESS WHEREOF I have hereunto set my hand and affixed my official seal, at my office in Tucson, this 8th day of March, A.D. 1913.

P. E. Howell  
County Recorder of Pima County,  
Arizona.



STATE OF ARIZONA, }  
 COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
 County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Little Joe Mining Claim,

as appears of record now in my office in Book T.T. Records of Mines, Pages 182

IN WITNESS WHEREOF, I have hereunto set my

hand and affixed my official seal, at my office  
 in Tucson, this 8th day of

April, A. D. 1913

P. E. Howell  
 County Recorder of Pima County,  
 Arizona,

AMENDED  
NOTICE OF MINING LOCATION.  
LODE CLAIM.

MAR 15 1913

130

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Little Joe Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co. on the 1st day of March, 1913.

The length of this claim is 1500 feet and I claim 300 feet in a southerly direction and 1200 feet in a northerly direction from the center of the discovery at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the north to the south.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 1300 feet in a north-westerly direction from Mineral Monument No. 4 and adjoins the Cokespa patented mining claim, the Schoonover and the Mac mining claims on the west, the Wilson mining claim on the south.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in a southerly direction 300 feet from the center of the discovery (at which this notice is posted) being in the center of the southerly end line of said claim; thence easterly 300 feet to a stake; thence at the south-easterly corner of said claim; thence northerly 1500 feet to a stake being at the north-easterly corner of said claim; thence westerly 300 feet to a mound of stone being at the center of the northerly end line of said claim; thence westerly 300 feet to a stake being at the north-westerly corner of said claim, thence southerly 1500 feet to a stake being at the south-westerly corner of said claim; thence easterly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona", approved March 16, 1901, and all acts amendatory thereof.

This is an amended Location Notice of the Little Joe Mining Claim, located by S. G. McWade on the 24th day of January, 1910, and recorded in Book QQ of Records of Mines at Page 446, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade  
for the Cababi Mining CO.

Filed and recorded at the request of Tom R. Richey March 6,  
1913, at 11:40 A. M.

P. E. Howell  
County Recorder.

by R. M. Shibley  
Deputy.

Book T V Records of Mines, page 182

AMENDED

MAR. 13. 1913

NOTICE OF MINING LOCATION

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Off Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, a citizen of the United States, for the Cababi Mining Co., the undersigned, on the 1st day of March, 1913. The length of this claim is 1500 feet and I claim I claim 640 feet in an easterly direction and 860 feet in a westerly direction from the center of the Discovery, at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit is from the east to the west. The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 2600 feet in a north-westerly direction from Mineral Monument No. 4, and adjoins, on the north, the Cokespa Patented Mining Claim.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a stake and mound of stone in an easterly direction 640 feet from the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 300 feet to a mound of stone being the south-easterly corner of said claim; thence westerly 1500 feet to mound of stone being the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone at the center of the westerly end line of said claim; thence northerly 300 feet to a mound of stone at the north-westerly corner of said claim; thence easterly 1500 feet to a mound of stone being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning. All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all the amendments thereto. This is an amended Location Notice of the Off Mining Claim, located by S. G. McWade, on the 16th day of August, 1910, and recorded in Book QQ, of Records of Mines, at Page

STATE OF ARIZONA, }  
COUNTY OF PIMA. } ss.

I, ..... **P. E. Howell,** ..... County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
Of **Amended Notice of Location of the Off Mining Claim,**

as appears of record now in my office in Book **R. R. Records of Mines,** Pages ..... **332** .....

IN WITNESS WHEREOF, I have hereunto set my hand  
and affixed my official seal, at my office in Tucson,  
this ..... **8th.** ..... day of

..... **April,** ....., A. D. 191... **3.**  
*P. E. Howell*  
County Recorder of Pima County, Arizona.

309, in the office of the County Recorder of the aforesaid County of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. Mc Wade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6, 1913,  
at 11-40 A. M.

P. E. Howell  
County Recorder.

by L. M. Shihell  
Deputy.

Recorded Book RR Records of Mines page 332.



STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Schoonover Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 185

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.

P. E. Howell  
County Recorder of Pima County,  
Arizona,

## NOTICE OF MINING LOCATION.

MAY 13 1913

## LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Schoonover Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, a citizen of the United States, for the Cababi Mining Co., the undersigned, on the 1st day of March, 1913.

The length of this claim is 1500 feet and I claim 640 feet in an easterly direction and 860 feet in a westerly direction from the center of the Discovery at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds, on ~~each~~ each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 1900 feet in a north-westerly direction from Mineral Monument No. 4, and adjoins, on the south side, the Cokespa Patented Mining Claim.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone, at a point in an easterly direction 640 feet from the discovery at which this notice is posted, being in the center of the easterly end line of said claim; thence southerly 300 feet to a mound of stone at the south-easterly corner of said claim; thence westerly 1500 feet to a mound of stone, being at the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone, being at the center of the westerly end line of said claim; thence northerly <sup>300</sup> to a mound of stone at the north-westerly corner of said claim; thence easterly 1500 feet to a mound of stone at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled An Act to Revise and Codify the Laws of the Territory of Arizona, approved March 16, 1901, and the amendments thereto.

This is an Amended Location Notice of the Schoonover Mining Claim, located by S. G. McWade on the 16th day of August, 1910, and recorded at in Book QQ, of Records of Mines, at Page 311, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6, 1913.  
at 11:40 A. M.

P. E. Howell  
County Recorder.

by P. M. Shihell  
Deputy.

Book QQ Records of Mines, page 185.

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Notice of Location of the Mac Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 169

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.  
P. E. Howell  
County Recorder of Pima County,  
Arizona,



3074

137

32

MAY 13 1913

NOTICE OF MINING LOCATION.  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Mac Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913.

The length of this claim is 1500 feet and I claim 950 feet in a westerly direction and 550 feet in an easterly direction from the center of the Discovery at which this notice is posted lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 1800 feet in a north-westerly direction from U. S. Mineral Monument No. 4, and is bounded on the north by the Schoonover Lode, on the east by the Little Joe Lode, on the south by the Kershner Lode, and on the west by the Daisy Lode.

The surface boundaries of the claim are marked upon the ground as follow Beginning at a mound of stone at a point in an easterly direction 550 feet from the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence northerly ~~300 feet~~ 300 feet to a stake being at the north-easterly corner of said claim thence westerly 1500 feet to a stake being at the north-westerly corner of said claim; thence southerly 300 feet to a mound of stone being at the center of the westerly end line of said claim; thence southerly 300 feet to a stake being at the south-westerly corner of said claim; thence easterly 1500 feet to a stake being at the south-easterly corner of said claim; thence northerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all the acts amendatory thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of  
March 6, 1913, at 11:40 A.M.

Tom H. Richey

A. E. Howell  
County Recorder.  
by S. M. Shibley  
Deputy.

Book 27 Records of Mines, page 69.

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, \_\_\_\_\_ County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy \_\_\_\_\_ Of  
Amended Location of the Daisy Mining Claim,

\_\_\_\_\_ as appears of record now in my office in Book T. T. Records of Mines, Pages 183.

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of

April, A. D. 1913.  
P. E. Howell  
County Recorder of Pima County,  
Arizona.

MAR 13 1913

AMENDED  
NOTICE OF MINING LOCATION.  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Daisy Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 1st day of March, 1913.

The length of this claim is 1500 feet and I claim 200 feet in an easterly direction and 1300 feet in a westerly direction, lengthwise of the claim, together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District in Pima County, State of Arizona, about 2700 feet in a north-westerly direction from Mineral Monument No. 4, and adjoins the Agnes claim on the south and the Mac claim on the west.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction <sup>200ft.</sup> from the center of the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 300 feet to a stake being the south-easterly corner of said claim; thence westerly 1500 feet to a stake being the south-westerly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the westerly end line of said claim; thence northerly 300 feet to a stake being at the north-westerly corner of said claim; thence easterly 1500 feet to a stake being at the north-easterly corner of said claim; thence southerly <sup>300ft.</sup> to the place of beginning.

All done under the provisions of Chapter Six, Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to ~~re~~ Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901, and all the acts amendatory ~~thereof~~, thereof.

This is an amended Location Notice of the Daisy Mining Claim, located by S. G. McWade for the Cababi Mining Co., on the 4th day of December, 1910, and recorded in Book QQ of Records of Mines at Page 333, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6, 1913, at 11-40 A. M.

P. E. Howell  
County Recorder.

by L. M. Shihell  
Deputy.

*Book T T Records of Mines, page 183*

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Amended Location of the Agnes Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 184

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of  
April, A. D. 1913.

P. E. Howell  
County Recorder of Pima County,  
Arizona,

37

MAR 13 1913 141

AMENDED  
NOTICE OF MINING LOCATION.  
LODE CLAIM.

---

TO ALL WHOM IT MAY CONCERN:

THIS Mining Claim, the name of which is the Agnes Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 1st day of March, 1913.

The length of this claim is 1500 feet, and I claim 750 feet in an easterly direction and 750 feet in a westerly direction from the center of the Discovery at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 3000 feet in a north-westerly direction from U. S. Mineral Monument No. 4, and adjoins the Cokespa Patented Mining Claim on the south, the Schoonover claim on the west, and the Daisy claim on the north.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in an easterly direction 750 feet from the center of the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 300 feet to a mound of stone being at the south-easterly corner of said claim; thence northerly 300 feet to a mound of stone being at the center of the westerly end line of said claim; thence northerly 300 feet to a mound of stone being at the north-westerly corner of said claim; thence easterly 1500 feet to a mound of stone being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona", approved March 16, 1901, and all the acts amendatory thereof.

This is an amended Location Notice of the Agnes Mining Claim, located by S. G. McWade on the 22nd day of January, 1909 and recorded in Book NN of Records of Mines, at Page 781, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this ~~is~~ Amended Location Notice is made and posted to correct errors in the description in the said original ~~Location~~ Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey Mar. 6, 1913, at 11:40 A. M.

P. E. Howell  
County Recorder

by P. M. Shihell  
Deputy.

*Book T Records of Mines, page 184.*

STATE OF ARIZONA,

COUNTY OF PIMA.

}  
SS.

I, ..... P. E. Howell, ..... County Recorder in and for the  
County of Pima, State of Arizona, do hereby certify that the above and foregoing is a full, true and correct copy  
Of Amended Notice of Location of the Cokespa No. 2 Mining Claim,

.....  
.....  
as appears of record now in my office in Book R. . R. . Records of Mines, Pages..... 329....

IN WITNESS WHEREOF, I have hereunto set my hand

and affixed my official seal, at my office in Tucson,

this ..... 8th. .... day of

..... April, ....., A. D. 191..3.

*P. E. Howell*  
.....  
County Recorder of Pima County, Arizona.

MAR 13 1913

143

AMENDED  
~~XXXXXXXXXXXXXXXXXXXX~~  
NOTICE OF MINING LOCATION.  
○○○○○○○○○○○○○○○○  
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Cokespa No. 2 Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by ~~xxxxxx~~ George H. Richey, the undersigned, a citizen of the United States, for the Cababi Mining Co. on the 1st day of March, 1913.

The length of this claim is 1500 feet and I claim 200 feet in an easterly direction and 1300 feet in a westerly direction from the ~~xxxx~~ center of the Discovery at which this notice is posted, lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the east to the west.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 4200 feet in a north-westerly direction from U. S. Mineral Monument No. 4, and adjoins and is ~~an~~ a westerly extension of the Cokespa patented mining claim.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in ~~xxxxxxxxxxxx~~ an easterly direction 200 feet from the center of the discovery (at which this notice is posted) being in the center of the easterly end line of said claim; thence southerly 300 feet to a stake being at the south-easterly corner of said claim; thence westerly 1500 feet to a stake being at the south-westerly corner of said claim, thence northerly 300 feet to a mound of stone being at the center of the westerly end line of said claim, thence northerly 300 feet to a stake being at the north-westerly corner of said claim; thence easterly 1500 feet to a stake being at the north-easterly corner of said claim; thence southerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States and an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona", approved March 16, 1901, and all the acts amendatory thereof.

This is an amended Location Notice of the Cokespa No. 2 Mining Claim located by George H. Richey, on the 1st day of January, 1909, and recorded in Book NN, of Records of Mines, at Page 722, in the office of the County Recorder of the aforesaid county of Pima, to which reference is hereby made, and this Amended Location Notice is made and posted for the purpose of correcting errors in the description in the said original Location Notice.

Dated and posted on the ground this 1st day of March, 1913.

George H. Richey  
for the Cababi Mining Co.

Filed and recorded at the request of Tom H. Richey March 6, 1913, at 11-40 A. M.

P. E. Howell  
County Recorder.

by L. M. Shihell  
Deputy.

Book RR Records of Mines, page 329.

STATE OF ARIZONA, }  
COUNTY OF PIMA } ss.

I, P. E. Howell, County Recorder in and for the  
County of Pima, do hereby certify that the above and foregoing is a full, true and correct copy Of  
Notice of Location of the Glance Mining Claim,

as appears of record now in my office in Book T. T. Records of Mines, Pages 170

IN WITNESS WHEREOF, I have hereunto set my  
hand and affixed my official seal, at my office  
in Tucson, this 8th. day of  
April, A. D. 1913.

P. E. Howell  
County Recorder of Pima County,  
Arizona,



NOTICE OF MINING LOCATION.  
LODE CLAIM.

MAR 13 1913

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Glance Mining Claim, situate on lands belonging to the United States, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by S. G. McWade, the undersigned, a citizen of the United States, for the Cababi Mining Co., on the 18th day of January, 1913.

The length of this claim is 1500 feet and I claim 100 feet in a southerly direction and 1400 feet in a northerly direction from the center of the Discovery at which this notice is posted lengthwise of the claim, together with 300 feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the south to the north.

The claim is situated and located in the Cababi Mining District, in Pima County, State of Arizona, about 5100 feet in a north-westerly direction from U. S. Mineral Monument No. 4, and adjoins the Cokespa No. 2 lode on the north.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a mound of stone at a point in a southerly direction 100 feet from the discovery at which this notice is posted, being in the center of the southerly end line of said claim; thence easterly 300 feet to a stake ~~thence~~ being the south-easterly corner of said claim; thence northerly 1500 feet to a stake being at the north-~~west~~ easterly corner of said claim; thence westerly 300 feet to a mound of stone being at the center of the northerly end line of said claim; thence westerly 300 feet to a stake being at the north-westerly corner of said claim; thence southerly 1500 feet to a stake being at the south-westerly ~~west~~ corner of said claim; thence easterly 300 feet to the place of beginning. ~~thence~~

All done under the provisions of Chapter Six; of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona", approved March 16, 1901, and all acts amendatory thereof.

Dated and posted on the ground this 18th day of January, 1913.

S. G. McWade  
for the Cababi Mining Co.

Filed and recorded at the request of  
March, 6, 1913, at 11-40 a. M.

Tom H. Kibbey

P. E. Howell  
County Recorder.

by L. M. Shibell  
Deputy.

Book T T Records of Mines, page 170.

U. S. SURVEYOR GENERAL'S FINAL CERTIFICATE ON  
FIELD NOTES.

DEPARTMENT OF THE INTERIOR,

OFFICE OF U. S. SURVEYOR GENERAL,

Phoenix, Arizona.

April 16, 1914.

I, U. S. Surveyor General for District of Arizona,

do hereby certify that the foregoing transcript of the Field Notes, return and approval

of the Survey of the mining claim of Cababi Mining Co., known as the Sulphide, Oxide, Garfield No. 2, Conduit, Wilson, Kershner, Extension, Coyote, Deal, Doctor, Peak, Bernice, Midway, Gladys, Watkins, Base, Garfield No. 3, Molly No. 3, Molly, Molly No. 2, Conch, Dome, Triangle, Hibben Summit, Summit, Garfield, Queen Mary, Little Joe, Off, Schoonover, Mac, Daisy, Agnes, Cokespa No. 2, Glance.

, situate in Cababi

Mining District, Pima County,

, in Sections 2, 3, 4, 10, 11, 12, Township No. 16 S,

Range No. 4 East, unsurveyed, and designated as Survey

No. 3074, has been correctly copied from the originals on

file in this office; that said Field Notes furnish such an accurate description of said mining claim as will, if incorporated into a patent, serve fully to identify the premises, and that such reference is made therein to natural objects or permanent monuments as will perpetuate and fix the *locus* thereof.

And I further certify that five hundred dollars' worth of labor has been expended or improvements <sup>or for each of</sup> made upon said mining claims by claimant or its grantors, and that said improvements consist of 85 shafts, 13 cuts, 2 tunnels and 1313 ft. of drifts and crosscuts, total value \$48185. Shaft No. 9 on the Wilson lode, with its workings, being a common improvement for the benefit and development of the claims of this survey and the Cokespa lode, Lot 40 A. and the Pichaco lode, Lot 39 A, an undivided 1/37th interest therein, value \$558.11, is properly credited to each of said claims.

and that no portion of said labor or improvements has been included in the estimate of expenditures upon any other claim.

I further certify that the plat thereof, filed in the U. S. Land Office at Phoenix, Arizona, is correct and in conformity with the foregoing Field Notes.

Frank S. Ingalls,

United States Surveyor General for Arizona.

4-687.

**SURVEYOR-GENERAL'S CERTIFICATE OF APPROVAL OF FIELD  
NOTES AND SURVEY OF MINING CLAIM.**

**Department of the Interior.**

*Office of U. S. Surveyor-General,*

..... Phoenix, Arizona, .....

..... April 16, 1914. ....

I, U. S. Surveyor-General for ..... District of Arizona, .....

do hereby certify that the foregoing and hereto attached Field Notes and Return of the Survey of the

Mining Claim of ..... Cababi Mining Co., ..... known as the .....

Sulphide, Oxide, Garfield No. 2, Conduit, Wilson, Kershner, Extension, Coyote, Deal, Doctor, Peak, Bernice, Midway, Gladys, Watkins, Base, Garfield No. 3, Molly No. 3, Molly, Molly No. 2, Conch, Dome, Triangle, Hibben Summit, Summit, Garfield, Queen Mary, Little Joe, Off, Schoonover, Mac, Daisy, Agnes, Cokespa No. 2, Glance. ....

situate in ..... Cababi ..... mining district,

..... Pima ..... County, ..... Arizona .....

in Section s 2, 3, 4, 10, 11, 12, Township No. 16 South, Range No. 4 East, unsur.,

....., designated as Survey No. 3074 .....

executed by ..... Edgar C. Dietrich ..... U. S. Deputy Mineral

Surveyor, ..... June 2-23 ..... 19 13, under my instructions dated

..... May 22 ..... 1913, have been critically examined and the necessary cor-

rections and explanations made, and the said Field Notes and Return, and the Survey they describe,

are hereby approved. A true copy of the copy of the location certificate filed by the applicant for

survey is included in the field notes.

*Frank J. Ingalls*

U. S. Surveyor-General for ..... Arizona .....